

CCAMP Working Group  
Internet-Draft  
Intended status: Informational  
Expires: March 2, 2016

O. Gonzalez de Dios, Ed.  
Telefonica I+D  
R. Casellas, Ed.  
CTTC  
August 30, 2015

**Framework and Requirements for GMPLS-based control of Flexi-grid DWDM  
networks  
draft-ietf-ccamp-flexi-grid-fwk-07**

**Abstract**

To allow efficient allocation of optical spectral bandwidth for high bit-rate systems, the International Telecommunication Union Telecommunication Standardization Sector (ITU-T) has extended its Recommendations G.694.1 and G.872 to include a new dense wavelength division multiplexing (DWDM) grid by defining a set of nominal central frequencies, channel spacings and the concept of "frequency slot". In such an environment, a data plane connection is switched based on allocated, variable-sized frequency ranges within the optical spectrum creating what is known as a flexible grid (flexi-grid).

Given the specific characteristics of flexi-grid optical networks and their associated technology, this document defines a framework and the associated control plane requirements for the application of the existing GMPLS architecture and control plane protocols to the control of flexi-grid DWDM networks. The actual extensions to the GMPLS protocols will be defined in companion documents.

**Status of This Memo**

This Internet-Draft is submitted in full conformance with the provisions of [BCP 78](#) and [BCP 79](#).

Internet-Drafts are working documents of the Internet Engineering Task Force (IETF). Note that other groups may also distribute working documents as Internet-Drafts. The list of current Internet-Drafts is at <http://datatracker.ietf.org/drafts/current/>.

Internet-Drafts are draft documents valid for a maximum of six months and may be updated, replaced, or obsoleted by other documents at any time. It is inappropriate to use Internet-Drafts as reference material or to cite them other than as "work in progress."

This Internet-Draft will expire on March 2, 2016.

## Copyright Notice

Copyright (c) 2015 IETF Trust and the persons identified as the document authors. All rights reserved.

This document is subject to [BCP 78](#) and the IETF Trust's Legal Provisions Relating to IETF Documents (<http://trustee.ietf.org/license-info>) in effect on the date of publication of this document. Please review these documents carefully, as they describe your rights and restrictions with respect to this document. Code Components extracted from this document must include Simplified BSD License text as described in Section 4.e of the Trust Legal Provisions and are provided without warranty as described in the Simplified BSD License.

## Table of Contents

<a href="#">1.</a>	Introduction . . . . .	<a href="#">3</a>
<a href="#">2.</a>	Terminology . . . . .	<a href="#">4</a>
<a href="#">2.1.</a>	Requirements Language . . . . .	<a href="#">4</a>
<a href="#">2.2.</a>	Abbreviations . . . . .	<a href="#">4</a>
<a href="#">3.</a>	Overview of Flexi-grid Networks . . . . .	<a href="#">5</a>
<a href="#">3.1.</a>	Flexi-grid in the Context of OTN . . . . .	<a href="#">5</a>
<a href="#">3.2.</a>	Flexi-grid Terminology . . . . .	<a href="#">6</a>
<a href="#">3.2.1.</a>	Frequency Slots . . . . .	<a href="#">6</a>
<a href="#">3.2.2.</a>	Media Layer Elements . . . . .	<a href="#">8</a>
<a href="#">3.2.3.</a>	Media Channels . . . . .	<a href="#">8</a>
<a href="#">3.2.4.</a>	Optical Tributary Signals . . . . .	<a href="#">9</a>
<a href="#">3.2.5.</a>	Composite Media Channels . . . . .	<a href="#">9</a>
<a href="#">3.3.</a>	Hierarchy in the Media Layer . . . . .	<a href="#">10</a>
<a href="#">3.4.</a>	Flexi-grid Layered Network Model . . . . .	<a href="#">10</a>
<a href="#">3.4.1.</a>	DWDM Flexi-grid Enabled Network Element Models . . . . .	<a href="#">12</a>
<a href="#">4.</a>	GMPLS Applicability . . . . .	<a href="#">12</a>
<a href="#">4.1.</a>	General Considerations . . . . .	<a href="#">12</a>
<a href="#">4.2.</a>	Consideration of TE Links . . . . .	<a href="#">13</a>
<a href="#">4.3.</a>	Consideration of LSPs in Flexi-grid . . . . .	<a href="#">15</a>
<a href="#">4.4.</a>	Control Plane Modeling of Network Elements . . . . .	<a href="#">20</a>
<a href="#">4.5.</a>	Media Layer Resource Allocation Considerations . . . . .	<a href="#">20</a>
<a href="#">4.6.</a>	Neighbor Discovery and Link Property Correlation . . . . .	<a href="#">24</a>
4.7.	Path Computation / Routing and Spectrum Assignment (RSA)	25
<a href="#">4.7.1.</a>	Architectural Approaches to RSA . . . . .	<a href="#">25</a>
<a href="#">4.8.</a>	Routing and Topology Dissemination . . . . .	<a href="#">26</a>
<a href="#">4.8.1.</a>	Available Frequency Ranges/Slots of DWDM Links . . . . .	<a href="#">27</a>
<a href="#">4.8.2.</a>	Available Slot Width Ranges of DWDM Links . . . . .	<a href="#">27</a>
<a href="#">4.8.3.</a>	Spectrum Management . . . . .	<a href="#">27</a>
<a href="#">4.8.4.</a>	Information Model . . . . .	<a href="#">28</a>
<a href="#">5.</a>	Control Plane Requirements . . . . .	<a href="#">29</a>
<a href="#">5.1.</a>	Support for Media Channels . . . . .	<a href="#">29</a>



<a href="#">5.1.1.</a>	Signaling . . . . .	<a href="#">30</a>
<a href="#">5.1.2.</a>	Routing . . . . .	<a href="#">30</a>
<a href="#">5.2.</a>	Support for Media Channel Resizing . . . . .	<a href="#">31</a>
5.3.	Support for Logical Associations of Multiple Media Channels . . . . .	<a href="#">31</a>
<a href="#">5.4.</a>	Support for Composite Media Channels . . . . .	<a href="#">31</a>
5.5.	Support for Neighbor Discovery and Link Property Correlation . . . . .	<a href="#">32</a>
<a href="#">6.</a>	IANA Considerations . . . . .	<a href="#">32</a>
<a href="#">7.</a>	Security Considerations . . . . .	<a href="#">32</a>
<a href="#">8.</a>	Manageability Considerations . . . . .	<a href="#">33</a>
<a href="#">9.</a>	Authors . . . . .	<a href="#">34</a>
<a href="#">10.</a>	Contributing Authors . . . . .	<a href="#">34</a>
<a href="#">11.</a>	Acknowledgments . . . . .	<a href="#">37</a>
<a href="#">12.</a>	References . . . . .	<a href="#">37</a>
<a href="#">12.1.</a>	Normative References . . . . .	<a href="#">37</a>
<a href="#">12.2.</a>	Informative References . . . . .	<a href="#">38</a>
Authors'	Addresses . . . . .	<a href="#">40</a>

## [1.](#) Introduction

The term "Flexible grid" (flexi-grid for short) as defined by the International Telecommunication Union Telecommunication Standardization Sector (ITU-T) Study Group 15 in the latest version of [\[G.694.1\]](#), refers to the updated set of nominal central frequencies (a frequency grid), channel spacing and optical spectrum management/allocation considerations that have been defined in order to allow an efficient and flexible allocation and configuration of optical spectral bandwidth for high bit-rate systems.

A key concept of flexi-grid is the "frequency slot"; a variable-sized optical frequency range that can be allocated to a data connection. As detailed later in the document, a frequency slot is characterized by its nominal central frequency and its slot width which, as per [\[G.694.1\]](#), is constrained to be a multiple of a given slot width granularity.

Compared to a traditional fixed grid network, which uses fixed size optical spectrum frequency ranges or frequency slots with typical channel separations of 50 GHz, a flexible grid network can select its media channels with a more flexible choice of slot widths, allocating as much optical spectrum as required.

From a networking perspective, a flexible grid network is assumed to be a layered network [\[G.872\]](#)[\[G.800\]](#) in which the media layer is the server layer and the optical signal layer is the client layer. In the media layer, switching is based on a frequency slot, and the size of a media channel is given by the properties of the associated



frequency slot. In this layered network, a media channel can transport more than one Optical Tributary Signals (OTSi), as defined later in this document.

A Wavelength Switched Optical Network (WSON), addressed in [[RFC6163](#)], is a term commonly used to refer to the application/deployment of a GMPLS-based control plane for the control (provisioning/recovery, etc.) of a fixed grid wavelength division multiplexing (WDM) network in which media (spectrum) and signal are jointly considered.

This document defines the framework for a GMPLS-based control of flexi-grid enabled dense wavelength division multiplexing (DWDM) networks (in the scope defined by ITU-T layered Optical Transport Networks [[G.872](#)]), as well as a set of associated control plane requirements. An important design consideration relates to the decoupling of the management of the optical spectrum resource and the client signals to be transported.

## **2. Terminology**

Further terminology specific to flexi-grid networks can be found in [Section 3.2](#).

### **2.1. Requirements Language**

The key words "MUST", "MUST NOT", "REQUIRED", "SHALL", "SHALL NOT", "SHOULD", "SHOULD NOT", "RECOMMENDED", "MAY", and "OPTIONAL" in this document are to be interpreted as described in [[RFC2119](#)].

While [[RFC2119](#)] describes interpretations of these key words in terms of protocol specifications and implementations, they are used in this document to describe design requirements for protocol extensions.

### **2.2. Abbreviations**

FS: Frequency Slot

FSC: Fiber-Switch Capable

LSR: Label Switching Router

NCF: Nominal Central Frequency

OCh: Optical Channel

OCh-P: Optical Channel Payload

OTN: Optical Transport Network



OTSi: Optical Tributary Signal

OTSiG: OTSi Group is a set of OTSi

OCC: Optical Channel Carrier

PCE: Path Computation Element

ROADM: Reconfigurable Optical Add-Drop Multiplexer

SSON: Spectrum-Switched Optical Network

SWG: Slot Width Granularity

### **3. Overview of Flexi-grid Networks**

#### **3.1. Flexi-grid in the Context of OTN**

[G.872] describes, from a network level, the functional architecture of an OTN. It is decomposed into independent layer networks with client/layer relationships among them. A simplified view of the OTN layers is shown in Figure 1.

```
+-----+
| Digital Layer |
+-----+
| Signal Layer  |
+-----+
| Media Layer   |
+-----+
```

Figure 1: Generic OTN Overview

In the OTN layering context, the media layer is the server layer of the optical signal layer. The optical signal is guided to its destination by the media layer by means of a network media channel. In the media layer, switching is based on a frequency slot.

In this scope, this document uses the term flexi-grid enabled DWDM network to refer to a network in which switching is based on frequency slots defined using the flexible grid, and covers mainly the Media Layer as well as the required adaptations from the Signal layer. The present document is thus focused on the control and management of the media layer.





### 3.2. Flexi-grid Terminology

This section presents the definition of the terms used in flexi-grid networks. More detail about these terms can be found in the ITU-T Recommendations [G.694.1], [G.872]), [G.870], [G.8080], and [G.959.1-2013].

Where appropriate, this documents also uses terminology and lexicography from [RFC4397].

#### 3.2.1. Frequency Slots

This subsection is focused on the frequency slot and related terms.

- o Frequency Slot [G.694.1]: The frequency range allocated to a slot within the flexible grid and unavailable to other slots. A frequency slot is defined by its nominal central frequency and its slot width.
- o Nominal Central Frequency: Each of the allowed frequencies as per the definition of flexible DWDM grid in [G.694.1]. The set of nominal central frequencies can be built using the following expression

$$f = 193.1 \text{ THz} + n \times 0.00625 \text{ THz}$$

where 193.1 THz is ITU-T "anchor frequency" for transmission over the C band, and n is a positive or negative integer including 0.

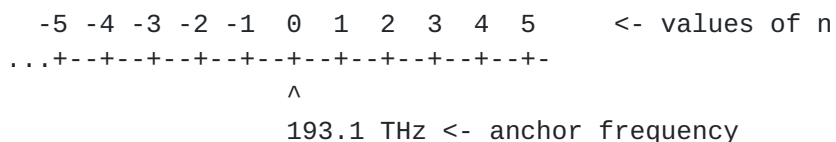


Figure 2: Anchor Frequency and Set of Nominal Central Frequencies

- o Nominal Central Frequency Granularity: This is the spacing between allowed nominal central frequencies and it is set to 6.25 GHz [G.694.1].
- o Slot Width Granularity (SWG): 12.5 GHz, as defined in [G.694.1].
- o Slot Width: The slot width determines the "amount" of optical spectrum regardless of its actual "position" in the frequency



axis. A slot width is constrained to be  $m \times \text{SWG}$  (that is,  $m \times 12.5 \text{ GHz}$ ), where  $m$  is an integer greater than or equal to 1.

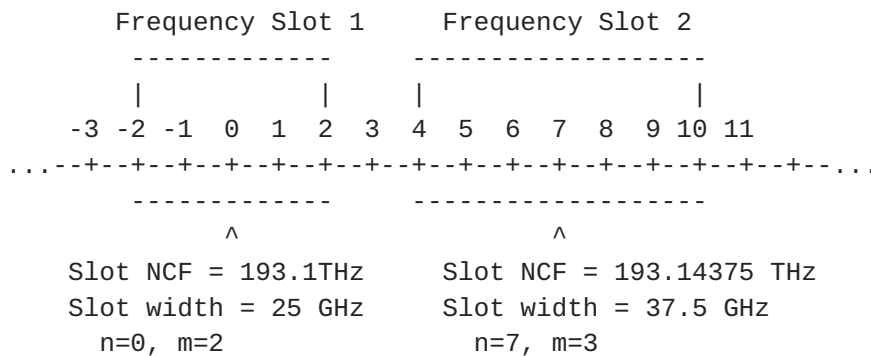


Figure 3: Example Frequency Slots

- \* The symbol '+' represents the allowed nominal central frequencies
  - \* The '--' represents the nominal central frequency granularity in units of 6.25 GHz
  - \* The '^' represents the slot nominal central frequency
  - \* The number on the top of the '+' symbol represents the 'n' in the frequency calculation formula.
  - \* The nominal central frequency is 193.1 THz when n equals to zero.
- o Effective Frequency Slot [G.870]: The effective frequency slot of a media channel is that part of the frequency slots of the filters along the media channel that is common to all of the filters' frequency slots. Note that both the Frequency Slot and Effective Frequency Slot are local terms.
  - o Figure 4 shows the effect of combining two filters along a channel. The combination of frequency slot 1 and frequency slot 2 applied to the media channel is effective frequency slot shown.



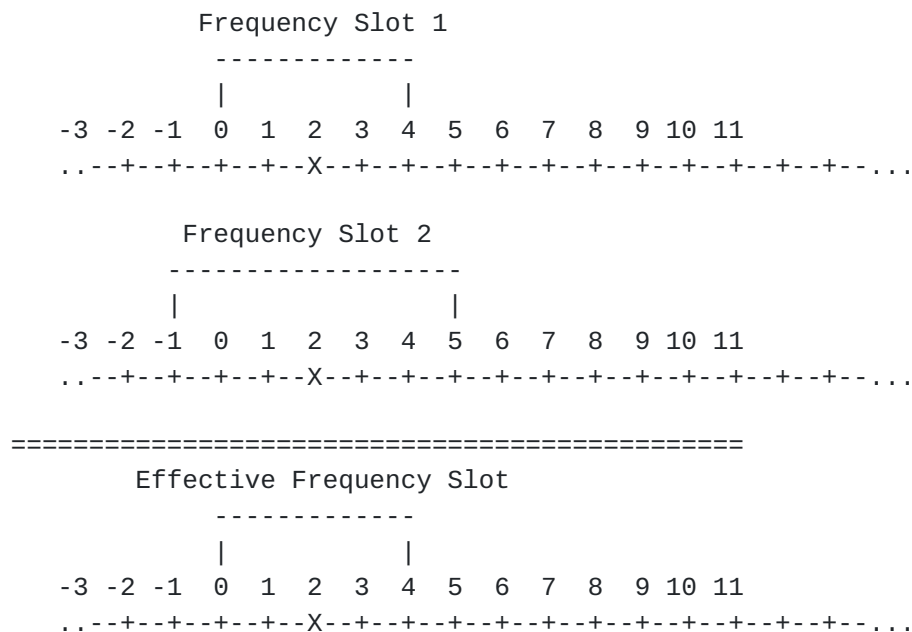


Figure 4: Effective Frequency Slot

### 3.2.2. Media Layer Elements

- o Media Element: A media element directs an optical signal or affects the properties of an optical signal. It does not modify the properties of the information that has been modulated to produce the optical signal [G.870]. Examples of media elements include fibers, amplifiers, filters, and switching matrices.
- o Media Channel Matrixes: The media channel matrix provides flexible connectivity for the media channels. That is, it represents a point of flexibility where relationships between the media ports at the edge of a media channel matrix may be created and broken. The relationship between these ports is called a matrix channel. (Network) Media Channels are switched in a Media Channel Matrix.

### 3.2.3. Media Channels

This section defines concepts such as (Network) Media Channel; the mapping to GMPLS constructs (i.e., LSP) is detailed in [Section 4](#).

- o Media Channel: A media association that represents both the topology (i.e., path through the media) and the resource (frequency slot) that it occupies. As a topological construct, it represents a frequency slot (an effective frequency slot) supported by a concatenation of media elements (fibers,



amplifiers, filters, switching matrices...). This term is used to identify the end-to-end physical layer entity with its corresponding (one or more) frequency slots local at each link filters.

- o Network Media Channel: [G.870] defines the Network Media Channel as a media channel that transports a single OTSi, defined next.

#### **3.2.4. Optical Tributary Signals**

- o Optical Tributary Signal (OTSi) [G.959.1-2013]: The optical signal that is placed within a network media channel for transport across the optical network. This may consist of a single modulated optical carrier or a group of modulated optical carriers or subcarriers. To provide a connection between the OTSi source and the OTSi sink the optical signal must be assigned to a network media channel.
- o OTSi Group (OTSiG): The set of OTSi that are carried by a group of network media channels. Each OTSi is carried by one network media channel. From a management perspective it SHOULD be possible to manage both the OTSiG and a group of Network Media Channels as single entities.

#### **3.2.5. Composite Media Channels**

- o It is possible to construct an end-to-end media channel as a composite of more than one network media channels. A composite media channel carries a group of OTSi (i.e., OTSiG). Each OTSi is carried by one network media channel. This group of OTSi are carried over a single fibre.
- o In this case, the effective frequency slots may be contiguous (i.e., there is no spectrum between them that can be used for other media channels) or non-contiguous.
- o It is not currently envisaged that such composite media channels may be constructed from slots carried on different fibers whether those fibers traverse the same hop-by-hop path through the network or not.
- o Furthermore, it is not considered likely that a media channel may be constructed from a different variation of slot composition on each hop. That is, the slot composition (i.e., the group of OTSi carried by the composite media channel) must be the same from one end to the other of the media channel even if the specific slot for each OTSi and the spacing among slots may vary hop by hop.





- o How the signal is carried across such groups of network media channels is out of scope for this document.

### 3.3. Hierarchy in the Media Layer

In summary, the concept of frequency slot is a logical abstraction that represents a frequency range, while the media layer represents the underlying media support. Media Channels are media associations, characterized by their (effective) frequency slot, respectively; and media channels are switched in media channel matrixes. From the control and management perspective, a media channel can be logically split into network media channels.

In Figure 5, a media channel has been configured and dimensioned to support two network media channels, each of them carrying one OTSi.


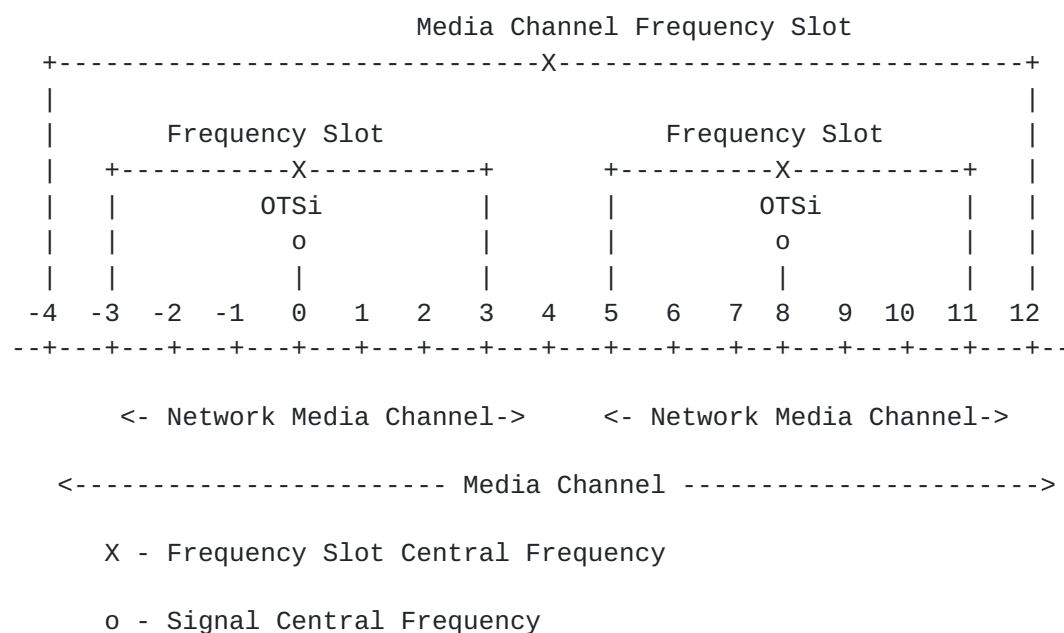


Figure 5: Example of Media Channel / Network Media Channels and Associated Frequency Slots

### 3.4. Flexi-grid Layered Network Model

In the OTN layered network, the network media channel transports a single OTSi (see Figure 6)




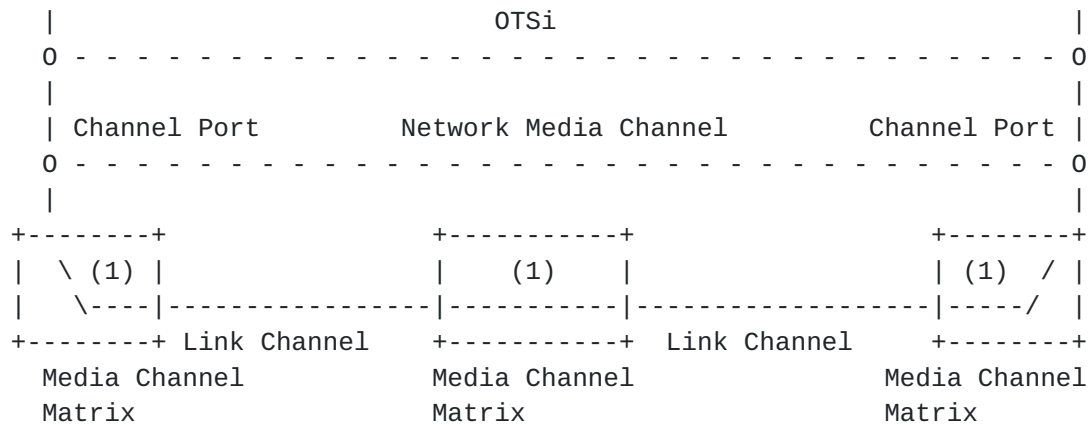

The symbol (1) indicates a Matrix Channel

Figure 6: Simplified Layered Network Model

Note that a particular example of OTSi is the OCh-P. Figure 7 shows this specific example as defined in G.805 [G.805].

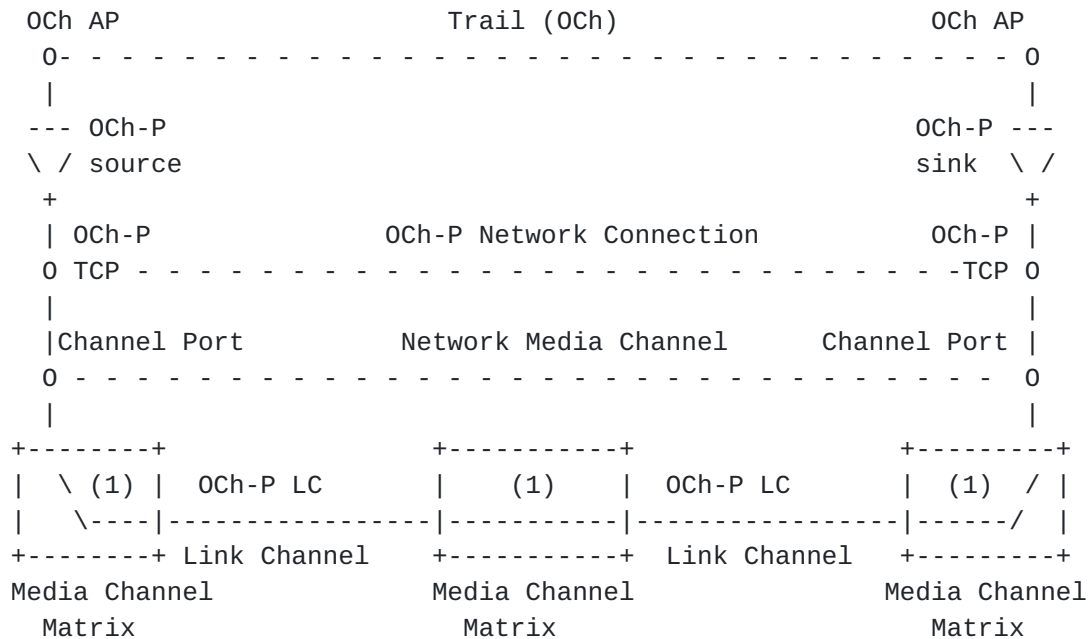

The symbol (1) indicates a Matrix Channel

Figure 7: Layered Network Model According to G.805



### **3.4.1. DWDM Flexi-grid Enabled Network Element Models**

A flexible grid network is constructed from subsystems that include WDM links, tunable transmitters, and receivers, (i.e, media elements including media layer switching elements that are media matrices) as well as electro-optical network elements. This is just the same as in a fixed grid network except that each element has flexible grid characteristics.

As stated in Clause 7 of [\[G.694.1\]](#) the flexible DWDM grid has a nominal central frequency granularity of 6.25 GHz and a slot width granularity of 12.5 GHz. However, devices or applications that make use of the flexible grid might not be capable of supporting every possible slot width or position. In other words, applications may be defined where only a subset of the possible slot widths and positions are required to be supported. For example, an application could be defined where the nominal central frequency granularity is 12.5 GHz (by only requiring values of  $n$  that are even) and that only requires slot widths as a multiple of 25 GHz (by only requiring values of  $m$  that are even).

## **4. GMPLS Applicability**

The goal of this section is to provide an insight into the application of GMPLS as a control mechanism in flexi-grid networks. Specific control plane requirements for the support of flexi-grid networks are covered in [Section 5](#). This framework is aimed at controlling the media layer within the OTN hierarchy, and controlling the required adaptations of the signal layer. This document also defines the term Spectrum-Switched Optical Network (SSON) to refer to a Flexi-grid enabled DWDM network that is controlled by a GMPLS/PCE control plane.

This section provides a mapping of the ITU-T G.872 architectural aspects to GMPLS/Control plane terms, and considers the relationship between the architectural concept/construct of media channel and its control plane representations (e.g., as a TE link, as defined in [\[RFC3945\]](#)).

### **4.1. General Considerations**

The GMPLS control of the media layer deals with the establishment of media channels that are switched in media channel matrices. GMPLS labels are used to locally represent the media channel and its associated frequency slot. Network media channels are considered a particular case of media channels when the end points are transceivers (that is, source and destination of an OTSi).



#### 4.2. Consideration of TE Links

From a theoretical / abstract point of view, a fiber can be modeled as having a frequency slot that ranges from minus infinity to plus infinity. This representation helps understand the relationship between frequency slots and ranges.

The frequency slot is a local concept that applies within a component or element. When applied to a media channel, we are referring to its effective frequency slot as defined in [G.872].

The association sequence of the three components (i.e., a filter, a fiber, and a filter), is a media channel in its most basic form. From the control plane perspective this may modeled as a (physical) TE-link with a contiguous optical spectrum. This can be represented by saying that the portion of spectrum available at time  $t_0$  depends on which filters are placed at the ends of the fiber and how they have been configured. Once filters are placed we have a one-hop media channel. In practical terms, associating a fiber with the terminating filters determines the usable optical spectrum.

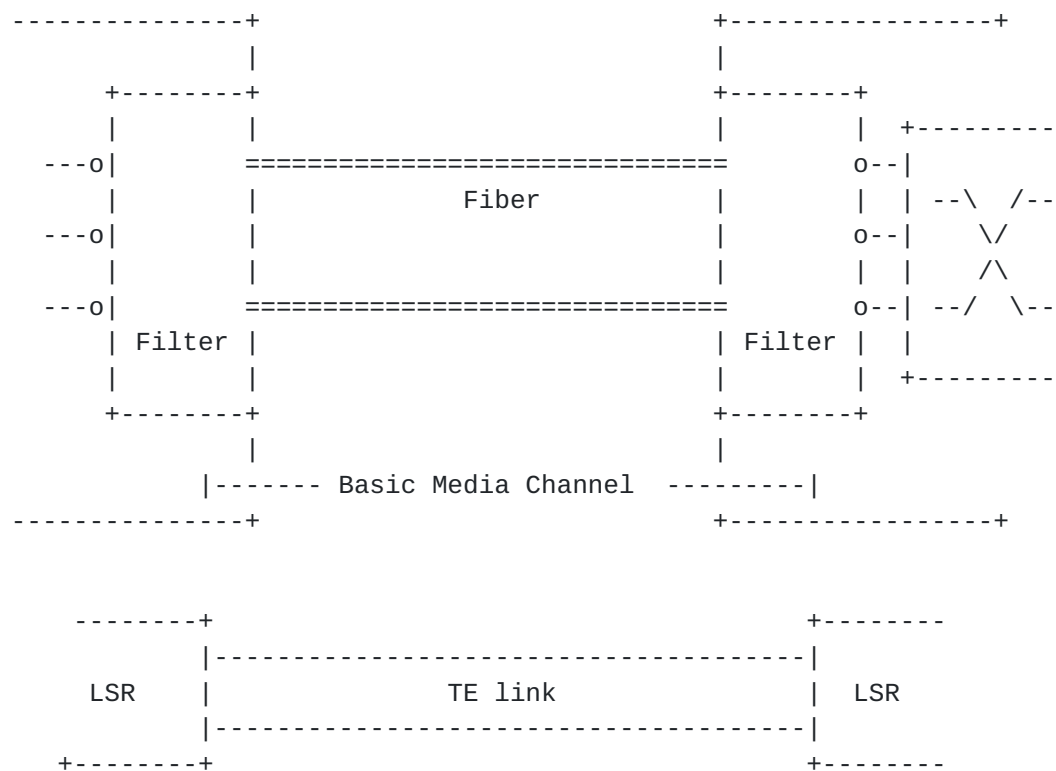


Figure 8: (Basic) Media Channel and TE Link





Additionally, when a cross-connect for a specific frequency slot is considered, the resulting media support of joining basic media channels is still a media channel, i.e., a longer association sequence of media elements and its effective frequency slot. In other words, It is possible to "concatenate" several media channels (e.g., patch on intermediate nodes) to create a single media channel.

The architectural construct resulting of the association sequence of basic media channels and media layer matrix cross-connects can be represented as (i.e., corresponds to) a Label Switched Path (LSP) from a control plane perspective.

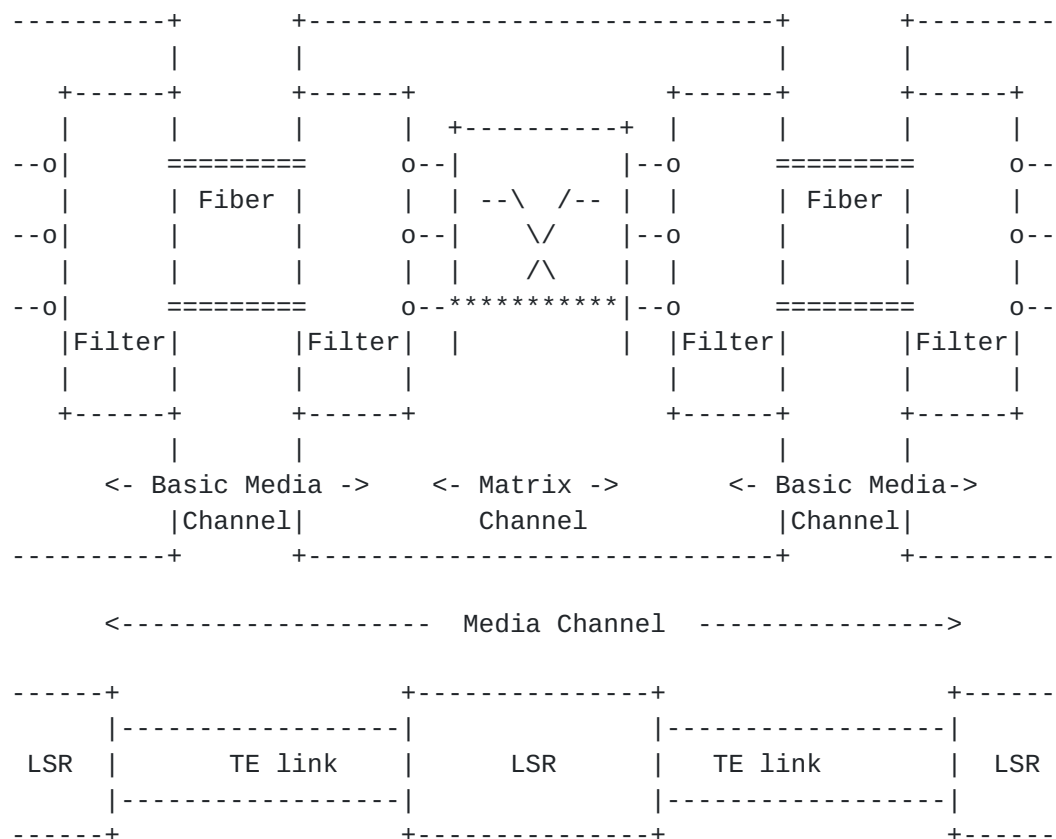


Figure 9: Extended Media Channel

Furthermore, if appropriate, the media channel can also be represented as a TE link or Forwarding Adjacency (FA) [[RFC4206](#)], augmenting the control plane network model.



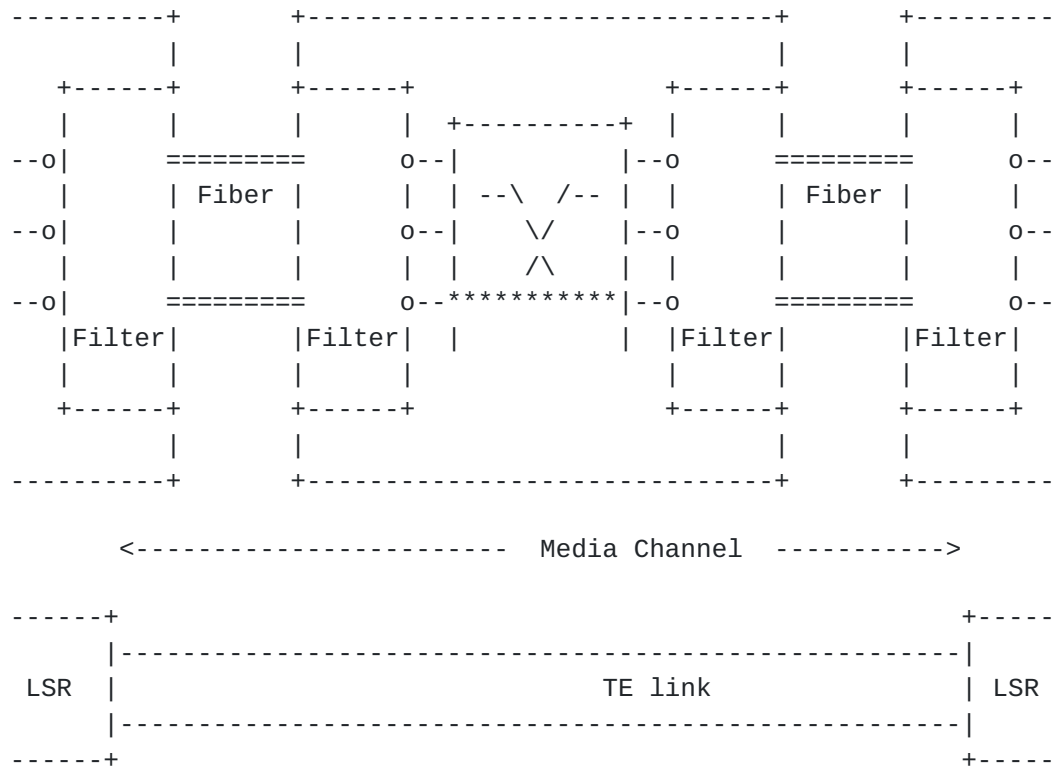


Figure 10: Extended Media Channel / TE Link / FA

#### 4.3. Consideration of LSPs in Flexi-grid

The flexi-grid LSP is a control plane representation of a media channel. Since network media channels are media channels, an LSP may also be the control plane representation of a network media channel (without considering the adaptation functions). From a control plane perspective, the main difference (regardless of the actual effective frequency slot which may be dimensioned arbitrarily) is that the LSP that represents a network media channel also includes the endpoints (transceivers), including the cross-connects at the ingress and egress nodes. The ports towards the client can still be represented as interfaces from the control plane perspective.

Figure 11 shows an LSP routed between 3 nodes. The LSP is terminated before the optical matrix of the ingress and egress nodes and can represent a media channel. This case does not (and cannot) represent a network media channel because it does not include (and cannot include) the transceivers.



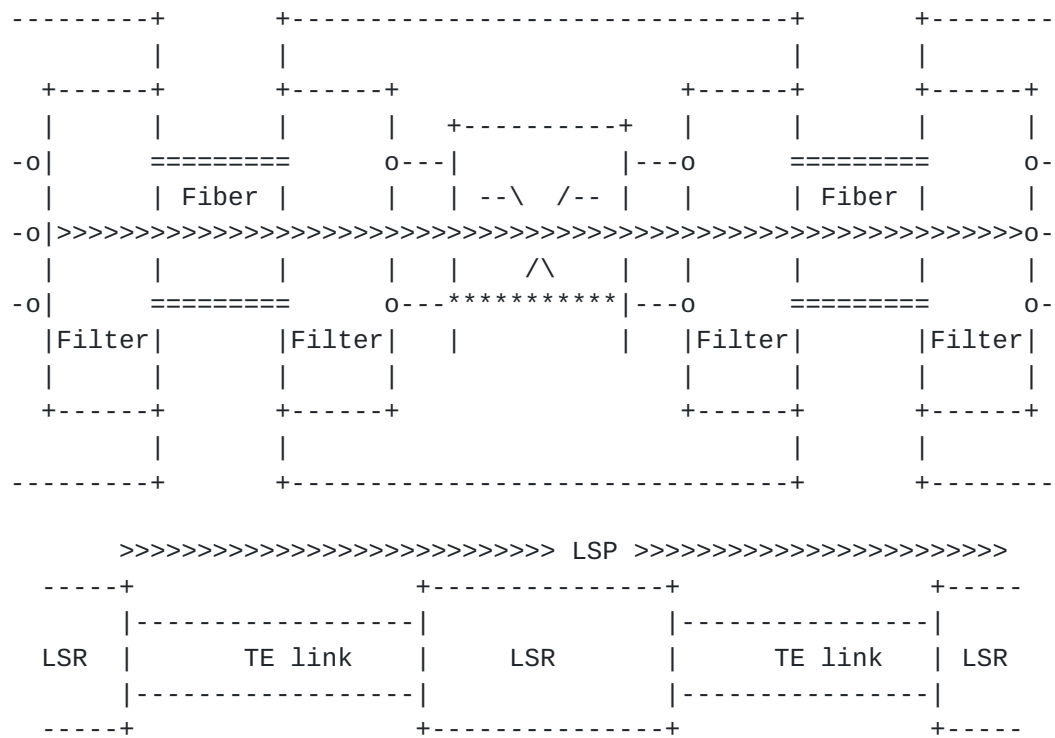


Figure 11: Flex-grid LSP Representing a Media Channel that Starts at the Filter of the Outgoing Interface of the Ingress LSR and ends at the Filter of the Incoming Interface of the Egress LSR

In Figure 12 a Network Media Channel is represented as terminated at the network side of the transceivers. This is commonly named an OTSi-trail connection.



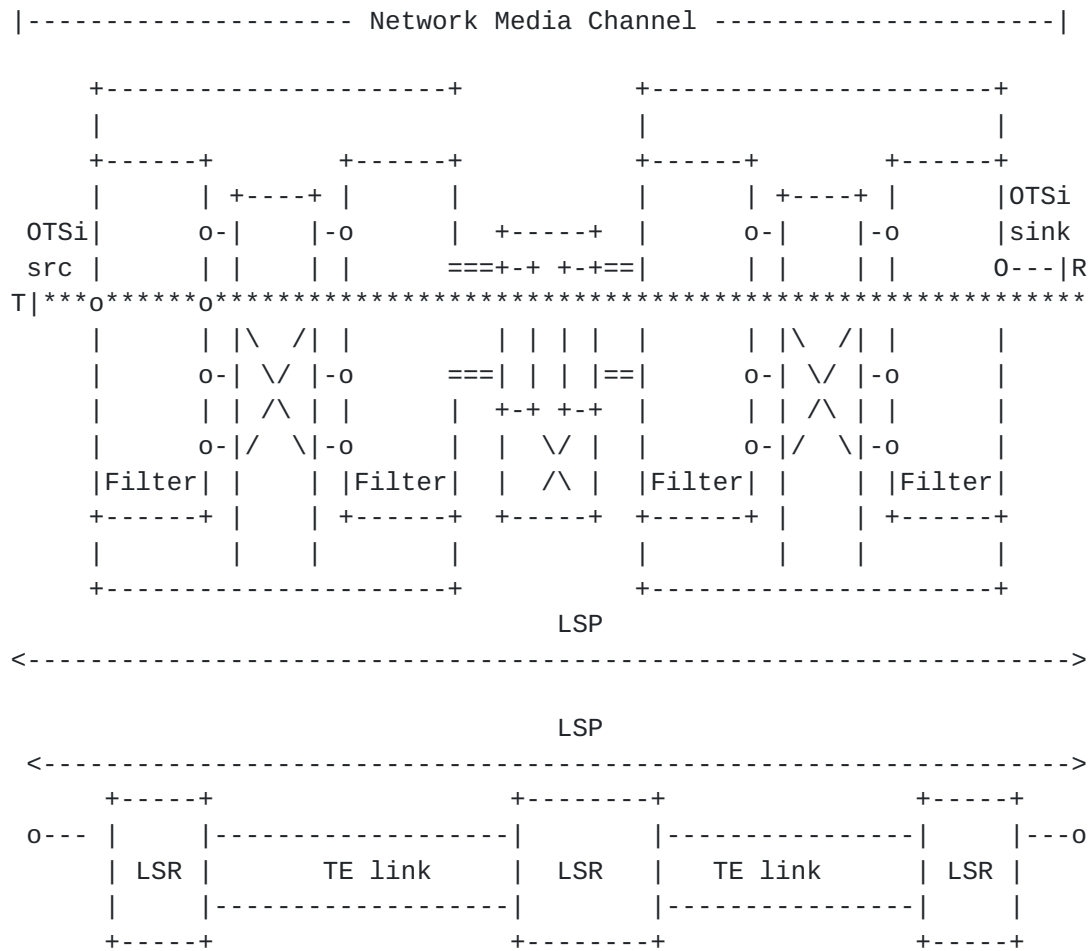


Figure 12: LSP Representing a Network Media Channel (OTSi Trail)

In a third case, a Network Media Channel is terminated on the Filter ports of the Ingress and Egress nodes. This is named in G.872 as OTSi Network Connection. As can be seen from the figures, there is no difference from a GMPLS modelling perspective between these cases, but they are shown as distinct examples to highlight the differences in the data plane.





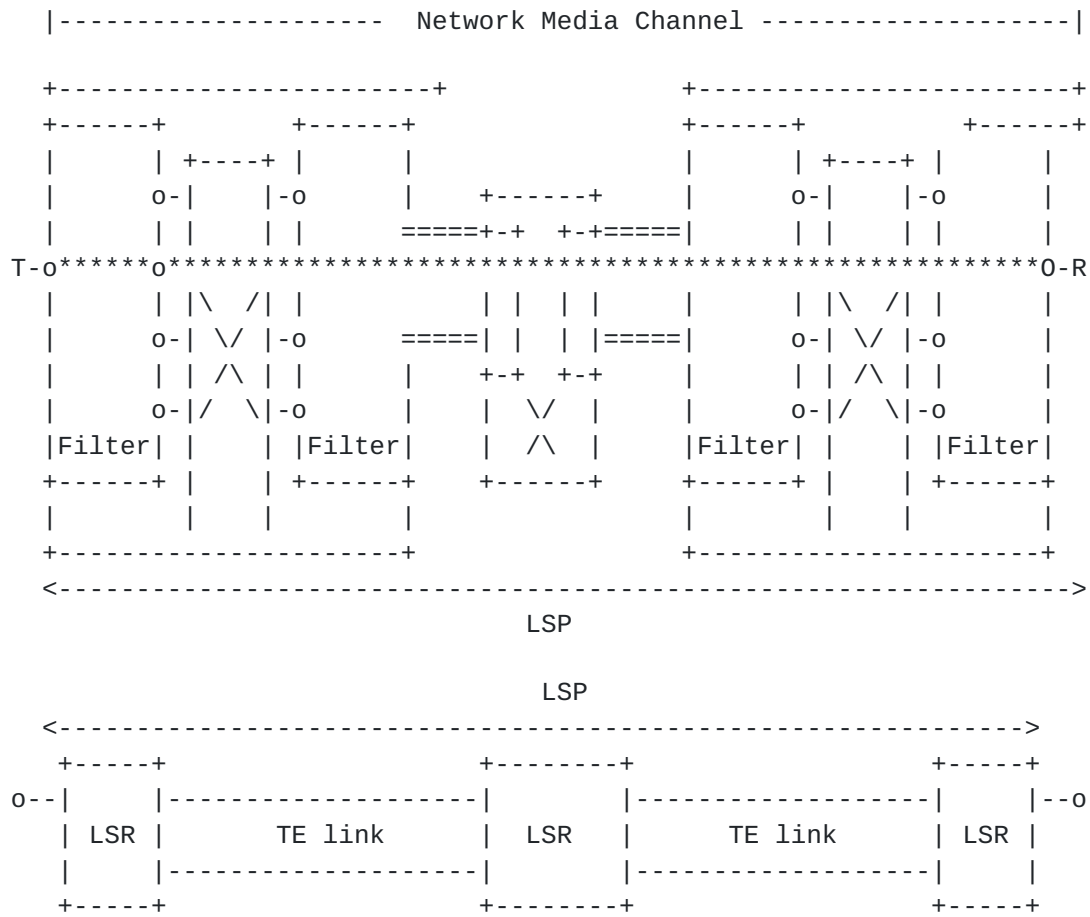


Figure 13: LSP Representing a Network Media Channel (OTSi Network Connection)

Applying the notion of hierarchy at the media layer, by using the LSP as an FA (i.e., by using hierarchical LSPs), the media channel created can support multiple (sub-)media channels.



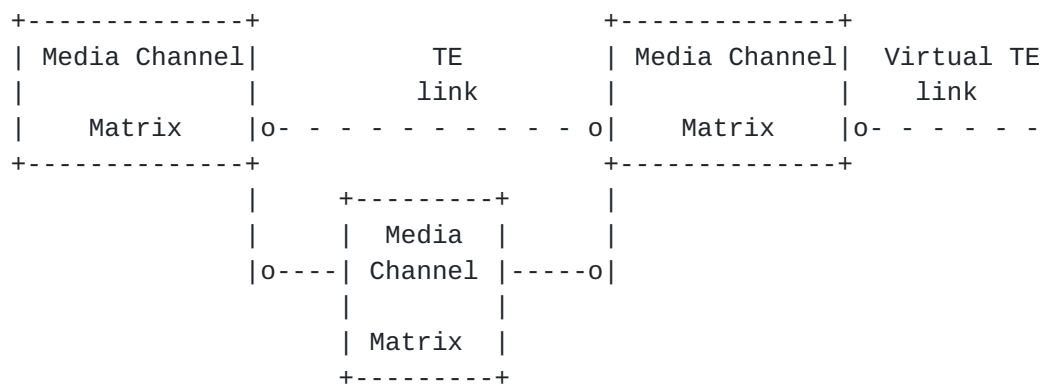


Figure 14: Topology View with TE Link / FA

Note that there is only one media layer switch matrix (one implementation is a FlexGrid ROADM) in SSON, while a signal layer LSP (Network Media Channel) is established mainly for the purpose of management and control of individual optical signals. Signal layer LSPs with the same attributes (such as source and destination) can be grouped into one media-layer LSP (media channel): this has advantages in spectral efficiency (reduce guard band between adjacent OChs in one FSC channel) and LSP management. However, assuming some network elements perform signal layer switching in an SSON, there must be enough guard band between adjacent OTSis in any media channel to compensate for the filter concatenation effects and other effects caused by signal layer switching elements. In such a situation, the separation of the signal layer from the media layer does not bring any benefit in spectral efficiency or in other aspects, but makes the network switch and control more complex. If two OTSis must be switched to different ports, it is better to carry them by different FSC channels, and the media layer switch is enough in this scenario.

As discussed in [Section 3.2.5](#), a media channel may be constructed from a composite of network media channels. This may be achieved in two ways using LSPs. These mechanisms may be compared to the techniques used in GMPLS to support inverse multiplexing in Time Division Multiplexing (TDM) networks and in OTN [[RFC4606](#)], [[RFC6344](#)], and [[RFC7139](#)].

- o In the first case, a single LSP may be established in the control plane. The signaling messages include information for all of the component network media channels that make up the composite media channel.
- o In the second case, each component network media channel is established using a separate control plane LSP, and these LSPs are



associated within the control plane so that the end points may see them as a single media channel.

#### **4.4. Control Plane Modeling of Network Elements**

Optical transmitters and receivers may have different tunability constraints, and media channel matrixes may have switching restrictions. Additionally, a key feature of their implementation is their highly asymmetric switching capability which is described in detail in [[RFC6163](#)]. Media matrices include line side ports that are connected to DWDM links, and tributary side input/output ports that can be connected to transmitters/receivers.

A set of common constraints can be defined:

- o Slot widths: The minimum and maximum slot width.
- o Granularity: The optical hardware may not be able to select parameters with the lowest granularity (e.g., 6.25 GHz for nominal central frequencies or 12.5 GHz for slot width granularity).
- o Available frequency ranges: The set or union of frequency ranges that have not been allocated (i.e., are available). The relative grouping and distribution of available frequency ranges in a fiber is usually referred to as "fragmentation".
- o Available slot width ranges: The set or union of slot width ranges supported by media matrices. It includes the following information.
  - \* Slot width threshold: The minimum and maximum Slot Width supported by the media matrix. For example, the slot width could be from 50GHz to 200GHz.
  - \* Step granularity: The minimum step by which the optical filter bandwidth of the media matrix can be increased or decreased. This parameter is typically equal to slot width granularity (i.e., 12.5GHz) or integer multiples of 12.5GHz.

#### **4.5. Media Layer Resource Allocation Considerations**

A media channel has an associated effective frequency slot. From the perspective of network control and management, this effective slot is seen as the "usable" end-to-end frequency slot. The establishment of an LSP is related to the establishment of the media channel and the configuration of the effective frequency slot.



A "service request" is characterized (at a minimum) by its required effective slot width. This does not preclude that the request may add additional constraints such as also imposing the nominal central frequency. A given effective frequency slot may be requested for the media channel in the control plane LSP setup messages, and a specific frequency slot can be requested on any specific hop of the LSP setup. Regardless of the actual encoding, the LSP setup message specifies a minimum effective frequency slot width that needs to be fulfilled in order to successfully establish the requested LSP.

An effective frequency slot must equally be described in terms of a central nominal frequency and its slot width (in terms of usable spectrum of the effective frequency slot). That is, it must be possible to determine the end-to-end values of the  $n$  and  $m$  parameters. We refer to this by saying that the "effective frequency slot of the media channel/LSP must be valid".

In GMPLS the requested effective frequency slot is represented to the TSpec present in the RSVP-TE Path message, and the effective frequency slot is mapped to the FlowSpec carried in the RSVP-TE Resv message.

In GMPLS-controlled systems, the switched element corresponds to the 'label'. In flexi-grid where the switched element is a frequency slot, the label represents a frequency slot. In consequence, the label in flexi-grid conveys the necessary information to obtain the frequency slot characteristics (i.e, central frequency and slot width: the  $n$  and  $m$  parameters). The frequency slot is locally identified by the label.

The local frequency slot may change at each hop, given hardware constraints and capabilities (e.g., a given node might not support the finest granularity). This means that the values of  $n$  and  $m$  may change at each hop. As long as a given downstream node allocates enough optical spectrum,  $m$  can be different along the path. This covers the issue where media matrices can have different slot width granularities. Such variations in the local value of  $m$  will appear in the allocated label that encodes the frequency slot as well as the in the FlowSpec that describes the flow.

Different operational modes can be considered. For Routing and Spectrum Assignment (RSA) with explicit label control, and for Routing and Distributed Spectrum Assignment (R+DSA), the GMPLS signaling procedures are similar to those described in [section 4.1.3 of \[RFC6163\]](#) for Routing and Wavelength Assignment (RWA) and for Routing and Distributed Wavelength Assignment (R+DWA). The main difference is that the label set specifies the available nominal central frequencies that meet the slot width requirements of the LSP.





The intermediate nodes use the control plane to collect the acceptable central frequencies that meet the slot width requirement hop by hop. The tail-end node also needs to know the slot width of an LSP to assign the proper frequency resource. Except for identifying the resource (i.e., fixed wavelength for WSON, and frequency resource for flexible grids), the other signaling requirements (e.g., unidirectional or bidirectional, with or without converters) are the same as for WSON as described in [section 6.1 of \[RFC6163\]](#).

Regarding how a GMPLS control plane can assign  $n$  and  $m$  hop-by-hop along the path of an LSP, different cases can apply:

- a.  $n$  and  $m$  can both change. It is the effective frequency slot that matters, it needs to remain valid along the path.
- b.  $m$  can change, but  $n$  needs to remain the same along the path. This ensures that the nominal central frequency stays the same, but the width of the slot can vary along the path. Again, the important thing is that the effective frequency slot remains valid and satisfies the requested parameters along the whole path of the LSP.
- c.  $n$  and  $m$  need to be unchanging along the path. This ensures that the frequency slot is well-known end-to-end, and is a simple way to ensure that the effective frequency slot remains valid for the whole LSP.
- d.  $n$  can change, but  $m$  needs to remain the same along the path. This ensures that the effective frequency slot remains valid, but allows the frequency slot to be moved within the spectrum from hop to hop.

The selection of a path that ensures  $n$  and  $m$  continuity can be delegated to a dedicated entity such as a Path Computation Element (PCE). Any constraint (including frequency slot and width granularities) can be taken into account during path computation. Alternatively, A PCE can compute a path leaving the actual frequency slot assignment to be done, for example, with a distributed (signaling) procedure:

- o Each downstream node ensures that  $m$  is  $\geq$  requested $_m$ .
- o A downstream node cannot foresee what an upstream node will allocate. A way to ensure that the effective frequency slot is valid along the length of the LSP is to ensure that the same value of  $n$  is allocated at each hop. By forcing the same value of  $n$  we avoid cases where the effective frequency slot of the media



channel is invalid (that is, the resulting frequency slot cannot be described by its  $n$  and  $m$  parameters).

- 0 This may be too restrictive, since a node (or even a centralized/combined RSA entity) may be able to ensure that the resulting end-to-end effective frequency slot is valid even if  $n$  varies locally. That means, the effective frequency slot that characterizes the media channel from end to end is consistent and is determined by its  $n$  and  $m$  values, but that the effective frequency slot and those values are logical (i.e., do not map direct to the physically assigned spectrum) in the sense that they are the result of the intersection of locally-assigned frequency slots applicable at local components (such as filters) each of which may have assigned different frequency slots.

For Figure 15 the effective slot is made valid by ensuring that the minimum  $m$  is greater than the requested  $m$ . The effective slot (intersection) is the lowest  $m$  (bottleneck).

For Figure 16 the effective slot is made valid by ensuring that it is valid at each hop in the upstream direction. The intersection needs to be computed because invalid slots could result otherwise.

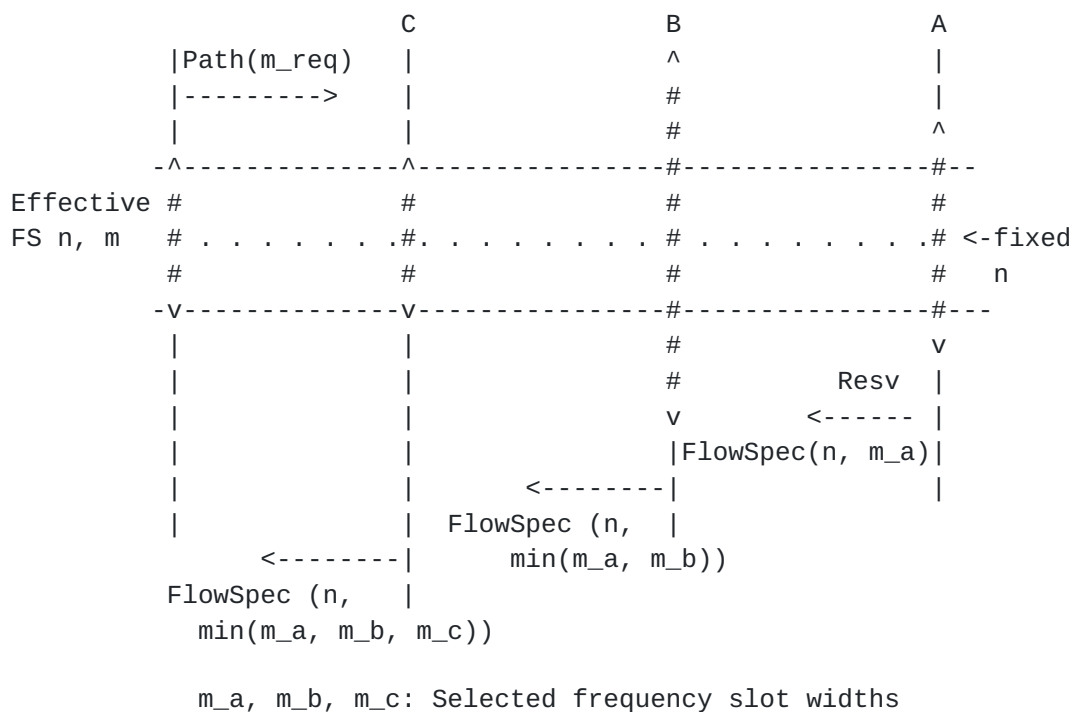


Figure 15: Distributed Allocation with Different  $m$  and Same  $n$



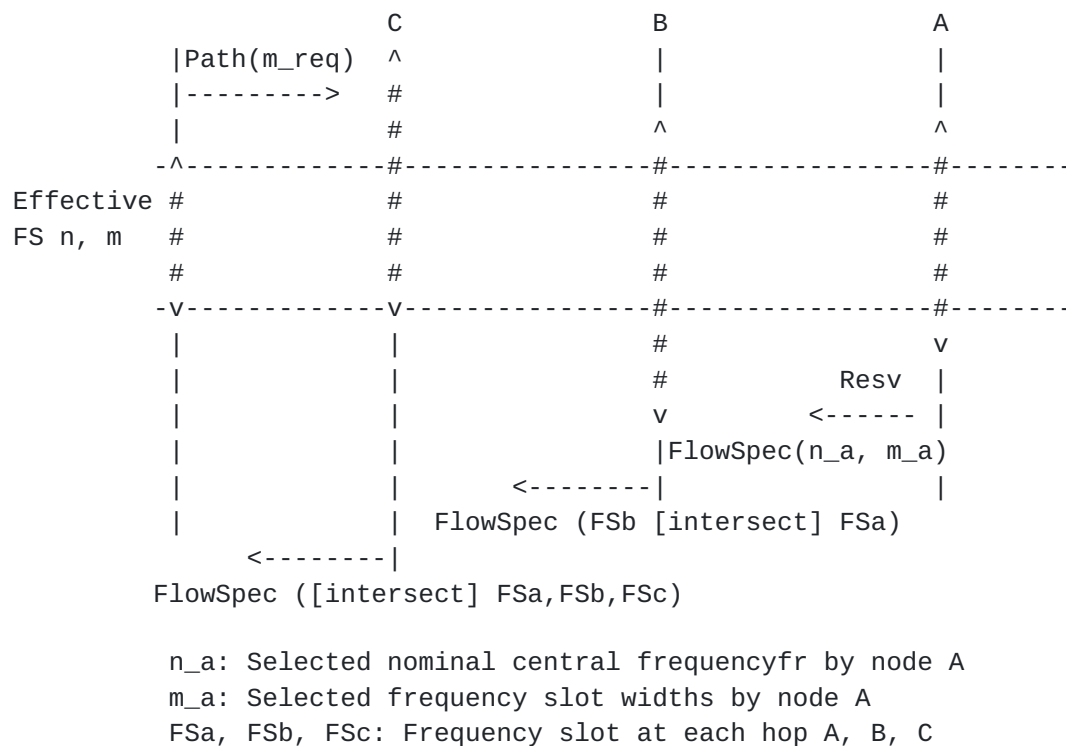


Figure 16: Distributed Allocation with Different m and Different n

Note, when a media channel is bound to one OTSi (i.e., is a network media channel), the effective FS must be the one of the OTSi. The media channel setup by the LSP may contain the effective FS of the network media channel effective FS. This is an endpoint property: the egress and ingress have to constrain the Effective FS to be the OTSi Effective FS.

#### 4.6. Neighbor Discovery and Link Property Correlation

There are potential interworking problems between fixed-grid DWDM and flexi-grid DWDM nodes. Additionally, even two flexi-grid nodes may have different grid properties, leading to link property conflict with resulting limited interworking.

Devices or applications that make use of the flexi-grid might not be able to support every possible slot width. In other words, different applications may be defined where each supports a different grid granularity. In this case the link between two optical nodes with different grid granularities must be configured to align with the larger of both granularities. Furthermore, different nodes may have different slot-width tuning ranges.



In summary, in a DWDM Link between two nodes, at least the following properties need to be negotiated:

- o Grid capability (channel spacing) - Between fixed-grid and flexi-grid nodes.
- o Grid granularity - Between two flexi-grid nodes.
- o Slot width tuning range - Between two flexi-grid nodes.

#### **4.7. Path Computation / Routing and Spectrum Assignment (RSA)**

In WSON, if there is no (available) wavelength converter in an optical network, an LSP is subject to the "wavelength continuity constraint" (see [section 4 of \[RFC6163\]](#)). Similarly in flexi-grid, if the capability to shift or convert an allocated frequency slot is absent, the LSP is subject to the "Spectrum Continuity Constraint".

Because of the limited availability of wavelength/spectrum converters (in what is called a "sparse translucent optical network") the wavelength/spectrum continuity constraint always has to be considered. When available, information regarding spectrum conversion capabilities at the optical nodes may be used by RSA mechanisms.

The RSA process determines a route and frequency slot for an LSP. Hence, when a route is computed the spectrum assignment process (SA) determines the central frequency and slot width based on the slot width and available central frequencies information of the transmitter and receiver, and utilizing the available frequency ranges information and available slot width ranges of the links that the route traverses.

##### **4.7.1. Architectural Approaches to RSA**

Similar to RWA for fixed grids [\[RFC6163\]](#), different ways of performing RSA in conjunction with the control plane can be considered. The approaches included in this document are provided for reference purposes only: other possible options could also be deployed.

Note that all of these models allow the concept of a composite media channel supported by a single control plane LSP or by a set of associated LSPs.





#### **4.7.1.1. Combined RSA (R&SA)**

In this case, a computation entity performs both routing and frequency slot assignment. The computation entity needs access to detailed network information, e.g., the connectivity topology of the nodes and links, the available frequency ranges on each link, the node capabilities, etc.

The computation entity could reside on a dedicated PCE server, in the provisioning application that requests the service, or on the ingress node.

#### **4.7.1.2. Separated RSA (R+SA)**

In this case, routing computation and frequency slot assignment are performed by different entities. The first entity computes the routes and provides them to the second entity. The second entity assigns the frequency slot.

The first entity needs the connectivity topology to compute the proper routes. The second entity needs information about the available frequency ranges of the links and the capabilities of the nodes in order to assign the spectrum.

#### **4.7.1.3. Routing and Distributed SA (R+DSA)**

In this case an entity computes the route, but the frequency slot assignment is performed hop-by-hop in a distributed way along the route. The available central frequencies which meet the spectrum continuity constraint need to be collected hop-by-hop along the route. This procedure can be implemented by the GMPLS signaling protocol.

### **4.8. Routing and Topology Dissemination**

In the case of the combined RSA architecture, the computation entity needs the detailed network information, i.e., connectivity topology, node capabilities, and available frequency ranges of the links. Route computation is performed based on the connectivity topology and node capabilities, while spectrum assignment is performed based on the available frequency ranges of the links. The computation entity may get the detailed network information via the GMPLS routing protocol.

For WSON, the connectivity topology and node capabilities can be advertised by the GMPLS routing protocol (refer to [section 6.2 of \[RFC6163\]](#)). Except for wavelength-specific availability information,



the information for flexi-grid is the same as for WSON and can equally be distributed by the GMPLS routing protocol.

This section analyses the necessary changes on link information brought by flexible grids.

#### **4.8.1. Available Frequency Ranges/Slots of DWDM Links**

In the case of flexible grids, channel central frequencies span from 193.1 THz towards both ends of the C band spectrum with 6.25 GHz granularity. Different LSPs could make use of different slot widths on the same link. Hence, the available frequency ranges need to be advertised.

#### **4.8.2. Available Slot Width Ranges of DWDM Links**

The available slot width ranges need to be advertised in combination with the available frequency ranges, in order that the computing entity can verify whether an LSP with a given slot width can be set up or not. This is constrained by the available slot width ranges of the media matrix. Depending on the availability of the slot width ranges, it is possible to allocate more spectrum than strictly needed by the LSP.

#### **4.8.3. Spectrum Management**

The total available spectrum on a fiber can be described as a resource that can be partitioned. For example, a part of the spectrum could be assigned to a third party to manage, or parts of the spectrum could be assigned by the operator for different classes of traffic. This partitioning creates the impression that spectrum is a hierarchy in view of Management and Control Plane: each partition could be itself be partitioned. However, the hierarchy is created purely within a management system: it defines a hierarchy of access or management rights, but there is no corresponding resource hierarchy within the fiber.

The end of fiber is a link end and presents a fiber port which represents all of spectrum available on the fiber. Each spectrum allocation appears as Link Channel Port (i.e., frequency slot port) within fiber. Thus, while there is a hierarchy of ownership (the Link Channel Port and corresponding LSP are located on a fiber and so associated with a fiber port) there is no continued nesting hierarchy of frequency slots within larger frequency slots. In its way, this mirrors the fixed grid behavior where a wavelength is associated with a port/fiber, but cannot be subdivided even though it is a partition of the total spectrum available on the fiber.



#### **4.8.4. Information Model**

This section defines an information model to describe the data that represents the capabilities and resources available in an flexi-grid network. It is not a data model and is not intended to limit any protocol solution such as an encoding for an IGP. For example, information required for routing/path selection may be the set of available nominal central frequencies from which a frequency slot of the required width can be allocated. A convenient encoding for this information is for further study in an IGP encoding document.

Fixed DWDM grids can also be described via suitable choices of slots in a flexible DWDM grid. However, devices or applications that make use of the flexible grid may not be capable of supporting every possible slot width or central frequency position. Thus, the information model needs to enable:

- exchange of information to enable RSA in a flexi-grid network

- representation of a fixed grid device participating in a flexi-grid network

- full interworking of fixed and flexible grid devices within the same network

- interworking of flexgrid devices with different capabilities.

The information model is represented using Routing Backus-Naur Format (RBNF) as defined in [[RFC5511](#)].



```

<Available Spectrum> ::=
  <Available Frequency Range-List>
  <Available NCFs>
  <Available Slot Widths>

where

<Available Frequency Range-List> ::=
  <Available Frequency Range> [<Available Frequency Range-List>]

<Available Frequency Range> ::=
  ( <Start NCF> <End NCF> ) |
  <FS defined by (n, m) containing contiguous available NCFs>

and

<Available NCFs> ::=
  <Available NCF Granularity> [<Offset>]
  -- Subset of supported n values given by  $p \times n + q$ 
  -- where p is a positive integer
  -- and q (offset) belongs to  $0, \dots, p-1$ .

and

<Available Slot Widths> ::=
  <Available Slot Width Granularity>
  <Min Slot Width>
  -- given by  $j \times 12.5\text{GHz}$ , with j a positive integer
  <Max Slot Width>
  -- given by  $k \times 12.5\text{GHz}$ , with k a positive integer ( $k \geq j$ )

```

Figure 17: Routing Information Model

## 5. Control Plane Requirements

The control of a flexi-grid networks places additional requirements on the GMPLS protocols. This section summarizes those requirements for signaling and routing.

### 5.1. Support for Media Channels

The control plane SHALL be able to support Media Channels, characterized by a single frequency slot. The representation of the Media Channel in the GMPLS control plane is the so-called flexi-grid LSP. Since network media channels are media channels, an LSP may also be the control plane representation of a network media channel.





Consequently, the control plane will also be able to support Network Media Channels.

#### **5.1.1. Signaling**

The signaling procedure SHALL be able to configure the nominal central frequency ( $n$ ) of a flexi-grid LSP.

The signaling procedure SHALL allow a flexible range of values for the frequency slot width ( $m$ ) parameter. Specifically, the control plane SHALL allow setting up a media channel with frequency slot width ( $m$ ) ranging from a minimum of  $m=1$  (12.5GHz) to a maximum of the entire C-band (the wavelength range 1530 nm to 1565 nm, which corresponds to the amplification range of erbium doped fiber amplifiers) with a slot width granularity of 12.5GHz.

The signaling procedure SHALL be able to configure the minimum width ( $m$ ) of a flexi-grid LSP. In addition, the signaling procedure SHALL be able to configure local frequency slots.

The control plane architecture SHOULD allow for the support of L-band (the wavelength range 1565 nm to 1625 nm) and S-band (the wavelength range 1460 nm to 1530 nm).

The signalling process SHALL be able to collect the local frequency slot assigned at each link along the path.

The signaling procedures SHALL support all of the RSA architectural models (R&SA, R+SA, and R+DSA) within a single set of protocol objects although some objects may only be applicable within one of the models.

#### **5.1.2. Routing**

The routing protocol will support all functions as described in [[RFC4202](#)] and extend them to a flexi-grid data plane.

The routing protocol SHALL distribute sufficient information to compute paths to enable the signaling procedure to establish LSPs as described in the previous sections. This includes, at a minimum the data described by the Information Model in Figure 17.

The routing protocol SHALL update its advertisements of available resources and capabilities as the usage of resources in the network varies with the establishment or tear-down of LSPs. These updates SHOULD be amenable to damping and thresholds as in other traffic engineering routing advertisements.



The routing protocol SHALL support all of the RSA architectural models (R&SA, R+SA, and R+DSA) without any configuration or change of behavior. Thus, the routing protocols SHALL be agnostic to the computation and signaling model that is in use.

## **5.2. Support for Media Channel Resizing**

The signaling procedures SHALL allow resizing (grow or shrink) the frequency slot width of a media channel/network media channel. The resizing MAY imply resizing the local frequency slots along the path of the flexi-grid LSP.

The routing protocol SHALL update its advertisements of available resources and capabilities as the usage of resources in the network varies with the resizing of LSP. These updates SHOULD be amenable to damping and thresholds as in other traffic engineering routing advertisements.

## **5.3. Support for Logical Associations of Multiple Media Channels**

A set of media channels can be used to transport signals that have a logical association between them. The control plane architecture SHOULD allow multiple media channels to be logically associated. The control plane SHOULD allow the co-routing of a set of media channels that are logically associated.

## **5.4. Support for Composite Media Channels**

As described in [Section 3.2.5](#) and [Section 4.3](#), a media channel may be composed of multiple network media channels.

The signaling procedures SHOULD include support for signaling a single control plane LSP that includes information about multiple network media channels that will comprise the single compound media channel.

The signaling procedures SHOULD include a mechanism to associate separately signaled control plane LSPs so that the end points may correlate them into a single compound media channel.

The signaling procedures MAY include a mechanism to dynamically vary the composition of a composite media channel by allowing network media channels to be added to or removed from the whole.

The routing protocols MUST provide sufficient information for the computation of paths and slots for composite media channels using any of the three RSA architectural models (R&SA, R+SA, and R+DSA).



### **5.5. Support for Neighbor Discovery and Link Property Correlation**

The control plane MAY include support for neighbor discovery such that an flexi-grid network can be constructed in a "plug-and-play" manner. Note, however, that in common operational practice validation processes are used rather than automatic discovery.

The control plane SHOULD allow the nodes at opposite ends of a link to correlate the properties that they will apply to the link. Such correlation SHOULD include at least the identities of the node and the identities they apply to the link. Other properties such as the link characteristics described for the routing information model in Figure 17 SHOULD also be correlated.

Such neighbor discovery and link property correlation, if provided, MUST be able to operate in both an out-of-band and an out-of-fiber control channel.

## **6. IANA Considerations**

This framework document makes no requests for IANA action.

## **7. Security Considerations**

The control plane and data plane aspects of a flexi-grid system are fundamentally the same as a fixed grid system and there is no substantial reason to expect the security considerations to be any different.

A good overview of the security considerations for a GMPLS-based control plane can be found in [[RFC5920](#)].

[RFC6163] includes a section describing security considerations for WSON, and it is reasonable to infer that these considerations apply and may be exacerbated in a flexi-grid SSON system. In particular, the detailed and granular information describing a flexi-grid network and the capabilities of nodes in that network could put stress on the routing protocol or the out-of-band control channel used by the protocol. An attacker might be able to cause small variations in the use of the network or the available resources (perhaps by modifying the environment of a fiber) and so trigger the routing protocol to make new flooding announcements. This situation is explicitly mitigated in the requirements for the routing protocol extensions where it is noted that the protocol must include damping and configurable thresholds as already exist in the core GMPLS routing protocols.



## 8. Manageability Considerations

GMPLS systems already contain a number of management tools.

- o MIB modules exist to model the control plane protocols and the network elements [[RFC4802](#)], [[RFC4803](#)], and there is early work to provide similar access through YANG. The features described in these models are currently designed to represent fixed-label technologies such as optical networks using the fixed grid: extensions may be needed in order to represent bandwidth, frequency slots, and effective frequency slots in flexi-grid networks.
- o There are protocol extensions within GMPLS signaling to allow control plane systems to report the presence of faults that affect LSPs [[RFC4783](#)], although it must be carefully noted that these mechanisms do not constitute an alarm mechanism that could be used to rapidly propagate information about faults in a way that would allow the data plane to perform protection switching. These mechanisms could easily be enhanced with the addition of technology-specific reason codes if any are needed.
- o The GMPLS protocols, themselves, already include fault detection and recovery mechanisms (such as the PathErr and Notify messages in RSVP-TE signaling as used by GMPLS [[RFC3473](#)]). It is not anticipated that these mechanisms will need enhancement to support flexi-grid although additional reason codes may be needed to describe technology-specific error cases.
- o [[RFC7260](#)] describes a framework for the control and configuration of data plane Operations, Administration, and Management (OAM). It would not be appropriate for the IETF to define or describe data plane OAM for optical systems, but the framework described in [RFC 7260](#) could be used (with minor protocol extensions) to enable data plane OAM that has been defined by the originators of the flexi-grid data plane technology (the ITU-T).
- o The Link Management Protocol [[RFC4204](#)] is designed to allow the two ends of a network link to coordinate and confirm the configuration and capabilities that they will apply to the link. This protocol is particularly applicable to optical links where the characteristics of the network devices may considerably affect how the link is used and where misconfiguration or mis-fibering could make physical interoperability impossible. LMP could easily be extended to collect and report information between the end points of links in a flexi-grid network.





## **9. Authors**

Fatai Zhang  
Huawei  
Huawei Base, Longgang District, Chine  
zhangfatai@huawei.com

Xihua Fu  
ZTE  
ZTE Plaza, No.10, Tangyan South Road, Gaoxin District, China  
fu.xihua@zte.com.cn

Daniele Ceccarelli  
Ericsson  
Via Calda 5, Genova, Italy  
daniele.ceccarelli@ericsson.com

Iftekhar Hussain  
Infinera  
140 Caspian Ct, Sunnyvale, 94089, USA  
ihussain@infinera.com

## **10. Contributing Authors**

Adrian Farrel  
Old Dog Consulting  
adrian@olddog.co.uk

Daniel King  
Old Dog Consulting  
daniel@olddog.co.uk

Xian Zhang  
Huawei  
zhang.xian@huawei.com

Cyril Margaria  
Juniper Networks  
cmargaria@juniper.net



Qilei Wang  
ZTE  
Ruanjian Avenue, Nanjing, China  
wang.qilei@zte.com.cn

Malcolm Betts  
ZTE  
malcolm.betts@zte.com.cn

Sergio Belotti  
Alcatel Lucent  
Optics CTO  
Via Trento 30 20059 Vimercate (Milano) Italy  
+39 039 6863033  
sergio.belotti@alcatel-lucent.com

Yao Li  
Nanjing University  
wsliguotou@hotmail.com

Fei Zhang  
Huawei  
zhangfei7@huawei.com

Lei Wang  
wang.lei@bupt.edu.cn

Guoying Zhang  
China Academy of Telecom Research  
No.52 Huayuan Bei Road, Beijing, China  
zhangguoying@ritt.cn

Takehiro Tsuritani  
KDDI R&D Laboratories Inc.  
2-1-15 Ohara, Fujimino, Saitama, Japan  
tsuri@kddilabs.jp

Lei Liu  
U.C. Davis, USA  
leiliu@ucdavis.edu



Eve Varma  
Alcatel-Lucent  
+1 732 239 7656  
eve.varma@alcatel-lucent.com

Young Lee  
Huawei

Jianrui Han  
Huawei

Sharfuddin Syed  
Infinera

Rajan Rao  
Infinera

Marco Sosa  
Infinera

Biao Lu  
Infinera

Abinder Dhillon  
Infinera

Felipe Jimenez Arribas  
Telefonica I+D

Andrew G. Malis  
Huawei  
agmalis@gmail.com

Huub van Helvoort  
Hai Gaoming BV  
The Netherlands  
huubatwork@gmail.com



## **11. Acknowledgments**

The authors would like to thank Pete Anslow for his insights and clarifications, and to Matt Hartley and Jonas Maertensson for their reviews.

This work was supported in part by the FP-7 IDEALIST project under grant agreement number 317999.

## **12. References**

### **12.1. Normative References**

- [G.694.1] International Telecommunications Union, "ITU-T Recommendation G.694.1, Spectral grids for WDM applications: DWDM frequency grid", November 2012.
- [G.800] International Telecommunications Union, "ITU-T Recommendation G.800, Unified functional architecture of transport networks.", February 2012.
- [G.805] International Telecommunications Union, "ITU-T Recommendation G.805, Generic functional architecture of transport networks.", March 2000.
- [G.8080] International Telecommunications Union, "ITU-T Recommendation G.8080/Y.1304, Architecture for the automatically switched optical network", 2012.
- [G.870] International Telecommunications Union, "ITU-T Recommendation G.870/Y.1352, Terms and definitions for optical transport networks", November 2012.
- [G.872] International Telecommunications Union, "ITU-T Recommendation G.872, Architecture of optical transport networks, draft v0.16 2012/09 (for discussion)", 2012.
- [G.959.1-2013] International Telecommunications Union, "Update of ITU-T Recommendation G.959.1, Optical transport network physical layer interfaces", 2013.
- [RFC2119] Bradner, S., "Key words for use in RFCs to Indicate Requirement Levels", [BCP 14](#), [RFC 2119](#), DOI 10.17487/RFC2119, March 1997, <<http://www.rfc-editor.org/info/rfc2119>>.





- [RFC3945] Mannie, E., Ed., "Generalized Multi-Protocol Label Switching (GMPLS) Architecture", [RFC 3945](#), DOI 10.17487/RFC3945, October 2004, <<http://www.rfc-editor.org/info/rfc3945>>.
- [RFC4202] Kompella, K., Ed. and Y. Rekhter, Ed., "Routing Extensions in Support of Generalized Multi-Protocol Label Switching (GMPLS)", [RFC 4202](#), DOI 10.17487/RFC4202, October 2005, <<http://www.rfc-editor.org/info/rfc4202>>.
- [RFC4206] Kompella, K. and Y. Rekhter, "Label Switched Paths (LSP) Hierarchy with Generalized Multi-Protocol Label Switching (GMPLS) Traffic Engineering (TE)", [RFC 4206](#), DOI 10.17487/RFC4206, October 2005, <<http://www.rfc-editor.org/info/rfc4206>>.
- [RFC5511] Farrel, A., "Routing Backus-Naur Form (RBNF): A Syntax Used to Form Encoding Rules in Various Routing Protocol Specifications", [RFC 5511](#), DOI 10.17487/RFC5511, April 2009, <<http://www.rfc-editor.org/info/rfc5511>>.

## **12.2. Informative References**

- [RFC3473] Berger, L., Ed., "Generalized Multi-Protocol Label Switching (GMPLS) Signaling Resource ReserVation Protocol-Traffic Engineering (RSVP-TE) Extensions", [RFC 3473](#), DOI 10.17487/RFC3473, January 2003, <<http://www.rfc-editor.org/info/rfc3473>>.
- [RFC4204] Lang, J., Ed., "Link Management Protocol (LMP)", [RFC 4204](#), DOI 10.17487/RFC4204, October 2005, <<http://www.rfc-editor.org/info/rfc4204>>.
- [RFC4397] Bryskin, I. and A. Farrel, "A Lexicography for the Interpretation of Generalized Multiprotocol Label Switching (GMPLS) Terminology within the Context of the ITU-T's Automatically Switched Optical Network (ASON) Architecture", [RFC 4397](#), DOI 10.17487/RFC4397, February 2006, <<http://www.rfc-editor.org/info/rfc4397>>.
- [RFC4606] Mannie, E. and D. Papadimitriou, "Generalized Multi-Protocol Label Switching (GMPLS) Extensions for Synchronous Optical Network (SONET) and Synchronous Digital Hierarchy (SDH) Control", [RFC 4606](#), DOI 10.17487/RFC4606, August 2006, <<http://www.rfc-editor.org/info/rfc4606>>.



- [RFC4783] Berger, L., Ed., "GMPLS - Communication of Alarm Information", [RFC 4783](#), DOI 10.17487/RFC4783, December 2006, <<http://www.rfc-editor.org/info/rfc4783>>.
- [RFC4802] Nadeau, T., Ed., Farrel, A., and , "Generalized Multiprotocol Label Switching (GMPLS) Traffic Engineering Management Information Base", [RFC 4802](#), DOI 10.17487/RFC4802, February 2007, <<http://www.rfc-editor.org/info/rfc4802>>.
- [RFC4803] Nadeau, T., Ed. and A. Farrel, Ed., "Generalized Multiprotocol Label Switching (GMPLS) Label Switching Router (LSR) Management Information Base", [RFC 4803](#), DOI 10.17487/RFC4803, February 2007, <<http://www.rfc-editor.org/info/rfc4803>>.
- [RFC5920] Fang, L., Ed., "Security Framework for MPLS and GMPLS Networks", [RFC 5920](#), DOI 10.17487/RFC5920, July 2010, <<http://www.rfc-editor.org/info/rfc5920>>.
- [RFC6163] Lee, Y., Ed., Bernstein, G., Ed., and W. Imajuku, "Framework for GMPLS and Path Computation Element (PCE) Control of Wavelength Switched Optical Networks (WSONs)", [RFC 6163](#), DOI 10.17487/RFC6163, April 2011, <<http://www.rfc-editor.org/info/rfc6163>>.
- [RFC6344] Bernstein, G., Ed., Caviglia, D., Rabbat, R., and H. van Helvoort, "Operating Virtual Concatenation (VCAT) and the Link Capacity Adjustment Scheme (LCAS) with Generalized Multi-Protocol Label Switching (GMPLS)", [RFC 6344](#), DOI 10.17487/RFC6344, August 2011, <<http://www.rfc-editor.org/info/rfc6344>>.
- [RFC7139] Zhang, F., Ed., Zhang, G., Belotti, S., Ceccarelli, D., and K. Pithewan, "GMPLS Signaling Extensions for Control of Evolving G.709 Optical Transport Networks", [RFC 7139](#), DOI 10.17487/RFC7139, March 2014, <<http://www.rfc-editor.org/info/rfc7139>>.
- [RFC7260] Takacs, A., Fedyk, D., and J. He, "GMPLS RSVP-TE Extensions for Operations, Administration, and Maintenance (OAM) Configuration", [RFC 7260](#), DOI 10.17487/RFC7260, June 2014, <<http://www.rfc-editor.org/info/rfc7260>>.



Authors' Addresses

Oscar Gonzalez de Dios (editor)  
Telefonica I+D  
Don Ramon de la Cruz 82-84  
Madrid 28045  
Spain

Phone: +34913128832  
Email: oscar.gonzalezdedios@telefonica.com

Ramon Casellas (editor)  
CTTC  
Av. Carl Friedrich Gauss n.7  
Castelldefels Barcelona  
Spain

Phone: +34 93 645 29 00  
Email: ramon.casellas@cttc.es

