

Network Working Group
Internet Draft
Intended status: Standards Track
Expires: May 2014

G. Bernstein
Grotto Networking
Y. Lee
D. Li
Huawei
W. Imajuku
NTT

November 13, 2013

**Routing and Wavelength Assignment Information Encoding for
Wavelength Switched Optical Networks**

[draft-ietf-ccamp-rwa-wson-encode-23.txt](#)

Status of this Memo

This Internet-Draft is submitted to IETF in full conformance with the provisions of [BCP 78](#) and [BCP 79](#).

Internet-Drafts are working documents of the Internet Engineering Task Force (IETF), its areas, and its working groups. Note that other groups may also distribute working documents as Internet-Drafts.

Internet-Drafts are draft documents valid for a maximum of six months and may be updated, replaced, or obsoleted by other documents at any time. It is inappropriate to use Internet-Drafts as reference material or to cite them other than as "work in progress."

The list of current Internet-Drafts can be accessed at <http://www.ietf.org/ietf/1id-abstracts.txt>

The list of Internet-Draft Shadow Directories can be accessed at <http://www.ietf.org/shadow.html>

This Internet-Draft will expire on May 13, 2013.

Copyright Notice

Copyright (c) 2013 IETF Trust and the persons identified as the document authors. All rights reserved.

This document is subject to [BCP 78](#) and the IETF Trust's Legal Provisions Relating to IETF Documents (<http://trustee.ietf.org/license-info>) in effect on the date of publication of this document. Please review these documents carefully, as they describe your rights and restrictions with respect to this document. Code Components extracted from this document must include Simplified BSD License text as described in Section 4.e of the [Trust Legal Provisions](#) and are provided without warranty as described in the Simplified BSD License.

Abstract

A wavelength switched optical network (WSON) requires that certain key information elements are made available to facilitate path computation and the establishment of label switching paths (LSPs). The information model described in "Routing and Wavelength Assignment Information for Wavelength Switched Optical Networks" shows what information is required at specific points in the WSON. Part of the WSON information model contains aspects that may be of general applicability to other technologies, while other parts are fairly specific to WSONs.

This document provides efficient, protocol-agnostic encodings for the WSON specific information elements. It is intended that protocol-specific documents will reference this memo to describe how information is carried for specific uses. Such encodings can be used to extend GMPLS signaling and routing protocols. In addition these encodings could be used by other mechanisms to convey this same information to a path computation element (PCE).

Conventions used in this document

The key words "MUST", "MUST NOT", "REQUIRED", "SHALL", "SHALL NOT", "SHOULD", "SHOULD NOT", "RECOMMENDED", "MAY", and "OPTIONAL" in this document are to be interpreted as described in [RFC-2119](#) [[RFC2119](#)].

Table of Contents

1.	Introduction.....	3
1.	Terminology.....	4
2.	Resources, Resource Blocks, and the Resource Pool.....	4
2.1.	Resource Block Set Field.....	5
3.	Resource Accessibility/Availability.....	6

3.1.	Resource Accessibility Field.....	6
3.2.	Resource Wavelength Constraints Field.....	8
3.3.	Resource Block Pool State (RBPoolState) Field.....	10
3.4.	Resource Block Shared Access Wavelength Availability (RBSharedAccessWaveAvailability) Field.....	11
4.	Resource Signal Constraints and Processing Capabilities.....	13
4.1.	Resource Block Information (ResourceBlockInfo) Field.....	13
4.2.	Shared Input or Output Indication.....	14
4.3.	Optical Interface Class List(s) Field.....	14
4.3.1.	Optical Interface Class Format.....	15
4.3.2.	ITU-G.698.1 Application Code Mapping.....	16
4.3.3.	ITU-G.698.2 Application Code Mapping.....	18
4.3.4.	ITU-G.959.1 Application Code Mapping.....	19
4.3.5.	ITU-G.695 Application Code Mapping.....	21
4.4.	Acceptable Client Signal List Field.....	23
4.5.	Input Bit Rate List Field.....	24
4.6.	Processing Capability List Field.....	24
4.6.1.	Processing Capabilities Field.....	24
5.	Security Considerations.....	26
6.	IANA Considerations.....	26
7.	Acknowledgments.....	26
	APPENDIX A: Encoding Examples.....	27
A.1.	Wavelength Converter Accessibility Field.....	27
A.2.	Wavelength Conversion Range Field.....	28
A.3.	An OEO Switch with DWDM Optics.....	29
8.	References.....	32
8.1.	Normative References.....	32
8.2.	Informative References.....	32
9.	Contributors.....	34
	Authors' Addresses.....	35
	Intellectual Property Statement.....	36
	Disclaimer of Validity.....	37

1. Introduction

A Wavelength Switched Optical Network (WSON) is a Wavelength Division Multiplexing (WDM) optical network in which switching is performed selectively based on the center wavelength of an optical signal.

[RFC6163] describes a framework for Generalized Multiprotocol Label Switching (GMPLS) and Path Computation Element (PCE) control of a WSON. Based on this framework, [[RWA-Info](#)] describes an information model that specifies what information is needed at various points in a WSON in order to compute paths and establish Label Switched Paths (LSPs).

This document provides efficient encodings of information needed by the routing and wavelength assignment (RWA) process in a WSON. Such encodings can be used to extend GMPLS signaling and routing protocols. In addition these encodings could be used by other mechanisms to convey this same information to a path computation element (PCE). Note that since these encodings are relatively efficient they can provide more accurate analysis of the control plane communications/processing load for WSONs looking to utilize a GMPLS control plane.

1. Terminology

Refer to [\[RFC6163\]](#) for CWDM, DWDM, RWA, WDM.

Refer to Section 5 of [\[Gen-Encode\]](#) for the terminology of Resources, Resources Blocks, and Resource Pool.

2. Resources, Resource Blocks, and the Resource Pool

This section provides encodings for the information elements defined in [RWA-INFO] that have applicability to WSON. The encodings are designed to be suitable for use in the GMPLS routing protocols OSPF [\[RFC4203\]](#) and IS-IS [\[RFC5307\]](#) and in the PCE protocol (PCEP) [\[RFC5440\]](#). Note that the information distributed in [\[RFC4203\]](#) and [\[RFC5307\]](#) is arranged via the nesting of sub-TLVs within TLVs and this document defines elements to be used within such constructs. Specific constructs of sub-TLVs and the nesting of sub-TLVs of the information element defined by this document will be defined in the respective protocol enhancement documents.

This document defines the following information elements pertaining to resources within an optical node:

- . Resource Accessibility <ResourceAccessibility>
- . Resource Wavelength Constraints <ResourceWaveConstraints>
- . Resource Block Pool State <RBPoolState>
- . Resource Block Shared Access Wavelength Availability
 <RBSharedAccessWaveAvailability>

Indicates that the TLV contains one or more ranges of RBs. Each individual range is denoted by two 32 bit RB identifier. The first 32 bits is the RB identifier for the start of the range and the next 32 bits is the RB identifier for the end of the range. Note that the Length field is used to determine the number of ranges.

C (Connectivity bit): Set to 0 to denote fixed (possibly multi-cast) connectivity; Set to 1 to denote potential (switched) connectivity. Used in Resource Accessibility field. Ignored elsewhere.

Reserved: 7 bits

This field is reserved. It MUST be set to zero on transmission and MUST be ignored on receipt.

Length: 16 bits

The total length of this field in bytes.

RB Identifier:

The RB identifier represents the ID of the resource block which is a 32 bit integer.

Usage Note: the inclusive range "Action" can result in very compact encoding of resource sets and it can be advantages to number resource blocks in such a way so that status updates (dynamic information) can take advantage of this efficiency.

3. Resource Accessibility/Availability

This section defines the information elements for dealing with accessibility and availability of resource blocks within a pool of resources. These include the ResourceAccessibility, ResourceWaveConstraints, and RBPoolState fields.

3.1. Resource Accessibility Field

This information element describes the structure of the resource pool in relation to the switching device. In particular it indicates the ability of an input port to reach sets of resources and of sets of resources to reach a particular output port. This is the PoolInputMatrix and PoolOutputMatrix of [[RWA-Info](#)].

The Resource Accessibility is defined by:

```

      0              1              2              3
      0 1 2 3 4 5 6 7 8 9 0 1 2 3 4 5 6 7 8 9 0 1 2 3 4 5 6 7 8 9 0 1
+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+
| Reserved      |C|              Reserved              |
+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+
|              Input Link Set Field A #1              |
:                                                         :
+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+
|              RB Set Field A #1                      |
:                                                         :
+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+
|      Additional Link set and RB set pairs as needed to      |
:              specify PoolInputMatrix                      :
+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+
|              Output Link Set Field B #1                |
:                                                         :
+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+
|              RB Set B Field #1 (for output connectivity)    |
:                                                         :
+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+
|      Additional Link Set and RB set pairs as needed to      |
:              specify PoolOutputMatrix                     :
+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+

```

Where

C (Connectivity bit): Connectivity indicates how the input/output ports connect to the resource blocks.

0 -- the device is fixed (e.g., a connected port must go through the resource block)

1 -- the device is switched (e.g., a port can be configured to go through a resource but isn't required)


The For the Input and Output Link Set Fields, the Link Set Field encoding defined in [[Gen-Encode](#)] is to be used. A Label Set Field MUST carry a label as defined in [[RFC6205](#)].

Note that the direction parameter within the Link Set Field is used to indicate whether the link set is an input or output link set, and the bidirectional value for this parameter is not permitted in this field.

See [Appendix A.1](#) for an illustration of this encoding.

3.2. Resource Wavelength Constraints Field

Resources, such as wavelength converters, etc., may have a limited input or output wavelength ranges. Additionally, due to the structure of the optical system not all wavelengths can necessarily reach or leave all the resources. These properties are described by using one or more resource wavelength restrictions fields as defined below:

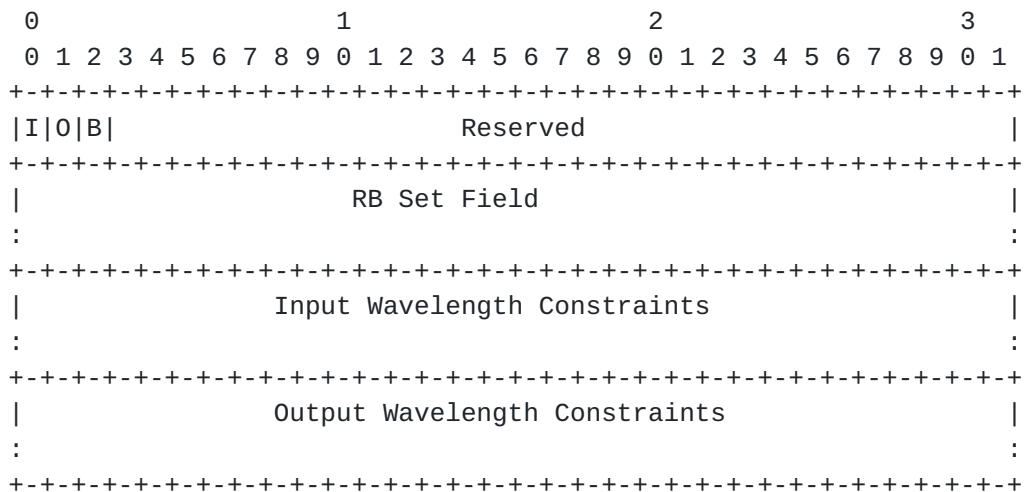

I = 1 or 0 indicates the presence or absence of the Input Wavelength Constraints Field.

0 = 1 or 0 indicates the presence or absence of the Output Wavelength Constraints Field.

B = 1 indicates that a single wavelength constraints field represents both Input and Output Wavelength Constraints Fields.

Currently the only valid combinations of (I, O, B) are $(1, 0, 0)$, $(0, 1, 0)$, $(1, 1, 0)$, $(0, 0, 1)$.

RB Set Field:

A set of resource blocks (RBs) which have the same wavelength restrictions.

Input Wavelength Constraints Field:


Indicates the wavelength input restrictions of the RBs in the corresponding RB set. This field is encoded via the Label Set field of [[Gen-Encode](#)].

Output Wavelength Constraints Field:


Indicates the wavelength output restrictions of RBs in the corresponding RB set. This field is encoded via the Label Set field of [[Gen-Encode](#)].

3.3. Resource Block Pool State (RBPoolState) Field


The state of the pool is given by the number of resources available with particular characteristics. A resource block set is used to encode all or a subset of the resources of interest. The usage state of resources within a resource block set is encoded as either a list of 16 bit integer values or a bit map indicating whether a single resource is available or in use. The bit map encoding is appropriate when resource blocks consist of a single resource. This information can be relatively dynamic, i.e., can change when a connection (LSP is established or torn down).

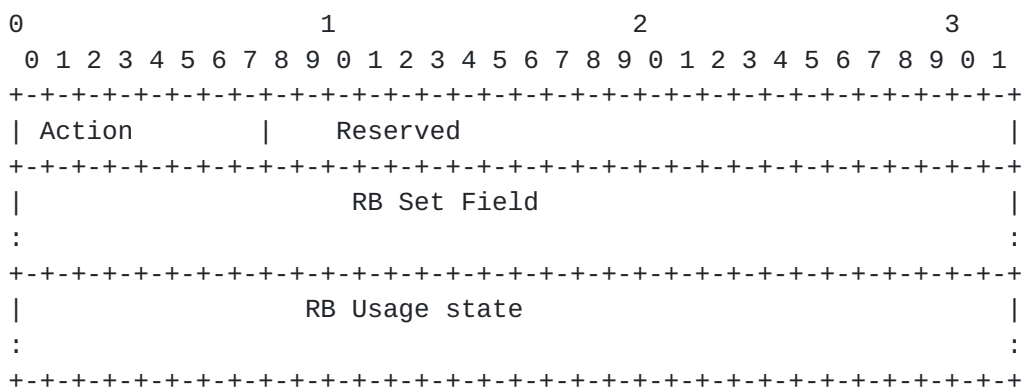

Where Action = 0 denotes a list of 16 bit integers and Action = 1 denotes a bit map. In both cases the elements of the RB Set field are in a one-to-one correspondence with the values in the usage RB usage state area.

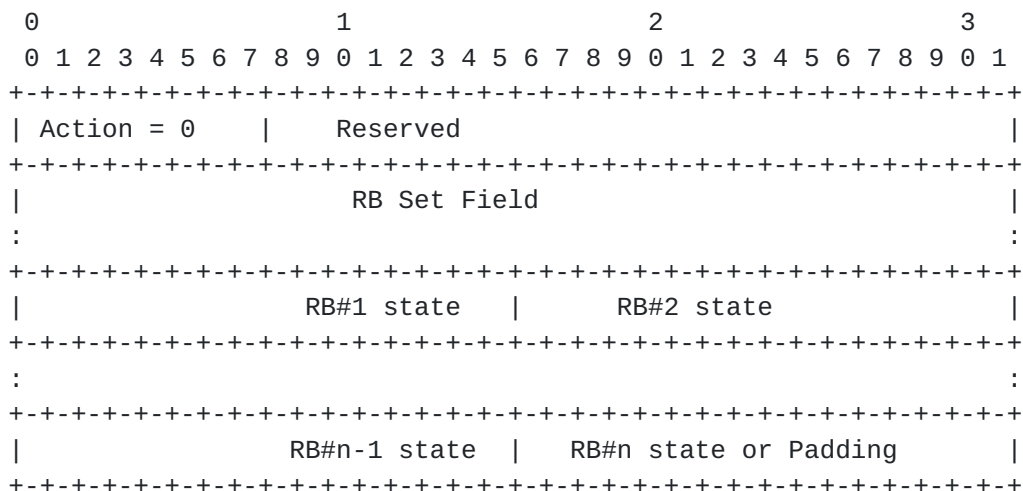

RB#i State (16 bits, unsigned integer): indicates Resource Block #i is in use or available.

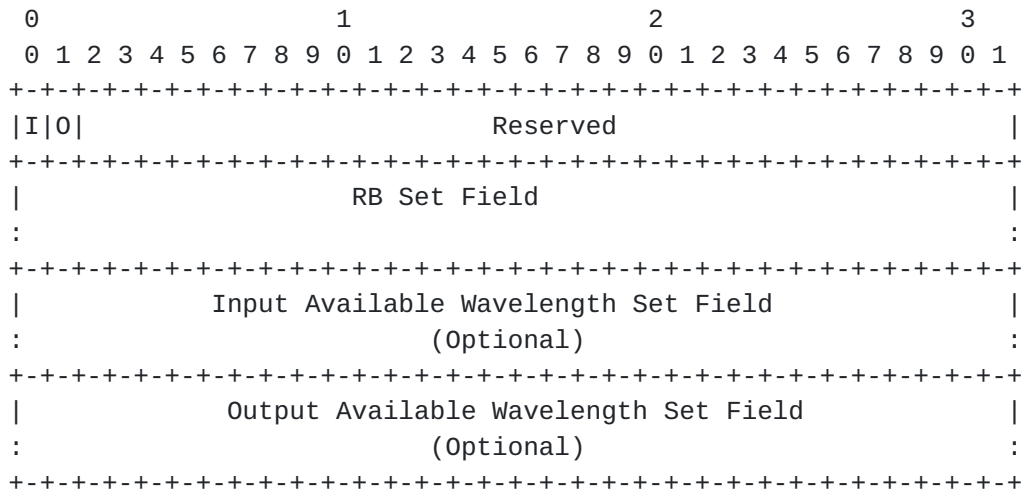

I bit:

Indicates whether the input available wavelength set field is included (1) or not (0).

O bit:

Indicates whether the output available wavelength set field is included (1) or not (0).

RB Set Field:

A Resource Block set in which all the members share the same input or output fiber or both.

Input Available Wavelength Set Field:

Indicates the wavelengths currently available (not being used) on the input fiber to this resource block. This field is encoded via the Label Set field of [[Gen-Encode](#)].

Output Available Wavelength Set Field:

Indicates the wavelengths currently available (not being used) on the output fiber from this resource block. This field is encoded via the Label Set field of [[Gen-Encode](#)].

4. Resource Signal Constraints and Processing Capabilities

Within a WSON network element (NE) there may be resources with signal compatibility constraints. These resources be regenerators, wavelength converters, etc... Such resources may also constitute the network element as a whole as in the case of an electro optical switch. This section primarily focuses on the signal compatibility and processing properties of such a resource block.

The fundamental properties of a resource block, such as a regenerator or wavelength converter, are:

- (a) Optical Interface Class List(s)
- (b) Acceptable Client Signal (shared input, modulation, FEC, bit rate, G-PID)
- (c) Input Bit Rate
- (d) Processing Capabilities (number of resources in a block, regeneration, performance monitoring, vendor specific)

4.1. Resource Block Information (ResourceBlockInfo) Field

Resource Block information fields are used to convey relatively static information about individual resource blocks including the resource block compatibility properties, processing properties, and the number of resources in a block.

There can be more than one Resource Block field as resources are packaged together in blocks of similar devices and its characteristics.

This field has the following format:

[illegible]

RB Set Field is described in [Section 2.1](#).

4.2. Shared Input or Output Indication

The shared input or output indication is indicated by the first bit (I) and the second bit (O):

where I and O are set to 1 if the resource blocks identified in the RB set field utilized a shared fiber for input/output access and set to 0 otherwise.

4.3. Optical Interface Class List(s) Field

The list of Optical Interface Class Field has the following format:

[illegible]

The following I and E combination are defined:

I E

0	0	Invalid
1	0	Optical Interface Class List acceptable in input
0	1	Optical Interface Class List available in output
1	1	Optical Interface Class List available on both input and output.

The Resource Block MAY contain one or more lists according to input/output flags.

4.3.1. Optical Interface Class Format

```

0                                     1                                     2                                     3
0 1 2 3 4 5 6 7 8 9 0 1 2 3 4 5 6 7 8 9 0 1 2 3 4 5 6 7 8 9 0 1
+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+
|S|      Reserved                |    OI Code Points              |
+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+
|          Optical Interface Class                                |
+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+
|          Optical Interface Class   (Cont.)                     |
+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+

```

Where the first 32 bits of the encoding shall be used to identify the semantic of the Optical Interface Class in the following way:

S Standard bit.

S=0, identify not ITU code points

S=1, identify ITU application codes

With S=0, the OI Code Points field can take the following values:

0: reserved

1: Vendor Specific Optical Interface Class.

With S=1, the OI Code Points field can take the following values:

0: reserved

1: [ITU-G.698.1] application code.

2: [ITU-G.698.2] application code.

3: [ITU-G.959.1] application code.

4: [ITU-G.695] application code.

In case of ITU Application Code, the mapping between the string defining the application code and the 64 bits number implementing the optical interface class is given in the following sections.

4.3.2. ITU-G.698.1 Application Code Mapping

Recommendation ITU-G.698.1 defines the Application Codes: DScW-ytz(v) and B-DScW-ytz(v). Where:

B: means Bidirectionals.

D: means a DWDM application.

S: take values N (narrow spectral excursion), W (wide spectral excursion).

c: Channel Spacing (GHz).

W: take values S (short-haul), L (long-haul).

y: take values 1 (NRZ 2.5G), 2 (indicating NRZ 10G).

t: take only D value is defined (link does not contain optical amplifier)

z: take values 2 (ITU-T G.652 fibre), 3 (ITU-T G.653 fibre), 5 (indicating ITU-T G.655 fibre).

v: take values S (Short wavelength), C (Conventional), L (Long wavelength).

An Optional F can be added indicating a FEC Encoding.

These get mapped into the 64 bit OIC field as follows:

[illegible]

Where (values between parenthesis refer to ITU defined values as reported above):

B: = 1 bidirectional, 0 otherwise

D (prefix): = 0 reserved, = 1 (D)

$$S: = 0 \quad (N), \quad = 1 \quad (W)$$

c: Channel Spacing, 4 bits mapped according to same definition in [RFC6205] (note that DWDM spacing apply here)

W: = 0 reserved, = 2 (S), = 3 (L)

y: = 0 reserved, = 1 (1), = 2 (2)

t: = 0 reserved, = 4 (D)

z: = 0 reserved, = 2 (2), = 3 (3), = 5 (5)

Where (values between parenthesis refer to ITU defined values as reported above):

B: = 1 bidirectional, 0 otherwise

D (prefix): = 0 reserved, = 1 (D)

S: = 0 (N), = 1 (W)

c: Channel Spacing, 4 bits mapped according to same definition in [[RFC6205](#)] (note that DWDM spacing apply here)

W: = 0 reserved, = 10 (C), = 11 (U)

y: = 0 reserved, = 1 (1), = 2 (2)

t: = 0 reserved, = 1 (A)

z: = 0 reserved, = 2 (2), = 3 (3), = 5 (5)

v: = 0 reserved, = 1 (S), = 2 (C), = 3 (L)

F (suffix): = 0 reserved, = 1 Fec Encoding

Values not mentioned here are not allowed in this application code, the last 32 bits are reserved and shall be set to zero.

4.3.4. ITU-G.959.1 Application Code Mapping

Recommendation ITU-G.959.1 defines the Application Codes: PnWx-ytz and BnWx-ytz. Where:

P,B: when present indicate Plural or Bidirectional

n: maximum number of channels supported by the application code (i.e. an integer number)

W: take values I (intra-office), S (short-haul), L (long-haul), V (very long-haul), U (ultra long-haul).

x: maximum number of spans allowed within the application code (i.e. an integer number)

y: take values 1 (NRZ 2.5G), 2 (NRZ 10G), 9 (NRZ 25G), 3 (NRZ 40G), 7 (RZ 40G).

t: take values A (power levels suitable for a booster amplifier in the originating ONE and power levels suitable for a pre-amplifier in the terminating ONE), B (booster amplifier only), C (pre-amplifier only), D (no amplifiers).

z: take values 1 (1310 nm sources on ITU-T G.652 fibre), 2 (1550 nm sources on ITU-T G.652 fibre), 3 (1550 nm sources on ITU-T G.653 fibre), 5 (1550 nm sources on ITU-T G.655 fibre).

The following list of suffixes can be added to these application codes:

F: FEC encoding.

D: Adaptive dispersion compensation.

E: receiver capable of dispersion compensation.

r: reduced target distance.

a: power levels appropriate to APD receivers.

b: power levels appropriate to PIN receivers.

These values are encoded as follows:

0										1										2										3									
0	1	2	3	4	5	6	7	8	9	0	1	2	3	4	5	6	7	8	9	0	1	2	3	4	5	6	7	8	9	0	1	2	3	4	5	6	7	8	9
+	-	+	-	+	-	+	-	+	-	+	-	+	-	+	-	+	-	+	-	+	-	+	-	+	-	+	-	+	-	+	-	+	-	+	-	+	-	+	-
	p			P																										x									
+	-	+	-	+	-	+	-	+	-	+	-	+	-	+	-	+	-	+	-	+	-	+	-	+	-	+	-	+	-	+	-	+	-	+	-	+	-	+	-
		y								t										z										suffix									
+	-	+	-	+	-	+	-	+	-	+	-	+	-	+	-	+	-	+	-	+	-	+	-	+	-	+	-	+	-	+	-	+	-	+	-	+	-	+	-
																														reserved									

Where (values between parenthesis refer to ITU defined values as reported above):

p (prefix) = 0 otherwise, = 1 Bidirectional (B)

P (optional): = 0 not present, = 2 (P).

n: maximum number of channels (10 bits, up to 1024 channels)

W: = 0 reserved, = 1 (I), = 2 (S), = 3 (L), = 4 (V), = 5 (U)

x: = number of spans (6 bits, up to 64 spans)

y: = 0 reserved, = 1 (1), = 2 (2), = 3 (3), = 7 (7), = 9 (9)

t: = 0 reserved, = 1 (A), = 2 (B), = 3 (C), = 4 (D)

z: = 0 reserved, = 1 (1), = 2 (2), = 3 (3), = 5 (5)

suffix is an 6 bit, bit map:

```

0 1 2 3 4 5
+--+--+--+--+
|F|D|E|r|a|b|
+--+--+--+--+

```

where a 1 in the appropriate slot indicates that the corresponding suffix has been added.

4.3.5. ITU-G.695 Application Code Mapping

Recommendation [ITU-G.695] defines the Application Codes: CnWx-ytz and B-CnWx-ytz and S-CnWx-ytz.

Where the optional prefixed are:

B: Bidirectional

S: a system using a black link approach

And the rest of the application code is defined as:

n: maximum number of channels (10 bits, up to 1024 channels)
W: = 0 reserved, = 1 reserved, = 2 (S), = 3 (L), > 3 reserved
x: = number of spans (6 bits, up to 64 spans)
y: = 0 (0), = 1 (1), =2 (2), > 2 reserved
t: = 4 (D), all other values are reserved
z: = 0 reserved, = 1 (1), = 2 (2), = 3 (3)
suffix is an 6 bit, bit map:

```

0 1 2 3 4 5
+--+--+--+--+
|F|0|0|0|0|0|
+--+--+--+--+

```

where a 1 in the appropriate slot indicates that the corresponding suffix has been added.

4.4. Acceptable Client Signal List Field

This field contains a list of acceptable input client signal types.

The acceptable client signal list is a list of Generalized Protocol Identifiers (G-PIDs). G-PIDs are assigned by IANA and many are defined in [[RFC3471](#)] and [[RFC4328](#)].

```

0                               1                               2                               3
0 1 2 3 4 5 6 7 8 9 0 1 2 3 4 5 6 7 8 9 0 1 2 3 4 5 6 7 8 9 0 1
+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+
|          Number of G-PIDs          |          G-PID #1          |
+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+
:                                     |                               :
+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+
|          G-PID #N          |          |          |
+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+

```

Where the number of G-PIDs is an integer greater than or equal to one.


```

      0              1              2              3
      0 1 2 3 4 5 6 7 8 9 0 1 2 3 4 5 6 7 8 9 0 1 2 3 4 5 6 7 8 9 0 1
+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+
|           Processing Cap ID           |           Length           |
+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+
| Possible additional capability parameters depending upon           |
+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+
:   the processing ID   :
+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+

```

When the processing Cap ID is "regeneration capability", the following additional capability parameters are provided in the following field:

```

      0              1              2              3
      0 1 2 3 4 5 6 7 8 9 0 1 2 3 4 5 6 7 8 9 0 1 2 3 4 5 6 7 8 9 0 1
+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+
|  T  | C |                               Reserved                               |
+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+

```

Where T bit indicates the type of regenerator:

T=0: Reserved

T=1: 1R Regenerator

T=2: 2R Regenerator

T=3: 3R Regenerator

Where C bit indicates the capability of regenerator:

C=0: Reserved

C=1: Fixed Regeneration Point

C=2: Selective Regeneration Point

Note that when the capability of regenerator is indicated to be Selective Regeneration Pools, regeneration pool properties such as input and output restrictions and availability need to be specified. This encoding is to be determined in the later revision.

5. Security Considerations

This document defines protocol-independent encodings for WSON information and does not introduce any security issues.

However, other documents that make use of these encodings within protocol extensions need to consider the issues and risks associated with, inspection, interception, modification, or spoofing of any of this information. It is expected that any such documents will describe the necessary security measures to provide adequate protection. A general discussion on security in GMPLS networks can be found in [[RFC5920](#)].

6. IANA Considerations

This document provides general protocol independent information encodings. There is no IANA allocation request for the information elements defined in this document. IANA allocation requests will be addressed in protocol specific documents based on the encodings defined here.

7. Acknowledgments

This document was prepared using 2-Word-v2.0.template.dot.

APPENDIX A: Encoding Examples

A.1. Wavelength Converter Accessibility Field

Example:

Figure 1 shows a wavelength converter pool architecture know as "shared per fiber". In this case the input and output pool matrices are simply:

$$\text{WI} = \begin{array}{c} +-----+ \\ | \ 1 \ 1 \ | \\ | \ 1 \ 1 \ | \\ +-----+ \end{array}, \quad \text{WE} = \begin{array}{c} +-----+ \\ | \ 1 \ 0 \ | \\ | \ 0 \ 1 \ | \\ +-----+ \end{array}$$

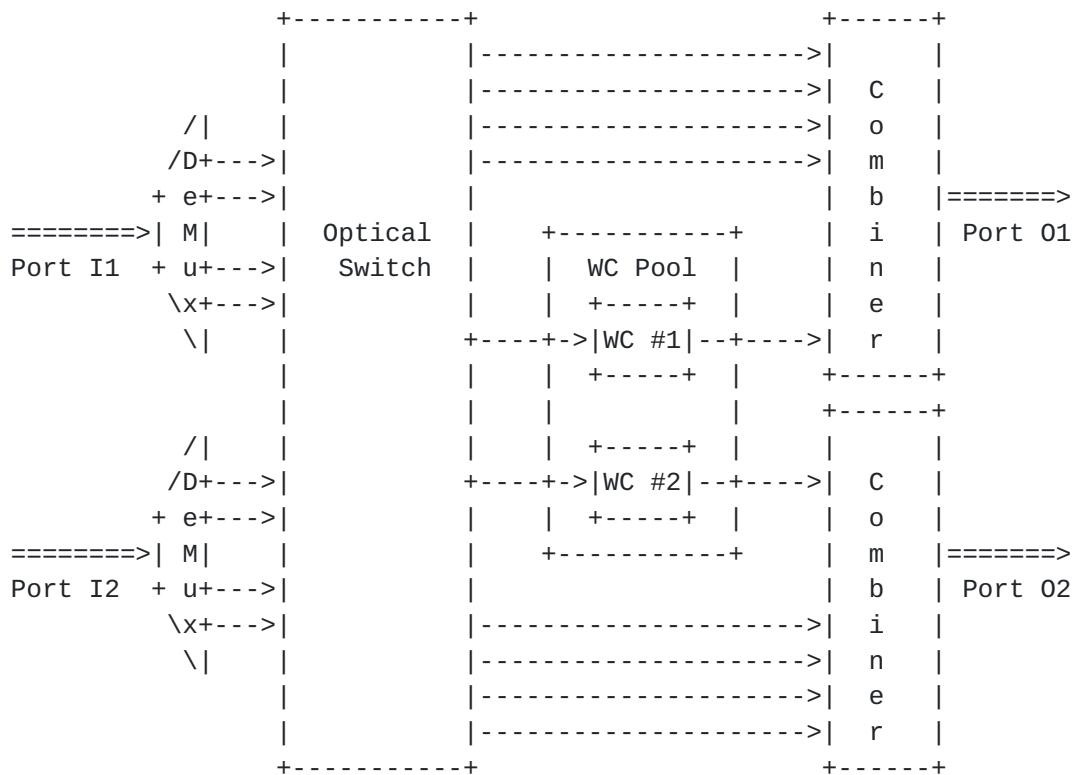


Figure 1 An optical switch featuring a shared per fiber wavelength converter pool architecture.

This wavelength converter pool can be encoded as follows:


```

0                               1                               2                               3
0 1 2 3 4 5 6 7 8 9 0 1 2 3 4 5 6 7 8 9 0 1 2 3 4 5 6 7 8 9 0 1
+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+
|   Reserved |1|                               Reserved                               |
+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+

Note: I1,I2 can connect to either WC1 or WC2
+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+
| Action=0    |0|   Reserved   |                               Length = 12           |
+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+
|                               Link Local Identifier = #1                          |
+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+
|                               Link Local Identifier = #2                          |
+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+
| Action=0    |1|   Reserved   |                               Length = 8           |
+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+
|                               RB ID = #1                                         |
+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+
|                               RB ID = #2                                         |
+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+

Note: WC1 can only connect to 01
+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+
| Action=0    |1|   Reserved   |                               Length = 8           |
+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+
|                               Link Local Identifier = #1                          |
+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+
| Action=0    |0|   Reserved   |                               Length = 8           |
+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+
|                               RB ID = #1                                         |
+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+

Note: WC2 can only connect to 02
+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+
| Action=0    |1|   Reserved   |                               Length = 8           |
+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+
|                               Link Local Identifier = #2                          |
+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+
| Action=0    |0|                               |                               Length = 8           |
+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+
|                               RB ID = #2                                         |
+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+

```

A.2. Wavelength Conversion Range Field

Example:

This example, based on figure 1, shows how to represent the wavelength conversion range of wavelength converters. Suppose the wavelength range of input and output of WC1 and WC2 are {L1, L2, L3, L4}:

```

      0              1              2              3
    0 1 2 3 4 5 6 7 8 9 0 1 2 3 4 5 6 7 8 9 0 1 2 3 4 5 6 7 8 9 0 1
      Note: WC Set
+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+
| Action=0      |1| Reserved      |      Length = 8      |
+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+
|      WC ID = #1      |      WC ID = #2      |
+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+
      Note: wavelength input range
+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+
| 2  | Num Wavelengths = 4      |      Length = 8      |
+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+
|Grid | C.S. |      Reserved      | n for lowest frequency = 1 |
+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+
      Note: wavelength output range
+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+
| 2  | Num Wavelengths = 4      |      Length = 8      |
+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+
|Grid | C.S. |      Reserved      | n for lowest frequency = 1 |
+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+

```

A.3. An OEO Switch with DWDM Optics

Figure 2 shows an electronic switch fabric surrounded by DWDM optics. In this example the electronic fabric can handle either G.709 or SDH signals only (2.5 or 10 Gbps). To describe this node, the following information is needed:

```

<Node_Info> ::= <Node_ID>[Other GMPLS info-
elements][<ConnectivityMatrix>...] [<ResourcePool>][<RBPoolState>]

```

In this case there is complete port to port connectivity so the <ConnectivityMatrix> is not required. In addition since there are sufficient ports to handle all wavelength signals the <RBPoolState> element is not needed.

Hence the attention will be focused on the <ResourcePool> field:

```

<ResourcePool> ::=
<ResourceBlockInfo>[<RBAccessibility>...][<ResourceWaveConstraints>..]

```

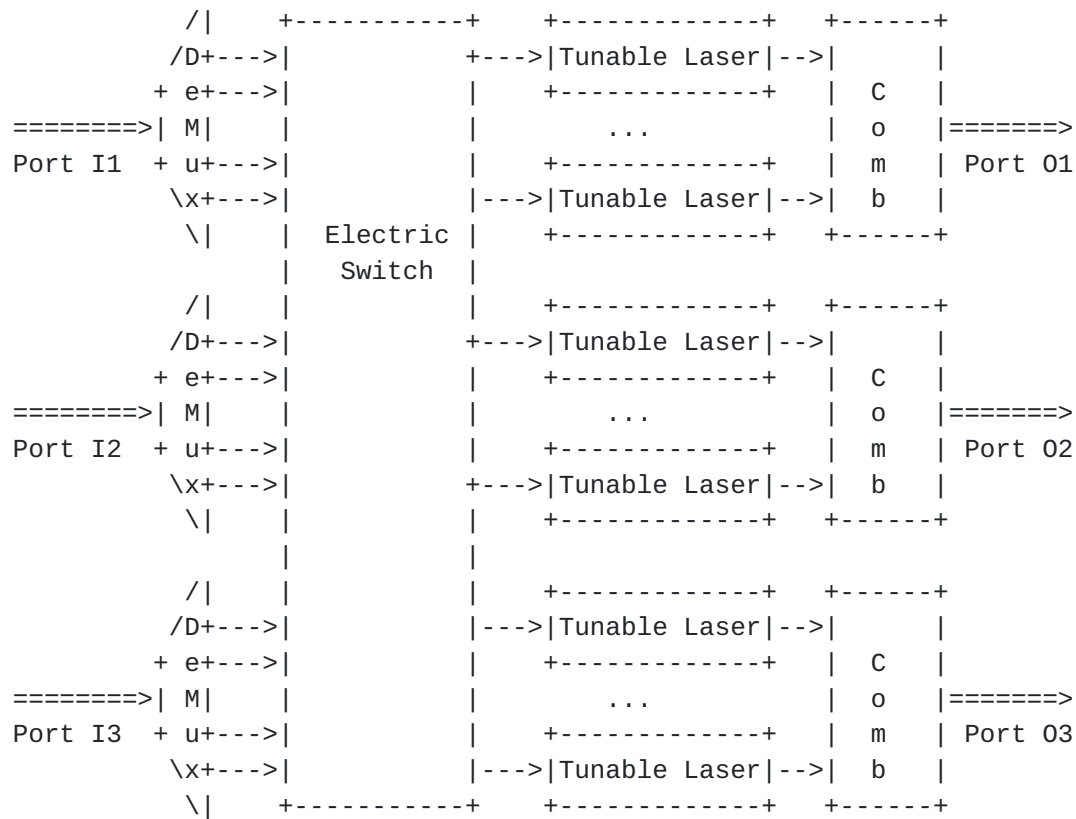



Figure 2 An optical switch built around an electronic switching fabric.

The resource block information will tell us about the processing constraints of the receivers, transmitters and the electronic switch. The resource availability information, although very simple, tells us that all signals must traverse the electronic fabric (fixed connectivity). The resource wavelength constraints are not needed since there are no special wavelength constraints for the resources that would not appear as port/wavelength constraints.

<ResourceBlockInfo>:

[illegible]

Since there is fixed connectivity to resource blocks (the electronic switch) the <RBAccessibility> is:

[illegible]

8. References

8.1. Normative References

- [RFC2119] Bradner, S., "Key words for use in RFCs to Indicate Requirement Levels", [BCP 14](#), [RFC 2119](#), March 1997.
- [RFC2578] McCloghrie, K., Perkins, D., and J. Schoenwaelder, "Structure of Management Information Version 2 (SMIv2)", STD 58, [RFC 2578](#), April 1999.
- [RFC4328] Papadimitriou, D., Ed., "Generalized Multi-Protocol Label Switching (GMPLS) Signaling Extensions for G.709 Optical Transport Networks Control", [RFC 4328](#), January 2006.
- [RWA-Info] G. Bernstein, Y. Lee, D. Li, W. Imajuku, "Routing and Wavelength Assignment Information Model for Wavelength Switched Optical Networks", work in progress: [draft-ietf-ccamp-rwa-info](#).
- [Gen-Encode] G. Bernstein, Y. Lee, D. Li, W. Imajuku, "General Network Element Constraint Encoding for GMPLS Controlled Networks", work in progress: [draft-ietf-ccamp-general-constraint-encode](#).

8.2. Informative References

- [G.694.1] ITU-T Recommendation G.694.1, Spectral grids for WDM applications: DWDM frequency grid, June 2002.
- [G.694.2] ITU-T Recommendation G.694.2, Spectral grids for WDM applications: CWDM wavelength grid, December 2003.
- [G.695] ITU-T Recommendation G.695, Optical interfaces for coarse wavelength division multiplexing applications, October, 2010.
- [G.959.1] ITU-T Recommendation G.959.1, Optical transport network physical layer interfaces, February, 2012.

- [RFC3471] Berger, L., "Generalized Multi-Protocol Label Switching (GMPLS) Signaling Functional Description", [RFC 3471](#), January 2003.
- [RFC4203] Kompella, L. and Y. Rekhter, Eds., "OSPF Extensions in Support of Generalized Multi-Protocol Label Switching (GMPLS)", [RFC 4203](#), October 2005.
- [RFC5307] Kompella, L. and Y. Rekhter, Eds., "IS-IS Extensions in Support of Generalized Multi-Protocol Label Switching (GMPLS)", [RFC 5307](#), October, 2008.
- [RFC5440] Vasseur, JP. and Le Roux, JL., Eds., "Path Computation Element (PCE) Communication Protocol (PCEP)", [RFC 5440](#), March 2009.
- [RFC5920] L. Fang, Ed., "Security Framework for MPLS and GMPLS Networks", [RFC 5920](#), July 2010.
- [RFC6205] T. Otani, H. Guo, K. Miyazaki, D. Caviglia, "Generalized Labels for G.694 Lambda-Switching Capable Label Switching Routers", [RFC 6205](#), March 2011.
- [RFC6163] Y. Lee, G. Bernstein, W. Imajuku, "Framework for GMPLS and PCE Control of Wavelength Switched Optical Networks", [RFC 6163](#), April 2011.

9. Contributors

Diego Caviglia
Ericsson
Via A. Negrone 1/A 16153
Genoa Italy

Phone: +39 010 600 3736
Email: diego.caviglia@ericsson.com

Anders Gavler
Acreo AB
Electrum 236
SE - 164 40 Kista Sweden

Email: Anders.Gavler@acreo.se

Jonas Martensson
Acreo AB
Electrum 236
SE - 164 40 Kista, Sweden

Email: Jonas.Martensson@acreo.se

Itaru Nishioka
NEC Corp.
1753 Simonumabe, Nakahara-ku, Kawasaki, Kanagawa 211-8666
Japan

Phone: +81 44 396 3287
Email: i-nishioka@cb.jp.nec.com

Pierre Peloso
ALU

Email: pierre.peloso@alcatel-lucent.com

Cyril Margaria
Email: cyril.margaria@gmail.com

Giovanni Martinelli

Cisco

Email: giomarti@cisco.com

Gabriele M Galimberti
Cisco
Email: ggalimbe@cisco.com

Lyndon Ong
Ciena Corporation
Email: lyong@ciena.com

Daniele Ceccarelli
Ericsson
Email: daniele.ceccarelli@ericsson.com

Authors' Addresses

Greg M. Bernstein (ed.)
Grotto Networking
Fremont California, USA

Phone: (510) 573-2237
Email: gregb@grotto-networking.com

Young Lee (ed.)
Huawei Technologies
5340 Legacy Drive Build 3
Plano, TX 75024
USA

Phone: (469) 277-5838
Email: leeyoung@huawei.com

Dan Li
Huawei Technologies Co., Ltd.
F3-5-B R&D Center, Huawei Base,
Bantian, Longgang District
Shenzhen 518129 P.R.China

Phone: +86-755-28973237
Email: danli@huawei.com

Wataru Imajuku
NTT Network Innovation Labs
1-1 Hikari-no-oka, Yokosuka, Kanagawa
Japan

Phone: +81-(46) 859-4315
Email: imajuku.wataru@lab.ntt.co.jp

Jianrui Han
Huawei Technologies Co., Ltd.
F3-5-B R&D Center, Huawei Base,
Bantian, Longgang District
Shenzhen 518129 P.R.China

Phone: +86-755-28972916
Email: hanjianrui@huawei.com

Intellectual Property Statement

The IETF Trust takes no position regarding the validity or scope of any Intellectual Property Rights or other rights that might be claimed to pertain to the implementation or use of the technology described in any IETF Document or the extent to which any license under such rights might or might not be available; nor does it represent that it has made any independent effort to identify any such rights.

Copies of Intellectual Property disclosures made to the IETF Secretariat and any assurances of licenses to be made available, or the result of an attempt made to obtain a general license or permission for the use of such proprietary rights by implementers or users of this specification can be obtained from the IETF on-line IPR repository at <http://www.ietf.org/ipr>

The IETF invites any interested party to bring to its attention any copyrights, patents or patent applications, or other proprietary rights that may cover technology that may be required to implement any standard or specification contained in an IETF Document. Please address the information to the IETF at ietf-ipr@ietf.org.

Disclaimer of Validity

All IETF Documents and the information contained therein are provided on an "AS IS" basis and THE CONTRIBUTOR, THE ORGANIZATION HE/SHE REPRESENTS OR IS SPONSORED BY (IF ANY), THE INTERNET SOCIETY, THE IETF TRUST AND THE INTERNET ENGINEERING TASK FORCE DISCLAIM ALL WARRANTIES, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO ANY WARRANTY THAT THE USE OF THE INFORMATION THEREIN WILL NOT INFRINGE ANY RIGHTS OR ANY IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE.

Acknowledgment

Funding for the RFC Editor function is currently provided by the Internet Society.