

Network Working Group
Internet Draft
Expiration Date: October 2002

Lou Berger - Editor (Movaz Networks)
Peter Ashwood-Smith (Nortel Networks)
Ayan Banerjee (Calient Networks)
Greg Bernstein (Ciena Corporation)
John Drake (Calient Networks)
Yanhe Fan (Axiowave Networks)
Kireeti Kompella (Juniper Networks)
Eric Mannie (KPNQwest)
Jonathan P. Lang (Calient Networks)
Bala Rajagopalan (Tellium)
Yakov Rekhter (Juniper Networks)
Debanjan Saha (Tellium)
Vishal Sharma (Metanoia)
George Swallow (Cisco Systems)
Z. Bo Tang (Tellium)

April 2002

Generalized MPLS - Signaling Functional Description

[draft-ietf-mpls-generalized-signaling-08.txt](#)

Status of this Memo

This document is an Internet-Draft and is in full conformance with all provisions of [Section 10 of RFC2026](#). Internet-Drafts are working documents of the Internet Engineering Task Force (IETF), its areas, and its working groups. Note that other groups may also distribute working documents as Internet-Drafts.

Internet-Drafts are draft documents valid for a maximum of six months and may be updated, replaced, or obsoleted by other documents at any time. It is inappropriate to use Internet-Drafts as reference material or to cite them other than as "work in progress."

To view the current status of any Internet-Draft, please check the "1id-abstracts.txt" listing contained in an Internet-Drafts Shadow Directory, see <http://www.ietf.org/shadow.html>.

Abstract

This document describes extensions to MPLS signaling required to support Generalized MPLS. Generalized MPLS extends the MPLS control plane to encompass time-division (e.g. SONET/SDH ADMs), wavelength (optical lambdas) and spatial switching (e.g. incoming port or fiber to outgoing port or fiber). This document presents a functional description of the extensions. Protocol specific formats and mechanisms, and technology specific details are specified in separate documents.

Contents

1	Introduction	3
2	Overview	4
3	Label Related Formats	6
3.1	Generalized Label Request	7
3.1.1	Required Information	7
3.1.2	Bandwidth Encoding	10
3.2	Generalized Label	10
3.2.1	Required Information	11
3.3	Waveband Switching	12
3.3.1	Required information	13
3.4	Suggested Label	13
3.5	Label Set	14
3.5.1	Required Information	15
4	Bidirectional LSPs	16
4.1	Required Information	17
4.2	Contention Resolution	17
5	Notification on Label Error	20
6	Explicit Label Control	20
6.1	Required Information	21
7	Protection Information	21
7.1	Required Information	22
8	Administrative Status Information	23
8.1	Required Information	24
9	Control Channel Separation	25
9.1	Interface Identification	25
9.1.1	Required Information	25
9.2	Fault Handling	27
10	Acknowledgments	28
11	Security Considerations	28
12	IANA Considerations	28
13	References	28
14	Authors' Addresses	29

[Editor's note: changes to be removed prior to publication as an RFC.]

Changes from previous version:

- o Reorder author's list to indicate primary contact

- o Updated LSP Encoding and G-PIDs per the "SONET/SDH" and other compromises
- o Other minor cleanup

1. Introduction

The Multiprotocol Label Switching (MPLS) architecture [[RFC3031](#)] has been defined to support the forwarding of data based on a label. In this architecture, Label Switching Routers (LSRs) were assumed to have a forwarding plane that is capable of (a) recognizing either packet or cell boundaries, and (b) being able to process either packet headers (for LSRs capable of recognizing packet boundaries) or cell headers (for LSRs capable of recognizing cell boundaries).

The original architecture has recently been extended to include LSRs whose forwarding plane recognizes neither packet, nor cell boundaries, and therefore, can't forward data based on the information carried in either packet or cell headers. Specifically, such LSRs include devices where the forwarding decision is based on time slots, wavelengths, or physical ports.

Given the above, LSRs, or more precisely interfaces on LSRs, can be subdivided into the following classes:

1. Interfaces that recognize packet/cell boundaries and can forward data based on the content of the packet/cell header. Examples include interfaces on routers that forward data based on the content of the "shim" header, interfaces on ATM-LSRs that forward data based on the ATM VPI/VCI. Such interfaces are referred to as Packet-Switch Capable (PSC).
2. Interfaces that forward data based on the data's time slot in a repeating cycle. An example of such an interface is an interface on a SONET/SDH Cross-Connect. Such interfaces are referred to as Time-Division Multiplex Capable (TDM).
3. Interfaces that forward data based on the wavelength on which the data is received. An example of such an interface is an interface on an Optical Cross-Connect that can operate at the level of an individual wavelength. Such interfaces are referred to as Lambda Switch Capable (LSC).
4. Interfaces that forward data based on a position of the data in

the real world physical spaces. An example of such an interface is an interface on an Optical Cross-Connect that can operate at the level of a single (or multiple) fibers. Such interfaces are referred to as Fiber-Switch Capable (FSC).

Using the concept of nested LSPs allows the system to scale by building a forwarding hierarchy. At the top of this hierarchy are FSC interfaces, followed by LSC interfaces, followed by TDM interfaces, followed by PSC interfaces. This way, an LSP that starts and ends on a PSC interface can be nested (together with other LSPs) into an LSP that starts and ends on a TDM interface. This LSP, in turn, can be nested (together with other LSPs) into an LSP that starts and ends on an LSC interface, which in turn can be nested (together with other LSPs) into an LSP that starts and ends on a FSC interface. See [[MPLS-HIERARCHY](#)] for more information on LSP hierarchies.

The establishment of LSPs that span only the first class of interfaces is defined in [LDP, CR-LDP, RSVP-TE]. This document presents a functional description of the extensions needed to generalize the MPLS control plane to support each of the four classes of interfaces. Only signaling protocol independent formats and definitions are provided in this document. Protocol specific formats are defined in [[GMPLS-RSVP](#)] and [[GMPLS-LDP](#)]. Technology specific details are outside the scope of this document and will be specified in technology specific documents, such as [[GMPLS-SONET](#)].

2. Overview

Generalized MPLS differs from traditional MPLS in that it supports multiple types of switching, i.e., the addition of support for TDM, lambda, and fiber (port) switching. The support for the additional types of switching has driven generalized MPLS to extend certain base functions of traditional MPLS and, in some cases, to add functionality. These changes and additions impact basic LSP properties, how labels are requested and communicated, the unidirectional nature of LSPs, how errors are propagated, and information provided for synchronizing the ingress and egress.

In traditional MPLS Traffic Engineering, links traversed by an LSP can include an intermix of links with heterogeneous label encodings. For example, an LSP may span links between routers, links between routers and ATM-LSRs, and links between ATM-LSRs. Generalized MPLS extends this by including links where the label is encoded as a time slot, or a wavelength, or a position in the real world physical space. Just like with traditional MPLS TE, where not all LSRs are capable of recognizing (IP) packet boundaries (e.g., an ATM-LSR) in

their forwarding plane, generalized MPLS includes support for LSRs that can't recognize (IP) packet boundaries in their forwarding plane. In traditional MPLS TE an LSP that carries IP has to start and end on a router. Generalized MPLS extends this by requiring an LSP to start and end on similar type of LSRs. Also, in generalized MPLS the type of a payload that can be carried by an LSP is extended to allow such payloads as SONET/SDH, or 1 or 10Gb Ethernet. These changes from traditional MPLS are reflected in how labels are requested and communicated in generalized MPLS, see Sections [3.1](#) and [3.2](#). A special case of Lambda switching, called Waveband switching is also described in [Section 3.3](#).

Another basic difference between traditional and non-PSC types of generalized MPLS LSPs, is that bandwidth allocation for an LSP can be performed only in discrete units, see [Section 3.1.3](#). There are also likely to be (much) fewer labels on non-PSC links than on PSC links. Note that the use of Forwarding Adjacencies (FA), see [MPLS-HIERARCHY], provides a mechanism that may improve bandwidth utilization, when bandwidth allocation can be performed only in discrete units, as well as a mechanism to aggregate forwarding state, thus allowing the number of required labels to be reduced.

Generalized MPLS allows for a label to be suggested by an upstream node, see [Section 3.4](#). This suggestion may be overridden by a downstream node but, in some cases, at the cost of higher LSP setup time. The suggested label is valuable when establishing LSPs through certain kinds of optical equipment where there may be a lengthy (in electrical terms) delay in configuring the switching fabric. For example micro mirrors may have to be elevated or moved, and this physical motion and subsequent damping takes time. If the labels and hence switching fabric are configured in the reverse direction (the norm) the MAPPING/Resv message may need to be delayed by 10's of milliseconds per hop in order to establish a usable forwarding path. The suggested label is also valuable when recovering from nodal faults.

Generalized MPLS extends on the notion of restricting the range of labels that may be selected by a downstream node, see [Section 3.5](#). In generalized MPLS, an ingress or other upstream node may restrict the labels that may be used by an LSP along either a single hop or along the whole LSP path. This feature is driven from the optical domain where there are cases where wavelengths used by the path must be restricted either to a small subset of possible wavelengths, or to one specific wavelength. This requirement occurs because some equipment may only be able to generate a small set of the wavelengths that intermediate equipment may be able to switch, or because intermediate equipment may not be able to switch a wavelength at all, being only able to redirect it to a different fiber.

While traditional traffic engineered MPLS (and even LDP) are unidirectional, generalized MPLS supports the establishment of bidirectional LSPs, see [Section 4](#). The need for bidirectional LSPs comes from non-PSC applications. There are multiple reasons why such LSPs are needed, particularly possible resource contention when allocating reciprocal LSPs via separate signaling sessions, and simplifying failure restoration procedures in the non-PSC case. Bidirectional LSPs also have the benefit of lower setup latency and lower number of messages required during setup.

Generalized MPLS supports the communication of a specific label to use on a specific interface, see [Section 6](#). [GMPLS-RSVP] also supports an RSVP specific mechanism for rapid failure notification.

Generalized MPLS formalizes possible separation of control and data channels, see [Section 9](#). Such support is particularly important to support technologies where control traffic cannot be sent in-band with the data traffic.

Generalized MPLS also allows for the inclusion of technology specific parameters in signaling. The intent is for all technology specific parameters to be carried, when using RSVP, in the SENDER_TSPEC and other related objects, and when using CR-LDP, in the Traffic Parameters TLV. Technology specific formats will be defined on an as needed basis. For an example definition, see [GMPLS-SONET].

3. Label Related Formats

To deal with the widening scope of MPLS into the optical and time domain, several new forms of "label" are required. These new forms of label are collectively referred to as a "generalized label". A generalized label contains enough information to allow the receiving node to program its cross connect, regardless of the type of this cross connect, such that the ingress segments of the path are properly joined. This section defines a generalized label request, a generalized label, support for waveband switching, suggested label and label sets.

Note that since the nodes sending and receiving the new form of label know what kinds of link they are using, the generalized label does not contain a type field, instead the nodes are expected to know from context what type of label to expect.

3.1. Generalized Label Request

The Generalized Label Request supports communication of characteristics required to support the LSP being requested. These characteristics include LSP encoding and LSP payload. Note that these characteristics may be used by transit nodes, e.g., to support penultimate hop popping.

The Generalized Label Request carries an LSP encoding parameter, called LSP Encoding Type. This parameter indicates the encoding type, e.g., SONET/SDH/GigE etc., that will be used with the data associated with the LSP. The LSP Encoding Type represents the nature of the LSP, and not the nature of the links that the LSP traverses. A link may support a set of encoding formats, where support means that a link is able to carry and switch a signal of one or more of these encoding formats depending on the resource availability and capacity of the link. For example, consider an LSP signaled with "lambda" encoding. It is expected that such an LSP would be supported with no electrical conversion and no knowledge of the modulation and speed by the transit nodes. Other formats normally require framing knowledge, and field parameters are broken into the framing type and speed as shown below.

The Generalized Label Request also indicates the type of switching that is being requested on a link. This field normally is consistent across all links of an LSP.

3.1.1. Required Information

The information carried in a Generalized Label Request is:

[illegible]

LSP Encoding Type: 8 bits

Indicates the encoding of the LSP being requested. The following shows permitted values and their meaning:

Value	Type
-----	----
1	Packet
2	Ethernet
3	ANSI/ETSI PDH
4	Reserved
5	SDH ITU-T G.707 / SONET ANSI T1.105
6	Reserved
7	Digital Wrapper
8	Lambda (photonic)
9	Fiber
10	Reserved
11	FiberChannel

The ANSI PDH and ETSI PDH types designate these respective networking technologies. DS1 and DS3 are examples of ANSI PDH LSPs. An E1 LSP would be ETSI PDH. The Lambda encoding type refers to an LSP that encompasses a whole wavelengths. The Fiber encoding type refers to an LSP that encompasses a whole fiber port.

Switching Type: 8 bits

Indicates the type of switching that should be performed on a particular link. This field is needed for links that advertise more than one type of switching capability. This field contains one of the values advertised for the corresponding link in the routing Switching Capability field as defined in [\[GMPLS-RTG\]](#).

Generalized PID (G-PID): 16 bits

An identifier of the payload carried by an LSP, i.e. an identifier of the client layer of that LSP. This is used by the nodes at the endpoints of the LSP, and in some cases by the penultimate hop. Standard Ethertype values are used for packet and Ethernet LSPs; other values are:

Value	Type	Technology
-----	----	-----
0	Unknown	All
1	Reserved	
2	Reserved	
3	Reserved	
4	Reserved	
5	Asynchronous mapping of E4	SDH
6	Asynchronous mapping of DS3/T3	SDH

7	Asynchronous mapping of E3	SDH
8	Bit synchronous mapping of E3	SDH
9	Byte synchronous mapping of E3	SDH
10	Asynchronous mapping of DS2/T2	SDH
11	Bit synchronous mapping of DS2/T2	SDH
12	Reserved	
13	Asynchronous mapping of E1	SDH
14	Byte synchronous mapping of E1	SDH
15	Byte synchronous mapping of 31 * DS0	SDH
16	Asynchronous mapping of DS1/T1	SDH
17	Bit synchronous mapping of DS1/T1	SDH
18	Byte synchronous mapping of DS1/T1	SDH
19	VC-11 in VC-12	SDH
20	Reserved	
21	Reserved	
22	DS1 SF Asynchronous	SONET
23	DS1 ESF Asynchronous	SONET
24	DS3 M23 Asynchronous	SONET
25	DS3 C-Bit Parity Asynchronous	SONET
26	VT/LOVC	SDH
27	STS SPE/HOVC	SDH
28	POS - No Scrambling, 16 bit CRC	SDH
29	POS - No Scrambling, 32 bit CRC	SDH
30	POS - Scrambling, 16 bit CRC	SDH
31	POS - Scrambling, 32 bit CRC	SDH
32	ATM mapping	SDH
33	Ethernet	SDH, Lambda, Fiber
34	SDH/SONET	Lambda, Fiber
35	Reserved (SONET deprecated)	Lambda, Fiber
36	Digital Wrapper	Lambda, Fiber
37	Lambda	Fiber
38	ANSI/ETSI PDH	SDH
39	Reserved	SDH
40	Link Access Protocol SDH (LAPS - X.85 and X.86)	SDH
41	FDDI	SDH, Lambda, Fiber
42	DQDB (ETSI ETS 300 216)	SDH
43	FiberChannel-3 (Services)	FiberChannel
44	HDLC	SDH
45	Ethernet V2/DIX (only)	SDH, Lambda, Fiber
46	Ethernet 802.3 (only)	SDH, Lambda, Fiber

3.1.2. Bandwidth Encoding

Bandwidth encodings are carried in in 32 bit number in IEEE floating point format (the unit is bytes per second). For non-packet LSPs, it is useful to define discrete values to identify the bandwidth of the LSP. Some typical values for the requested bandwidth are enumerated below. (These values are guidelines.) Additional values will be defined as needed. Bandwidth encoding values are carried in a per protocol specific manner, see [[GMPLS-RSVP](#)] and [[GMPLS-LDP](#)].

Signal Type	(Bit-rate)	Value (Bytes/Sec) (IEEE Floating point)
-----	-----	-----
DS0	(0.064 Mbps)	0x45FA0000
DS1	(1.544 Mbps)	0x483C7A00
E1	(2.048 Mbps)	0x487A0000
DS2	(6.312 Mbps)	0x4940A080
E2	(8.448 Mbps)	0x4980E800
Ethernet	(10.00 Mbps)	0x49989680
E3	(34.368 Mbps)	0x4A831A80
DS3	(44.736 Mbps)	0x4AAAA780
STS-1	(51.84 Mbps)	0x4AC5C100
Fast Ethernet	(100.00 Mbps)	0x4B3EBC20
E4	(139.264 Mbps)	0x4B84D000
FC-0 133M		0x4B7DAD68
OC-3/STM-1	(155.52 Mbps)	0x4B9450C0
FC-0 266M		0x4BFDAD68
FC-0 531M		0x4C7D3356
OC-12/STM-4	(622.08 Mbps)	0x4C9450C0
GigE	(1000.00 Mbps)	0x4CEE6B28
FC-0 1062M		0x4CFD3356
OC-48/STM-16	(2488.32 Mbps)	0x4D9450C0
OC-192/STM-64	(9953.28 Mbps)	0x4E9450C0
10GigE-LAN	(10000.00 Mbps)	0x4E9502F9
OC-768/STM-256	(39813.12 Mbps)	0x4F9450C0

3.2. Generalized Label

The Generalized Label extends the traditional label by allowing the representation of not only labels which travel in-band with associated data packets, but also labels which identify time-slots, wavelengths, or space division multiplexed positions. For example, the Generalized Label may carry a label that represents (a) a single fiber in a bundle, (b) a single waveband within fiber, (c) a single wavelength within a waveband (or fiber), or (d) a set of time-slots within a wavelength (or fiber). It may also carry a label that

Some configurations of fiber switching (FSC) and lambda switching (LSC) use multiple data channels/links controlled by a single control channel. In such cases the label indicates the data channel/link to be used for the LSP. Note that this case is not the same as when [MPLS-BUNDLE] is being used.

The information carried in a Port and Wavelength label is:

```

      0               1               2               3
      0 1 2 3 4 5 6 7 8 9 0 1 2 3 4 5 6 7 8 9 0 1 2 3 4 5 6 7 8 9 0 1
+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+
|                                     Label                               |
+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+

```

Label: 32 bits

Indicates port/fiber or lambda to be used, from the sender's perspective. Values used in this field only have significance between two neighbors, and the receiver may need to convert the received value into a value that has local significance. Values may be configured or dynamically determined using a protocol such as [\[LMP\]](#).

[3.2.1.2. Other Labels](#)

Generic MPLS labels and Frame Relay labels are encoded right justified aligned in 32 bits (4 octets). ATM labels are encoded with the VPI right justified in bits 0-15 and the VCI right justified in bits 16-31.

[3.3. Waveband Switching](#)

A special case of lambda switching is waveband switching. A waveband represents a set of contiguous wavelengths which can be switched together to a new waveband. For optimization reasons it may be desirable for an optical cross connect to optically switch multiple wavelengths as a unit. This may reduce the distortion on the individual wavelengths and may allow tighter separation of the individual wavelengths. The Waveband Label is defined to support this special case.

Waveband switching naturally introduces another level of label hierarchy and as such the waveband is treated the same way all other upper layer labels are treated.

As far as the MPLS protocols are concerned there is little difference between a waveband label and a wavelength label except that semantically the waveband can be subdivided into wavelengths whereas the wavelength can only be subdivided into time or statistically multiplexed labels.

alternate LSPs may need to be rapidly established as a result of network failures.

The use of Suggested Label is only an optimization. If a downstream node passes a different label upstream, an upstream LSR reconfigures itself so that it uses the label specified by the downstream node, thereby maintaining the downstream control of a label. Note, the transmission of a suggested label does not imply that the suggested label is available for use. In particular, an ingress node should not transmit data traffic on a suggested label until the downstream node passes a label upstream.

The information carried in a suggested label is identical to a generalized label.

3.5. Label Set

The Label Set is used to limit the label choices of a downstream node to a set of acceptable labels. This limitation applies on a per hop basis.

We describe four cases where a Label Set is useful in the optical domain. The first case is where the end equipment is only capable of transmitting on a small specific set of wavelengths/bands. The second case is where there is a sequence of interfaces which cannot support wavelength conversion (CI-incapable) and require the same wavelength be used end-to-end over a sequence of hops, or even an entire path. The third case is where it is desirable to limit the amount of wavelength conversion being performed to reduce the distortion on the optical signals. The last case is where two ends of a link support different sets of wavelengths.


Label Set is used to restrict label ranges that may be used for a particular LSP between two peers. The receiver of a Label Set must restrict its choice of labels to one which is in the Label Set. Much like a label, a Label Set may be present across multiple hops. In this case each node generates it's own outgoing Label Set, possibly based on the incoming Label Set and the node's hardware capabilities. This case is expected to be the norm for nodes with conversion incapable (CI-incapable) interfaces.

The use of Label Set is optional, if not present, all labels from the valid label range may be used. Conceptually the absence of a Label Set implies a Label Set whose value is {U}, the set of all valid labels.

3.5.1. Required Information

A label set is composed of one or more Label_Set objects/TLVs. Each object/TLV contains one or more elements of the Label Set. Each element is referred to as a subchannel identifier and has the same format as a generalized label.

The information carried in a Label_Set is:

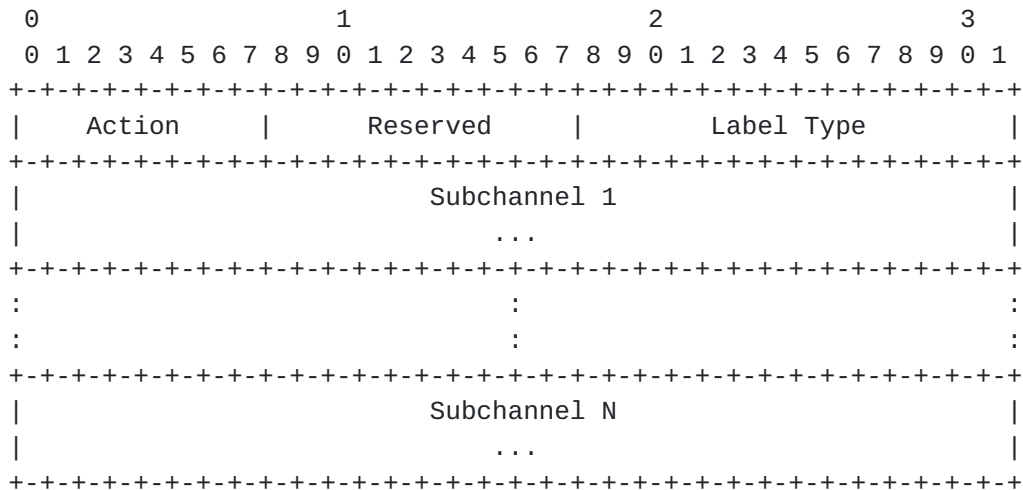

Action: 8 bits

0 - Inclusive List

Indicates that the object/TLV contains one or more subchannel elements that are included in the Label Set.

1 - Exclusive List

Indicates that the object/TLV contains one or more subchannel elements that are excluded from the Label Set.

2 - Inclusive Range

Indicates that the object/TLV contains a range of labels. The object/TLV contains two subchannel elements. The first element indicates the start of the range. The second element indicates the end of the range. A value of zero indicates that there is no bound on the corresponding portion of the range.

3 - Exclusive Range

Indicates that the object/TLV contains a range of labels that are excluded from the Label Set. The object/TLV contains two subchannel elements. The first element indicates the start of the range. The second element indicates the end of the range. A value of zero indicates that there is no bound on the corresponding portion of the range.

Reserved: 10 bits

This field is reserved. It MUST be set to zero on transmission and MUST be ignored on receipt.

Label Type: 14 bits

Indicates the type and format of the labels carried in the object/TLV. Values are signaling protocol specific.

Subchannel:

The subchannel represents the label (wavelength, fiber ...) which is eligible for allocation. This field has the same format as described for labels under [section 3.2](#).

Note that subchannel to local channel identifiers (e.g., wavelength) mappings are a local matter.

4. Bidirectional LSPs

This section defines direct support of bidirectional LSPs. Support is defined for LSPs that have the same traffic engineering requirements including fate sharing, protection and restoration, LSRs, and resource requirements (e.g., latency and jitter) in each direction. In the remainder of this section, the term "initiator" is used to refer to a node that starts the establishment of an LSP and the term "terminator" is used to refer to the node that is the target of the LSP. Note that for bidirectional LSPs, there is only one "initiator" and one "terminator".

Normally to establish a bidirectional LSP when using [[RFC3209](#)] or [[RFC3212](#)] two unidirectional paths must be independently established. This approach has the following disadvantages:

- * The latency to establish the bidirectional LSP is equal to one round trip signaling time plus one initiator-terminator signaling

transit delay. This not only extends the setup latency for successful LSP establishment, but it extends the worst-case latency for discovering an unsuccessful LSP to as much as two times the initiator-terminator transit delay. These delays are particularly significant for LSPs that are established for restoration purposes.

- * The control overhead is twice that of a unidirectional LSP. This is because separate control messages (e.g. Path and Resv) must be generated for both segments of the bidirectional LSP.
- * Because the resources are established in separate segments, route selection is complicated. There is also additional potential race for conditions in assignment of resources, which decreases the overall probability of successfully establishing the bidirectional connection.
- * It is more difficult to provide a clean interface for SONET/SDH equipment that may rely on bidirectional hop-by-hop paths for protection switching.
- * Bidirectional optical LSPs (or lightpaths) are seen as a requirement for many optical networking service providers.

With bidirectional LSPs both the downstream and upstream data paths, i.e., from initiator to terminator and terminator to initiator, are established using a single set of signaling messages. This reduces the setup latency to essentially one initiator-terminator round trip time plus processing time, and limits the control overhead to the same number of messages as a unidirectional LSP.

4.1. Required Information

For bidirectional LSPs, two labels must be allocated. Bidirectional LSP setup is indicated by the presence of an Upstream Label object/TLV in the appropriate signaling message. An Upstream Label has the same format as the generalized label, see [Section 3.2](#).

4.2. Contention Resolution

Contention for labels may occur between two bidirectional LSP setup requests traveling in opposite directions. This contention occurs when both sides allocate the same resources (labels) at effectively the same time. If there is no restriction on the labels that can be used for bidirectional LSPs and if there are alternate resources, then both nodes will pass different labels upstream and there is no

contention. However, if there is a restriction on the labels that can be used for the bidirectional LSPs (for example, if they must be physically coupled on a single I/O card), or if there are no more resources available, then the contention must be resolved by other means. To resolve contention, the node with the higher node ID will win the contention and it MUST issue a PathErr/NOTIFICATION message with a "Routing problem/Label allocation failure" indication. Upon receipt of such an error, the node SHOULD try to allocate a different Upstream label (and a different Suggested Label if used) to the bidirectional path. However, if no other resources are available, the node must proceed with standard error handling.

To reduce the probability of contention, one may impose a policy that the node with the lower ID never suggests a label in the downstream direction and always accepts a Suggested Label from an upstream node with a higher ID. Furthermore, since the labels may be exchanged using LMP, an alternative local policy could further be imposed such that (with respect to the higher numbered node's label set) the higher numbered node could allocate labels from the high end of the label range while the lower numbered node allocates labels from the low end of the label range. This mechanism would augment any close packing algorithms that may be used for bandwidth (or wavelength) optimization. One special case that should be noted when using RSVP and supporting this approach is that the neighbor's node ID might not be known when sending an initial Path message. When this case occurs, a node should suggest a label chosen at random from the available label space.

An example of contention between two nodes (PXC 1 and PXC 2) is shown in Figure 1. In this example PXC 1 assigns an Upstream Label for the channel corresponding to local BCId=2 (local BCId=7 on PXC 2) and sends a Suggested Label for the channel corresponding to local BCId=1 (local BCId=6 on PXC 2). Simultaneously, PXC 2 assigns an Upstream Label for the channel corresponding to its local BCId=6 (local BCId=1 on PXC 1) and sends a Suggested Label for the channel corresponding to its local BCId=7 (local BCId=2 on PXC 1). If there is no restriction on the labels that can be used for bidirectional LSPs and if there are alternate resources available, then both PXC 1 and PXC 2 will pass different labels upstream and the contention is resolved naturally (see Fig. 2). However, if there is a restriction on the labels that can be used for bidirectional LSPs (for example, if they must be physically coupled on a single I/O card), then the contention must be resolved using the node ID (see Fig. 3).

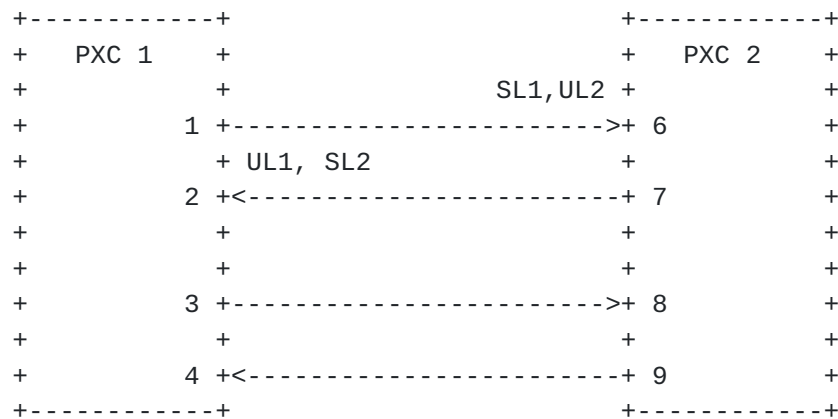


Figure 1. Label Contention

In this example, PXC 1 assigns an Upstream Label using BCId=2 (BCId=7 on PXC 2) and a Suggested Label using BCId=1 (BCId=6 on PXC 2). Simultaneously, PXC 2 assigns an Upstream Label using BCId=6 (BCId=1 on PXC 1) and a Suggested Label using BCId=7 (BCId=2 on PXC 1).

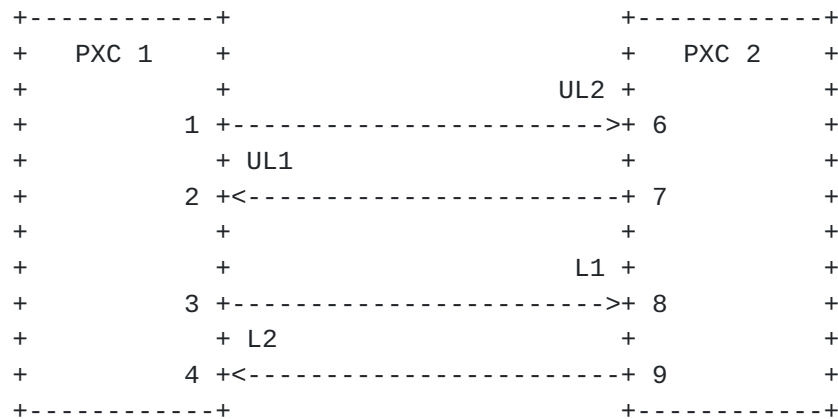


Figure 2. Label Contention Resolution without resource restrictions

In this example, there is no restriction on the labels that can be used by the bidirectional connection and there is no contention.

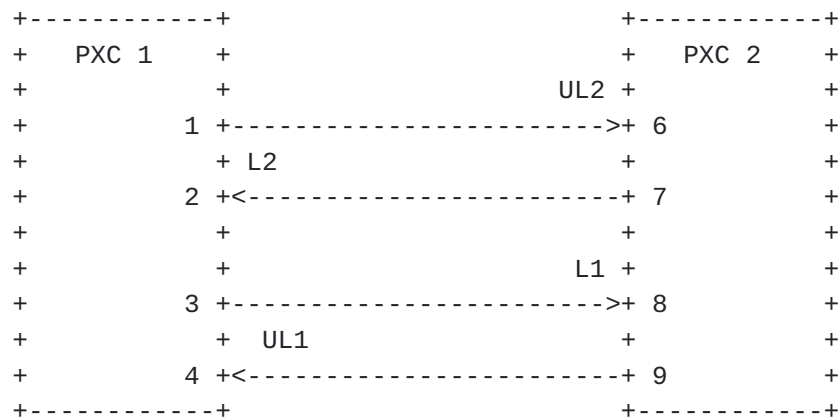


Figure 3. Label Contention Resolution with resource restrictions

In this example, labels 1,2 and 3,4 on PXC 1 (labels 6,7 and 8,9 on PXC 2, respectively) must be used by the same bidirectional connection. Since PXC 2 has a higher node ID, it wins the contention and PXC 1 must use a different set of labels.

5. Notification on Label Error

There are cases in traditional MPLS and in GMPLS that result in an error message containing an "Unacceptable label value" indication, see [[RFC3209](#)], [[GMPLS-LDP](#)] and [[GMPLS-RSVP](#)]. When these cases occur, it can be useful for the node generating the error message to indicate which labels would be acceptable. To cover this case, GMPLS introduces the ability to convey such information via the "Acceptable Label Set". An Acceptable Label Set is carried in appropriate protocol specific error messages, see [[GMPLS-LDP](#)] and [[GMPLS-RSVP](#)].

The format of an Acceptable Label Set is identical to a Label Set, see [section 3.5.1](#).

6. Explicit Label Control

In traditional MPLS, the interfaces used by an LSP may be controlled via an explicit route, i.e., ERO or ER-Hop. This enables the inclusion of a particular node/interface, and the termination of an LSP on a particular outgoing interface of the egress LSR. Where the interface may be numbered or unnumbered, see [[MPLS-UNNUM](#)].

There are cases where the existing explicit route semantics do not provide enough information to control the LSP to the degree desired. This occurs in the case when the LSP initiator wishes to select a label used on a link. Specifically, the problem is that ERO and ER-Hop do not support explicit label sub-objects. An example case where

such a mechanism is desirable is where there are two LSPs to be "spliced" together, i.e., where the tail of the first LSP would be "spliced" into the head of the second LSP. This last case is more likely to be used in the non-PSC classes of links.

To cover this case, the Label ERO subobject / ER Hop is introduced.

6.1. Required Information

The Label Explicit and Record Routes contains:

L: 1 bit

This bit must be set to 0.

U: 1 bit

This bit indicates the direction of the label. It is 0 for the downstream label. It is set to 1 for the upstream label and is only used on bidirectional LSPs.

Label: Variable

This field identifies the label to be used. The format of this field is identical to the one used by the Label field in Generalized Label, see [Section 3.2.1](#).

Placement and ordering of these parameters are signaling protocol specific.

7. Protection Information

Protection Information is carried in a new object/TLV. It is used to indicate link related protection attributes of a requested LSP. The use of Protection Information for a particular LSP is optional. Protection Information currently indicates the link protection type desired for the LSP. If a particular protection type, i.e., 1+1, or 1:N, is requested, then a connection request is processed only if the desired protection type can be honored. Note that the protection capabilities of a link may be advertised in routing, see [\[GMPLS-RTG\]](#). Path computation algorithms may take this information into account when computing paths for setting up LSPs.

Protection Information also indicates if the LSP is a primary or secondary LSP. A secondary LSP is a backup to a primary LSP. The

0x10 Dedicated 1+1

Indicates that a dedicated link layer protection scheme, i.e., 1+1 protection, should be used to support the LSP.

0x08 Dedicated 1:1

Indicates that a dedicated link layer protection scheme, i.e., 1:1 protection, should be used to support the LSP.

0x04 Shared

Indicates that a shared link layer protection scheme, such as 1:N protection, should be used to support the LSP.

0x02 Unprotected

Indicates that the LSP should not use any link layer protection.

0x01 Extra Traffic

Indicates that the LSP should use links that are protecting other (primary) traffic. Such LSPs may be preempted when the links carrying the (primary) traffic being protected fail.

8. Administrative Status Information

Administrative Status Information is carried in a new object/TLV. Administrative Status Information is currently used in two ways. In the first, the information indicates administrative state with respect to a particular LSP. In this usage, Administrative Status Information indicates the state of the LSP. State indications include "up" or "down", if it is in a "testing" mode, and if deletion is in progress. The actions taken by a node based on a state local decision. An example action that may be taken is to inhibit alarm reporting when an LSP is in "down" or "testing" states, or to report alarms associated with the connection at a priority equal to or less than "Non service affecting".

In the second usage of Administrative Status Information, the information indicates a request to set an LSP's administrative state. This information is always relayed to the ingress node which acts on the request.

The different usages are distinguished in a protocol specific fashion. See [[GMPLS-RSVP](#)] and [[GMPLS-LDP](#)] for details. The use of Administrative Status Information for a particular LSP is optional.

8.1. Required Information

The following information is carried in Administrative Status Information:

0										1										2										3									
0	1	2	3	4	5	6	7	8	9	0	1	2	3	4	5	6	7	8	9	0	1	2	3	4	5	6	7	8	9	0	1	2	3	4	5	6	7	8	9
+	-	+	-	+	-	+	-	+	-	+	-	+	-	+	-	+	-	+	-	+	-	+	-	+	-	+	-	+	-	+	-	+	-	+	-	+	-	+	-
R										Reserved																				T A D									
+	-	+	-	+	-	+	-	+	-	+	-	+	-	+	-	+	-	+	-	+	-	+	-	+	-	+	-	+	-	+	-	+	-	+	-	+	-	+	-

Reflect (R): 1 bit

When set, indicates that the edge node SHOULD reflect the object back in the appropriate message. This bit MUST NOT be set in state change request, i.e. Notify, messages.

Reserved: 28 bits

This field is reserved. It MUST be set to zero on transmission and MUST be ignored on receipt.

Testing (T): 1 bit


When set, indicates that the local actions related to the "testing" mode should be taken.

Administratively down (A): 1 bit


When set, indicates that the local actions related to the "administratively down" state should be taken.

Deletion in progress (D): 1 bit

When set, indicates that that the local actions related to LSP teardown should be taken. Edge nodes may use this flag to control connection teardown.

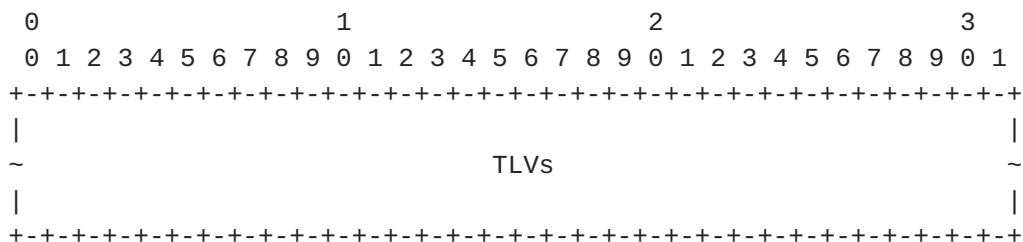

Where each TLV has the following format:

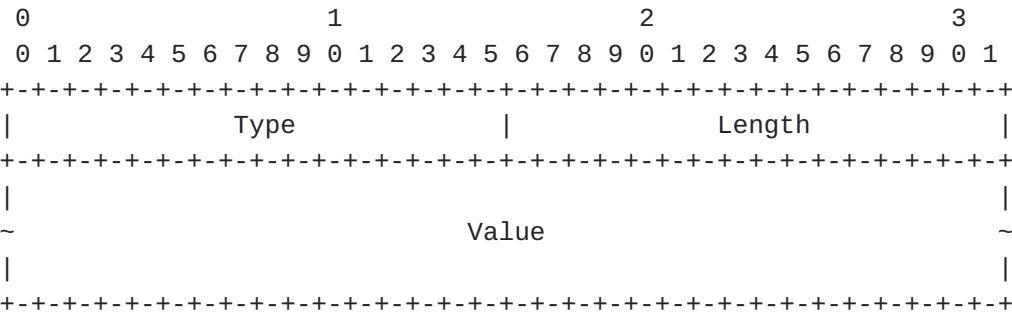

Length: 16 bits


Indicates the total length of the TLV, i.e., 4 + the length of the value field in octets. A value field whose length is not a multiple of four MUST be zero-padded so that the TLV is four-octet aligned.

Type: 16 bits

Indicates type of interface being identified. Defined values are:

Type	Length	Format	Description
1	8	IPv4 Addr.	IPv4
2	20	IPv6 Addr.	IPv6
3	12	See below	IF_INDEX (Interface Index)
4	12	See below	COMPONENT_IF_DOWNSTREAM (Component interface)
5	12	See below	COMPONENT_IF_UPSTREAM (Component interface)

For types 3, 4 and 5 the Value field has the format:

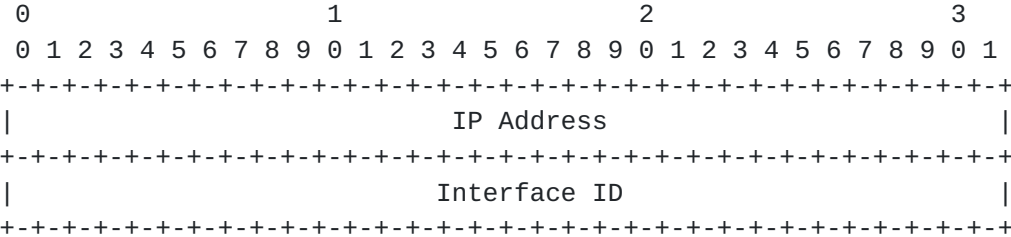

IP Address: 32 bits

The IP address field may carry either an IP address of a link, or an IP address associated with the router ID, where router ID may be the value carried in the router ID TLV of routing. See [\[MPLS-UNNUM\]](#) for details related to type 3 usage.

Interface ID: 32 bits

For type 3 usage, the Interface ID carries an interface identifier as defined in [\[MPLS-UNNUM\]](#).

For types 4 and 5, the Interface ID indicates a bundled component link. The special value 0xFFFFFFFF can be used to indicate the same label is to be valid across all component links.

[9.2. Fault Handling](#)

There are two new faults that must be handled when the control channel is independent of the data channel. In the first, there is a link or other type of failure that limits the ability of neighboring nodes to pass control messages. In this situation, neighboring nodes are unable to exchange control messages for a period of time. Once communication is restored the underlying signaling protocol must indicate that the nodes have maintained their state through the failure. The signaling protocol must also ensure that any state changes that were instantiated during the failure are synchronized between the nodes.

In the second, a node's control plane fails and then restarts and loses most of its state information. In this case, both upstream and downstream nodes must synchronize their state information with the restarted node. In order for any resynchronization to occur the node undergoing the restart will need to preserve some information, such as its mappings of incoming to outgoing labels.

Both cases are addressed in protocol specific fashions, see [\[GMPLS-RSVP\]](#) and [\[GMPLS-LDP\]](#).

Note that these cases only apply when there are mechanisms to detect data channel failures independent of control channel failures.

10. Acknowledgments

This draft is the work of numerous authors and consists of a composition of a number of previous drafts in this area. A list of the drafts from which material and ideas were incorporated follows:

[draft-saha-rsvp-optical-signaling-00.txt](#)

[draft-lang-mpls-rsvp-oxc-00.txt](#)

[draft-kompella-mpls-optical-00.txt](#)

[draft-fan-mpls-lambda-signaling-00.txt](#)

Valuable comments and input were received from a number of people, including Igor Bryskin, Adrian Farrel, Ben Mack-Crane, Dimitri Papadimitriou, Fong Liaw and Juergen Heiles. Some sections of this document are based on text proposed by Fong Liaw.

11. Security Considerations

This draft introduce no new security considerations to either [RFC3212] or [RFC3209]. The security considerations mentioned in [RFC3212] or [RFC3209] apply to the respective protocol specific forms of GMPLS, see [GMPLS-RSVP] and [GMPLS-LDP].

12. IANA Considerations

There are multiple fields and values defined within this document. IANA is requested to administer assignment of new values. All values should be allocated through an IETF Consensus action.

13. References

- [GMPLS-LDP] Ashwood-Smith, P. et al, "Generalized MPLS Signaling - CR-LDP Extensions", Internet Draft, [draft-ietf-mpls-generalized-cr-ldp-07.txt](#), April 2002.
- [GMPLS-RSVP] Ashwood-Smith, P. et al, "Generalized MPLS Signaling - RSVP-TE Extensions", Internet Draft, [draft-ietf-mpls-generalized-rsvp-te-08.txt](#), April 2002.
- [GMPLS-RTG] Kompella, K., et al, "Routing Extensions in Support of Generalized MPLS", Internet Draft, [draft-ietf-ccamp-gmpls-routing-00.txt](#), September, 2001.

[GMPLS-SONET] Ashwood-Smith, P. et al, "GMPLS - SONET / SDH Specifics", Internet Draft, [draft-ietf-ccamp-gmpls-sonet-sdh-00.txt](#), April, 2001.

[LMP] Lang, et al. "Link Management Protocol", Internet Draft, [draft-ietf-mpls-lmp-02.txt](#), March, 2001.

[MPLS-BUNDLE] Kompella, K., Rekhter, Y., and Berger, L., "Link Bundling in MPLS Traffic Engineering", Internet Draft, [draft-kompella-mpls-bundle-05.txt](#), Feb., 2001.

[MPLS-HIERARCHY] Kompella, K., and Rekhter, Y., "LSP Hierarchy with MPLS TE", Internet Draft, [draft-ietf-mpls-lsp-hierarchy-02.txt](#), Feb., 2001.

[MPLS-UNNUM] Kompella, K., Rekhter, Y., "Signalling Unnumbered Links in RSVP-TE", Internet Draft, [draft-ietf-mpls-rsvp-unnum-01.txt](#), February 2001

[RECOVERY] Sharma, et al "A Framework for MPLS-based Recovery," [draft-ietf-mpls-recovery-frmrk-02.txt](#), March, 2001

[RFC3031] Rosen et al., "Multiprotocol label switching Architecture", [RFC 3031](#).

[RFC3036] Andersson et al., "LDP Specification", [RFC 3036](#).

[RFC3209] Awduche, et al, "RSVP-TE: Extensions to RSVP for LSP Tunnels", [RFC 3209](#), December 2001.

[RFC3212] Jamoussi et al., "Constraint-Based LSP Setup using LDP", [RFC 3212](#), January 2002.

[14. Authors' Addresses](#)

Peter Ashwood-Smith
Nortel Networks Corp.
P.O. Box 3511 Station C,
Ottawa, ON K1Y 4H7
Canada
Phone: +1 613 763 4534
Email: petera@nortelnetworks.com

Ayan Banerjee
Calient Networks
5853 Rue Ferrari
San Jose, CA 95138
Phone: +1 408 972-3645
Email: abanerjee@calient.net

Lou Berger
Movaz Networks, Inc.
7926 Jones Branch Drive
Suite 615
McLean VA, 22102
Phone: +1 703 847-1801
Email: lberger@movaz.com

Editor & Primary Point of Contact

Greg Bernstein
Ciena Corporation
10480 Ridgeview Court
Cupertino, CA 94014
Phone: +1 408 366 4713
Email: greg@ciena.com

John Drake
Calient Networks
5853 Rue Ferrari
San Jose, CA 95138
Phone: +1 408 972 3720
Email: jdrake@calient.net

Yanhe Fan
Axiowave Networks, Inc.
200 Nickerson Road
Marlborough, MA 01752
Phone: + 1 774 348 4627
Email: yfan@axiowave.com

Kireeti Kompella
Juniper Networks, Inc.
1194 N. Mathilda Ave.
Sunnyvale, CA 94089
Email: kireeti@juniper.net

Jonathan P. Lang
Calient Networks
25 Castilian
Goleta, CA 93117
Email: jplang@calient.net

Eric Mannie
KPNQwest
Terhulpsessesteenweg 6A
1560 Hoeilaart - Belgium
Phone: +32 2 658 56 52
Mobile: +32 496 58 56 52
Fax: +32 2 658 51 18
Email: eric.mannie@kpnqwest.com

Bala Rajagopalan
Tellium, Inc.
2 Crescent Place
P.O. Box 901
Oceanport, NJ 07757-0901
Phone: +1 732 923 4237
Fax: +1 732 923 9804
Email: braja@tellium.com

Yakov Rekhter
Juniper Networks, Inc.
Email: yakov@juniper.net

Debanjan Saha
Tellium Optical Systems
2 Crescent Place
Oceanport, NJ 07757-0901
Phone: +1 732 923 4264
Fax: +1 732 923 9804
Email: dsaha@tellium.com

Vishal Sharma
Metanoia, Inc.
335 Elan Village Lane, Unit 203
San Jose, CA 95134-2539
Phone: +1 408-943-1794
Email: v.sharma@ieee.org

George Swallow
Cisco Systems, Inc.
250 Apollo Drive
Chelmsford, MA 01824
Voice: +1 978 244 8143
Email: swallow@cisco.com

Z. Bo Tang
Tellium, Inc.
2 Crescent Place
P.O. Box 901
Oceanport, NJ 07757-0901
Phone: +1 732 923 4231
Fax: +1 732 923 9804
Email: btang@tellium.com

Generated on: Thu Apr 25 12:52:19 2002