

Internet Engineering Task Force
Internet-Draft
Intended status: Standards Track
Expires: January 10, 2013

D. Hiremagalur, Ed.
G. Grammel, Ed.
J. Drake, Ed.
Juniper
G. Galimberti, Ed.
Z. Ali, Ed.
Cisco
R. Kunze, Ed.
Deutsche Telekom
July 9, 2012

Extension to the Link Management Protocol (LMP/DWDM -rfc4209) for Dense Wavelength Division Multiplexing (DWDM) Optical Line Systems to manage black-link optical interface parameters of DWDM application
[draft-dharinigert-ccamp-g-698-2-lmp-00](#)

Abstract

This memo defines extensions to LMP([rfc4209](#)) for managing Optical parameters associated with Wavelength Division Multiplexing (WDM) systems or characterized by the Optical Transport Network (OTN) in accordance with the Black-Link approach defined in ITU-T Recommendation G.698.2[ITU.G698.2].[\[ITU.G698.2\]](#), G.694.1[ITU.G694.1].[\[ITU.G694.1\]](#) and its extensions./>

Copyright Notice

Copyright (c) 2011 IETF Trust and the persons identified as the document authors. All rights reserved.

Status of this Memo

This Internet-Draft is submitted in full conformance with the provisions of [BCP 78](#) and [BCP 79](#).

Internet-Drafts are working documents of the Internet Engineering Task Force (IETF). Note that other groups may also distribute working documents as Internet-Drafts. The list of current Internet-Drafts is at <http://datatracker.ietf.org/drafts/current/>.

Internet-Drafts are draft documents valid for a maximum of six months and may be updated, replaced, or obsoleted by other documents at any time. It is inappropriate to use Internet-Drafts as reference material or to cite them other than as "work in progress."

This Internet-Draft will expire on January 10, 2013.

Internet-Draft [draft-dharinigert-ccamp-g-698-2-lmp-00](https://datatracker.ietf.org/doc/draft-dharinigert-ccamp-g-698-2-lmp-00)

July 2012

Copyright Notice

Copyright (c) 2012 IETF Trust and the persons identified as the document authors. All rights reserved.

This document is subject to [BCP 78](https://www.ietf.org/rfc/rfc7800.html) and the IETF Trust's Legal Provisions Relating to IETF Documents (<http://trustee.ietf.org/license-info>) in effect on the date of publication of this document. Please review these documents carefully, as they describe your rights and restrictions with respect to this document. Code Components extracted from this document must include Simplified BSD License text as described in Section 4.e of the Trust Legal Provisions and are provided without warranty as described in the Simplified BSD License.


Table of Contents

1.	Introduction	3
2.	Extensions to LMP-WDM Protocol	3
3.	Black Link General Parameters - BL_General	4
4.	Black Link ApplicationCode - BL_ApplicationCode	5
5.	Black Link - BL_Ss	6
6.	Black Link - BL_SsRs	7
7.	Black Link - BL_Rs	8
8.	Black Link - OLS_Status	10
9.	Security Considerations	12
10.	IANA Considerations	12
11.	References	13
11.1.	Normative References	13
11.2.	Informative References	13
	Authors' Addresses	14

1. Introduction

This extension is based on "[draft-galikonze-ccamp-g-698-2-snmp-mib-00](#)" and "[draft-kunze-g-698-2-management-control-framework-02](#)", for the relevant parameters specified in G.698.2 [[ITU.G698.2](#)].

Figure 1 Extended LMP Model (from [[RFC4209](#)])

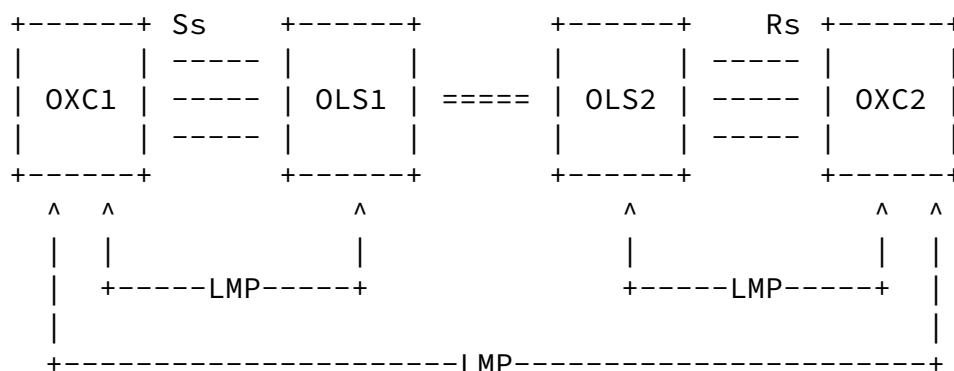

- OXC : is an entity that contains transponders
- OLS : generic optical system, it can be -
Optical mux , Optical demux, Optical Add Drop M
- OLS to OLS : represents the black-Link itself
- Rs/Ss : inbetween the OXC and the OLS

Figure 1: Extended LMP Model

2. Extensions to LMP-WDM Protocol

This document defines extensions to [[RFC4209](#)] to allow the Black Link (BL) parameters of G.698.2, as described in the draft

[draft-kunze-g-698-2-management-control-framework-02](#), to be exchanged between a router or optical switch and the optical line system to which it is attached. In particular, this document defines additional Data Link sub-objects to be carried in the LinkSummary message defined in [[RFC4204](#)]. The OXC and OLS systems may be managed by different Network management systems and hence may not know the capability and status of their peer. The intent of this draft is to enable the OXC and OLS systems to exchange this information. These messages and their usage are defined in subsequent sections of this document.

The following new messages are defined for the Black Link:

- BL_General (sub-object Type = TBA)
- BL_ApplicationCode (sub-object Type = TBA)
- BL_Ss (sub-object Type = TBA)
- BL_SsRs (sub-object Type = TBA)
- BL_Rs (sub-object Type = TBA)
- BL_OLS_Status (sub-object Type = TBA)


3. Black Link General Parameters - BL_General

These are the general parameters as described in [G698.2]. Please refer to the "[draft-galikusze-ccamp-g-698-2-snmp-mib-00](#)". for more details about these parameters.

The general parameters are

1. Bit-Rate/line coding of optical tributary signals
2. Wavelength - (Hertz) 4 bytes
3. Min Wavelength Range - (Hertz) 4 bytes
4. Max Wavelength Range - (Hertz) 4 bytes
5. Channel Spacing -(Hertz) 4 bytes
6. BER mantisa - 4 bytes
7. BER exponent - 4 bytes
8. FEC Coding - 1 byte
9. Administrative state - 1 byte
10. Operation state - 1 byte

Figure 2: The format of the this sub-object (Type = TBA, Length = TBA) is as follows:

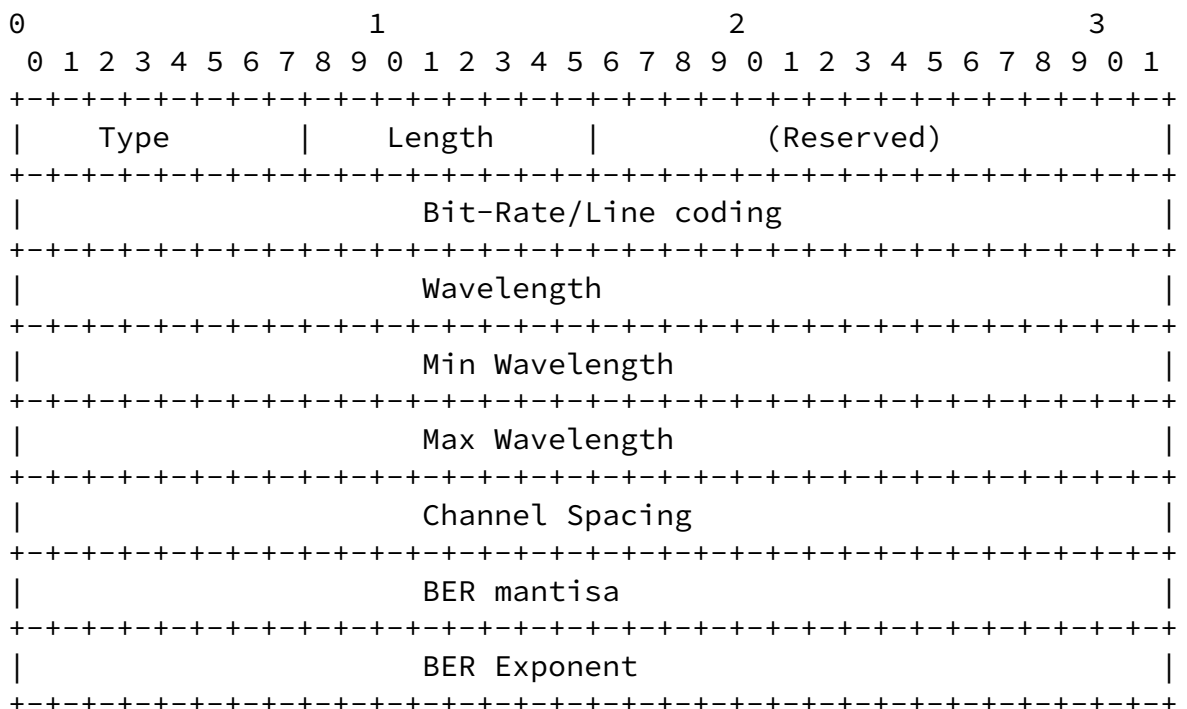

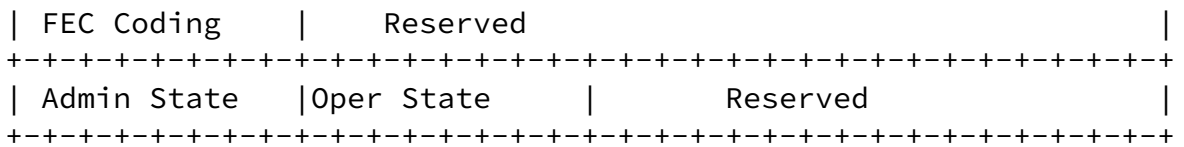


Figure 2: BL_General

4. Black Link ApplicationCode - BL_ApplicationCode


These are the general parameters as described in [G698.2]. Please refer to the "[draft-galikusze-ccamp-g-698-2-snmp-mib-00](#)". for more details about these parameters.

The general parameters are

1. Single-channel application codes -- 32 bytes
2. Vendor Transceiver Class -- 32 bytes

When Single-channel application code (which is defined in G.698.2) is used in the message, then the vendor transaction class need not be used (i.e. all 0) and the optional parameters except nominal central frequency need not be used. When vendor transaction class is used in the message, then the Single-channel application code need not be used (i.e. all 0) and the optional parameters needs to be used.

Figure 3: The format of the this sub-object (Type = TBA, Length = TBA) is as follows:

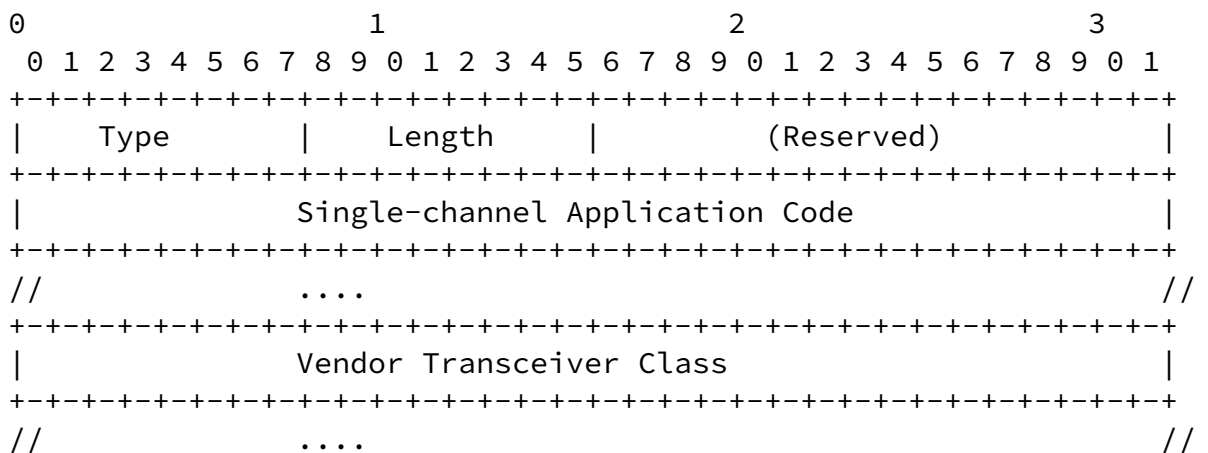

+++++-----


Figure 3: BL_ApplicationCode

5. Black Link - BL_Ss

These are the G.698.2 parameters at the Source(Ss reference points). Please refer to "[draft-galikusze-ccamp-g-698-2-snmp-mib-00](#)" for more details about these parameters.

1. Minimum Mean Channel Output Power -(0.1 dbm) 4 bytes
2. Maximum Mean Channel Output Power -(0.1 dbm) 4 bytes
3. Minimum Central Frequency - (0.01 THz) 4 bytes
4. Maximum Central Frequency - (0.01 THz) 4 bytes
5. Maximum Spectral Excursion - (0.1 GHz) 4 bytes
6. Maximum Tx Dispersion OSNR Penalty - (0.1 dbm) 4 bytes
7. Current Output Power - (0.1dbm) 4 bytes
8. Status of TX - Status of the Transmit link at OXC - 4 bytes

Figure 4: The format of the Black link sub-object (Type = TBA, Length = TBA) is as follows:

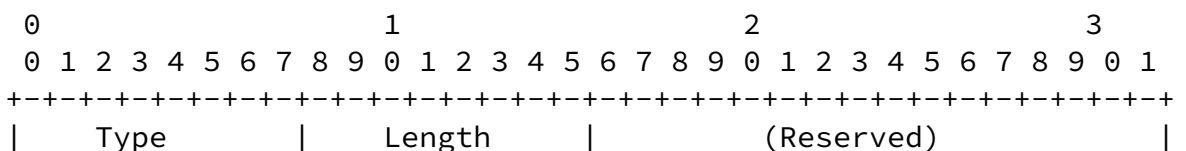

```

+++++
|           Minimum Mean Channel Output Power           |
+++++
|           Maximum Mean Channel Output Power           |
+++++
|           Minimum Central Frequency                   |
+++++
|           Maximum Central Frequency                   |
+++++
|           Maximum Spectral Excursion                  |
+++++
|           Maximum Tx Dispersion OSNR Penalty         |
+++++
|           Current Output Power                       |
+++++
|           Status of TX                               |
+++++

```

Figure 4: Black Link - BL_Ss

6. Black Link - BL_SsRs

These are the G.698.2 parameters for the path (Ss-Rs). Please refer to the "[draft-galikusze-ccamp-g-698-2-snmp-mib-00](#)" for more details about these parameters.

1. Minimum Chromatic Dispersion - (ps/nm) 4 bytes
2. Maximum Chromatic Dispersion -(ps/nm) 4 bytes
3. Minimum Src Optical ReturnLoss -(0.1 db) 4 bytes
4. Maximum Discrete Reflectance Src To Sink - (0.1 db) 4 bytes
5. Maximum Differential Group Delay - (ps) 4 bytes
6. Maximum Polarisation Dependent Loss - (0.1 db) 4 bytes
7. Maximum Inter Channel Crosstalk - (0.1 db) 4 bytes
8. Interferometric Crosstalk - (0.1 db) 4 bytes
9. Optical Path OSNR Penalty - (0.1 db) 4 bytes
10. Fiber type - 1 byte

Figure 5: The format of the Black link sub-object (Type = TBA, Length

= TBA) is as follows:

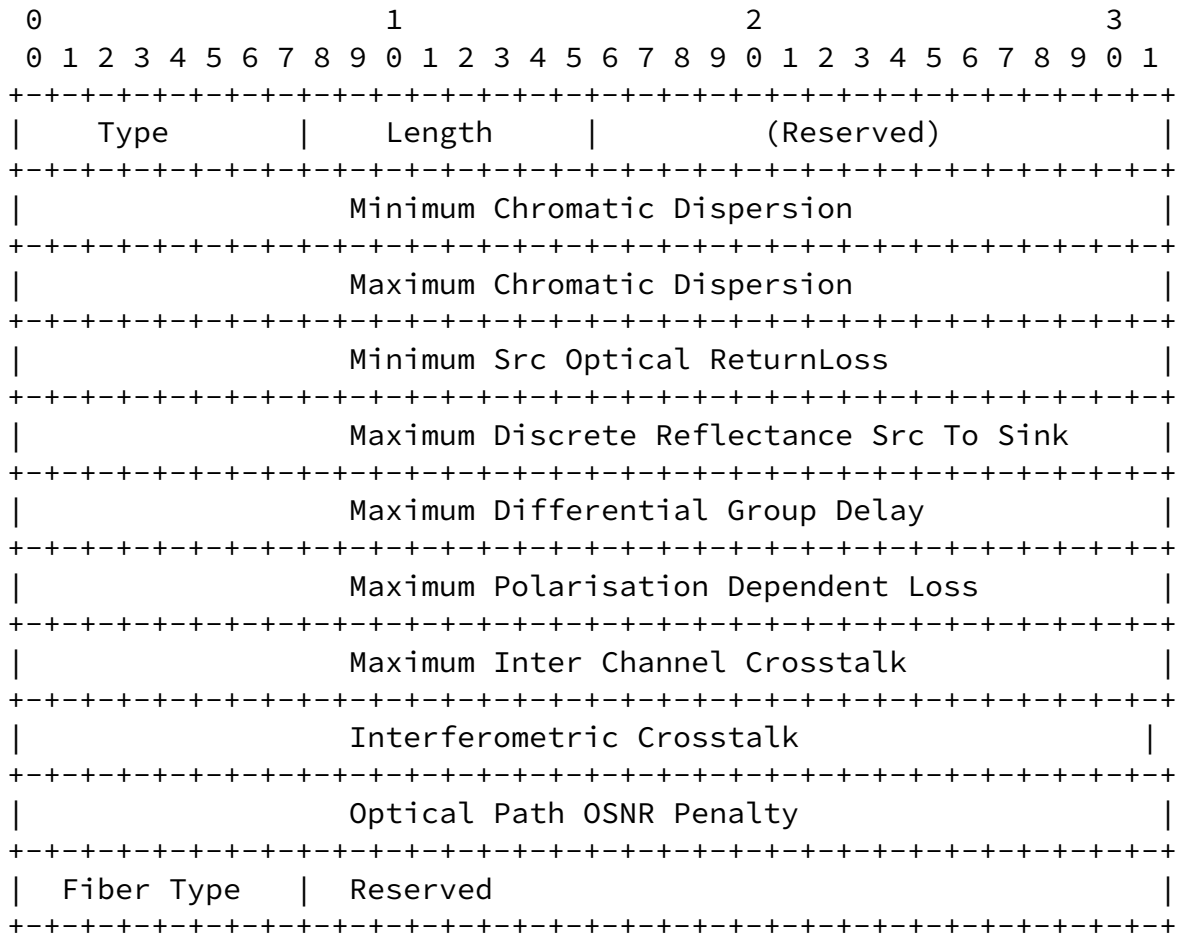


Figure 5: Black Link - BL_SsRs

7. Black Link - BL_Rs

These are the G.698.2 parameters at the Sink (Rs reference points). Please refer to the "[draft-galikusze-ccamp-g-698-2-snmp-mib-00](#)" for more details about these parameters.

1. Minimum Mean Input Power - (0.1dbm) 4bytes
2. Maximum Mean Input Power - (0.1dbm) 4bytes
3. Minimum OSNR - (0.1dB) 4bytes
4. OSNR Tolerance - (0.1dB) 4bytes
5. Current Input Power at the OXC - (0.1dbm) 4bytes
6. Threshold of the input power at OLS
 - The power level above which the OLS will not function (0.1dbm) 4bytes
7. Current Optical OSNR (0.1dB)
8. Q factor
9. Post FEC BER Mantissa
10. Post FEC BER Exponent
11. Status of RX - Status of the Receive link at OXC - 2bytes

Figure 6: The format of the Black link sub-object (Type = TBA, Length = TBA) is as follows:

The format of the Black Link/OLS Sink sub-object (Type = TBA, Length = TBA) is as follows:

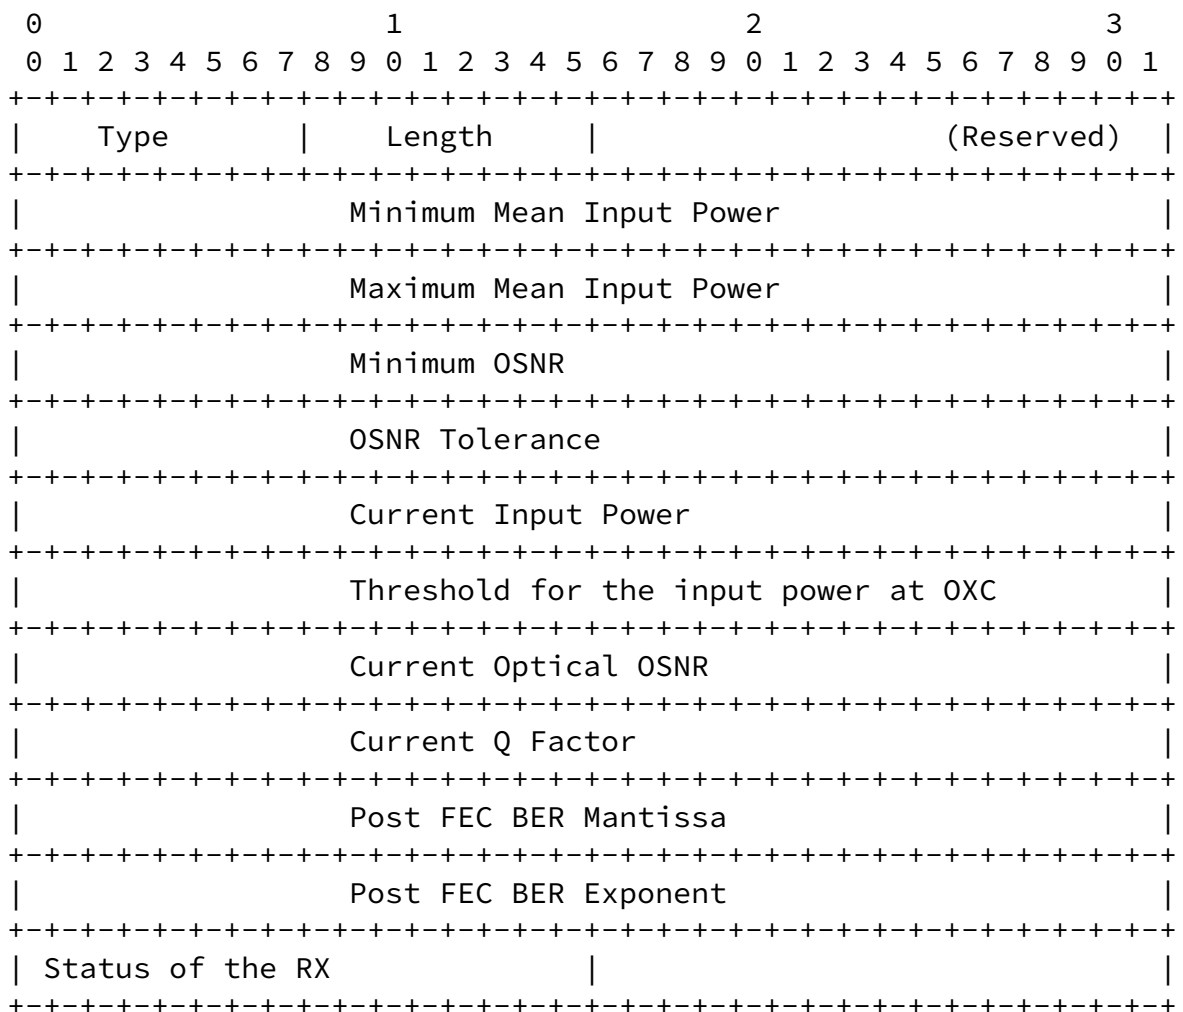


Figure 6: Black Link - BL_Rs

8. Black Link - OLS_Status

This message is sent by the OLS to the OXC.

Hiremagalur, et al.

Expires January 10, 2013

[Page 10]

Internet-Draft

[draft-dharinigert-ccamp-g-698-2-lmp-00](#)

July 2012

1. Wavelength
The wavelength which has been accepted by the OLS (Hertz) 4 bytes.
2. Length of the Wavelength Availability Map 1 byte
3. Wavelength Availability bits - variable bits depending on the number of wavelengths available (For eg 96 bits for C-band 50GHz) (Allocation is in multiples of 1byte - 96 bits - 10 bytes)
0 - wavelength is available, 1 - used - variable length
4. Current Input Power (0.1dbm) 4 bytes
- This is the current input power at OLS
5. Delta between output power at the Src(OXC)and Input Power at OLS (0.1dbm) 4 bytes
- This is the delta between the input power and the transmitted output power at the OXC (from message 2.2 BL_Src)
6. Threshold of the input power at OLS 4 bytes
- This is the power level above which the OLS will not function.
7. Current Output Power (0.1dbm) 4 bytes
- This is the transmitted output power at the OLS.
8. Status of Rx link at OLS 2 bytes
- Status of the Receive link at the OLS
9. Status of Tx link at OLS 2 bytes
- Status of the Transmit link at the OLS

Figure 7: The format of the Black link sub-object (Type = TBA, Length = TBA) is as follows:

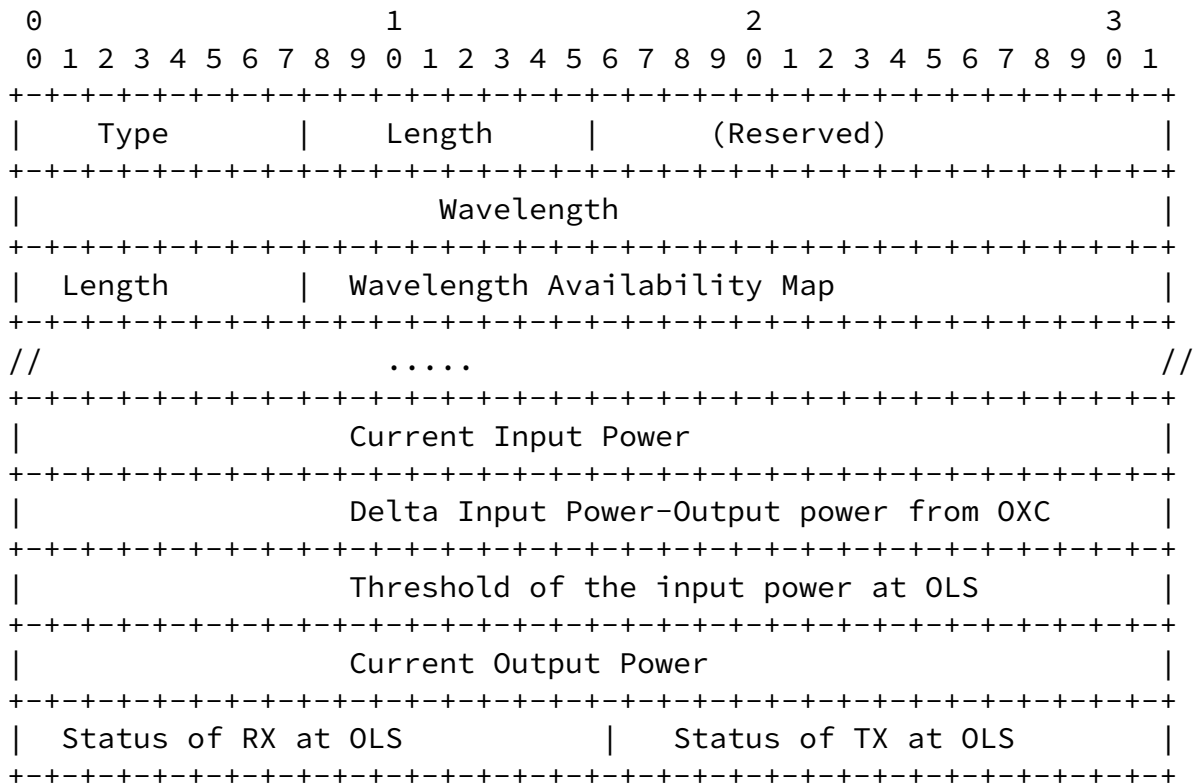


Figure 7: Black Link - OLS_Status

9. Security Considerations

LMP message security uses IPsec, as described in [RFC4204]. This document only defines new LMP objects that are carried in existing LMP messages, similar to the LMP objects in [RFC:4209]. This document does not introduce new security considerations.

10. IANA Considerations

LMP [RFC4204] defines the following name spaces and the ways in which IANA can make assignments to these namespaces: - LMP Message Type - LMP Object Class - LMP Object Class type (C-Type) unique within the Object Class - LMP Sub-object Class type (Type) unique within the Object Class This memo introduces the following new assignments: LMP Sub-Object Class names: under DATA_LINK Class name (as defined in [RFC4204]) - BL_General (sub-object Type = TBA) - BL_Applicationcode (sub-object Type = TBA) - BL_Ss (sub-object Type = TBA) - BL_SsRs (sub-object Type = TBA) - BL_Rs (sub-object Type = TBA) - OLS_Status

Hiremagalur, et al.

Expires January 10, 2013

[Page 12]

Internet-Draft

[draft-dharinigert-ccamp-g-698-2-lmp-00](#)

July 2012

(sub-object Type = TBA)

11. References

11.1. Normative References

[RFC4204] Lang, J., "Link Management Protocol (LMP)", [RFC 4204](#), October 2005.

[RFC4209] Fredette, A. and J. Lang, "Link Management Protocol (LMP) for Dense Wavelength Division Multiplexing (DWDM) Optical Line Systems", [RFC 4209](#), October 2005.

[ITU.G698.2]

International Telecommunications Union, "Amplified multichannel dense wavelength division multiplexing applications with single channel optical interfaces", ITU-

T Recommendation G.698.2, November 2009.

[ITU.G694.1]

International Telecommunications Union, "'Spectral grids for WDM applications: DWDM frequency grid'", ITU-T Recommendation G.698.2, June 2002.

[ITU.G709]

International Telecommunications Union, "Interface for the Optical Transport Network (OTN)", ITU-T Recommendation G.709, March 2003.

[ITU.G872]

International Telecommunications Union, "Architecture of optical transport networks", ITU-T Recommendation G.872, November 2001.

11.2. Informative References

[I-D.kunze-g-698-2-management-control-framework]

Kunze, R., "A framework for Management and Control of optical interfaces supporting G.698.2", [draft-kunze-g-698-2-management-control-framework-00](#) (work in progress), July 2011.

[I-D.galimbe-kunze-g-698-2-snmp-mib]

Kunze, R. and D. Hiremagalur, "A SNMP MIB to manage black-link optical interface parameters of DWDM applications", [draft-galimbe-kunze-g-698-2-snmp-mib-02](#) (work in progress), March 2012.

Hiremagalur, et al. Expires January 10, 2013

[Page 13]

Internet-Draft [draft-dharinigert-ccamp-g-698-2-lmp-00](#)

July 2012

Authors' Addresses

Dharini Hiremagalur (editor)
Juniper
1194 N Mathilda Avenue
Sunnyvale - 94089 California
USA

Phone: +1408

Email: dharinih@juniper.net

Gert Grammel (editor)
Juniper
1194 N Mathilda Avenue
Sunnyvale - 94089 California
USA

Phone: +1408
Email: ggrammel@juniper.net

John E. Drake (editor)
Juniper
1194 N Mathilda Avenue
HW-US, Pennsylvania
USA

Phone: +1408
Email: jdrake@juniper.net

Gabriele Galimberti (editor)
Cisco
Via Philips,12
20052 - Monza
Italy

Phone: +390392091462
Email: ggalimbe@cisco.com

Zafar Ali (editor)
Cisco
3000 Innovation Drive
KANATA

ONTARIO K2K 3E8

Phone:

Email: zali@cisco.com

Ruediger Kunze (editor)

Deutsche Telekom

Dddd, xx

Berlin

Germany

Phone: +49xxxxxxxxxx

Email: RKunze@telekom.de