

INTERNET-DRAFT  
Intended Status: Proposed Standard

Mohammed Umair  
Kingston Smiler S  
Shaji Ravindranathan  
IP Infusion  
Lucy Yong  
Donald Eastlake 3rd  
Huawei Technologies  
October 19, 2015

Expires: April 21, 2016

**TRILL MPLS-Based Ethernet VPN**  
<[draft-muks-trill-evpn-00.txt](#)>

Abstract

This document describes a TRILL based L2VPN solution using VTSD. VTSD (Virtual TRILL Service/Switch Domain) is specified in [[draft-VTSD](#)]. This draft describes the advantages provided by a TRILL based EVPN solution over an existing MPLS L2VPN solution, advantages such as bandwidth scaling and providing multiple active pseudowires.

Status of this Memo

This Internet-Draft is submitted to IETF in full conformance with the provisions of [BCP 78](#) and [BCP 79](#).

Internet-Drafts are working documents of the Internet Engineering Task Force (IETF), its areas, and its working groups. Note that other groups may also distribute working documents as Internet-Drafts.

Internet-Drafts are draft documents valid for a maximum of six months and may be updated, replaced, or obsoleted by other documents at any time. It is inappropriate to use Internet-Drafts as reference material or to cite them other than as "work in progress."

The list of current Internet-Drafts can be accessed at <http://www.ietf.org/lid-abstracts.html>

The list of Internet-Draft Shadow Directories can be accessed at <http://www.ietf.org/shadow.html>

Copyright and License Notice

Copyright (c) 2015 IETF Trust and the persons identified as the document authors. All rights reserved.

This document is subject to [BCP 78](#) and the IETF Trust's Legal Provisions Relating to IETF Documents (<http://trustee.ietf.org/license-info>) in effect on the date of publication of this document. Please review these documents carefully, as they describe your rights and restrictions with respect to this document. Code Components extracted from this document must include Simplified BSD License text as described in Section 4.e of the Trust Legal Provisions and are provided without warranty as described in the Simplified BSD License.

## Table of Contents

<a href="#">1</a>	Introduction . . . . .	<a href="#">3</a>
<a href="#">1.1</a>	Terminology . . . . .	<a href="#">4</a>
<a href="#">2</a>	Appointed Forwarders . . . . .	<a href="#">6</a>
<a href="#">3</a>	Multiple Parallel VPLS pseudowires. . . . .	<a href="#">7</a>
<a href="#">4</a>	Active-Active Pseudowire . . . . .	<a href="#">8</a>
<a href="#">4.1</a>	Port-based AC operations. . . . .	<a href="#">9</a>
<a href="#">4.2</a>	VLAN-based AC operations. . . . .	<a href="#">9</a>
<a href="#">5</a>	MPLS encapsulation and Loop free provider PSN/MPLS . . . . .	<a href="#">10</a>
<a href="#">6</a>	Frame processing . . . . .	<a href="#">10</a>
<a href="#">6.1</a>	Frame processing between CE's and TIR's. . . . .	<a href="#">10</a>
<a href="#">6.2</a>	Frame processing between TIR's. . . . .	<a href="#">11</a>
<a href="#">7</a>	MAC Address learning and withdrawal. . . . .	<a href="#">11</a>
<a href="#">8</a>	Security Considerations . . . . .	<a href="#">12</a>
<a href="#">9</a>	IANA Considerations . . . . .	<a href="#">12</a>
<a href="#">10</a>	References . . . . .	<a href="#">12</a>
<a href="#">10.1</a>	Normative References . . . . .	<a href="#">12</a>
<a href="#">10.2</a>	Informative References . . . . .	<a href="#">13</a>
	Authors' Addresses . . . . .	<a href="#">14</a>



## **1 Introduction**

Pseudo Wire Emulation Edge-to-Edge (PWE3) is a mechanism that emulates the essential attributes of a service such as Ethernet over a Packet Switched Network (PSN). The required functions of PWS include encapsulating service-specific PDUs arriving at an ingress port, and carrying them across a path or tunnel, managing their timing and order, and any other operations required to emulate the behavior and characteristics of the service as faithfully as possible.

The IETF Transparent Interconnection of Lots of Links (TRILL) protocol [[RFC6325](#)] [[RFC7177](#)] [[rfc7180bis](#)] provides transparent forwarding in multi-hop networks with arbitrary topology and link technologies using a header with a hop count and link-state routing. TRILL provides optimal pair-wise forwarding without configuration, safe forwarding even during periods of temporary loops, and support for multipathing of both unicast and multicast traffic. Intermediate Systems (ISs) implementing TRILL are called Routing Bridges(RBridges)or TRILL Switches.

VPLS, specified in [[RFC4672](#)], is a proven widely deployed technology. However, the existing solution has a number of limitations when it comes to redundancy, flow-based load balancing, multipathing and handling of BUM (Broadcast, Unknown Unicast, and Multicast) traffic.

The [[draft-VTSD](#)] introduces a new terminology called VTSD which is a replacement for VSI (Virtual Service Instance) in a traditional VPLS network. [[draft-VTSD](#)] states that a VTSD is a logical RBridge resides inside TIR (TRILL Intermediate Router) that should be capable of performing all the operations that a standard TRILL switch can do, along with IP and MPLS functions. A TIR is a Provider Edge (PE) device where VTSD resides and provides TRILL based EVPN solution.

The TRILL based EVPN solution is similar the to MPLS based L2VPN solution and uses MPLS L2VPN concepts like pseudowire, attachment circuit, PSN tunnel etc. TRILL EVPN requires extensions to existing IP/MPLS protocols as described in this document. In addition to these extensions, EVPN uses several building blocks from existing MPLS technologies. The VSI in IP/MPLS L2VPN is replaced with VTSD. Replacing VSI with VTSD with TRILL EVPN brings some new features and advantages. This document states these advantages in detail.

TRILL as a protocol enables optimal use of the links in a layer2 network and running TRILL inside the TIR or VTSD provides a way for optimally utilizing the following:

1. The PWE3 mesh connectivity in the VPLS core using parallel



pseudowires.

2. The PWE3 attachment circuit interface, when there are more than one attachment circuit interfaces using active-active pseudowires.

When there is a requirement to increase the bandwidth of a particular pseudowire, with TRILL EVPN, new pseudowires could be created with the same endpoints and with different peer address. These pseudowires are termed as parallel pseudowires. As these pseudowires are attached to VTSD (which is a TRILL RBridge), the TRILL protocol takes care of optimally load sharing the traffic across these parallel pseudowires.

Similarly when there is a requirement to increase the bandwidth of customer facing interface (attachment circuit), this can be achieved effectively by adding new attachment circuit interfaces and attaching them to the same VTSD of TRILL EVPN.

The objective of a pseudowire (PW) connected in parallel or mesh is to maintain connectivity across the packet switched network (PSN) used by the emulated service. In this model all pseudowires that are part of a service domain will carry data traffic without making any of the pseudowire go in to standby mode.

### **1.1 Terminology**

The key words "MUST", "MUST NOT", "REQUIRED", "SHALL", "SHALL NOT", "SHOULD", "SHOULD NOT", "RECOMMENDED", "MAY", and "OPTIONAL" in this document are to be interpreted as described in [RFC 2119](#) [[RFC2119](#)].

Acronyms used in this document include the following:

AC	- Attachment Circuit [ <a href="#">RFC4664</a> ]
Access Port	- A TRILL switch port configured with the "end station service enable" bit on, as described in <a href="#">Section 4.9.1 of [RFC6325]</a> . All AC's, VTSD ports connected to CE's, should configured as TRILL Access port.
AF	- Appointed Forwarder [ <a href="#">RFC6325</a> ], [ <a href="#">RFC6439</a> ] and [RFC6439bis].
Data Label	- VLAN or FGL



ECMP	- Equal Cost Multi Pathing
FGL	- Fine-Grained Labeling [ <a href="#">RFC7172</a> ]
IS-IS	- Intermediate System to Intermediate System [ <a href="#">IS-IS</a> ]
LAN	- Local Area Network
Link	- The means by which adjacent TRILL switches or VTSD is connected. May be a bridged LAN
MLAG	- Multi-Chassis Link Aggregation
MPLS	- Multi-Protocol Label Switching
PE	- Provider Edge Device
PSN	- Packet Switched Network
PW	- Pseudowire [ <a href="#">RFC4664</a> ]
RBridge	- An alternative name for TRILL Switch
TIR	- TRILL Intermediate Router (Devices where Pseudowire starts and Terminates)
TRILL	- Transparent Interconnection of Lots of Links OR Tunneled Routing in the Link Layer
TRILL Site	- A part of a TRILL campus that contains at least one RBridge.
TRILL switch	- A device implementing the TRILL protocol. An alternative name for an RBridge.
Trunk port	- A TRILL switch port configured with the "end station service disable" bit on, as described in <a href="#">Section 4.9.1 of [RFC6325]</a> . All pseudowires should be configured as TRILL Trunk port.
VLAN	- Virtual Local Area Network





VPLS	- Virtual Private LAN Service
VPTS	- Virtual Private TRILL Service
VSI	- Virtual Service Instance [ <a href="#">RFC4664</a> ]
VTSI	- Virtual TRILL Service Instance
VTSD	- Virtual TRILL Switch Domain OR Virtual TRILL Service Domain A Virtual RBridge that segregates one tenant's TRILL database as well as traffic from the other.
VTSD-AP	- A VTSD TRILL Access port can be a AC or a logical port connected with CE's. it can be a combination of physical port and Data Label. OR just Physical port connected to CE's

## **[2.](#) Appointed Forwarders**

TRILL supports multi-access LAN (Local Area Network) links that can have multiple end stations and R Bridges attached. Where multiple R Bridges are attached to a link, native traffic to and from end stations on that link is handled by a subset of those R Bridges called "Appointed Forwarders" [[rfc6439bis](#)], with the intent that native traffic in each VLAN be handled by at most one R Bridge. An R Bridge can be Appointed Forwarder for many VLANs.

The Appointed Forwarder mechanism is irrelevant to any link on which end station service is not offered. This includes links configured as point-to-point IS-IS links and any link with all R Bridge ports on that link configured as trunk ports. (In TRILL, configuration of a port as a "trunk port" just means that no end station service will be provided. It does not imply that all VLANs are enabled on that port). Furthermore, Appointed Forwarder status has no effect on the forwarding of TRILL Data frames. It only affects the handling of native frames.

By default, the DRB (Designated R Bridge) on a link is in-charge of native traffic for all VLANs on the link. The DRB may, if it wishes, act as Appointed Forwarder for any VLAN and it may appoint other R Bridges that have ports on the link as Appointed Forwarder for one or more VLANs.



The DRB may appoint other RBridges on the link with any one of the mechanism described in [[rfc6439bis](#)].

A RBridge on a multi-access link forms adjacency [[RFC7177](#)] with other RBridge if the VLAN's configured/enabled between them are common. For example there are four RBridges attached to multi-access link, say RB1, RB2, RB3 and RB4. RB1 and RB2 are configured with single VLAN "VLAN 2", whereas RB3 and RB4 are configured with "VLAN 3". Assume that there are no Native VLAN's present on any of the RBridges connected to multi-access link. Since TRILL Hellos are sent with VLAN Tag enabled on the interface, RB3 and RB4 drops the hellos of RB1 and RB2 (since they are not configured for VLAN 2). Similarly RB1 and RB2 drops the Hellos of RB3 and RB4. This results in RB1 and RB2 not forming adjacency with RB3 and RB4. RB1 and RB2 after electing DRB and forming adjacency between them, will decide about VLAN 2 AF. Similarly RB3 and RB4 decide about the VLAN 3 AF.

As VTSD should be capable of performing all the operations a standard TRILL Switch should do, it should also be capable of performing Appointed Forwarder selection. A group of VTSD that are configured for same service's (VLAN's in our case) on different TIR's will form adjacencies, whereas VTSD which are enabled for different VTSDI will never form adjacencies.

### **3. Multiple Parallel VPLS pseudowires.**

TRILL supports multiple parallel adjacencies between neighbor RBridges. [Appendix C of \[RFC6325\]](#) and [section 3.5 of \[RFC7177\]](#) describes this in detail. Multipathing across such parallel connections can be done for unicast TRILL Data traffic on a per-flow basis, but is restricted for multi-destination traffic. VTSD should also support this functionality.

TRILL EVPN Pseudowires which belong to same VTSD instance in a TIR and connected to same remote TIR are referred to as parallel pseudowires. These parallel pseudowires corresponds to a single link inside VTSD.

Here all pseudowires should be capable of carrying traffic.



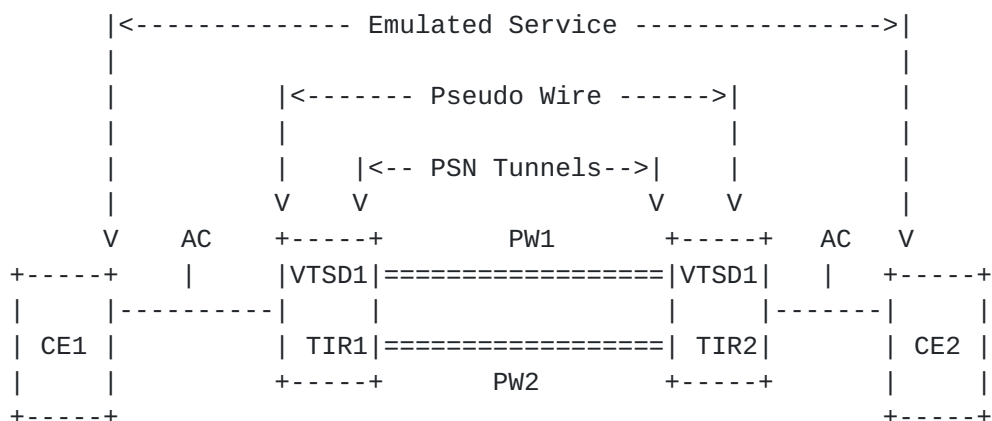


Figure 1: Parallel pseudowires with TRILL EVPN

In above Figure 1, PW1 and PW2 are parallel pseudowires, as these pseudowires belongs to same VTSD and provides a connectivity across same TIRs.

This mechanism provides a way for actively increasing and optimally utilizing the bandwidth in the service provider network without affecting the existing traffic.

#### 4. Active-Active Pseudowire

[RFC6718] describes pseudowire Redundancy mechanism, wherein among the pair of pseudowires, one pseudowire will be selected as a active pseudowire and the other will be selected as a standby pseudowire. The standby pseudowire will not forward any user traffic under normal circumstances. The introduction of VTSD in TRILL EVPN provides a very simple mechanism for providing multiple active pseudowires.

Pseudowires which belongs to the same VTSD instance inside the same TIR or between TIR's will be in active-active state. These pseudowires are able to carry data-traffic without making any one of pseudowire to go in standby mode.

To distribute traffic between pseudowires, TRILL protocol will be used.

```
|<----- Emulated Service ----->|
```



Likewise in Port-based AC, in this case also the VTSDs in TIR1 and TIR2 will form TRILL adjacency via AC ports. Since only one VLAN end-





station service is enabled, only one TIR's VTSD can become AF for that VLAN. Hence native traffic can be processed by any one of the AC.

## **5. MPLS encapsulation and Loop free provider PSN/MPLS**

TRILL with MPLS encapsulation over pseudowire is specified in [\[RFC7173\]](#), and requires no changes in the frame format.

TRILL EVPN doesn't require to employ Split Horizon mechanism in the provider PSN network, as TRILL takes care of Loop free topology using Distribution Trees. Any multi-destination frame will traverse a distribution tree path. All distribution trees are calculated based on TRILL base protocol standard [\[RFC6325\]](#) as updated by [\[RFC7180bis\]](#).

## **6. Frame processing**

This section specifies frame processing from CE's and TIR's

### **[6.1.](#) Frame processing between CE's and TIR's.**

In a multi-homed CE topology where in a CE is connected to two PEs / TIRs, AF mechanism described in [section 2](#) will be used to decide which TIR/VTSD will carry the traffic for a particular VLAN. This is applicable to the case wherein a CE device is connected to a PE/TIR device via multiple layer 2 interfaces to increase the bandwidth.

As a frame gets ingressed into a TIR (or any one of the TIR, when CE/CEs are connected to multiple TIR's) after having AF check, the TIR encapsulates the frame with TRILL and MPLS headers and forwards the frame on a pseudowire. If parallel pseudowires are present, the TRILL protocol running in VTSD will select any one of the pseudowire and forward the TRILL Data packet. Multi-destination packets will be forwarded on Distribution tree's path [\[rfc7180bis\]](#)

The advantage of using TRILL for distribution of frames is, even if any of the paths or links fails between CE and TIR's or between TIR's, frames can be always be forwarded to any of available UP links or paths through other links/pseudowires.

If multiple equal paths are available, TRILL will distribute traffic among all the paths.

Also VTSD doesn't depend on the routing or signaling protocol that is running between TIRs, provided there is a tunnel available with



proper encapsulation mechanism.

Any multi-destination frames when ingressed to TIR's will traverse one of the Distribution-Trees, with strong RFC Checks. Hop count field in TRILL Header will avoid loops or duplication of Traffic.

## **6.2. Frame processing between TIR's.**

When a frame gets ingressed into a VTSD inside TIR, the TRILL protocol will forward the frames to the proper pseudowire. When multiple paths / pseudowires are available between the TIR's then shortest path, calculated through TRILL protocol, will be used. If multiple paths are of equal cost, then TRILL protocol will do ECMP load spreading. If any multi-destination frame gets received by the VTSD through a pseudowire, TRILL will do an RPF check and will take proper action.

Once a frame gets to the VTSD through pseudowire, MPLS header will be de-capsulated, further action will be taken depending on the egress nickname field of TRILL header. If egress nickname is the nickname of this VTSD, MAC address table and AF lookup will be performed and the frame will be forwarded by decapsulating the TRILL header. If egress nickname belongs to some other VTSD, frame will be forwarded on a pseudowire connected to that VTSD by encapsulating with an MPLS header.

## **7. MAC Address learning and withdrawal.**

MAC address learning and withdrawal mechanism on a RBridge is specified in [section 4.8. of \[RFC6325\]](#), this document requires no changes for MAC address learning and its withdrawal.



## **8. Security Considerations**

TBD

## **9. IANA Considerations**

TBD

## **10. References**

### **10.1. Normative References**

- [IS-IS] "Intermediate system to Intermediate system routing information exchange protocol for use in conjunction with the Protocol for providing the Connectionless-mode Network Service (ISO 8473)", ISO/IEC 10589:2002, 2002".
- [RFC6325] Perlman, R., Eastlake 3rd, D., Dutt, D., Gai, S., and A. Ghanwani, "Routing Bridges (RBridges): Base Protocol Specification", [RFC 6325](#), DOI 10.17487/RFC6325, July 2011, <<http://www.rfc-editor.org/info/rfc6325>>.
- [RFC4762] Lasserre, M., Ed., and V. Kompella, Ed., "Virtual Private LAN Service (VPLS) Using Label Distribution Protocol (LDP) Signaling", [RFC 4762](#), DOI 10.17487/RFC4762, January 2007, <<http://www.rfc-editor.org/info/rfc4762>>.
- [RFC4124] Le Faucheur, F., Ed., "Protocol Extensions for Support of Diffserv-aware MPLS Traffic Engineering", [RFC 4124](#), DOI 10.17487/RFC4124, June 2005, <<http://www.rfc-editor.org/info/rfc4124>>.
- [RFC3270] Le Faucheur, F., Wu, L., Davie, B., Davari, S., Vaananen, P., Krishnan, R., Cheval, P., and J. Heinanen, "Multi-Protocol Label Switching (MPLS) Support of Differentiated Services", [RFC 3270](#), DOI 10.17487/RFC3270, May 2002, <<http://www.rfc-editor.org/info/rfc3270>>.
- [RFC6718] Muley, P., Aissaoui, M., and M. Bocci, "Pseudowire Redundancy", [RFC 6718](#), DOI 10.17487/RFC6718, August 2012, <<http://www.rfc-editor.org/info/rfc6718>>.
- [RFC7177] Eastlake 3rd, D., Perlman, R., Ghanwani, A., Yang, H., and V. Manral, "Transparent Interconnection of Lots of Links (TRILL): Adjacency", [RFC 7177](#), DOI 10.17487/RFC7177, May



2014, <<http://www.rfc-editor.org/info/rfc7177>>.

- [RFC7173] Yong, L., Eastlake 3rd, D., Aldrin, S., and J. Hudson, "Transparent Interconnection of Lots of Links (TRILL) Transport Using Pseudowires", [RFC 7173](#), DOI 10.17487/RFC7173, May 2014, <<http://www.rfc-editor.org/info/rfc7173>>.
- [rfc7180bis] Eastlake, D., et al, "TRILL: Clarifications, Corrections, and Updates", [draft-ietf-trill-rfc7180bis](#), work in progress.,.
- [[draft-VTSD](#)] Umair, M., Smiler, K., Eastlake, D., Yong, L., "TRILL Transparent Transport over MPLS" [draft-muks-trill-transport-over-mpls](#), work in progress.,.
- [rfc6439bis] Eastlake, D., et al., "TRILL: Appointed Forwarders", [draft-eastlake-trill-rfc6439bis](#), work in progress.,.

## **[10.2.](#) Informative References**

- [RFC2119] Bradner, S., "Key words for use in RFCs to Indicate Requirement Levels", [BCP 14](#), [RFC 2119](#), DOI 10.17487/RFC2119, March 1997, <<http://www.rfc-editor.org/info/rfc2119>>.
- [RFC4026] Andersson, L. and T. Madsen, "Provider Provisioned Virtual Private Network (VPN) Terminology", [RFC 4026](#), DOI 10.17487/RFC4026, March 2005, <<http://www.rfc-editor.org/info/rfc4026>>.
- [RFC4664] Andersson, L., Ed., and E. Rosen, Ed., "Framework for Layer 2 Virtual Private Networks (L2VPNs)", [RFC 4664](#), DOI 10.17487/RFC4664, September 2006, <<http://www.rfc-editor.org/info/rfc4664>>.
- [RFC3985] Bryant, S., Ed., and P. Pate, Ed., "Pseudo Wire Emulation Edge-to-Edge (PWE3) Architecture", [RFC 3985](#), DOI 10.17487/RFC3985, March 2005, <<http://www.rfc-editor.org/info/rfc3985>>.
- [RFC4023] Worster, T., Rekhter, Y., and E. Rosen, Ed.,





"Encapsulating MPLS in IP or Generic Routing Encapsulation (GRE)", [RFC 4023](#), DOI 10.17487/RFC4023, March 2005, <<http://www.rfc-editor.org/info/rfc4023>>.

[RFC4448] Martini, L., Ed., Rosen, E., El-Aawar, N., and G. Heron, "Encapsulation Methods for Transport of Ethernet over MPLS Networks", [RFC 4448](#), DOI 10.17487/RFC4448, April 2006, <<http://www.rfc-editor.org/info/rfc4448>>.

[RFC7172] Eastlake 3rd, D., Zhang, M., Agarwal, P., Perlman, R., and D. Dutt, "Transparent Interconnection of Lots of Links (TRILL): Fine-Grained Labeling", [RFC 7172](#), DOI 10.17487/RFC7172, May 2014, <<http://www.rfc-editor.org/info/rfc7172>>.

#### Authors' Addresses

Mohammed Umair  
IP Infusion  
RMZ Centennial  
Mahadevapura Post  
Bangalore - 560048 India  
EMail: [mohammed.umair2@gmail.com](mailto:mohammed.umair2@gmail.com)

Kingston Smiler S  
IP Infusion  
RMZ Centennial  
Mahadevapura Post  
Bangalore - 560048 India  
EMail: [kingstonsmiler@gmail.com](mailto:kingstonsmiler@gmail.com)

Shaji Ravindranathan  
IP Infusion  
3965 Freedom Circle, Suite 200  
Santa Clara, CA 95054 USA  
EMail: [srnathan2014@gmail.com](mailto:srnathan2014@gmail.com)



Lucy Yong  
Huawei Technologies  
5340 Legacy Drive  
Plano, TX 75024  
USA  
Phone: +1-469-227-5837  
EMail: lucy.yong@huawei.com

Donald E. Eastlake 3rd  
Huawei Technologies  
155 Beaver Street  
Milford, MA 01757  
USA

Phone: +1-508-333-2270  
EMail: d3e3e3@gmail.com

