

6Lo Working Group  
Internet-Draft  
Intended status: Standards Track  
Expires: November 3, 2014

J. Nieminen  
T. Savolainen  
M. Isomaki  
Nokia  
B. Patil  
AT&T  
Z. Shelby  
Arm  
C. Gomez  
Universitat Politecnica de Catalunya/i2CAT  
May 2, 2014

**Transmission of IPv6 Packets over BLUETOOTH(R) Low Energy  
draft-ietf-6lo-btle-01**

**Abstract**

Bluetooth Smart is the brand name for the low energy feature in the Bluetooth specification defined by the Bluetooth Special Interest Group. The standard Bluetooth radio has been widely implemented and available in mobile phones, notebook computers, audio headsets and many other devices. The low power version of Bluetooth is a specification that enables the use of this air interface with devices such as sensors, smart meters, appliances, etc. The low power variant of Bluetooth is standardized since the revision 4.0 of the Bluetooth specifications, although version 4.1 or newer is required for IPv6. This document describes how IPv6 is transported over Bluetooth Low Energy using 6LoWPAN techniques.

**Status of This Memo**

This Internet-Draft is submitted in full conformance with the provisions of [BCP 78](#) and [BCP 79](#).

Internet-Drafts are working documents of the Internet Engineering Task Force (IETF). Note that other groups may also distribute working documents as Internet-Drafts. The list of current Internet-Drafts is at <http://datatracker.ietf.org/drafts/current/>.

Internet-Drafts are draft documents valid for a maximum of six months and may be updated, replaced, or obsoleted by other documents at any time. It is inappropriate to use Internet-Drafts as reference material or to cite them other than as "work in progress."

This Internet-Draft will expire on November 3, 2014.

## Copyright Notice

Copyright (c) 2014 IETF Trust and the persons identified as the document authors. All rights reserved.

This document is subject to [BCP 78](http://trustee.ietf.org/license-info) and the IETF Trust's Legal Provisions Relating to IETF Documents (<http://trustee.ietf.org/license-info>) in effect on the date of publication of this document. Please review these documents carefully, as they describe your rights and restrictions with respect to this document. Code Components extracted from this document must include Simplified BSD License text as described in Section 4.e of the Trust Legal Provisions and are provided without warranty as described in the Simplified BSD License.

## Table of Contents

<a href="#">1.</a>	<a href="#">Introduction</a>	<a href="#">2</a>
<a href="#">1.1.</a>	<a href="#">Terminology and Requirements Language</a>	<a href="#">3</a>
<a href="#">2.</a>	<a href="#">Bluetooth Low Energy</a>	<a href="#">3</a>
<a href="#">2.1.</a>	<a href="#">Bluetooth Low Energy stack</a>	<a href="#">4</a>
<a href="#">2.2.</a>	<a href="#">Link layer roles and topology</a>	<a href="#">4</a>
<a href="#">2.3.</a>	<a href="#">Bluetooth LE device addressing</a>	<a href="#">5</a>
<a href="#">2.4.</a>	<a href="#">Bluetooth LE packets sizes and MTU</a>	<a href="#">5</a>
<a href="#">3.</a>	<a href="#">Specification of IPv6 over Bluetooth Low Energy</a>	<a href="#">6</a>
<a href="#">3.1.</a>	<a href="#">Protocol stack</a>	<a href="#">6</a>
<a href="#">3.2.</a>	<a href="#">Link model</a>	<a href="#">7</a>
<a href="#">3.2.1.</a>	<a href="#">Stateless address autoconfiguration</a>	<a href="#">8</a>
<a href="#">3.2.2.</a>	<a href="#">Neighbor discovery</a>	<a href="#">8</a>
<a href="#">3.2.3.</a>	<a href="#">Header compression</a>	<a href="#">9</a>
<a href="#">3.2.3.1.</a>	<a href="#">Remote destination example</a>	<a href="#">10</a>
<a href="#">3.2.4.</a>	<a href="#">Unicast and Multicast address mapping</a>	<a href="#">11</a>
<a href="#">3.3.</a>	<a href="#">Internet connectivity scenarios</a>	<a href="#">11</a>
<a href="#">4.</a>	<a href="#">IANA Considerations</a>	<a href="#">12</a>
<a href="#">5.</a>	<a href="#">Security Considerations</a>	<a href="#">12</a>
<a href="#">6.</a>	<a href="#">Additional contributors</a>	<a href="#">13</a>
<a href="#">7.</a>	<a href="#">Acknowledgements</a>	<a href="#">13</a>
<a href="#">8.</a>	<a href="#">References</a>	<a href="#">13</a>
<a href="#">8.1.</a>	<a href="#">Normative References</a>	<a href="#">13</a>
<a href="#">8.2.</a>	<a href="#">Informative References</a>	<a href="#">14</a>
	<a href="#">Authors' Addresses</a>	<a href="#">14</a>

## [1. Introduction](#)

Bluetooth low energy (LE) is a radio technology targeted for devices that operate with coin cell batteries or minimalistic power sources, which means that low power consumption is essential. Bluetooth LE is an especially attractive technology for Internet of Things



applications, such as health monitors, environmental sensing, proximity applications and many others.

Considering the potential for the exponential growth in the number of sensors and Internet connected devices and things, IPv6 is an ideal protocol due to the large address space it provides. In addition, IPv6 provides tools for stateless address autoconfiguration, which is particularly suitable for sensor network applications and nodes which have very limited processing power or lack a full-fledged operating system.

[RFC 4944](#) [[RFC4944](#)] specifies the transmission of IPv6 over IEEE 802.15.4. The Bluetooth LE link in many respects has similar characteristics to that of IEEE 802.15.4. Many of the mechanisms defined in the [RFC 4944](#) can be applied to the transmission of IPv6 on Bluetooth LE links. This document specifies the details of IPv6 transmission over Bluetooth LE links.

### **[1.1.](#) Terminology and Requirements Language**

The key words "MUST", "MUST NOT", "REQUIRED", "SHALL", "SHALL NOT", "SHOULD", "SHOULD NOT", "RECOMMENDED", "MAY", and "OPTIONAL" in this document are to be interpreted as described in [RFC 2119](#) [[RFC2119](#)].

The terms 6LN, 6LR and 6LBR are defined as in [[RFC6775](#)], with an addition that Bluetooth LE central and Bluetooth LE peripheral can both be either 6LN or 6LBR.

## **[2.](#) Bluetooth Low Energy**

Bluetooth LE is designed for transferring small amounts of data infrequently at modest data rates at a very low cost per bit. Bluetooth Special Interest Group (Bluetooth SIG) has introduced two trademarks, Bluetooth Smart for single-mode devices (a device that only supports Bluetooth LE) and Bluetooth Smart Ready for dual-mode devices. In the rest of the document, the term Bluetooth LE refers to both types of devices.

Bluetooth LE was introduced in Bluetooth 4.0 and further enhanced in Bluetooth 4.1 [[BTCorev4.1](#)]. Bluetooth SIG will also publish Internet Protocol Support Profile (IPSP) [[IPSP](#)], which includes Internet Protocol Support Service (IPSS) and that enables discovery of IP-enabled devices and establishment of link-layer connection for transporting IPv6 packets. IPv6 over Bluetooth LE is dependent on both Bluetooth 4.1 and IPSP.

Devices such as mobile phones, notebooks, tablets and other handheld computing devices which will include Bluetooth 4.1 chipsets will also



have the low-energy functionality of Bluetooth. Bluetooth LE will also be included in many different types of accessories that collaborate with mobile devices such as phones, tablets and notebook computers. An example of a use case for a Bluetooth LE accessory is a heart rate monitor that sends data via the mobile phone to a server on the Internet.

### **2.1. Bluetooth Low Energy stack**

The lower layer of the Bluetooth LE stack consists of the Physical (PHY) and the Link Layer (LL). The Physical Layer transmits and receives the actual packets. The Link Layer is responsible for providing medium access, connection establishment, error control and flow control. The upper layer consists of the Logical Link Control and Adaptation Protocol (L2CAP), Attribute Protocol (ATT), Generic Attribute Profile (GATT) and Generic Access Profile (GAP) as shown in Figure 1. The device internal Host Controller Interface (HCI) separates the lower layers, often implemented in the Bluetooth controller, from higher layers, often implemented in the host stack. GATT and Bluetooth LE profiles together enable the creation of applications in a standardized way without using IP. L2CAP provides multiplexing capability by multiplexing the data channels from the above layers. L2CAP also provides fragmentation and reassembly for large data packets.

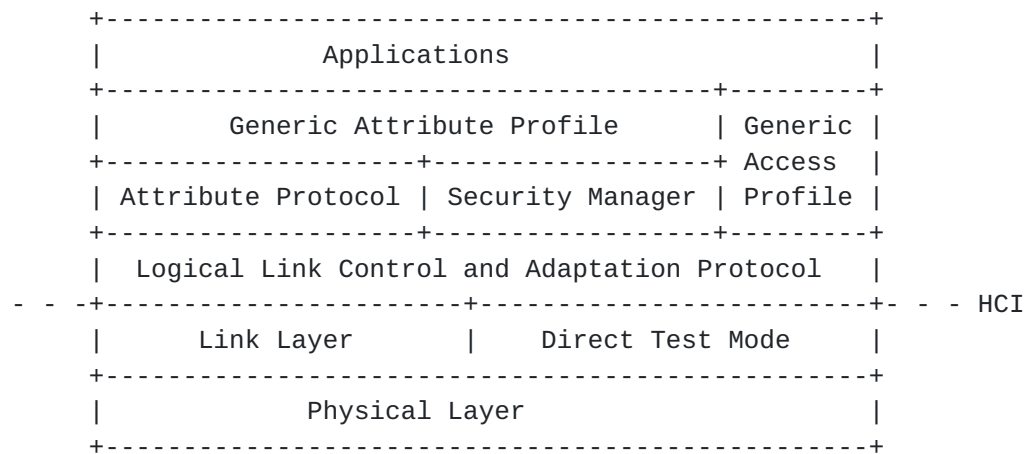


Figure 1: Bluetooth LE Protocol Stack

### **2.2. Link layer roles and topology**

Bluetooth LE defines two Link Layer roles: the Bluetooth LE central role and the Bluetooth LE peripheral role. A device in the central role, which is called central from now on, has traditionally been



able to manage multiple simultaneous connections with a number of devices in the peripheral role, called peripherals from now on. A peripheral is commonly connected to a single central, but since Bluetooth 4.1 can also connect to multiple centrals. In this document for IPv6 networking purposes the Bluetooth LE network (i.e. a Bluetooth LE piconet) follows a star topology shown in the Figure 2, where the router typically implements the Bluetooth LE central role and nodes Bluetooth LE peripheral roles. In the future mesh networking may be defined for IPv6 over Bluetooth LE.



Figure 2: Bluetooth LE Star Topology

In Bluetooth LE a central is assumed to be less constrained than a peripheral. Hence, in the primary deployment scenario central and peripheral will act as 6LoWPAN Border Router (6LBR) and a 6LoWPAN Node (6LN), respectively.

In Bluetooth LE, direct communication only takes place between a central and a peripheral. Hence, in a Bluetooth LE network using IPv6, a radio hop is equivalent to an IPv6 link and vice versa.

### **2.3. Bluetooth LE device addressing**

Every Bluetooth LE device is identified by a 48-bit device address. The Bluetooth specification describes the device address of a Bluetooth LE device as: "Devices are identified using a device address. Device addresses may be either a public device address or a random device address." [BTCorev4.1]. The public device addresses are based on the IEEE 802-2001 standard [IEEE802-2001]. The random device addresses are generated as defined in the Bluetooth specification. The device addresses are always unique within a Bluetooth LE piconet, but the random addresses are not guaranteed to be globally unique.

### **2.4. Bluetooth LE packets sizes and MTU**

Optimal MTU defined for L2CAP fixed channels over Bluetooth LE is 27 bytes including the L2CAP header of four bytes. Default MTU for Bluetooth LE is hence defined to be 27 bytes. Therefore, excluding L2CAP header of four bytes, protocol data unit (PDU) size of 23 bytes is available for upper layers. In order to be able to transmit IPv6 packets of 1280 bytes or larger, link layer fragmentation and





reassembly solution is provided by the L2CAP layer. The IPSP defines means for negotiating up a link-layer connection that provides MTU of 1280 bytes or higher for the IPv6 layer [[IPSP](#)].

### **3. Specification of IPv6 over Bluetooth Low Energy**

Before any IP-layer communications can take place over Bluetooth LE, Bluetooth LE enabled nodes such as 6LNs and 6LBRs have to find each other and establish a suitable link-layer connection. The discovery and Bluetooth LE connection setup procedures are documented by Bluetooth SIG in the IPSP specification [[IPSP](#)], and hence are out of scope of this document. The IPSP depends on Bluetooth version 4.1, and hence both Bluetooth version 4.1 or newer and IPSP are required for IPv6 communications.

Bluetooth LE technology sets strict requirements for low power consumption and thus limits the allowed protocol overhead. 6LoWPAN standards [[RFC6775](#)], and [[RFC6282](#)] provide useful functionality for reducing overhead which can be applied to Bluetooth LE. This functionality comprises of link-local IPv6 addresses and stateless IPv6 address autoconfiguration (see [Section 3.2.1](#)), Neighbor Discovery (see [Section 3.2.2](#)) and header compression (see [Section 3.2.3](#)).

A significant difference between IEEE 802.15.4 and Bluetooth LE is that the former supports both star and mesh topology (and requires a routing protocol), whereas Bluetooth LE does not currently support the formation of multihop networks at the link layer.

#### **[3.1.](#) Protocol stack**

Figure 3 illustrates IPv6 over Bluetooth LE stack including the Internet Protocol Support Service. UDP and TCP are provided as examples of transport protocols, but the stack can be used by any other upper layer protocol capable of running atop of IPv6. The 6LoWPAN runs on top of Bluetooth LE L2CAP layer.



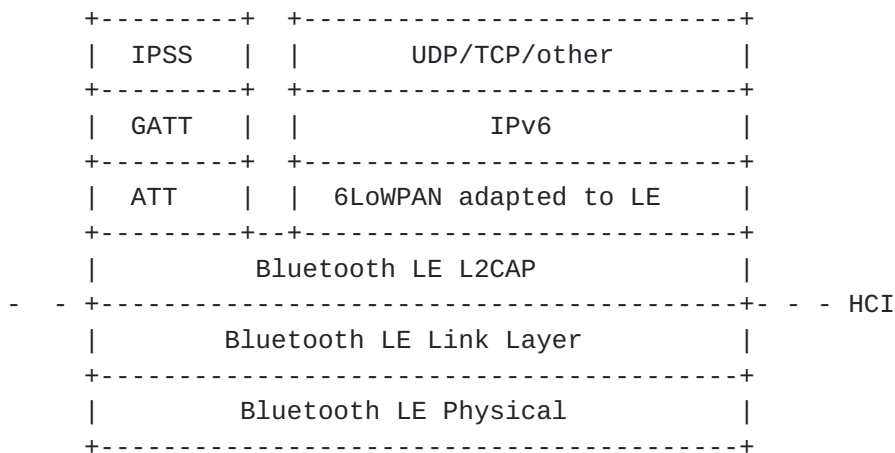


Figure 3: IPv6 over Bluetooth LE Stack

### 3.2. Link model

The concept of IPv6 link (layer 3) and the physical link (combination of PHY and MAC) needs to be clear and the relationship has to be well understood in order to specify the addressing scheme for transmitting IPv6 packets over the Bluetooth LE link. [RFC 4861](#) [[RFC4861](#)] defines a link as "a communication facility or medium over which nodes can communicate at the link layer, i.e., the layer immediately below IPv6."

In the case of Bluetooth LE, 6LoWPAN layer is adapted to support transmission of IPv6 packets over Bluetooth LE. The IPSP defines all steps required for setting up the Bluetooth LE connection over which 6LoWPAN can function [[IPSP](#)], including handling the link-layer fragmentation required on Bluetooth LE, as described in [Section 2.4](#).

This specification also assumes the IPv6 header compression format specified in [RFC 6282](#) is used [[RFC6282](#)]. It is also assumed that the IPv6 payload length can be inferred from the L2CAP header length and the IID value inferred from the link-layer address with help of Neighbor Cache, if elided from compressed packet.

The Bluetooth LE link between two communicating nodes can be considered to be a point-to-point or point-to-multipoint link. When one of the communicating nodes is simultaneously connected to multiple nodes, the link can be viewed as a point-to-multipoint link from the particular node point of view. However, due to Bluetooth LE star topology, each branch of the star is considered to be an individual link and thus only two nodes can directly talk to each other. Node-to-node communications, e.g. using link-local addresses, need to be bridged by the 6LBR. The 6LBR ensures address collisions do not occur (see [Section 3.2.2](#)).



After the peripheral and central have connected at the Bluetooth LE level, the link can be considered up and IPv6 address configuration and transmission can begin.

### 3.2.1. Stateless address autoconfiguration

A Bluetooth LE 6LN performs stateless address autoconfiguration as per [RFC 4862](#) [[RFC4862](#)]. A 64-bit Interface identifier (IID) for a Bluetooth LE interface MAY be formed by utilizing the 48-bit Bluetooth device address (see [Section 2.3](#)) as defined in [RFC 2464](#) "IPv6 over Ethernet" specification [[RFC2464](#)]. Alternatively, a randomly generated IID (see [Section 3.2.2](#)) can be used instead, for example, as discussed in [[I-D.ietf-6man-default-iids](#)]. In the case of randomly generated IID or randomly generated Bluetooth device address, the "Universal/Local" bit MUST be set to 0 [[RFC4291](#)]. Only if the Bluetooth device address is known to be a public address the "Universal/Local" bit can be set to 1.

As defined in [RFC 4291](#) [[RFC4291](#)], the IPv6 link-local address for a Bluetooth LE node is formed by appending the IID, to the prefix FE80::/64, as depicted in Figure 4.

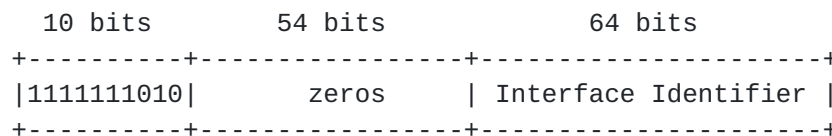


Figure 4: IPv6 link-local address in Bluetooth LE

The tool for a 6LBR to obtain an IPv6 prefix for numbering the Bluetooth LE network is out of scope of this document, but can be, for example, accomplished via DHCPv6 Prefix Delegation [[RFC3633](#)] or by using Unique Local IPv6 Unicast Addresses (ULA) [[RFC4193](#)]. Due to the link model of the Bluetooth LE (see [Section 2.2](#)) the 6LBR MUST set the "on-link" flag (L) to zero in the Prefix Information Option [[RFC4861](#)]. This will cause 6LNs to always send packets to the 6LBR, including the case when the destination is another 6LN using the same prefix.

### 3.2.2. Neighbor discovery

'Neighbor Discovery Optimization for IPv6 over Low-Power Wireless Personal Area Networks (6LoWPANs)' [[RFC6775](#)] describes the neighbor discovery approach as adapted for use in several 6LoWPAN topologies, including the mesh topology. Bluetooth LE does not support mesh



networks and hence only those aspects that apply to a star topology are considered.

The following aspects of the Neighbor Discovery optimizations [[RFC6775](#)] are applicable to Bluetooth LE 6LNs:

1. A Bluetooth LE 6LN MUST register its addresses with the 6LBR by sending a Neighbor Solicitation (NS) message with the Address Registration Option (ARO) and process the Neighbor Advertisement (NA) accordingly. The NS with the ARO option SHOULD be sent irrespective of the method used to generate the IID. The 6LN MUST register only one IPv6 address per IPv6 prefix available on a link.
2. For sending Router Solicitations and processing Router Advertisements the Bluetooth LE 6LNs MUST, respectively, follow Sections [5.3](#) and [5.4](#) of the [[RFC6775](#)].

### **[3.2.3](#). Header compression**

Header compression as defined in [RFC 6282](#) [[RFC6282](#)], which specifies the compression format for IPv6 datagrams on top of IEEE 802.15.4, is REQUIRED in this document as the basis for IPv6 header compression on top of Bluetooth LE. All headers MUST be compressed according to [RFC 6282](#) [[RFC6282](#)] encoding formats.

The Bluetooth LE's star topology structure and ARO can be exploited in order to provide a mechanism for IID compression. The following text describes the principles of IPv6 address compression on top of Bluetooth LE.

The ARO option requires use of EUI-64 identifier [[RFC6775](#)]. In the case of Bluetooth LE, the field SHALL be filled with the 48-bit device address used by the Bluetooth LE node converted into 64-bit Modified EUI-64 format [[RFC4291](#)].

When a 6LN is sending a packet to or through a 6LBR, it MUST fully elide the source address if the source IPv6 address is currently registered with ARO to the 6LBR and the 6LN has registered only one address for the indicated prefix. That is, if SAC=0 and SAM=11 the 6LN MUST have registered the source link-local IPv6 address it is using using ARO, and if SAC=1 and SAM=11 the 6LN MUST have registered the source IPv6 address with the prefix related to compression context identified with Context Identifier Extension. The destination IPv6 address MUST be fully elided if the destination address is the same address to which the 6LN has successfully registered its source IPv6 address with ARO (set DAC=0, DAM=11). The destination IPv6 address MUST be fully or partially elided if the destination address has prefix for which context has been set up, for





example, DAC=0 and DAM=01 when destination is link-local, and DAC=1 and DAM=01 with Context Identifier Extension if compression context has been configured for the used destination.

When a 6LBR is transmitting packets to 6LN, it MUST fully elide the source IID if the source IPv6 address is the one 6LN has used to register its address with ARO (set SAC=0, SAM=11), and it MUST elide the source prefix or address if a compression context related to the IPv6 source address has been set up. The 6LBR also MUST elide the destination IPv6 address if it is currently registered by the 6LN with ARO and thus 6LN can determine it based on indication of link-local prefix (DAC=0) or indication of other prefix (DAC=1 with Context Identifier Extension).

#### **3.2.3.1. Remote destination example**

When a 6LN transmits an IPv6 packet to a remote destination using global Unicast IPv6 addresses, if a context is defined for the prefix of the 6LN's global IPv6 address, the 6LN has to indicate this context in the corresponding source fields of the compressed IPv6 header as per [Section 3.1 of RFC 6282](#) [RFC6282], and has to elide the IPv6 source address previously registered with ARO. For this, the 6LN MUST use the following settings in the IPv6 compressed header: CID=1, SAC=1, SAM=11. In this case, the 6LBR can infer the elided IPv6 source address since 1) the 6LBR has previously assigned the prefix to the 6LNs; and 2) the 6LBR maintains a Neighbor Cache that relates the Device Address and the IID the device has registered with ARO. If a context is defined for the IPv6 destination address, the 6LN has to also indicate this context in the corresponding destination fields of the compressed IPv6 header, and elide the prefix of the destination IPv6 address. For this, the 6LN MUST set the DAM field of the compressed IPv6 header as DAM=01 (if the context covers a 64-bit prefix) or as DAM=11 (if the context covers a full, 128-bit address). CID and DAC MUST be set to CID=1 and DAC=1. Note that when a context is defined for the IPv6 destination address, the 6LBR can infer the elided destination prefix by using the context.

When a 6LBR receives an IPv6 packet sent by a remote node outside the Bluetooth LE network, and the destination of the packet is a 6LN, if a context is defined for the prefix of the 6LN's global IPv6 address, the 6LBR has to indicate this context in the corresponding destination fields of the compressed IPv6 header. The 6LBR has to elide the IPv6 destination address of the packet before forwarding it, if the IPv6 destination address is inferable by the 6LN. For this, the 6LBR will set the DAM field of the IPv6 compressed header as DAM=11. CID and DAC needs to be set to CID=1 and DAC=1. If a context is defined for the prefix of the IPv6 source address, the 6LBR needs to indicate this context in the source fields of the



compressed IPv6 header, and elide that prefix as well. For this, the 6LBR needs to set the SAM field of the IPv6 compressed header as SAM=01 (if the context covers a 64-bit prefix) or SAM=11 (if the context covers a full, 128-bit address). CID and SAC are to be set to CID=1 and SAC=1.

#### **3.2.4. Unicast and Multicast address mapping**

The Bluetooth LE link layer does not support multicast. Hence traffic is always unicast between two Bluetooth LE nodes. Even in the case where a 6LBR is attached to multiple 6LNs, the 6LBR cannot do a multicast to all the connected 6LNs. If the 6LBR needs to send a multicast packet to all its 6LNs, it has to replicate the packet and unicast it on each link. However, this may not be energy-efficient and particular care must be taken if the master is battery-powered. In the opposite direction, a 6LN can only transmit data to a single destination (i.e. the 6LBR). Hence, when a 6LN needs to transmit an IPv6 multicast packet, the 6LN will unicast the corresponding Bluetooth LE packet to the 6LBR. The 6LBR will then forward the multicast packet to other 6LNs. To avoid excess unwanted multicast traffic being sent to 6LNs, the 6LBR SHOULD implement MLD Snooping feature [[RFC4541](#)].

#### **3.3. Internet connectivity scenarios**

In a typical scenario, the Bluetooth LE network is connected to the Internet as shown in the Figure 5.

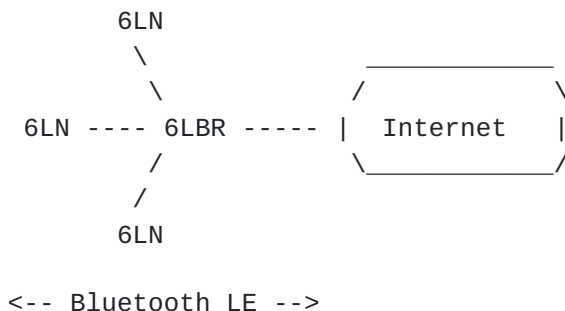


Figure 5: Bluetooth LE network connected to the Internet

In some scenarios, the Bluetooth LE network may transiently or permanently be an isolated network as shown in the Figure 6.



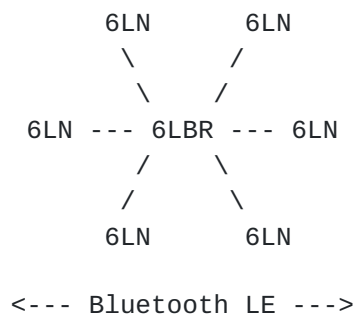


Figure 6: Isolated Bluetooth LE network

It is also possible to have point-to-point connection between two 6LNs, one of which being central and another being peripheral. Similarly, it is possible to have point-to-point connections between two 6LBRs, one of which being central and another being peripheral.

At this point in time mesh networking with Bluetooth LE is not specified.

In the isolated network scenario communications between 6LN and 6LBR can use IPv6 link-local methodology, but for communications between different 6LNs, the 6LBR has to number the network with ULA prefix [[RFC4193](#)], and route packets between 6LNs.

#### 4. IANA Considerations

There are no IANA considerations related to this document.

#### 5. Security Considerations

The transmission of IPv6 over Bluetooth LE links has similar requirements and concerns for security as for IEEE 802.15.4. Bluetooth LE Link Layer security considerations are covered by the IPSP [[IPSP](#)].

Bluetooth LE Link Layer supports encryption and authentication by using the Counter with CBC-MAC (CCM) mechanism [[RFC3610](#)] and a 128-bit AES block cipher. Upper layer security mechanisms may exploit this functionality when it is available. (Note: CCM does not consume bytes from the maximum per-packet L2CAP data size, since the link layer data unit has a specific field for them when they are used.)

Key management in Bluetooth LE is provided by the Security Manager Protocol (SMP), as defined in [[BTCorev4.1](#)].



## **6. Additional contributors**

Kanji Kerai, Jari Mutikainen, David Canfeng-Chen and Minjun Xi from Nokia have contributed significantly to this document.

## **7. Acknowledgements**

The Bluetooth, Bluetooth Smart and Bluetooth Smart Ready marks are registered trademarks owned by Bluetooth SIG, Inc.

Samita Chakrabarti, Erik Nordmark, and Marcel De Kogel have provided valuable feedback for this draft.

Authors would like to give special acknowledgements for Krishna Shingala, Frank Berntsen, and Bluetooth SIG's Internet Working Group for providing significant feedback and improvement proposals for this document.

## **8. References**

### **8.1. Normative References**

- [BTCorev4.1] Bluetooth Special Interest Group, "Bluetooth Core Specification Version 4.1", December 2013.
- [IPSP] Bluetooth Special Interest Group, "Bluetooth Internet Protocol Support Profile Specification - REFERENCE TO BE UPDATED ONCE IPSP IS PUBLISHED", 2014.
- [RFC2119] Bradner, S., "Key words for use in RFCs to Indicate Requirement Levels", [BCP 14](#), [RFC 2119](#), March 1997.
- [RFC2464] Crawford, M., "Transmission of IPv6 Packets over Ethernet Networks", [RFC 2464](#), December 1998.
- [RFC4291] Hinden, R. and S. Deering, "IP Version 6 Addressing Architecture", [RFC 4291](#), February 2006.
- [RFC4541] Christensen, M., Kimball, K., and F. Solensky, "Considerations for Internet Group Management Protocol (IGMP) and Multicast Listener Discovery (MLD) Snooping Switches", [RFC 4541](#), May 2006.
- [RFC4861] Narten, T., Nordmark, E., Simpson, W., and H. Soliman, "Neighbor Discovery for IP version 6 (IPv6)", [RFC 4861](#), September 2007.





- [RFC4862] Thomson, S., Narten, T., and T. Jinmei, "IPv6 Stateless Address Autoconfiguration", [RFC 4862](#), September 2007.
- [RFC6282] Hui, J. and P. Thubert, "Compression Format for IPv6 Datagrams over IEEE 802.15.4-Based Networks", [RFC 6282](#), September 2011.
- [RFC6775] Shelby, Z., Chakrabarti, S., Nordmark, E., and C. Bormann, "Neighbor Discovery Optimization for IPv6 over Low-Power Wireless Personal Area Networks (6LoWPANs)", [RFC 6775](#), November 2012.

## **8.2. Informative References**

- [I-D.ietf-6man-default-iids]  
Gont, F., Cooper, A., Thaler, D., and W. Will,  
"Recommendation on Stable IPv6 Interface Identifiers",  
[draft-ietf-6man-default-iids-00](#) (work in progress),  
January 2014.
- [IEEE802-2001]  
Institute of Electrical and Electronics Engineers (IEEE),  
"IEEE 802-2001 Standard for Local and Metropolitan Area  
Networks: Overview and Architecture", 2002.
- [RFC3610] Whiting, D., Housley, R., and N. Ferguson, "Counter with  
CBC-MAC (CCM)", [RFC 3610](#), September 2003.
- [RFC3633] Troan, O. and R. Droms, "IPv6 Prefix Options for Dynamic  
Host Configuration Protocol (DHCP) version 6", [RFC 3633](#),  
December 2003.
- [RFC4193] Hinden, R. and B. Haberman, "Unique Local IPv6 Unicast  
Addresses", [RFC 4193](#), October 2005.
- [RFC4944] Montenegro, G., Kushalnagar, N., Hui, J., and D. Culler,  
"Transmission of IPv6 Packets over IEEE 802.15.4  
Networks", [RFC 4944](#), September 2007.

## Authors' Addresses

Johanna Nieminen  
Nokia  
Itamerenkatu 11-13  
Helsinki 00180  
Finland

Email: [johannamaria.nieminen@gmail.com](mailto:johannamaria.nieminen@gmail.com)



Teemu Savolainen  
Nokia  
Hermiankatu 12 D  
Tampere 33720  
Finland

Email: teemu.savolainen@nokia.com

Markus Isomaki  
Nokia  
Keilalahdentie 2-4  
Espoo 02150  
Finland

Email: markus.isomaki@nokia.com

Basavaraj Patil  
AT&T  
1410 E. Renner Road  
Richardson, TX 75082  
USA

Email: basavaraj.patil@att.com

Zach Shelby  
Arm  
Hallituskatu 13-17D  
Oulu 90100  
Finland

Email: zach.shelby@arm.com

Carles Gomez  
Universitat Politecnica de Catalunya/i2CAT  
C/Esteve Terradas, 7  
Castelldefels 08860  
Spain

Email: carlesgo@entel.upc.edu

