

6TiSCH
Internet-Draft
Intended status: Informational
Expires: January 7, 2016

Q. Wang, Ed.
Univ. of Sci. and Tech. Beijing
X. Vilajosana
Universitat Oberta de Catalunya
July 6, 2015

6TiSCH Operation Sublayer (6top) Interface
[draft-ietf-6tisch-6top-interface-04](#)

Abstract

This document defines a generic data model for the 6TiSCH Operation Sublayer (6top), using the YANG data modeling language. This data model can be used for network management solutions defined by the 6TiSCH working group.

Status of This Memo

This Internet-Draft is submitted in full conformance with the provisions of [BCP 78](#) and [BCP 79](#).

Internet-Drafts are working documents of the Internet Engineering Task Force (IETF). Note that other groups may also distribute working documents as Internet-Drafts. The list of current Internet-Drafts is at <http://datatracker.ietf.org/drafts/current/>.

Internet-Drafts are draft documents valid for a maximum of six months and may be updated, replaced, or obsoleted by other documents at any time. It is inappropriate to use Internet-Drafts as reference material or to cite them other than as "work in progress."

This Internet-Draft will expire on January 7, 2016.

Copyright Notice

Copyright (c) 2015 IETF Trust and the persons identified as the document authors. All rights reserved.

This document is subject to [BCP 78](#) and the IETF Trust's Legal Provisions Relating to IETF Documents (<http://trustee.ietf.org/license-info>) in effect on the date of publication of this document. Please review these documents carefully, as they describe your rights and restrictions with respect to this document. Code Components extracted from this document must include Simplified BSD License text as described in Section 4.e of the Trust Legal Provisions and are provided without warranty as described in the Simplified BSD License.

Internet-Draft

6tisch-6top-interface

July 2015

Table of Contents

1.	Introduction	2
2.	Requirements Language	3
3.	6TiSCH Operation Sublayer (6top) Overview	3
3.1.	Cell Model	4
3.1.1.	hard cells	5
3.1.2.	soft cells	6
3.2.	Data Transfer Model	6
4.	Generic Data Model	8
4.1.	YANG model of the 6top MIB	8
4.2.	Yang Model for the Security aspects of 6top	32
5.	References	32
5.1.	Normative References	32
5.2.	Informative References	32
5.3.	External Informative References	33
	Authors' Addresses	33

[1.](#) Introduction

This document defines a generic data model for the 6TiSCH Operation Sublayer (6top), using the YANG data modeling language defined in [\[RFC6020\]](#). This data model can be used for future network management solutions defined by the 6TiSCH working group. This data model gives access to metrics (e.g. cell state), TSCH configuration and control procedures, and support for the different scheduling mechanisms described in [\[I-D.ietf-6tisch-architecture\]](#). The 6top sublayer addresses the set of management information and functionalities described in [\[I-D.ietf-6tisch-tsch\]](#).

For example, network formation in a TSCH network is handled by the use of Enhanced Beacons (EB). EBs include information for joining nodes to be able to synchronize and set up an initial network topology. However, [\[IEEE802154e\]](#) does not specify how the period of EBs is configured, nor the rules for a node to select a particular node to join. 6top offers a set of commands so control mechanisms can be introduced on top of TSCH to configure nodes to join a specific node and obtain a unique 16-bit identifier from the network. Once a network is formed, 6top maintains the network's health, allowing for nodes to stay synchronized. It supplies mechanisms to manage each node's time source neighbor and configure the EB interval. Network layers running on top of 6top take advantage of the TSCH MAC layer information so routing metrics, topological

information, energy consumption and latency requirements can be adjusted to TSCH, and adapted to application requirements.

TSCH requires a mechanism to manage its schedule; 6top provides a set of commands for upper layers to set up specific schedules, either

explicitly by detailing specific cell information, or by allowing 6top to establish a schedule given a bandwidth or latency requirement. 6top is designed to enable decentralized, centralized or hybrid scheduling solutions. 6top enables internal TSCH queuing configuration, size of buffers, packet priorities, transmission failure behavior, and defines mechanisms to encrypt and authenticate MAC slotframes.

As described in [[morell04label](#)], due to the slotted nature of a TSCH network, it is possible to use a label switched architecture on top of TSCH cells. As a cell belongs to a specific track, a label header is not needed at each packet; the input cell (or bundle) and the output cell (or bundle) uniquely identify the data flow. The 6top sublayer provides operations to manage the cell mappings.

[2.](#) Requirements Language

The key words "MUST", "MUST NOT", "REQUIRED", "SHALL", "SHALL NOT", "SHOULD", "SHOULD NOT", "RECOMMENDED", "MAY", and "OPTIONAL" in this document are to be interpreted as described in [RFC 2119](#) [[RFC2119](#)].

[3.](#) 6TiSCH Operation Sublayer (6top) Overview

6top is a sublayer which is the next-higher layer for TSCH (Figure 1), as detailed in [[I-D.ietf-6tisch-architecture](#)]. 6top offers both management and data interfaces to an upper layer, and includes monitoring and statistics collection, both of which are configurable through its management interface. The detail of 6top-sublayer is described in [[I-D.wang-6tisch-6top-sublayer](#)]

Protocol Stack

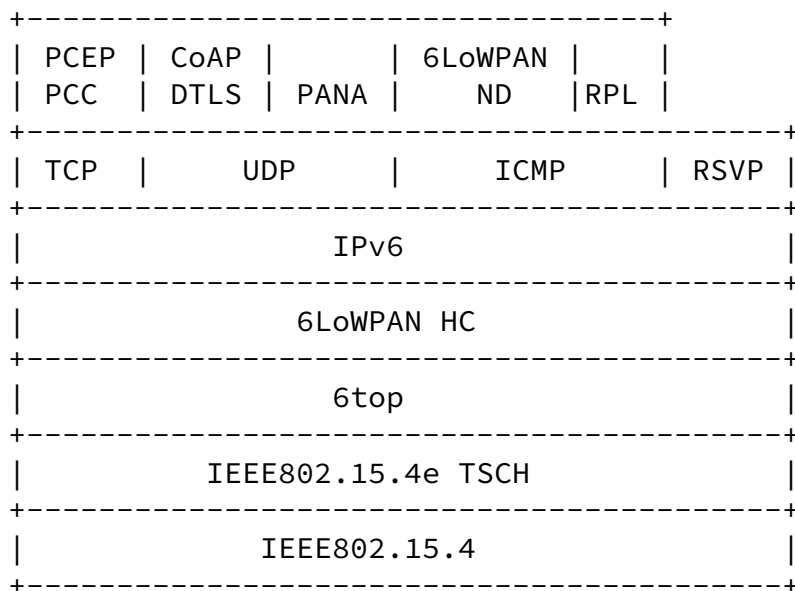


Figure 1

6top distinguishes between hard cells and soft cells. It therefore requires an extra flag to all cells in the TSCH schedule, as detailed in [Section 3.1](#).

When a higher layer gives 6top a 6LoWPAN packet for transmission, 6top maps it to the appropriate outgoing priority-based queue, as detailed in [Section 3.2](#).

[Section 4](#) contains a generic data model for the 6top sublayer, described in the YANG data modeling language.

[3.1.](#) Cell Model

[IEEE802154e] defines a set of options attached to each cell. A cell can be a Transmit cell, a Receive cell, a Shared cell or a Timekeeping cell. These options are not exclusive, as a cell can be qualified with more than one of them. The MLME-SET-LINK.request command defined in [IEEE802154e] uses a linkOptions bitmap to specify the options of a cell. Acceptable values are:

b0 = Transmit

b1 = Receive

b2 = Shared

b3 = Timekeeping

b4-b7 = Reserved

Only Transmit cells can also be marked as Shared cells. When the shared bit is set, a back-off procedure is applied to handle collisions. Shared behavior does not apply to Receive cells.

6top allows an upper layer to schedule a cell at a specific slotOffset and channelOffset, in a specific slotframe.

In addition, 6top allows an upper layer to schedule a certain amount of bandwidth to a neighbor, without having to specify the exact slotOffset(s) and channelOffset(s). Once bandwidth is reserved, 6top is in charge of ensuring that this requirement is continuously satisfied. 6top dynamically reallocates cells if needed, and over-provisions if required.

6top allows an upper layer to associate a cell with a specific track by using a TrackID. A TrackID is a tuple (TrackOwnerAddr,InstanceID), where TrackOwnerAddr is the address of the node which initializes the process of creating the track, i.e., the owner of the track; and InstanceID is an instance identifier given by the owner of the track. InstanceID comes from upper layer;

InstanceID could for example be the local instance ID defined in RPL.

If the TrackID is set to (0,0), the cell can be used by the best-effort QoS configuration or as a Shared cell. If the TrackID is not set to (0,0), i.e., the cell belongs to a specific track, the cell MUST not be set as Shared cell.

6top allows an upper layer to ask a node to manage a portion of a slotframe, which is named as chunk. Chunks can be delegated explicitly by the PCE to a node, or claimed automatically by any node that participates to the distributed cell scheduling process. The resource in a chunk can be appropriated by the node, i.e. the owner of the chunk.

Given this mechanism, 6top defines hard cells (which have been requested specifically) and soft cells (which can be reallocated dynamically). The hard/soft flag is introduced by the 6top sublayer named as CellType, 0: soft cell, 1: hard cell. This option is mandatory; all cells are either hard or soft.

[3.1.1.](#) hard cells

A hard cell is a cell that cannot be dynamically reallocated by 6top. The CellType MUST be set to 1. The cell is installed by 6top given specific slotframe ID, slotOffset, and channelOffset.

[3.1.2.](#) soft cells

A soft cell is a cell that can be reallocated by 6top dynamically. The CellType MUST be set to 0. This cell is installed by 6top given a specific bandwidth requirement. Soft cells are installed through the soft cell negotiation procedure described in [\[I-D.wang-6tisch-6top-sublayer\]](#).

[3.2.](#) Data Transfer Model

Once a TSCH schedule is established, 6top is responsible for feeding the data from the upper layer into TSCH. This section describes how 6top shapes data from the upper layer (e.g., RPL, 6LoWPAN), and feeds it to TSCH. Since 6top is a sublayer between TSCH and 6LoWPAN, the properties associated with a packet/fragment from the upper layer

includes the next hop neighbor (DestAddr) and expected sending priority of the packet (Priority), and/or TrackID(s). The output to TSCH is the fragment corresponding to the next active cell in the TSCH schedule.

6top Data Transfer Model



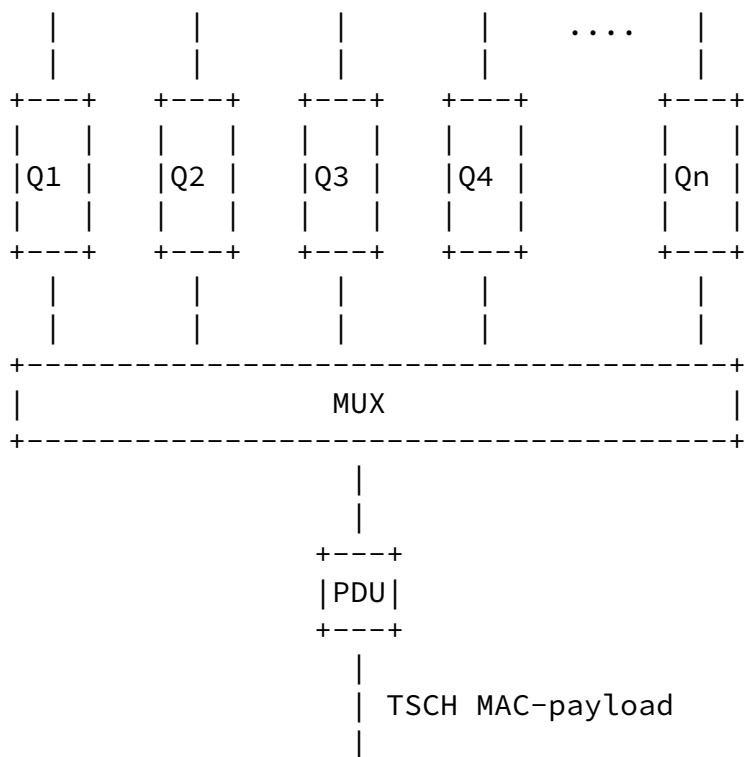


Figure 2

In Figure 2, Q_i represents a queue, which is either broadcast or unicast, and has an assigned priority. The number of queues is configurable. The relationship between queues and tracks is configurable. For example, for a given queue, only one specific track can be used, all of the tracks can be used, or a subset of the tracks can be used.

When 6top receives a packet to transmit, the I-MUX module selects a queue in which to insert it. If the packet's destination address is a unicast (resp. broadcast) address, it will be inserted into a unicast (resp. broadcast) queue.

The MUX module is invoked at each scheduled transmit cell by TSCH. When invoked, the MUX module goes through the queues, looking for the best matching frame to send. If it finds a frame, it hands it over to TSCH for transmission. If the next active cell is a broadcast cell, it selects a fragment only from broadcast queues.

following rules are a typical example:

The frame's layer 2 destination address MUST match the neighbor address associated with the transmit cell.

If the transmit cell is associated with a specific track, the frames in the queue corresponding to the TrackID have the highest priority.

If the transmit cell is not associated with a specific track, i.e., TrackID=(0,0), frames from a queue with a higher priority MUST be sent before frames from a queue with a lower priority.

Further rules can be configured to satisfy specific QoS requirements.

[4.](#) Generic Data Model

This section presents the generic data model of the 6top sublayer, using the YANG data modeling language. This data model can be used for future network management solutions defined by the 6TiSCH working group. The data model consists of the MIB (management information base) defined in 6top, and part of the PIB (personal area network information base) defined in [[IEEE802154e](#)] and [[IEEE802154](#)].

[4.1.](#) YANG model of the 6top MIB

```
module ietf-6top {  
  
  namespace  
    "urn:ietf:params:xml:ns:yang:ietf-6top";  
  prefix  
    "ietf";  
  
  contact  
    "WG Web: <http://tools.ietf.org/wg/6tisch/>  
    WG List: <mailto:6tisch@ietf.org>  
  
    WG Chair: Pascal Thubert  
              <mailto:pthubert@cisco.com>  
  
    WG Chair: Thomas Watteyne  
              <mailto:thomas.watteyne@inria.fr>  
  
    Editor:    Qin Wang  
              <mailto:wangqin@ies.ustb.edu.cn>;
```

```
description
  "Data model for the 6top sublayer";
organization
  "IETF 6TiSCH Working Group";
revision 2015-06-16 {
  description
    "v4 revision.";
  reference
    "draft-ietf-6tisch-6top-interface";
}

typedef nodeaddresstype {
  type uint64;
  description
    "The type to store a node's address. It can be a 64-bit EUI;
    or the short address defined by 6top, constrained by TSCH
    macNodeAddress size, 2-octets. If using TSCH as MAC, the
    higher 6 octets should be filled with 0, and lowest 2-octets
    is neighbor short address";
}

typedef asntype {
  type string {
    length "0..5";
  }
  description
    "The type to store ASN. String of 5 bytes";
}

list Version {
  key "major minor";
  description
    "Provides a unique identification for the set of resources
    defined in this draft. Provides a major and minor version
    number that may be accessible independently";

  leaf major {
    type uint8;
    description
      "major revision number";
  }
  leaf minor {
    type uint8;
    description
      "minor revision number";
  }
}
```

}

```
list SlotframeList {
  key "SlotframeID";
  min-elements 1;
  description
    "List of all of the slotframes used by the node.";

  leaf SlotframeID {
    type uint8;
    mandatory true;
    description
      "Equal to SlotframeHandle defined in TSCH";
    reference
      "IEEE802154e";
  }
  leaf NumOfSlots {
    mandatory true;
    type uint16 {
      range "1..max";
    }
    description
      "indicates how many timeslots in the slotframe";
  }
}

list CellList {
  key "CellID";
  min-elements 1;
  unique "SlotframeID SlotOffset ChannelOffset";
  description
    "List of scheduled cells of a node with all of its neighbors,
    in all of its slotframes.";

  leaf CellID {
    type uint16;
    description
      "Equal to Linkhandle in the linkTable of TSCH";
    reference
```

```

        "IEEE802154e";
    }
    leaf SlotframeID {
        type leafref {
            path "/SlotframeList/SlotframeID";
        }
        description
            "SlotframeID, one in SlotframeList, indicates the slotframe
            the cell belongs to.";
    }

```

```

        reference
            "IEEE802154e";
    }
    leaf SlotOffset {
        type uint16;
        description
            "Defined in IEEE802154e.";
        reference
            "IEEE802154e";
    }
    leaf ChannelOffset {
        type uint16;
        description
            "Defined in IEEE802154e. Value range is 0..15";
        reference
            "IEEE802154e";
    }
    leaf LinkOption {
        type bits {
            bit Transmit {
                position 0;
            }
            bit Receive {
                position 1;
            }
            bit Share {
                position 2;
            }
            bit Timekeeping {
                position 3;
            }
        }
    }
}

```

```

description
  "Defined in IEEE802154e.";
reference
  "IEEE802154e";
}
leaf LinkType {
  type enumeration {
    enum NORMAL;
    enum ADVERTISING;
  }
  description
    "Defined in IEEE802154";
  reference
    "IEEE802154";
}
leaf CellType {

```

```

  type enumeration {
    enum SOFT;
    enum HARD;
  }
  description
    "Defined in 6top";
}
leaf NodeAddress {
  type nodeaddress-type;
  description
    "specify the target node address.";
}
leaf TrackID {
  type leafref {
    path "/TrackList/TrackId";
  }
  description
    "A TrackID is one in the TrackList, pointing to a tuple
    (TrackOwnerAddr,InstanceID) , where TrackOwnerAddr is the
    address of the node which initializes the process of
    creating the track, i.e., the owner of the track; and
    InstanceID is an instance identifier given by the owner of
    the track.";
}
container Statistic {

```

```

description
  "The Statistic container";
leaf NumOfStatistic {
  mandatory true;
  type uint8;
  description
    "Number of statistics collected on the cell";
}
list MeasureList {
  key "StatisticsMetricsID";
  min-elements 1;
  description
    "The list of measures.";
  leaf StatisticsMetricsID{
    type leafref {
      path "/StatisticsMetricsList/StatisticsMetricsID";
    }
    description
      "An index of StatisticsMetricList, which defines how
        to collect data and get the statistic value";
  }
  leaf StatisticsValue{
    type uint16;
  }
}

```

```

    config false;
    description
      "updated by 6top according to the statistics method
        specified by StatisticsMetricsID";
  }
}
}
}

list MonitoringStatusList {
  key "MonitoringStatusID";
  min-elements 1;
  unique "SlotframeID NodeAddress";
  description
    "List of the monitoring configuration and results per
      slotframe and neighbor. Basically, it is used for Monitoring
      Function of 6top to re-allocate softcells or initial the
      softcell negotiation process to increase/decrease number of

```

```

    softcells. Upper layer can use it also.";

leaf MonitoringStatusID {
    type uint16;
    description
        "The monitoring status ID.";
}
leaf SlotframeID {
    type leafref {
        path "/SlotframeList/SlotframeID";
    }
    description
        "SlotframeID, one in SlotframeList, indicates the slotframe
        being monitored";
    reference
        "IEEE802154e";
}
leaf NodeAddress {
    type nodeaddressstype;
    description
        "The lead node address";
}
leaf EnforcePolicy {
    type enumeration {
        enum DISABLE;
        enum BESTEFFORT;
        enum STRICT;
        enum OVERPROVISION;
    }
    default DISABLE;
}

```

```

    description
        "Currently enforced QoS policy. DISABLE-no QoS;
        BESTEFFORT- best effort policy is used; STRICT- Strict
        Priority Queueing; OVERPROVISION- cell overprovision";
}
leaf AllocatedHard {
    type uint16;
    config false;
    description
        "Number of hard cells allocated";
}
}

```

```

leaf AllocatedSoft {
    type uint16;
    config false;
    description
        "Number of soft cells allocated";
}
leaf OverProvision {
    type uint16;
    config false;
    must "../EnforcePolicy <> DISABLE ./";
    description
        "Overprovisioned cells. 0 if EnforcePolicy is
        DISABLE";
}
leaf QoS {
    type uint16;
    config false;
    description
        "Current QoS including overprovisioned cells, i.e. the
        bandwidth obtained including the overprovisioned cells.";
}
leaf NQoS {
    type uint16;
    config false;
    description
        "Real QoS without over provisioned cells, i.e. the actual
        bandwidth without taking into account the overprovisioned
        cells.";
}
}

list StatisticsMetricsList {
    key "StatisticsMetricsID";
    min-elements 1;
    unique "SlotframeID SlotOffset ChannelOffset NodeAddress";
    description
        "List of Statistics Metrics used in the node.";
}

```

```

leaf StatisticsMetricsID {
    type uint16;
    description
        "The metrics ID for statistics.";
}

```



```

}
leaf SlotframeID {
  type leafref {
    path "/SlotframeList/SlotframeID";
  }
  description
    "SlotframeID, one in SlotframeList, specifies the
    slotframe to which the statistics metrics applies to.
    If empty, applies to all slotframes";
  reference
    "IEEE802154e";
}
leaf SlotOffset {
  type uint16;
  description
    "Specific slotOffset to which the statistics metrics applies
    to. If empty, applies to all timeslots";
  reference
    "IEEE802154e";
}
leaf ChannelOffset {
  type uint16;
  description
    "Specific channelOffset to which the statistics metrics
    applies to. If empty, applies to all channels";
  reference
    "IEEE802154e";
}

leaf NodeAddress {
  type nodeaddressstype;
  description
    "If NodeAddress is empty, applies to all neighbor nodes.";
}

leaf Metrics {
  type enumeration {
    enum macCounterOctets;
    enum macRetryCount;
    enum macMultipleRetryCount;
    enum macTXFailCount;
    enum macTXSuccessCount;
    enum macFCSErrorCount;
    enum macSecurityFailure;
  }
}

```

```
        enum macDuplicateFrameCount;
        enum macRXSuccessCount;
        enum macNACKcount;
        enum PDR;
        enum ETX;
        enum RSSI;
        enum LQI;
    }
    description
        "The metric to be monitored. Include those provided by
        underlying IEEE 802.15.4e TSCH -- see table 4i (2012).
        PDR,ETX,RSSI,LQI are maintained by 6top. ";
}
leaf Window {
    type uint16;
    description
        "measurement period, in Number of the slotframe size";
}
leaf Enable {
    type enumeration {
        enum DISABLE;
        enum ENABLE;
    }
    default DISABLE;
    description
        "indicates the StatisticsMetric is active or not";
}
}

list EBList {
    key "EbID";
    min-elements 1;
    description
        "List of information related with the EBs used by the node";

    leaf EbID {
        type uint8;
        description
            "The EB id.";
    }

    leaf CellID {
        type leafref {
            path "/CellList/CellID";
        }
        description
            "CellID, one in CellList, indicates the cell used
```

to send EB";

```
    }
    leaf Peroid {
        type uint16;
        description
            "The EBs period, in seconds, indicates the interval between
            two EB sendings";
    }
    leaf Expiration {
        type enumeration {
            enum NEVERSTOP;
            enum EXPIRATION;
        }
        description
            "NEVERSTOP- the period of the EB never stops; EXPIRATION-
            when the Period arrives, the EB will stop.";
    }
    leaf Priority {
        type uint8;
        description
            "The joining priority model that will be used for
            advertisements. Joining priority MAY be for example
            SAME_AS_PARENT, RANDOM, BEST_PARENT+1 or
            DAGRANK(rank).";
    }
}

container TimeSource {
    description
        "specify the timesource selection policy and some relative
        statistics. ";
    leaf policy {
        type enumeration {
            enum ALLPARENT;
            enum BESTCONNECTED;
            enum LOWESTJOINPRIORITY;
        }
        default LOWESTJOINPRIORITY;
        description
            "indicates the policy to choose timesource.
            ALLPARENT- choose from all parents;
```

```
        BESTCONNECTED- choose the best-connected node;
        LOWESTJOINPRIORITY- choose the node with lowest
        priority in its EB.";
    }
    leaf NodeAddress {
        type nodeaddressstype;
        description
            "Specifies the address of selected time source neighbors.";
    }
```

```
    }
    leaf MinTimeCorrection {
        type uint16;
        config false;
        description
            "measured in microsecond";
    }
    leaf MaxTimeCorrection {
        type uint16;
        config false;
        description
            "measured in microsecond";
    }
    leaf AveTimeCorrection {
        type uint16;
        config false;
        description
            "measured and computed in microsecond";
    }
}

list NeighborList {
    key "NodeAddress";
    description
        "statistics per communication link. ";
    leaf NodeAddress {
        type nodeaddressstype;
        description
            "Specifies the address of the neighbor.";
    }
    leaf RSSI {
        type uint8;
        config false;
    }
}
```

```

    description
        "The received signal strength";
}
leaf LinkQuality {
    type uint8;
    config false;
    description
        "The LQI metric";
}
leaf ASN {
    type asntype;
    config false;
    description
        "The 5 ASN bytes, indicates the most recent
        timeslot when a packet from the neighbor was received";
}

```

```

}
}

list QueueList {
    key "QueueId";
    min-elements 1;
    description
        "List of Queues, including configuration and statistics.";
    leaf QueueId {
        type uint8;
        description
            "Queue Identifier";
    }
    leaf TxqLength {
        type uint8;
        description
            "The TX queue length in number of packets";
    }
    leaf RxqLength {
        type uint8;
        description
            "The RX queue length in number of packets";
    }
    leaf NumrTx {
        type uint8;
        description

```

```

    "Number of allowed retransmissions.";
}
leaf Age {
    type uint16;
    description
        "In seconds. Discard packet according to its age
        on the queue. 0 if no discards are allowed.";
}
leaf RTXbackoff {
    type uint8;
    description
        "retransmission backoff in number of slotframes.
        0 if next available timeslot wants to be used.";
}
leaf StatsWindow {
    type uint16;
    description
        "In second, window of time used to compute stats.";
}
leaf QueuePriority {
    type uint8;
    description

```

```

    "The priority for this queue.";
}
list TrackIds {
    key "TrackID";
    leaf TrackID{
        type leafref {
            path "/TrackList/TrackId";
        }
        description
            "The TrackID, one in TrackList, indicates the Track is
            associated with the Queue.";
    }
    description
        "The track IDs.";
}
leaf MinLenTXQueue {
    type uint8;
    config false;
    description

```

```

        "Statistics, lowest TX queue length registered
          in the window.";
    }
leaf MaxLenTXQueue {
    type uint8;
    config false;
    description
        "Statistics, largest TX queue length registered
          in the window.";
}
leaf AvgLenTXQueue {
    type uint8;
    config false;
    description
        "Statistics, avg TX queue length registered
          in the window.";
}
leaf MinLenRXQueue {
    type uint8;
    config false;
    description
        "Statistics, lowest RX queue length registered
          in the window.";
}
leaf MaxLenRXQueue {
    type uint8;
    config false;
    description
        "Statistics, largest RX queue len registered

```

```

        in the window.";
    }
leaf AvgLenRXQueue {
    type uint8;
    config false;
    description
        "Statistics, avg RX queue length registered
          in the window.";
}
leaf MinRetransmissions {
    type uint8;
    config false;

```

```

description
  "Statistics, lowest number of retransmissions registered
  in the window.";
}
leaf MaxRetransmissions {
  type uint8;
  config false;
  description
    "Statistics, largest number of retransmissions registered
    in the window.";
}
leaf AvgRetransmissions {
  type uint8;
  config false;
  description
    "Statistics, average number of retransmissions registered
    in the window.";
}
leaf MinPacketAge {
  type uint16;
  config false;
  description
    "Statistics, in seconds, minimum time a packet stayed in
    the queue during the observed window.";
}
leaf MaxPacketAge {
  type uint16;
  config false;
  description
    "Statistics, in seconds, maximum time a packet stayed
    in the queue during the observed window.";
}
leaf AvgPacketAge {
  type uint16;
  config false;
  description

```

```

  "Statistics, in seconds, average time a packet stayed in
  the queue during the observed window.";
}
leaf MinBackoff {
  type uint8;

```



```

    config false;
    description
        "Statistics, in number of slotframes, minimum Backoff
        for a packet in the queue during the observed window.";
}
leaf MaxBackoff {
    type uint8;
    config false;
    description
        "Statistics, in number of slotframes, maximum Backoff
        for a packet in the queue during the observed window.";
}
leaf AvgBackoff {
    type uint8;
    config false;
    description
        "Statistics, in number of slotframes, average Backoff
        for a packet in the queue during the observed window.";
}
}

list LabelSwitchList {
    key "LabelSwitchID";
    description
        "List of Label switch' configuration on the node";

    leaf LabelSwitchID {
        type uint16;
        description
            "The label switch ID.";
    }
}
list InputCellIds {
    key "CellID";
    leaf CellID{
        type leafref {
            path "/CellList/CellID";
        }
        description
            "The CellID, indicates the Rx cell on which the packet
            will come in.";
    }
}
description

```

```

        "The input cell IDs.";
    }
list OutputCellIds {
    key "CellID";
    leaf CellID{
        type leafref {
            path "/CellList/CellID";
        }
        description
            "The CellID, indicates the Tx cell on which the received
            packet should be sent out.";
    }
    description
        "The output cell IDs.";
}

leaf LoadBalancingPolicy {
    type enumeration {
        enum ROUNDROBIN;
        enum OTHER;
    }
    description
        "The load-balancing policy.
        ROUNDROBIN- Round Robin algorithm is used for
        forwarding scheduling.";
}
}

list TrackList {
    key "TrackId";
    min-elements 1;
    unique "TrackOwnerAddr InstanceID";
    description
        "List of the tracks through the node. At lease the best effort
        track is existing";

    leaf TrackId {
        type uint16;
        description
            "Track Identifier, named locally. It is used to refer to the
            tuple (TrackOwnerAddr, InstanceID).";
    }
    leaf TrackOwnerAddr {
        type uint64;
        description
            "The address of the node which initializes the process of
            creating the track, i.e., the owner of the track;";
    }
}

```

Internet-Draft

6tisch-6top-interface

July 2015

```
leaf InstanceID {
  type uint16;
  description
    "InstanceID is an instance identifier given by
    the owner of the track. InstanceID comes from
    upper layer; InstanceID could for example be
    the local instance ID defined in RPL.";
}
}

list ChunkList {
  key "ChunkId";
  description
    "List of the chunks assigned to the node.";

  leaf ChunkId{
    type uint16;
    description
      "The identifier of a chunk";
  }
  leaf SlotframeId{
    type leafref {
      path "/SlotframeList/SlotframeID";
    }
    description
      "SlotframeID, one in SlotframeList, indicates the
      slotframe to which the chunk belongs";
  }
  leaf SlotBase {
    type uint16;
    description
      "the base slotOffset of the chunk in the slotframe";
  }
  leaf SlotStep {
    type uint8;
    description
      "the slot incremental of the chunk";
  }
  leaf ChannelBase {
    type uint16;
    description
      "the base channelOffset of the chunk";
```

```
}
leaf ChannelStep {
    type uint8;
    description
        "the channel incremental of the chunk";
}
```

```
leaf ChunkSize {
    type uint8;
    description
        "the number of cells in the chunk. The chunk is the set
        of (slotOffset(i), channelOffset(i)),
        i=0..Chunksize-1,
        slotOffset(i)= (slotBase + i * slotStep) % slotframeLen,
        channelOffset(i) = (channelBase + i * channelStep) % 16";
}
}

list ChunkCellList {
    key "SlotOffset ChannelOffset";
    description
        "List of all of the cells assigned to the node via the
        assignment of chunks.";

    leaf SlotOffset{
        type uint16;
        description
            "The slotoffset of a cell which belongs to a Chunk";
    }
    leaf ChannelOffset{
        type uint16;
        description
            "The channeloffset of a cell which belongs to a chunk.";
    }
    leaf ChunkId {
        type leafref{
            path "/ChunkList/ChunkId";
        }
        description
            "Identifier of the chunk the cell belongs to";
    }
    leaf CellID{
```

```

type leafref {
  path "/CellList/CellID";
}
description
  "Initial value of CellID is 0xFFFF. When the cell is
  scheduled, the value of CellID is same as that in
  CellList";
}
leaf ChunkCellStatus {
  type enumeration {
    enum UNSCHEDULED;
    enum SCHEDULED;
  }
}

```

```

description
  "The Cell status in a Chunk.";
}
}

container TSCHSpecificPIBAttributes {
  description
    "TSCH specific MAC PIB attributes.";
  reference
    "table 52b in IEEE802.15.4e-2012.";

  leaf macMinBE {
    type uint8;
    description
      "defined in Table 52b of IEEE802.15.4e-2012,
      The minimum value of the backoff exponent (BE) in the
      CSMA-CA algorithm or the TSCH-CA algorithm. default:
      3-CSMA-CA, 1-TSCH-CA";
  }

  leaf macMaxBE {
    type uint8;
    description
      "defined in Table 52b of IEEE802.15.4e-2012,
      The maximum value of the backoff exponent (BE) in the
      CSMA-CA algorithm or the TSCH-CA algorithm. default:
      5-CSMA-CA, 7-TSCH-CA";
  }
}

```

```

leaf macDisconnectTime {
    type uint16;
    description
        "defined in Table 52b of IEEE802.15.4e-2012,
        Time (in Timeslots) to send out Disassociate frames
        before disconnecting, default: 0x00ff";
}
leaf macJoinPriority {
    type uint8;
    description
        "defined in Table 52b of IEEE802.15.4e-2012,
        The lowest join priority from the TSCH Synchronization
        IE in an Enhanced beacon, default: 1";
}
leaf macASN {
    type asntype;
    description
        "defined in Table 52b of IEEE802.15.4e-2012,
        The Absolute Slot Number, i.e., the number of slots
        that ha elapsed since the start of the network.";
}

```

```

}
leaf macNoHLBuffers {
    type enumeration {
        enum TRUE;
        enum FALSE;
    }
    description
        "defined in Table 52b of IEEE802.15.4e-2012,
        If the value is TRUE, the higher layer receiving the
        frame payload cannot buffer it, and the device should
        acknowledge frames with a NACK; If FALSE, the higher
        layer can accept the frame payload. default: FALSE";
}
}
list TSCHmacTimeslotTemplate {
    key "macTimeslotTemplateId";
    min-elements 1;
    description
        "List of all timeslot templates used in the node.";
    reference

```

```

"table 52e in IEEE802.15.4e-2012.";

leaf macTimeslotTemplateId {
    type uint8;
    description
        "defined in Table 52e of IEEE802.15.4e-2012.
        Identifier of Timeslot Template. default: 0";
}
leaf macTsCCAOffset {
    type uint16;
    description
        "The time between the beginning of timeslot and start
        of CCA operation, in microsecond. default: 1800";
}
leaf macTsCCA {
    type uint16;
    description
        "Duration of CCA, in microsecond. default: 128";
}
leaf macTsTxOffset {
    type uint16;
    description
        "The time between the beginning of the timeslot and
        the start of frame transmission, in microsecond.
        default: 2120";
}
leaf macTsRxOffset {

```

```

    type uint16;
    description
        "Beginning of the timeslot to when the receiver shall
        be listening, in microsecond. default: 1120";
}
leaf macTsRxAckDelay {
    type uint16;
    description
        "End of frame to when the transmitter shall listen for
        Acknowledgment, in microsecond. default: 800";
}
leaf macTsTxAckDelay {
    type uint16;
    description

```

```

    "End of frame to start of Acknowledgment, in
    microsecond.
    default: 1000";
}
leaf macTsRxWait {
    type uint16;
    description
        "The time to wait for start of frame, in microsecond.
        default: 2200";
}
leaf macTsAckWait {
    type uint16;
    description
        "The minimum time to wait for start of an
        Acknowledgment, in microsecond. default: 400";
}
leaf macTsRxTx {
    type uint16;
    description
        "Transmit to Receive turnaround, in microsecond.
        default: 192";
}
leaf macTsMaxAck {
    type uint16;
    description
        "Transmission time to send Acknowledgment,in
        microsecond. default: 2400";
}
leaf macTsMaxTx {
    type uint16;
    description
        "Transmission time to send the maximum length frame,
        in microsecond. default: 4256";
}

```

```

leaf macTsTimeslotLength {
    type uint16;
    description
        "The total length of the timeslot including any unused
        time after frame transmission and Acknowledgment,
        in microsecond. default: 10000";
}

```



```

}

list TSCHHoppingSequence {
  key "macHoppingSequenceID";
  min-elements 1;
  description
    "List of all channel hopping sequences used in the
    nodes";
  reference
    "Table 52f of IEEE802.15.4e-2012";

  leaf macHoppingSequenceID {
    type uint8;
    description
      "defined in Table 52f of IEEE802.15.4e-2012.
      Each hopping sequence has a unique ID. default: 0";
  }
  leaf macChannelPage {
    type uint8;
    description
      "Corresponds to the 5 MSBs (b27, ..., b31) of a row
      in phyChannelsSupported. Note this may not correspond
      to the current channelPage in use.";
  }
  leaf macNumberOfChannels {
    type uint16;
    description
      "Number of channels supported by the PHY on this
      channelPage.";
  }
  leaf macPhyConfiguration {
    type uint32;
    description
      "For channel pages 0 to 6, the 27 LSBs(b0, b1, ...,
      b26) indicate the status (1 = to be used, 0 = not to
      be used) for each of the up to 27 valid channels
      available to the PHY. For pages 7 and 8, the 27 LSBs
      indicate the configuration of the PHY, and the channel
      list is contained in the extendedBitmap.";
  }
  leaf macExtendedBitmap {

```

```

    type uint64;
    description
        "For pages 7 and 8, a bitmap of numberOfChannels bits,
        where bk shall indicate the status of channel k for
        each of the up to numberOfChannels valid channels
        supported by that channel page and phyConfiguration.
        Otherwise field is empty.";
}
leaf macHoppingSequenceLength {
    type uint16;
    description
        "The number of channels in the Hopping Sequence.
        Does not necessarily equal numberOfChannels.";
}
list macHoppingSequenceList {
    key "HoppingChannelID";
    leaf HoppingChannelID {
        type uint16;
        description
            "channels to be hopped over";
    }
    description
        "The hopping sequence";
}
leaf macCurrentHop {
    type uint16;
    config false;
    description
        "Index of the current position in the hopping sequence
        list.";
}
}

container SecurityAttributes{
    description
        "The Security Attributes Container.";

    leaf-list K1{
        type uint8;
        config true;
        min-elements 16;
        description
            "The key is used to authenticate EBs.
            The default value of the key is
            36 54 69 53 43 48 20 6D 69 6E 69 6D 61 6C 31 35
            ,i.e. 6TiSCH minimal15.";
    }
}

```

Internet-Draft

6tisch-6top-interface

July 2015

```
leaf EBSecurityLevel{
  type enumeration {
    enum NONE;
    enum MIC-32;
  }
  description
    "The security level respective to the EB key.";
}

list K2List{
  key "NodeAddress";
  description
    "The keys are shared with neighbors, used to authenticate
    and/or encrypt DATA, ACKNOWLEDGEMENT, MAC COMMAND frame.";

  leaf NodeAddress {
    type nodeaddressstype;
    description
      "Specifies the address of the neighbor(s) sharing the key.
      The address could be broadcast/unicast address.";
  }
  leaf-list K2{
    type uint8;
    min-elements 16;
    config true;
    description
      "The key is used as shared key with
      the specific neighbor";
  }
  leaf SecurityLevel{
    type enumeration {
      enum NONE;
      enum MIC-32;
      enum MIC-64;
      enum MIC-128;
      enum ENC;
      enum ENC-MIC-32;
      enum ENC-MIC-64;
      enum ENC-MIC-128;
    }
    description
      "The security level respective to
      the specific shared key.";
```

```
}
}
}
}
```

[4.2.](#) Yang Model for the Security aspects of 6top

The [[I-D.ietf-6tisch-architecture](#)] and [[I-D.richardson-6tisch--security-6top](#)] define the attributes needed to secure network bootstrapping and joining and authentication processes. The SecurityAttributes container in the included yang model above contains attributes that are exposed by 6top interface to enable access and configuration to the security mechanisms carried out by 6top management entity.

[5.](#) References

[5.1.](#) Normative References

[RFC2119] Bradner, S., "Key words for use in RFCs to Indicate Requirement Levels", [BCP 14](#), [RFC 2119](#), March 1997.

[5.2.](#) Informative References

[RFC6020] Bjorklund, M., "YANG - A Data Modeling Language for the Network Configuration Protocol (NETCONF)", [RFC 6020](#), October 2010.

[I-D.ietf-6tisch-tsch]

Watteyne, T., Palattella, M., and L. Grieco, "Using IEEE802.15.4e TSCH in an IoT context: Overview, Problem Statement and Goals", [draft-ietf-6tisch-tsch-06](#) (work in progress), March 2015.

[I-D.ietf-6tisch-architecture]

Thubert, P., "An Architecture for IPv6 over the TSCH mode of IEEE 802.15.4", [draft-ietf-6tisch-architecture-08](#) (work in progress), May 2015.

[I-D.ietf-6tisch-terminology]

Palattella, M., Thubert, P., Watteyne, T., and Q. Wang,

"Terminology in IPv6 over the TSCH mode of IEEE 802.15.4e", [draft-ietf-6tisch-terminology-04](#) (work in progress), March 2015.

[I-D.ietf-6tisch-minimal]

Vilajosana, X. and K. Pister, "Minimal 6TiSCH Configuration", [draft-ietf-6tisch-minimal-09](#) (work in progress), June 2015.

Wang & Vilajosana

Expires January 7, 2016

[Page 32]

Internet-Draft

6tisch-6top-interface

July 2015

[I-D.wang-6tisch-6top-sublayer]

Wang, Q., Vilajosana, X., and T. Watteyne, "6TiSCH Operation Sublayer (6top)", [draft-wang-6tisch-6top-sublayer-01](#) (work in progress), July 2014.

[I-D.ietf-6tisch-coap]

Sudhaakar, R. and P. Zand, "6TiSCH Resource Management and Interaction using CoAP", [draft-ietf-6tisch-coap-03](#) (work in progress), March 2015.

[I-D.richardson-6tisch--security-6top]

Richardson, M., "6tisch secure join using 6top", [draft-richardson-6tisch--security-6top-04](#) (work in progress), November 2014.

5.3. External Informative References

[IEEE802154e]

IEEE standard for Information Technology, "IEEE std. 802.15.4e, Part. 15.4: Low-Rate Wireless Personal Area Networks (LR-WPANs) Amendment 1: MAC sublayer", April 2012.

[IEEE802154]

IEEE standard for Information Technology, "IEEE std. 802.15.4, Part. 15.4: Wireless Medium Access Control (MAC) and Physical Layer (PHY) Specifications for Low-Rate Wireless Personal Area Networks", June 2011.

[OpenWSN] Watteyne, T., Vilajosana, X., Kerkez, B., Chraim, F., Weekly, K., Wang, Q., Glaser, S., and K. Pister, "OpenWSN: a Standards-Based Low-Power Wireless Development Environment", Transactions on Emerging Telecommunications Technologies , August 2012.

[morell04label]

Morell, A., Vilajosana, X., Lopez-Vicario, J., and T. Watteyne, "Label Switching over IEEE802.15.4e Networks. Transactions on Emerging Telecommunications Technologies", June 2013.

Authors' Addresses

Wang & Vilajosana Expires January 7, 2016 [Page 33]

Internet-Draft 6tisch-6top-interface July 2015

Qin Wang (editor)
Univ. of Sci. and Tech. Beijing
30 Xueyuan Road
Beijing, Hebei 100083
China

Phone: +86 (10) 6233 4781
Email: wangqin@ies.ustb.edu.cn

Xavier Vilajosana
Universitat Oberta de Catalunya
156 Rambla Poblenou
Barcelona, Catalonia 08018
Spain

Phone: +34 (646) 633 681
Email: xvilajosana@uoc.edu

