

Yang Data model for I2RS interface to the OSPF protocol
draft-wang-i2rs-ospf-dm-00

Abstract

OSPF (OSPFv2 and OSPFv3) is widely deployed link-state protocol in routing networks. During the past decades, it has been operated and maintained through typical CLI, SNMP and NETCONF. With the expansion and complication of modern networks, the necessity for rapid and dynamic control has been increased. The I2RS is a standard-based interface which provides a programmatic way to achieve this goal.

This document specifies an OSPF yang data model for the I2RS interface to OSPF. This model is based on the the I2RS OSPF informational model ([draft-ietf-wu-ospf-info-model-00](#)) which satisfies the requirements suggested by the I2RS use case requirements for the IGPs. This yang data model can be used by I2RS client-agent protocol to program OSPF routing entities.

Requirements Language

The key words "MUST", "MUST NOT", "REQUIRED", "SHALL", "SHALL NOT", "SHOULD", "SHOULD NOT", "RECOMMENDED", "MAY", and "OPTIONAL" in this document are to be interpreted as described in [RFC 2119](#) [[RFC2119](#)].

Status of This Memo

This Internet-Draft is submitted in full conformance with the provisions of [BCP 78](#) and [BCP 79](#).

Internet-Drafts are working documents of the Internet Engineering Task Force (IETF). Note that other groups may also distribute working documents as Internet-Drafts. The list of current Internet-Drafts is at <http://datatracker.ietf.org/drafts/current/>.

Internet-Drafts are draft documents valid for a maximum of six months and may be updated, replaced, or obsoleted by other documents at any time. It is inappropriate to use Internet-Drafts as reference material or to cite them other than as "work in progress."

This Internet-Draft will expire on March 30, 2015.

Copyright Notice

Copyright (c) 2014 IETF Trust and the persons identified as the document authors. All rights reserved.

This document is subject to [BCP 78](#) and the IETF Trust's Legal Provisions Relating to IETF Documents (<http://trustee.ietf.org/license-info>) in effect on the date of publication of this document. Please review these documents carefully, as they describe your rights and restrictions with respect to this document. Code Components extracted from this document must include Simplified BSD License text as described in Section 4.e of the Trust Legal Provisions and are provided without warranty as described in the Simplified BSD License.

Table of Contents

1. Introduction	2
1.1. Yang Tree Diagrams	3
2. OSPF data	3
3. I2RS OSPF Data Model	4
4. Relationship to other I2RS Data Models	15
5. OSPF Yang Data Model	15
6. IANA Considerations	52
7. Security Considerations	53
8. Acknowledgements	53
9. References	53
9.1. Informative References	53
9.2. Normative References	53
Authors' Addresses	54

[1. Introduction](#)

As one of well-known link-state protocols, OSPF[RFC2328] has been widely used in the routing of intra domain networks. During the past decades, it has been deployed with the help of typical interfaces such as CLI, SNMP and NETCONF. As modern networks grow in scale and complexity, the necessity for rapid and dynamic control has been increased. The I2RS[I-D.ietf-i2rs-architecture] is a standard-based interface which provides a programmatic way to achieve this goal.

This document specifies an yang data model for I2RS interface to the OSPF protocol based on the I2RS information model specified in [draft-ietf-wu-ospf-info-model-00](#).

In order to support large intra-domain, OSPF has been organized hierarchically into areas. The topology of one area is hidden from the rest of networks, which is beneficial from the reduction of

Wang, et al.

Expires March 30, 2015

[Page 2]

routing traffic. Based on flooding mechanism, each routing-system in one OSPF area will maintain the identical database from which a pairwise shortest tree is calculated in the distributed manner. As one client of RIB, OSPF SHOULD populate its routing information into RIB as stated in [[I-D.ietf-i2rs-rib-info-model](#)]

1.1. Yang Tree Diagrams

The Yang Tree diagrams used in this draft utilized a simple graphical representation of the data model. The meaning of the symbols are as follows:

- o Brackets "[" and "]" enclose list keys
- o Abbreviations before data node names: "rw" mean configuration (read-write) and "ro" state diagrams.
- o Symbols after data node names: "?" means an optional node, "!" means a presence container, and "*" denotes a list and leaf-list.
- o Parentheses enclose choice and case nodes, and case nodes are also marked with a colon ":").
- o Ellipsis ("...") stand for the contents of subtress that are not shown.

Future yang symbols may be added to indicate the object relationship, ephemeral state, and other I2RS specific relationships in yang 1.1

2. OSPF data

This section describes the data involved in the OSPF information model in detail. Please note OSPF in this document means both OSPFv2 and OSPFv3[RFC5340]protocol unless specified. OSPF data includes information related to OSPF instance, OSPF area, OSPF multi-topology, OSPF interfaces, OSPF adjacencies and OSPF routes. A high-level architecture of the OSPF contents is shown as below.

Wang, et al.

Expires March 30, 2015

[Page 3]

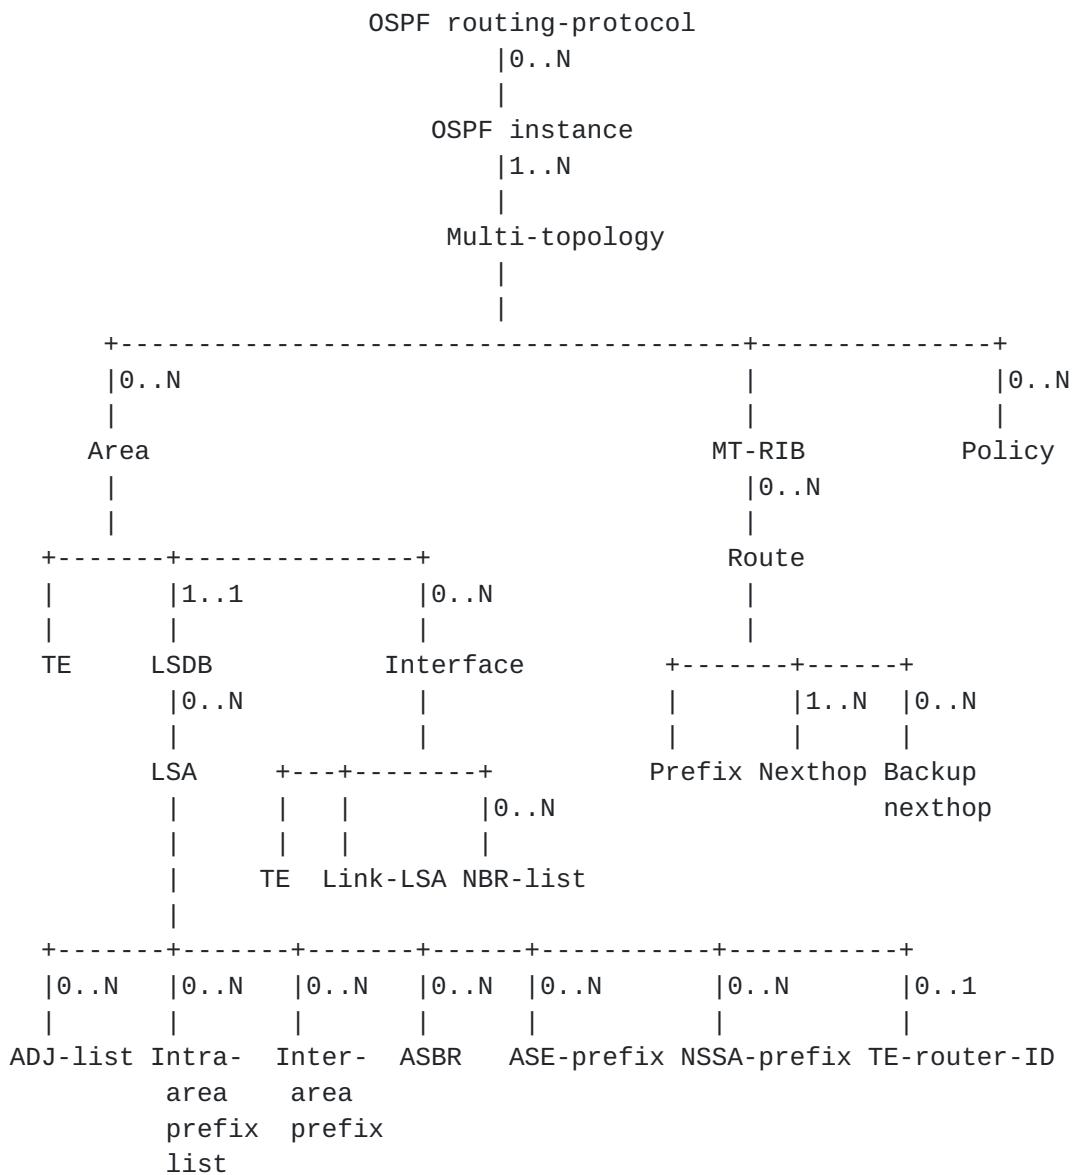


Figure 1: Architecture of OSPF information model

[3. I2RS OSPF Data Model](#)

Wang, et al.

Expires March 30, 2015

[Page 4]

```
module: ospf-protocol
++-rw ospf-v4ur-instance
| +-rw ospf-instance-name          string
| +-rw ospf-vpn-name?             string
| +-rw router-id                 inet:ip-address
| +-ro protocol-status           protocol-status-def
| +-ro ospf-type                 ospf-type-def
| +-ro version                   ospf-version-def
| +-ro ospf-process-create-mode  ospf-process-create-mode-def
| +-rw preference                uint32
| +-rw hostname?                string
| +-rw mt-list
|   +-rw multi-topo* [mt-id]
|     +-rw mt-id                  uint16
|     +-rw address-family        address-family-def
|     +-rw mt-status?            enumeration
|     +-rw policy-list* [policy-id]
|       +-rw policy-id          string
| +-rw mt-rib
|   +-rw route* [prefix]
|     +-rw prefix                inet:ipv4-prefix
|     +-rw nexthop-list
|       +-rw nexthop* [ospf-nexthop]
|         +-rw ospf-nexthop    inet:ipv4-prefix
|     +-rw back-nexthop?         inet:ipv4-prefix
|     +-rw metric?              uint32
|     +-rw type?                ospf-route-type-def
|     +-rw route-state-info
|       +-rw metric?            uint32
|       +-rw route-current-state? ospf-route-state-def
|       +-rw route-previous-state? ospf-route-state-def
|       +-rw route-chg-reason?   route-chg-reason-def
|       +-rw lsid?               inet:ip-address
|       +-rw lsa-type?           lsa-type-def
|       +-rw advertiser?        inet:ip-address
```

Wang, et al.

Expires March 30, 2015

[Page 5]

```
|   +-rw area-list
|     +-rw area-id          uint16
|     +-rw area-type?       area-type-def
|     +-rw area-status?     area-status-def
|     +-rw lsa-arrival-int? uint32
|     +-rw lsa-orig-int?    uint32
|     +-rw router-number?   uint32
|     +-rw area-auth
|       |  +-rw (auth-mode-type)?
|       |    +-:(mode-simple)
|       |      |  +-rw simple-password?  string
|       |    +-:(mode-md5)
|       |      |  +-rw md5-password?  string
|       |    +-:(mode-hmac-sha256)
|       |      |  +-rw hmac-key-id?  uint32
|       |      |  +-rw hmac-password? string
|       |    +-:(mode-keychain)
|       |      |  +-rw keychain-key-id?  uint32
|       |      |  +-rw keychain-password? string
|       |      |  +-rw keychain-mode?    enumeration
|       |      |  +-rw keychain-periodic? enumeration
|       |      |  +-rw send_time?      uint32
|       |      |  +-rw receive_tim?    uint32
```

Wang, et al.

Expires March 30, 2015

[Page 6]

```
+--rw lsdb
|   +-rw lsa*[lsa-v2-type link-state-id advertiser-id]
|       +-rw lsa-age?          uint32
|       +-rw lsa-options?      uint8
|       +-rw lsa-v2-type       enumeration
|       +-rw link-state-id    inet:ipv4-address
|       +-rw advertiser-id    inet:ip-prefix
|       +-rw seq-no?          uint32
|       +-rw checksum?         uint32
|       +-rw lsa-length?       uint32
|       +-rw (ls-type)?
|           +---:(ospf-v2-router-lsa)
|               +-rw ospf-v2-router-lsa
|                   +-rw bit-flag  uint16
|                   +-rw link-num  uint16
|                   +-rw link-list* [link-id link-data]
|                       +-rw link-id  inet:ipv4-address
|                       +-rw link-data  inet:ipv4-address
|                       +-rw link-type enumeration
|                           +-rw mt-num   uint16
|                           +-rw metric   uint16
|                           +-rw mt-metric* [mt-id]
|                               +-rw mt-id   uint16
|                               +-rw metric?  uint16
|           +---:(ospf-v2-network-lsa)
|               +-rw ospf-v2-network-lsa
|                   +-rw network-mask  inet:ipv4-prefix
|                   +-rw attached-router* [router-id]
|                       +-rw router-id  inet:ipv4-address
|           +---:(ospf-v2-summary-lsa)
|               +-rw ospf-v2-summary-lsa
|                   +-rw network-mask  inet:ipv4-prefix
|                   +-rw mt-metric* [mt-id]
|                       +-rw mt-id   uint16
|                       +-rw metric?  uint16
|           +---:(ospf-v2-as-external-lsa)
|               +-rw ospf-v2-as-external-lsa
|                   +-rw network-mask  inet:ipv4-prefix
|                   +-rw mt-metric* [mt-id]
|                       +-rw e-bit?   uint8
|                       +-rw mt-id   uint8
|                       +-rw metric?  uint16
|                       +-rw forwarding-address?
|                           inet:ipv4-address
|                       +-rw external-route-tag? uint32
|
|           +---:(ospf-v2-nssa-external-lsa)
|               +-rw ospf-v2-nssa-external-lsa
```

Wang, et al.

Expires March 30, 2015

[Page 7]

```
|      +-+rw network-mask    inet:ipv4-prefix
|      +-+rw mt-metric* [mt-id]
|          +-+rw e-bit?        uint8
|          +-+rw mt-id        uint8
|          +-+rw metric?       uint32
|          +-+rw forwarding-address?
|              inet:ipv4-address
|              +-+rw external-route-tag? uint32
+--:(ospf-v2-te-router-lsa)
|      +-+rw ospf-v2-te-router-lsa
|          +-+rw type?        uint8
|          +-+rw length?       uint32
|          +-+rw router-id?    inet:ipv4-address
+--:(ospf-te-link-lsa)
|      +-+rw ospf-te-link-lsa
|          +-+rw type?        uint8
|          +-+rw length?       uint32
|          +-+rw link-type-stlv
|              +-+rw type?        uint8
|              +-+rw length?       uint32
|              +-+rw link-type?    enumeration
|          +-+rw link-id-tlv-stlv
|              +-+rw type?        uint8
|              +-+rw length?       uint32
|              +-+rw link-id?     inet:ipv4-address
|          +-+rw local-address-stlv
|              +-+rw type?        uint8
|              +-+rw length?       uint32
|              +-+rw local-address-list*
|                  [remote-address]
|          +-+rw remote-address
|              inet:ipv4-address
|      +-+rw remote-address-stlv
|          +-+rw type?        uint8
|          +-+rw length?       uint32
|          +-+rw remote-address-list*
|              [remote-address]
|          +-+rw remote-address
|              inet:ipv4-address
|      +-+rw te-metric-stlv
|          +-+rw type?        uint8
|          +-+rw length?       uint32
|          +-+rw value?        uint32
|      +-+rw maximum-bandwidth-stlv
|          +-+rw type?        uint8
|          +-+rw length?       uint32
|          +-+rw value?        uint32
|      +-+rw maximum-reservable-bandwidth-stlv
```

Wang, et al.

Expires March 30, 2015

[Page 8]

```
| | | +--rw type?      uint8
| | | +--rw length?    uint32
| | | +--rw value?     uint32
| | +--rw unreserved-bandwidth-stlv
| | | +--rw type?      uint8
| | | +--rw length?    uint32
| | | +--rw value?     uint32
| | +--rw administrative-group-stlv
| | | +--rw type?      uint8
| | | +--rw length?    uint32
| | | +--rw value?     uint32
| |
| +--rw interface-list
| | +--rw interface* [interface-index]
| | | +--rw interface-index  uint64
| | | +--rw interface-name?   string
| | | +--rw interface-status?  interface-status-def
| | | +--rw interface-down-reason?
| | | | +--rw interface-down-reason-def
| | | +--rw interface-net-type? interface-net-type-def
| | | +--rw interface-role?    interface-role-def
| | | +--rw interface-te-info
| | | | +--rw admin_group?    uint32
| | | | +--rw max_bandwidth?  uint32
| | | | +--rw max_rsv_bandwidth? uint32
| | | | +--rw unrsv_bandwidth? uint32
| | +--rw interface-auth
| | | +--rw (auth-mode-type)?
| | | | +--:(mode-simple)
| | | | | +--rw simple-password?  string
| | | | +--:(mode-md5)
| | | | | +--rw md5-password?    string
| | | | +--:(mode-hmac-sha256)
| | | | | +--rw hmac-key-id?    uint32
| | | | | +--rw hmac-password?   string
| | | | +--:(mode-keychain)
| | | | | +--rw keychain-key-id?  uint32
| | | | | +--rw keychain-password? string
| | | | | +--rw keychain-mode?    enumeration
| | | | | +--rw keychain-periodic? enumeration
| | | | | +--rw send_time?       uint32
| | | | | +--rw receive_tim?     uint32
| | +--rw ip-address?      inet:ipv4-address
| | +--rw nbr-list
| | | +--rw nbr* [router-id]
| | | | +--rw router-id    inet:ip-address
| | | | +--rw interface-index? uint64
| | | | +--rw interface-name?  string
```

Wang, et al.

Expires March 30, 2015

[Page 9]

```

|           +-rw nbr-status?          nbr-status-def
|           +-rw nbr-previous-status? nbr-status-def
|           +-rw nbr-down-reason?    nbr-down-reason-def
|           +-rw nbr-address?       inet:ipv4-address
|           +-rw ip-address?        inet:ipv4-address
+-rw network-list* [network-prefix mask]
|   +-rw network-prefix      inet:ipv4-prefix
|   +-rw mask                inet:ipv4-prefix
+-rw route-info-list* [route-info-index]
|   +-rw route-info-index    uint32
|   +-rw router-id          inet:ipv4-address
|   +-rw ip-address-list* [ip-address]
|       +-rw ip-address      inet:ipv4-address

+-rw ospf-v6ur-instance
+-rw ospf-instance-name          string
+-rw ospf-vpn-name?            string
+-rw router-id                 inet:ip-address
+-ro protocol-status           protocol-status-def
+-ro ospf-type                 ospf-type-def
+-ro version                   ospf-version-def
+-ro ospf-process-create-mode  ospf-process-create-mode-def
+-rw preference                uint32
+-rw hostname?                string
+-rw mt-list
+-rw multi-topo* [mt-id]
|   +-rw mt-id                  uint16
|   +-rw address-family        address-family-def
|   +-rw mt-status?            enumeration
|   +-rw policy-list* [policy-id]
|       +-rw policy-id         string
+-rw mt-rib
|   +-rw route* [prefix]
|       +-rw prefix             inet:ipv6-prefix
|       +-rw nexthop-list
|           +-rw nexthop* [ospf-nexthop]
|               +-rw ospf-nexthop  inet:ipv6-prefix
|           +-rw back-nexthop?    inet:ipv6-prefix
|           +-rw metric?         uint32
|           +-rw type?           ospf-route-type-def
|           +-rw route-state-info
|               +-rw metric?       uint32
|               +-rw route-current-state? ospf-route-state-def
|               +-rw route-previous-state? ospf-route-state-def
|               +-rw route-chg-reason?  route-chg-reason-def
|               +-rw lsid?          inet:ip-address
|               +-rw lsa-type?      lsa-type-def
|               +-rw advertiser?    inet:ip-address

```

Wang, et al.

Expires March 30, 2015

[Page 10]

```
+--rw area-list
  +-rw area* [area-id]
    +-rw area-id          uint16
    +-rw area-type?       area-type-def
    +-rw area-status?     area-status-def
    +-rw lsa-arrival-int? uint32
    +-rw lsa-orig-int?    uint32
    +-rw router-number?   uint32
    +-rw area-auth
      | +-rw (auth-mode-type)?
      |   +-:(mode-simple)
      |     | +-rw simple-password?   string
      |   +-:(mode-md5)
      |     | +-rw md5-password?     string
      |   +-:(mode-hmac-sha256)
      |     | +-rw hmac-key-id?     uint32
      |     | +-rw hmac-password?   string
      |   +-:(mode-keychain)
      |     | +-rw keychain-key-id?   uint32
      |     | +-rw keychain-password? string
      |     | +-rw keychain-mode?    enumeration
      |     | +-rw keychain-periodic? enumeration
      |     | +-rw send_time?        uint32
      |     | +-rw receive_time?     uint32
  +-rw lsdb
    +-rw lsa* [lsa-v3-type link-state-id advertiser-id]
      +-rw lsa-age?          uint32
      +-rw lsa-v3-type        enumeration
      +-rw link-state-id      uint32
      +-rw advertiser-id       inet:ip-prefix
      +-rw seq-no?            uint32
      +-rw checksum?          uint32
      +-rw lsa-length?         uint32
      +-rw (ls-type)?
        +-:(ospf-v3-router-lsa)
          | +-rw ospf-v3-router-lsa
            |   +-rw option          uint16
            |   +-rw link-list*
              |     [link-type interface-id neighbor-interface-id]
                |       +-rw link-type    enumeration
                |       +-rw metric?      uint32
                |       +-rw interface-id uint32
                |       +-rw neighbor-interface-id uint32
                |       +-rw neighbor-router-id?
                  |         inet:ipv4-address
        +-:(ospf-v3-network-lsa)
          | +-rw ospf-v3-network-lsa
            |   +-rw option          uint32
```

Wang, et al.

Expires March 30, 2015

[Page 11]

```
|     +-+rw link-list* [attached-router-id]
|         +-+rw attached-router-id
|             inet:ipv4-address
+--:(ospf-v3-inter-area-prefix-lsa)
|     +-+rw ospf-v3-inter-area-prefix-lsa
|         +-+rw metric?          uint32
|         +-+rw prefix-length    uint8
|         +-+rw prefix-options   uint8
|         +-+rw address-prefix-list* [address-prefix]
|             +-+rw address-prefix  inet:ipv6-prefix
+--:(ospf-v3-inter-area-router-lsa)
|     +-+rw ospf-v3-inter-area-router-lsa
|         +-+rw options          uint8
|         +-+rw metric?          uint32
|         +-+rw destination-router-id?
|             inet:ipv4-address
+--:(ospf-v3-as-external-lsa)
|     +-+rw ospf-v3-as-external-lsa
|         +-+rw options          uint16
|         +-+rw metric            uint16
|         +-+rw prefix-length     uint8
|         +-+rw prefix-options   uint8
|         +-+rw referenced-ls-type uint8
|         +-+rw address-prefix-list* [address-prefix]
|             +-+rw address-prefix  inet:ipv6-prefix
|         +-+rw forwarding-address?  inet:ipv6-prefix
|         +-+rw external-route-tag? uint32
|         +-+rw referenced-link-state-id? uint32
+--:(ospf-v3-nssa-lsa)
|     +-+rw ospf-v3-nssa-lsa
|         +-+rw options          uint16
|         +-+rw metric            uint16
|         +-+rw prefixlength      uint8
|         +-+rw prefixoptions    uint8
|         +-+rw referenced-ls-type uint8
|         +-+rw address-prefix-list* [address-prefix]
|             +-+rw address-prefix  inet:ipv6-prefix
|         +-+rw forwarding-address?  inet:ipv6-prefix
|         +-+rw external-route-tag? uint32
|         +-+rw referenced-link-state-id? uint32
+--:(ospf-v3-link-lsa)
|     +-+rw ospf-v3-link-lsa
|         +-+rw priority          uint8
|         +-+rw options           uint32
|         +-+rw link-local-interface-address?
|             inet:ipv6-address
|         +-+rw prefixes          uint32
|         +-+rw address-prefix-list*
```

Wang, et al.

Expires March 30, 2015

[Page 12]

```
                                [address-prefix-index]
|   +-rw address-prefix-index      uint32
|   +-rw prefix-length           uint8
|   +-rw prefix-options?        uint8
|   +-rw address-prefix* [address]
|       +-rw address      inet:ipv6-prefix
+--:(ospf-v3-intra-area-prefix-lsa)
|   +-rw ospf-v3-intra-area-prefix-lsa
|       +-rw prefixes            uint32
|       +-rw referenced-ls-type    uint16
|       +-rw referenced-link-state-id uint32
|       +-rw referenced-advertising-router
|           inet:ipv4-address
|   +-rw address-prefix-list*
|       [address-prefix-index]
|           +-rw address-prefix-index  uint32
|           +-rw prefix-length       uint8
|           +-rw prefix-options      uint8
|           +-rw address-prefix* [address]
|               +-rw address      inet:ipv6-prefix
+--:(ospf-v3-te-router-ipv6-address-lsa)
|   +-rw ospf-v3-te-router-ipv6-address
|       +-rw type                uint8
|       +-rw length              uint16
|       +-rw router-id           inet:ipv6-address
+--:(te-link-lsa)
|   +-rw ospf-te-link-lsa
|       +-rw type?              uint8
|       +-rw length?             uint32
|       +-rw link-type-stlv
|           |   +-rw type?          uint8
|           |   +-rw length?         uint32
|           |   +-rw link-type?      enumeration
|       +-rw link-id-tlv-stlv
|           |   +-rw type?          uint8
|           |   +-rw length?         uint32
|           |   +-rw link-id?        inet:ipv4-address
|       +-rw local-address-stlv
|           |   +-rw type?          uint8
|           |   +-rw length?         uint32
|           |   +-rw local-address-list*
|               [remote-address]
|               +-rw remote-address
|                   inet:ipv4-address
|   +-rw remote-address-stlv
|       |   +-rw type?          uint8
|       |   +-rw length?         uint32
|       |   +-rw remote-address-list*
```

Wang, et al.

Expires March 30, 2015

[Page 13]

```
|           [remote-address]
|           +-rw remote-address
|                   inet:ipv4-address
+--rw te-metric-stlv
|   +-rw type?      uint8
|   +-rw length?    uint32
|   +-rw value?     uint32
+--rw maximum-bandwidth-stlv
|   +-rw type?      uint8
|   +-rw length?    uint32
|   +-rw value?     uint32
+--rw maximum-reservable-bandwidth-stlv
|   +-rw type?      uint8
|   +-rw length?    uint32
|   +-rw value?     uint32
+--rw unreserved-bandwidth-stlv
|   +-rw type?      uint8
|   +-rw length?    uint32
|   +-rw value?     uint32
+--rw administrative-group-stlv
|   +-rw type?      uint8
|   +-rw length?    uint32
|   +-rw value?     uint32
+--rw interface-list
|   +-rw interface* [interface-index]
|       +-rw interface-index      uint64
|       +-rw interface-name?     string
|       +-rw interface-status?   interface-status-def
|       +-rw interface-down-reason?
|               interface-down-reason-def
|       +-rw interface-net-type?  interface-net-type-def
|       +-rw interface-role?     interface-role-def
|       +-rw interface-te-info
|           +-rw admin_group?     uint32
|           +-rw max_bandwidth?   uint32
|           +-rw max_rsv_bandwidth? uint32
|           +-rw unrsv_bandwidth? uint32
|       +-rw interface-auth
|           +-rw (auth-mode-type)?
|               +-:(mode-simple)
|                   +-rw simple-password?   string
|               +-:(mode-md5)
|                   +-rw md5-password?   string
|               +-:(mode-hmac-sha256)
|                   +-rw hmac-key-id?   uint32
|                   +-rw hmac-password? string
|               +-:(mode-keychain)
|                   +-rw keychain-key-id? uint32
```

Wang, et al.

Expires March 30, 2015

[Page 14]

```

|   |   +-rw keychain-password?    string
|   |   +-rw keychain-mode?      enumeration
|   |   +-rw keychain-periodic?  enumeration
|   |   +-rw send_time?         uint32
|   |   +-rw receive_tim?       uint32
|   +-rw ip-address            inet:ipv6-address
|   +-rw nbr-list
|   |   +-rw nbr* [router-id]
|   |   |   +-rw router-id        inet:ip-address
|   |   |   +-rw interface-index? uint64
|   |   |   +-rw interface-name?  string
|   |   |   +-rw nbr-status?     nbr-status-def
|   |   |   +-rw nbr-previous-status? nbr-status-def
|   |   |   +-rw nbr-down-reason?  nbr-down-reason-def
|   |   |   +-rw nbr-address?    inet:ipv6-address
|   |   |   +-rw ip-address      inet:ipv6-address
|   +-rw network-list* [network-index]
|   |   +-rw network-index      uint32
|   |   +-rw network-prefix     inet:ipv4-prefix
|   |   +-rw mask               inet:ipv4-prefix
|   +-rw route-info-list* [route-info-index]
|   |   +-rw route-info-index   uint32
|   |   +-rw router-id          inet:ipv4-address
|   |   +-rw ip-address-list* [ip-address]
|   |   |   +-rw ip-address      inet:ipv4-address

```

Figure 2 top-level I2RS YANG model of OSPF

4. Relationship to other I2RS Data Models

(TBD)

5. OSPF Yang Data Model

```

module ospf-protocol {
  namespace "urn:huawei:params:xml:ns:yang:rt:i2rs:i2rs-ospf";
  // replace with iana namespace when assigned
  prefix "i2rs-ospf";

  import ietf-inet-types {
    prefix inet;
    //rfc6991
  }

  organization "Huawei Technologies Co., Ltd.";
  contact
    "Email: wanglixing@huawei.com"
}

```

Wang, et al.

Expires March 30, 2015

[Page 15]

```
Email: shares@ndzh.com
Email: eric.wu@huawei.com";

revision "2014-08-22" {
    description "initial revision";
    reference "draft-wu-i2rs-ospf-info-model-00";
}

typedef address-family-def {
    description
        "tbd.";
    type enumeration {
        enum "v4ur";
        enum "v6ur";
        enum "v4mr";
        enum "v6mr";
    }
}

typedef ospf-type-def {
    type enumeration {
        enum "asbr";
        enum "abr";
    }
}

typedef ospf-route-type-def {
    description
        "The type of ospf route.";
    type enumeration {
        enum "ospf type 1";
        enum "ospf type 2";
        enum "ospf type 3";
        enum "ospf type 4";
        enum "ospf type 5";
        enum "ospf type 7";
    }
}

typedef lsa-type-def {
    description
        "The type of ospf lsa.";
    type enumeration {
        enum "route lsa";
        enum "network lsa";
        enum "summary3 lsa";
        enum "summary4 lsa";
        enum "ase lsa";
    }
}
```

Wang, et al.

Expires March 30, 2015

[Page 16]

```
enum "nssa lsa";
enum "inter-area-prefix lsa";
enum "inter-area-router lsa";
enum "link lsa";
enum "intra-area-prefix lsa";
enum "te router-id lsa";
enum "link-te lsa";
}
}

typedef ospf-route-state-def {
    type enumeration {
        enum "active";
        enum "inactive";
        enum "primary";
        enum "backup";
    }
}

typedef route-chg-reason-def {
    description
        "The changing reason of ospf route .";
    type enumeration {
        enum "orig-adv";
        enum "orig-withdraw";
        enum "adj-down";
        enum "policy-deny";
    }
}

typedef area-status-def {
    type enumeration {
        enum "active";
        enum "reset";
        enum "shutdown";
    }
}

typedef area-type-def {
    type enumeration {
        enum "normal";
        enum "stub";
        enum "nssa";
    }
}

typedef lsdb-status-def {
    type enumeration {
```

Wang, et al.

Expires March 30, 2015

[Page 17]

```
    enum "normal";
    enum "overflow";
}
}

typedef interface-net-type-def {
    type enumeration {
        enum "p2p";
        enum "broadcast";
        enum "nbma";
        enum "p2mp";
    }
}

typedef interface-status-def {
    type enumeration {
        enum "if-up";
        enum "if-down";
    }
}

typedef interface-down-reason-def {
    type enumeration {
        enum "phy-down";
        enum "admin-down";
        enum "ip-down";
        enum "i2rs-down";
    }
}

typedef nbr-status-def {
    type enumeration {
        enum "down";
        enum "attempt";
        enum "2-way";
        enum "exstat";
        enum "exchange";
        enum "loading";
        enum "full";
    }
}

typedef nbr-down-reason-def {
    type enumeration {
        enum "if-down";
        enum "bfd-down";
        enum "expiration";
        enum "cfd-chg";
        enum "i2rs-down";
    }
}
```

Wang, et al.

Expires March 30, 2015

[Page 18]

```
        }
    }

typedef interface-role-def {
    type enumeration {
        enum "dr";
        enum "bdr";
    }
}

typedef protocol-status-def {
    type enumeration {
        enum "active";
        enum "reset";
        enum "shutdown";
        enum "overload";
    }
}

typedef ospf-version-def {
    description
        "OSPF v2 is for IPV4, and ospf v3 is for IPV6.";
    type enumeration {
        enum "v2";
        enum "v3";
    }
}

typedef ospf-process-create-mode-def {
    type enumeration {
        enum "not-i2rs";
        enum "i2rsclient-create-ospf-instance";
        enum "i2rsagent-fails-ospf-instance-create";
        enum "i2rsagent-created-ospf-instance";
        enum "i2rsagent-ospf-instance-create";
        enum "i2rsagent-rejects-ospf-instance-create";
        enum "i2rsagent-attempts-ospf-instance-create";
    }
}

grouping ospf-instance-common {
    description
        "the common structure of ospf process.";
    leaf ospf-instance-name {
        type string;
        mandatory true;
    }
}
```

Wang, et al.

Expires March 30, 2015

[Page 19]

```
leaf ospf-vpn-name {  
    type string;  
    mandatory false;  
}  
  
leaf router-id {  
    type inet:ip-address;  
    mandatory true;  
}  
  
leaf protocol-status {  
    type protocol-status-def;  
    config "false";  
    mandatory true;  
}  
  
leaf ospf-type {  
    type ospf-type-def;  
    config "false";  
    mandatory true;  
}  
  
leaf version {  
    type ospf-version-def;  
    config "false";  
    mandatory true;  
}  
  
leaf ospf-process-create-mode {  
    type ospf-process-create-mode-def;  
    config "false";  
    mandatory true;  
}  
  
leaf preference {  
    type uint32 {  
        range "1..4294967295";  
    }  
    mandatory true;  
}  
  
leaf hostname {  
    type string;  
    mandatory false;  
}  
}
```

Wang, et al.

Expires March 30, 2015

[Page 20]

```
grouping ospf-mt-common {
    description
        "the common structure of ospf process.";
    leaf mt-id {
        type uint16;
    }
    leaf address-family {
        type address-family-def;
        mandatory true;
    }

    leaf mt-status {
        type enumeration {
            enum "active";
            enum "inactive";
        }
    }

    list policy-list {
        description
            "The policy of this MT.";
        key "policy-id";
        leaf policy-id {
            type string;
        }
    }
}

grouping auth-info {
    choice auth-mode-type {
        case mode-simple {
            leaf simple-password {
                type string;
            }
        }
        case mode-md5 {
            leaf md5-password {
                type string;
            }
        }
        case mode-hmac-sha256 {
            leaf hmac-key-id {
                type uint32;
            }
            leaf hmac-password {
                type string;
            }
        }
    }
}
```

Wang, et al.

Expires March 30, 2015

[Page 21]

```
case mode-keychain {
    leaf keychain-key-id {
        type uint32;
    }
    leaf keychain-password {
        type string;
    }
    leaf keychain-mode {
        type enumeration {
            enum "absolute";
            enum "periodic";
        }
    }
}

leaf keychain-periodic {
    type enumeration {
        enum "daily";
        enum "weekly";
        enum "monthly";
        enum "yearly";
    }
}
leaf send_time {
    type uint32;
}
leaf receive_time {
    type uint32;
}
}
```

```
grouping ospf-area-common {
    description
        "the area structure of ospf process.";
    leaf area-id {
        description "Tbd.";
        type uint16;
    }

    leaf area-type {
        type area-type-def;
    }

    leaf area-status {
        type area-status-def;
```

Wang, et al.

Expires March 30, 2015

[Page 22]

```
}
```

```
leaf lsa-arrival-int {
    type uint32;
}
```

```
leaf lsa-orig-int {
    type uint32;
}
```

```
leaf router-number {
    type uint32;
}
```

```
container area-auth{
    uses auth-info;
}
```

```
}
```

```
grouping ospf-route-common {
    description
        "the common structure of ospf route.";
    leaf metric {
        type uint32;
    }

    leaf type {
        type ospf-route-type-def;
    }

    container route-state-info {
        leaf metric {
            type uint32;
        }

        leaf route-current-state {
            type ospf-route-state-def;
        }

        leaf route-previous-state {
            type ospf-route-state-def;
        }

        leaf route-chg-reason {
            type route-chg-reason-def;
        }

        leaf lsid {
            type inet:ip-address;
        }
    }
}
```

Wang, et al.

Expires March 30, 2015

[Page 23]

```
leaf lsa-type {
    type lsa-type-def;
}

leaf advertiser {
    type inet:ip-address;
}
}

grouping ospf-interface-common {
    description
        "the area structure of ospf interface.";
    leaf interface-index {
        description "Tbd.";
        type uint64;
    }

    leaf interface-name {
        description "Tbd.";
        type string;
    }

    leaf interface-status {
        type interface-status-def;
    }

    leaf interface-down-reason {
        type interface-down-reason-def;
    }
    leaf interface-net-type {
        type interface-net-type-def;
    }

    leaf interface-role {
        type interface-role-def;
    }
}

container interface-te-info {
    leaf admin_group {
        type uint32;
    }
    leaf max_bandwidth {
        type uint32;
    }
    leaf max_rsv_bandwidth {
        type uint32;
    }
    leaf unrsv_bandwidth {
```

Wang, et al.

Expires March 30, 2015

[Page 24]

```
        type uint32;
    }
}
```

```
container interface-auth{
    uses auth-info;
}
}
```

```
grouping ospf-nbr-common {
    description
        "the area structure of ospf nbr.";
    leaf router-id {
        type inet:ip-address;
    }
}
```

```
leaf interface-index {
    description "Tbd.";
    type uint64;
}
```

```
leaf interface-name {
    description "Tbd.";
    type string;
}
```

```
leaf nbr-status {
    type nbr-status-def;
}
leaf nbr-previous-status {
    type nbr-status-def;
}
leaf nbr-down-reason {
    type nbr-down-reason-def;
}
}
```

```
grouping ospf-v2-lsa-header-common {
    description
        "the ospf v2 lsa header ";
    leaf lsa-age {
        type uint32;
    }
    leaf lsa-options {
        type uint8;
    }
    leaf lsa-v2-type {
        mandatory "true";
        type enumeration {
```

Wang, et al.

Expires March 30, 2015

[Page 25]

```
enum router-lsa {
    value "1";
}
enum network-lsa {
    value "2";
}
enum summary-abr-lsa {
    value "3";
}
enum summary-asbr-lsa {
    value "4";
}
enum ase-lsa {
    value "5";
}
enum nssa-lsa {
    value "7";
}
enum te-lsa {
    description "export-extcommunity and import-extcommunity:";
    value "10";
}
leaf link-state-id {
    type inet:ipv4-address;
    mandatory true;
}
leaf advertiser-id {
    type inet:ip-prefix;
    mandatory true;
}
leaf seq-no {
    type uint32;
}
leaf chksum {
    type uint32;
}
leaf lsa-length {
    type uint32;
}
}

grouping ospf-v3-lsa-header-common {
    description
        "the ospf v3 lsa header ";
    leaf lsa-age {
```

Wang, et al.

Expires March 30, 2015

[Page 26]

```
    type uint32;
}

leaf lsa-v3-type {
    mandatory "true";
    type enumeration {
        enum router-lsa {
            value "2001";
        }
        enum network-lsa {
            value "2002";
        }
        enum inter-area-prefix-lsa {
            value "2003";
        }
        enum inter-area-router-lsa {
            value "2004";
        }
        enum as-external-lsas {
            value "4005";
        }
        enum nssa-lsa {
            value "2007";
        }
        enum link-lsa {
            value "0008";
        }
        enum intra-area-prefix-lsa {
            value "2009";
        }
        enum te-lsa {
            value "10";
            description "Te:";
        }
    }
}

leaf link-state-id {
    description "lsa type/scope unique identifier.";
    type uint32;
}
leaf advertiser-id {
    type inet:ip-prefix;
    mandatory true;
}
leaf seq-no {
    type uint32;
}
```

Wang, et al.

Expires March 30, 2015

[Page 27]

```
leaf chksum {
    type uint32;
}
leaf lsa-length {
    type uint32;
}
}
grouping ospf-v2-router-lsa {
    container ospf-v2-router-lsa {
        leaf bit-flag {
            description "bit V:When set, the router is
an endpoint of one or more fully
adjacent virtual links having the
described area as Transit area
(V is for virtual link endpoint).
bit E:When set, the router is an AS boundary
router (E is for external).
bit B:When set, the router is an area
border router (B is for border).";
            type uint16;
            mandatory true;
        }
        leaf link-num {
            description "The number of router links
described in this LSA. This must be
the total collection of router links
(i.e., interfaces) to the area.";
            type uint16;
            mandatory true;
        }
        list link-list{
            key "link-id link-data";
            leaf link-id {
                description "Identifies the object
that this router link connects to. Value
depends on the link's Type. When
connecting to an object that also
originates an LSA (i.e., another router
or a transit network) the Link ID is equal
to the neighboring LSA's Link
State ID. This provides the key
for looking up the neighboring
LSA in the link state database
during the routing table calculation.";
                type inet:ipv4-address;
                mandatory true;
            }
        }
    }
}
```

Wang, et al.

Expires March 30, 2015

[Page 28]

```
leaf link-data{
    type inet:ipv4-address;
}

leaf link-type {
    type enumeration {
        enum "p2p";
        enum "transit";
        enum "stub";
        enum "virtual";
    }
    mandatory true;
}
leaf mt-num {
    type uint16;
    mandatory true;
}
leaf metric {
    type uint16;
    mandatory true;
}
list mt-metric{
    key "mt-id";
    leaf mt-id {
        type uint16;
    }
    leaf metric {
        type uint16;
    }
}
}

grouping ospf-v2-network-lsa {
    container ospf-v2-network-lsa {
        leaf network-mask {
            description "The ip address mask for the
network. for example, a class a
network would have the mask 0xff000000.";
            type inet:ipv4-prefix;
            mandatory true;
        }
        list attached-router{
            description "The router ids of each of the
routers attached to the network.
actually, only those routers that are fully
adjacent to the designated router are listed.
        }
    }
}
```

Wang, et al.

Expires March 30, 2015

[Page 29]

```
    the designated router includes itself in this list. ";
key "router-id";
leaf router-id {
    type inet:ipv4-address;
}
}
}

grouping ospf-v2-summary-lsa {
container ospf-v2-summary-lsa {
leaf network-mask {
description "for type 3 summary-lsas, this
indicates the destination network's ip address
mask. for example, when advertising the
location of a class a network the value 0xff000000 would be
used. this field is not meaningful and must be
zero for type 4 summary-lsas.";
type inet:ipv4-prefix;
mandatory true;
}

list mt-metric{
key "mt-id";
leaf mt-id {
type uint16;
}
leaf metric {
type uint16;
}
}
}

grouping ospf-v2-as-external-lsa {
container ospf-v2-as-external-lsa {
leaf network-mask {
description "The ip address mask for the
advertised destination. for example,
when advertising a class a network the
mask 0xff000000 would be used.";
type inet:ipv4-prefix;
mandatory true;
}

list mt-metric{
key "mt-id";
leaf e-bit {
```

Wang, et al.

Expires March 30, 2015

[Page 30]

```
description "The type of external metric.  
if bit e is set, the metric specified is a type  
2 external metric. this means the metric is  
considered larger than any link state path.  
if bit e is zero, the specified metric is a  
type 1 external metric. this means  
that it is expressed in the same units as  
the link state metric  
(i.e., the same units as interface cost)..";  
type uint8;  
}  
leaf mt-id {  
    type uint8;  
}  
leaf metric {  
    type uint16;  
}  
leaf forwarding-address {  
    description "data traffic for the advertised  
destination will be forwarded to this address.  
if the forwarding address is set to 0.0.0.0,  
data traffic will be forwarded instead to the  
lsa's originator (i.e., the responsible as  
boundary router).";  
    type inet:ipv4-address;  
}  
leaf external-route-tag {  
    description "a 32-bit field attached to each external  
route. this is not used by the ospf protocol itself.  
it may be used to communicate information between as  
boundary routers; the precise nature of  
such information is outside the scope of  
this specification.";  
    type uint32;  
}  
}  
}  
}  
  
grouping ospf-v2-nssa-external-lsa {  
    container ospf-v2-nssa-external-lsa {  
        leaf network-mask {  
            description "The ip address mask for the  
advertised destination. for  
example, when advertising a class a  
network the mask 0xff000000  
would be used.";  
            type inet:ipv4-prefix;
```

Wang, et al.

Expires March 30, 2015

[Page 31]

```
    mandatory true;
}

list mt-metric{
    key "mt-id";
    leaf e-bit {
        description "The type of external metric.
                      if bit e is set, the metric specified is a
                      type 2 external metric. this means the metric is
                      considered larger than any link state path.
                      If bit e is zero, the specified metric is a
                      type 1 external metric. This means
                      that it is expressed in the same units as
                      the link state metric
                      (i.e., the same units as interface cost)..";
        type uint8;
    }
    leaf mt-id {
        type uint8;
    }
    leaf metric {
        type uint32;
    }
    leaf forwarding-address {
        description "data traffic for the advertised
                     destination will be forwarded to
                     this address. if the forwarding address is
                     set to 0.0.0.0, data traffic will be forwarded
                     instead to the lsa's originator (i.e.,
                     the responsible as boundary router).";
        type inet:ipv4-address;
    }
    leaf external-route-tag {
        description "a 32-bit field attached to each
                     external route. this is not used by the ospf
                     protocol itself. it may be used to communicate
                     information between as boundary routers;
                     the precise nature of such information is outside
                     the scope of this specification.";
        type uint32;
    }
}
}

grouping ospf-v2-te-router-lsa {
    container ospf-v2-te-router-lsa {
        description "The router address tlv specifies a
```

Wang, et al.

Expires March 30, 2015

[Page 32]

```
stable ip address of the advertising router that
is always reachable if there is any
connectivity to it; this is typically implemented
as a loopback address. the key attribute is that
the address does not become unusable if an interface
is down. in other protocols, this is known
as the router id, but for obvious reasons this
nomenclature is avoided here. if a router advertises
bgp routes with the bgp next hop attribute set to the
bgp router id, then the router address
should be the same as the bgp router id. ";
leaf type {
    description "The router address tlv is type 1,
        has a length of 4.";
    type uint8;
}
leaf length {
    description "The router address tlv has a length of 4.";
    type uint32;
}
leaf router-id {
    description "The value of router address tlv is the
        four octet ip address..";
    type inet:ipv4-address;
}
}

grouping ospf-te-link-lsa {
container ospf-te-link-lsa {
    description "The link tlv describes a single link.
        It is constructed of a set of sub-tlvs. There are no
        ordering requirements for the sub-tlvs.";
    leaf type {
        description "The link tlv is type 2.";
        type uint8;
    }
    leaf length {
        description "The length of the link tlv is variable.";
        type uint32;
    }
    container link-type-stlv {
        description "The link type sub-tlv defines the
            type of the link.";
        leaf type {
            description "The link type sub-tlv is tlv type 1.";
            type uint8;
        }
    }
}
```

Wang, et al.

Expires March 30, 2015

[Page 33]

```
leaf length {
    description "The link type sub-tlv is one octet in length.";
    type uint32;
}
leaf link-type {
    description ".      1 - point-to-point     2 - multi-access.";
    type enumeration {
        enum "point-to-point";
        enum "multi-access";
    }
}
}

container link-id-tlv-stlv {
    description "The link id sub-tlv identifies the
other end of the link. The link id is identical to the
contents of the link id field in the
router lsa for these link types.";
leaf type {
    description "The link type sub-tlv is tlv type 2.";
    type uint8;
}
leaf length {
    description "The link type sub-tlv is four octet in length.";
    type uint32;
}
leaf link-id {
    description ".";
    type inet:ipv4-address;
}
}

container local-address-stlv {
    description "The local interface ip address sub-tlv
specifies the ip address(es) of the interface corresponding
to this link. If there are multiple local addresses on
the link, they are all listed in this sub-tlv.";
leaf type {
    description "The local interface ip address sub-tlv is tlv type 3.";
    type uint8;
}
leaf length {
    description "The local interface ip address sub-tlv is 4n
octets in length, where n is the number of neighbor addresses.";
    type uint32;
}
list local-address-list {
    key "remote-address";
```

Wang, et al.

Expires March 30, 2015

[Page 34]

```
leaf remote-address {
    type inet:ipv4-address;
}
}

container remote-address-stlv {
    description "The remote interface ip address sub-tlv
        specifies the ip address(es) of the neighbor's interface
        corresponding to this link. This and the
        local address are used to discern multiple parallel
        links between systems. If the link type of the link
        is multi-access, the remote interface ip address is
        set to 0.0.0.0; alternatively, an
        implementation may choose not to send this sub-tlv.";
    leaf type {
        description "The remote interface ip address sub-tlv is tlv type
4.";
        type uint8;
    }
    leaf length {
        description "The remote interface ip address sub-tlv is 4n
        octets in length, where n is the number of neighbor addresses.";
        type uint32;
    }
    list remote-address-list {
        key "remote-address";
        leaf remote-address {
            type inet:ipv4-address;
        }
    }
}

container te-metric-stlv {
    description "The traffic engineering metric sub-tlv
        specifies the link metric for traffic engineering purposes.
        This metric may be different than the
        standard ospf link metric. Typically, this metric
        is assigned by a network administrator..";
    leaf type {
        description "The traffic engineering metric
        sub-tlv is tlv type 5.";
        type uint8;
    }
    leaf length {
        description "The traffic engineering metric sub-tlv is
        four octets in length..";
        type uint32;
    }
}
```

}

Wang, et al.

Expires March 30, 2015

[Page 35]

```
leaf value {
    type uint32;
}
}

container maximum-bandwidth-stlv {
    description "The maximum bandwidth sub-tlv specifies
        the maximum bandwidth that can be used on this link,
        in this direction (from the system originating the lsa
        to its neighbor), in ieee floating point format.
        This is the true link capacity. The units are bytes
        per second. The maximum bandwidth sub-tlv is tlv type 6,
        and is four octets in length.";
    leaf type {
        description "The maximum bandwidth sub-tlv is tlv type 6.";
        type uint8;
    }
    leaf length {
        description "The maximum bandwidth sub-tlv is
            four octets in length.";
        type uint32;
    }
    leaf value {
        type uint32;
    }
}

container maximum-reservable-bandwidth-stlv {
    description "The maximum reservable bandwidth
        sub-tlv specifies the maximum bandwidth that may
        be reserved on this link, in this direction, in
        ieee floating point format. note that this may be
        greater than the maximum bandwidth (in which case
        the link may be oversubscribed).
        This should be user-configurable; The default value should
        be the maximum bandwidth. the units are bytes per second.";
    leaf type {
        description "The maximum reservable bandwidth sub-tlv
            is tlv type 7, .";
        type uint8;
    }
    leaf length {
        description "The maximum reservable bandwidth sub-tlv is
            four octets in length.";
        type uint32;
    }
    leaf value {
        type uint32;
    }
}
```

Wang, et al.

Expires March 30, 2015

[Page 36]

```
        }
```

```
}
```

```
container unreserved-bandwidth-stlv {
```

```
    description "The unreserved bandwidth sub-tlv specifies
```

```
        the amount of bandwidth not yet reserved at each of the
```

```
        eight priority levels in IEEE floating point format.
```

```
        The values correspond to the bandwidth that
```

```
        can be reserved with a setup priority of 0 through 7,
```

```
        arranged in increasing order with priority 0 occurring
```

```
        at the start of the sub-tlv, and priority 7 at the end
```

```
        of the sub-tlv. The initial values (before any bandwidth
```

```
        is reserved) are all set to the maximum reservable
```

```
        bandwidth. each value will be less than or
```

```
        equal to the maximum reservable bandwidth.
```

```
        The units are bytes per second.";
```

```
leaf type {
```

```
    description "The unreserved bandwidth sub-tlv is
```

```
        tlv type 8.";
```

```
    type uint8;
```

```
}
```

```
leaf length {
```

```
    description "The unreserved bandwidth sub-tlv is
```

```
        32 octets in length.";
```

```
    type uint32;
```

```
}
```

```
leaf value {
```

```
    type uint32;
```

```
}
```

```
}
```

```
container administrative-group-stlv {
```

```
    description "The administrative group sub-tlv contains
```

```
        a 4-octet bit mask assigned by the network administrator.
```

```
        Each set bit corresponds to one administrative group assigned
```

```
        to the interface. a link may belong to multiple groups.
```

```
        by convention, the least significant bit is referred to
```

```
        as 'group 0', and the most significant bit is referred
```

```
        to as 'group 31'. The administrative group is also
```

```
        called resource class/color [5]..";
```

```
leaf type {
```

```
    description "The administrative group sub-tlv is tlv type 9.";
```

```
    type uint8;
```

```
}
```

```
leaf length {
```

```
    description "The administrative group sub-tlv is
```

```
        four octet in length.";
```

Wang, et al.

Expires March 30, 2015

[Page 37]

```
        type uint32;
    }
    leaf value {
        type uint32;
    }
}
}

grouping ospf-v3-router-lsa {
    container ospf-v3-router-lsa {
        description
            "router-lsas have ls type equal to 0x2001.
             Each router in an area originates one or more
             router-lsas.  the complete collection of
             router-lsas originated by the router describe
             the state and cost of the router's interfaces
             to the area.";
        leaf option {
            description " 0  |nt|x|v|e|b|  options .";
            type uint16;
            mandatory true;
        }
        list link-list{
            key "link-type interface-id neighbor-interface-id";
            leaf link-type {
                type enumeration {
                    enum "p2p";
                    enum "transit";
                    enum "reserved";
                    enum "virtual";
                }
                mandatory true;
            }
            leaf metric {
                description "The cost of using this router
                             interface for outbound traffic.";
                type uint32;
            }
            leaf interface-id {
                description "The interface id assigned to the
                             interface being described.";
                type uint32;
            }
        }
        leaf neighbor-interface-id{
            description "The interface id the neighbor router
                         has associated with the link, as advertised in the
```

Wang, et al.

Expires March 30, 2015

[Page 38]

```
neighbor's hello packets. for transit (type
2) links, the link's designated router is the
neighbor described. For other link types, the
sole adjacent neighbor is described.";
type uint32;
}
leaf neighbor-router-id{
    description "The router id the of the neighbor router.
    For transit (type 2) links, the link's designated
    router is the neighbor described. For other link types,
    the sole adjacent neighbor is described.";
    type inet:ipv4-address;
}
}
}
}

grouping ospf-v3-network-lsa {
    container ospf-v3-network-lsa {
        leaf option {
            description " 0 | options .";
            type uint32;
            mandatory true;
        }
        list link-list{
            key "attached-router-id";
            leaf attached-router-id{
                description "The router ids of each of the routers
                attached to the link. Actually, only those routers
                that are fully adjacent to the designated router
                are listed. the designated router includes
                itself in this list.";
                type inet:ipv4-address;
            }
        }
    }
}

grouping ospf-v3-inter-area-prefix-lsa {
    container ospf-v3-inter-area-prefix-lsa {
        description " These lsas are the ipv6 equivalent of ospf
        for ipv4's type 3 summary-lsas (see section 12.4.3 of
        [ospfv2]). originated by area border routers, they
        describe routes to ipv6 address prefixes that belong
        to other areas. A separate inter-area-prefix-lsa is originated
        for each ipv6 address prefix. ";
        leaf metric {
            description "The cost of this rout.";
```

Wang, et al.

Expires March 30, 2015

[Page 39]

```
    type uint32;
}
leaf prefix-length {
    type uint8;
    mandatory true;
}
leaf prefix-options {
    type uint8;
    mandatory true;
}
list address-prefix-list{
    key "address-prefix";
    leaf address-prefix{
        type inet:ipv6-prefix;
    }
}
}
}

grouping ospf-v3-inter-area-router-lsa {
container ospf-v3-inter-area-router-lsa {
    description " inter-area-router-lsas have ls
        type equal to 0x2004.  these lsas are the ipv6
        equivalent of ospf for ipv4's type 4 summary-lsas (see
        section 12.4.3 of [ospfv2]).  originated by
        area border routers, they describe routes
        to as boundary routers in other areas .";
    leaf options {
        type uint8;
        mandatory true;
    }
    leaf metric {
        description "The cost of this rout.";
        type uint32;
    }
    leaf destination-router-id {
        description "The router id of the router being
        described by the lsa.";
        type inet:ipv4-address;
    }
}
}

grouping ospf-v3-as-external-lsa {
container ospf-v3-as-external-lsa {
    description " As-external-lsas have ls type equal to 0x4005.
        These lsas are originated by as boundary routers and describe
        destinations external to the as.  Each lsa describes a route
```

Wang, et al.

Expires March 30, 2015

[Page 40]

```
    to a single ipv6 address prefix. .";
leaf options {
    type uint16;
    mandatory true;
}
leaf metric {
    description "The cost of this rout.";
    type uint16;
    mandatory true;
}
leaf prefix-length {
    type uint8;
    mandatory true;
}
leaf prefix-options {
    type uint8;
    mandatory true;
}
leaf referenced-ls-type {
    type uint8;
    mandatory true;
}
list address-prefix-list{
    key "address-prefix";
    leaf address-prefix{
        type inet:ipv6-prefix;
    }
}
leaf forwarding-address {
    type inet:ipv6-prefix;
    mandatory false;
}
leaf external-route-tag {
    type uint32;
    mandatory false;
}
leaf referenced-link-state-id {
    type uint32;
    mandatory false;
}
grouping ospf-v3-nssa-lsa {
    container ospf-v3-nssa-lsa {
        description "Nssa-lsas have ls type equal to 0x4005.
These lsas are originated by as boundary routers and
describe destinations external to the as. Each lsa
```

Wang, et al.

Expires March 30, 2015

[Page 41]

```
    describes a route to a single ipv6 address prefix. .";
leaf options {
    type uint16;
    mandatory true;
}
leaf metric {
    type uint16;
    mandatory true;
}
leaf prefixlength {
    type uint8;
    mandatory true;
}
leaf prefixoptions {
    type uint8;
    mandatory true;
}
leaf referenced-ls-type {
    type uint8;
    mandatory true;
}
list address-prefix-list{
    key "address-prefix";
    leaf address-prefix{
        type inet:ipv6-prefix;
    }
}
leaf forwarding-address {
    type inet:ipv6-prefix;
    mandatory false;
}
leaf external-route-tag {
    type uint32;
    mandatory false;
}
leaf referenced-link-state-id {
    type uint32;
    mandatory false;
}
}
}
}

grouping ospf-v3-link-lsa {
container ospf-v3-link-lsa {
description " Link-lsas have ls type equal to 0x0008.
A router originates a separate link-lsa for each
attached physical link. These lsas have
link-local flooding scope; they are never flooded
```

Wang, et al.

Expires March 30, 2015

[Page 42]

```
beyond the associated link.";

leaf priority {
    description " The router priority of the interface
                  attaching the originating router to the link .";
    type uint8;
    mandatory true;
}
leaf options {
    description "The set of options bits that the router
                  would like set in the network-lsa that will be
                  originated by the designated router on
                  broadcast or nbma links .";
    type uint32;
    mandatory true;
}

leaf link-local-interface-address {
    description "The originating router's link-local
                  interface address on the link.";
    type inet:ipv6-address;
}

leaf prefixes {
    description "The number of ipv6 address prefixes contained
                  in the lsa.";
    type uint32;
    mandatory true;
}

list address-prefix-list{
    key "address-prefix-index";
    leaf address-prefix-index{
        type uint32;
        mandatory true;
    }
    leaf prefix-length{
        type uint8;
        mandatory true;
    }
    leaf prefix-options{
        type uint8;
    }
    list address-prefix{
        key "address";
        leaf address{
            type inet:ipv6-prefix;
        }
    }
}
```

Wang, et al.

Expires March 30, 2015

[Page 43]

```
        }
    }

}

grouping ospf-v3-intra-area-prefix-lsa {
    container ospf-v3-intra-area-prefix-lsa {
        description " Intra-area-prefix-lsas have ls
                      type equal to 0x2009.  a router uses
                      intra-area-prefix-lsas to advertise one
                      or more ipv6 address prefixes that are associated
                      with a local router address,
                      an attached stub network segment, or an attached
                      transit network segment.  In ipv4,
                      the first two were accomplished via the router's
                      router-lsa and the last via a network-lsa.
                      In ospf for ipv6, all addressing information
                      that was advertised in router-lsas and network-lsas
                      has been removed and is now advertised in
                      intra-area-prefix-lsas.";

leaf prefixes {
    description "The number of ipv6 address prefixes
                 contained in the lsa.";
    type uint32;
    mandatory true;
}
leaf referenced-ls-type {
    description " Referenced ls type, referenced link state id,
                  and referenced advertising router identifies the router-lsa
                  or network-lsa with which the ipv6
                  address prefixes should be associated.  if referenced ls
                  type is 0x2001, the prefixes are associated with a
                  router-lsa, referenced link state id should be 0,
                  and referenced advertising router
                  should be the originating router's router id.
                  If referenced ls type is 0x2002, the prefixes
                  are associated with a network-lsa, referenced link
                  state id should be the interface id of the link's
                  designated router, and referenced advertising router
                  should be the designated router's router id.";
    type uint16;
    mandatory true;
}
leaf referenced-link-state-id {
    type uint32;
    mandatory true;
```

Wang, et al.

Expires March 30, 2015

[Page 44]

```
}

leaf referenced-advertising-router {
    type inet:ipv4-address;
    mandatory true;
}

list address-prefix-list{
    key "address-prefix-index";
    leaf address-prefix-index{
        type uint32;
    }
    leaf prefix-length{
        type uint8;
        mandatory true;
    }
    leaf prefix-options{
        type uint8;
        mandatory true;
    }
    list address-prefix{
        key "address";
        leaf address{
            type inet:ipv6-prefix;
        }
    }
}
}

grouping ospfv3-te-router-ipv6-address {
    container ospfv3-te-router-ipv6-address {
        description "The router ipv6 address tlv has
                     type 3, length 16, and a value
                     containing a 16-octet local ipv6 address.
                     A link-local address must not be specified for this tlv.
                     It must appear in exactly one traffic
                     engineering lsa originated by an ospfv3 router supporting
                     the te extensions.  the router ipv6 address tlv
                     is a top-level tlv as defined in traffic engineering
                     extensions to ospf ";
        leaf type {
            description "The router address tlv is type 3, has a
                         length of 16.";
            type uint8;
            mandatory true;
        }
        leaf length {
            description "The router address tlv has a length of 4.";
            type uint16;
        }
    }
}
```

Wang, et al.

Expires March 30, 2015

[Page 45]

```
        mandatory true;
    }
    leaf router-id {
        description "The value of router address tlv is the
                     16 octet ip address..";
        type inet:ipv6-address;
        mandatory true;
    }
}

container ospf-v4ur-instance {
    uses ospf-instance-common;
    container mt-list {
        list multi-topo {
            key "mt-id";
            max-elements "unbounded";
            min-elements "1";
            uses ospf-mt-common;
            container mt-rib {
                list route {
                    key "prefix";
                    max-elements "unbounded";
                    min-elements "0";
                    leaf prefix {
                        type inet:ipv4-prefix;
                        mandatory true;
                    }
                    container nexthop-list {
                        list nexthop {
                            key "ospf-nexthop";
                            max-elements "unbounded";
                            min-elements "0";
                            leaf ospf-nexthop {
                                type inet:ipv4-prefix;
                            }
                        }
                    }
                    leaf back-nexthop {
                        type inet:ipv4-prefix;
                    }
                    uses ospf-route-common;
                }
            }
        }
    }
}

container area-list {
    list area {
```

Wang, et al.

Expires March 30, 2015

[Page 46]

```
key "area-id";
max-elements "unbounded";
min-elements "1";
uses ospf-area-common;
container lsdb {
    list lsa {
        key "lsa-v2-type link-state-id advertiser-id";
        max-elements "unbounded";
        min-elements "0";
        uses ospf-v2-lsa-header-common;
        choice ls-type {
            case ospf-v2-router-lsa {
                uses ospf-v2-router-lsa;
            }

            case ospf-v2-network-lsa {
                uses ospf-v2-network-lsa ;
            }

            case ospf-v2-summary-lsa {
                uses ospf-v2-summary-lsa ;
            }

            case ospf-v2-as-external-lsa {
                uses ospf-v2-as-external-lsa ;
            }

            case ospf-v2-nssa-external-lsa {
                uses ospf-v2-nssa-external-lsa ;
            }

            case ospf-v2-te-router-lsa {
                uses ospf-v2-te-router-lsa ;
            }

            case ospf-te-link-lsa {
                uses ospf-te-link-lsa ;
            }
        }
    }
}

container interface-list {
    list interface {
        key "interface-index";
        max-elements "unbounded";
        min-elements "1";
        uses ospf-interface-common;
```



```
leaf ip-address {
    type inet:ipv4-address;
}
container nbr-list {
    list nbr {
        key "router-id";
        uses ospf-nbr-common;
        leaf nbr-address {
            type inet:ipv4-address;
        }
        leaf ip-address {
            type inet:ipv4-address;
        }
    }
}
list network-list {
    description " configure the ospf .";
    key "network-prefix mask";
    leaf network-prefix {
        type inet:ipv4-prefix;
        mandatory true;
    }
    leaf mask {
        type inet:ipv4-prefix;
        mandatory true;
    }
}
list route-info-list {
    description " collision detection .";
    key "route-info-index";
    leaf route-info-index {
        type uint32;
        mandatory true;
    }
}
leaf router-id {
    type inet:ipv4-address;
    mandatory true;
}
list ip-address-list {
    description " collision detect .";
    key "ip-address";
    leaf ip-address {
        type inet:ipv4-address;
        mandatory true;
    }
}
```

Wang, et al.

Expires March 30, 2015

[Page 48]

```
        }
    }
}
}
}
}

container ospf-v6ur-instance {
    uses ospf-instance-common;
    container mt-list {
        list multi-topo {
            key "mt-id";
            max-elements "unbounded";
            min-elements "1";
            uses ospf-mt-common;
            container mt-rib {
                list route {
                    key "prefix";
                    max-elements "unbounded";
                    min-elements "0";
                    leaf prefix {
                        type inet:ipv6-prefix;
                        mandatory true;
                    }
                    container nexthop-list {
                        list nexthop {
                            key "ospf-nexthop";
                            max-elements "unbounded";
                            min-elements "0";
                            leaf ospf-nexthop {
                                type inet:ipv6-prefix;
                            }
                        }
                    }
                    leaf back-nexthop {
                        type inet:ipv6-prefix;
                    }
                    uses ospf-route-common;
                }
            }
        }
    }
}

container area-list {
    list area {
        key "area-id";
        max-elements "unbounded";
```

Wang, et al.

Expires March 30, 2015

[Page 49]

```
min-elements "1";
uses ospf-area-common;
container lsdb {
    list lsa {
        key "lsa-v3-type link-state-id advertiser-id";
        max-elements "unbounded";
        min-elements "0";
        uses ospf-v3-lsa-header-common;
        choice ls-type {
            case ospf-v3-router-lsa {
                uses ospf-v3-router-lsa ;
            }

            case ospf-v3-network-lsa {
                uses ospf-v3-network-lsa ;
            }

            case ospf-v3-inter-area-prefix-lsa {
                uses ospf-v3-inter-area-prefix-lsa ;
            }

            case ospf-v3-inter-area-router-lsa {
                uses ospf-v3-inter-area-router-lsa ;
            }

            case ospf-v3-as-external-lsa {
                uses ospf-v3-as-external-lsa ;
            }

            case ospf-v3-nssa-lsa {
                uses ospf-v3-nssa-lsa ;
            }

            case ospf-v3-link-lsa {
                uses ospf-v3-link-lsa ;
            }

            case ospf-v3-intra-area-prefix-lsa {
                uses ospf-v3-intra-area-prefix-lsa ;
            }

            case ospf-v3-te-router-ipv6-address-lsa {
                uses ospf-v3-te-router-ipv6-address ;
            }

            case te-link-lsa {
                uses ospf-te-link-lsa ;
            }
        }
    }
}
```

Wang, et al.

Expires March 30, 2015

[Page 50]

```
        }
    }

    container interface-list {
        list interface {
            key "interface-index";
            max-elements "unbounded";
            min-elements "1";
            uses ospf-interface-common;
            leaf ip-address {
                type inet:ipv6-address;
                mandatory true;
            }
            container nbr-list {
                list nbr {
                    key "router-id";
                    uses ospf-nbr-common;
                    leaf nbr-address {
                        type inet:ipv6-address;
                    }
                    leaf ip-address {
                        type inet:ipv6-address;
                        mandatory true;
                    }
                }
            }
        }
    }

    list network-list {
        description " Configure the ospf .";
        key "network-index";
        leaf network-index {
            type uint32;
            mandatory true;
        }
        leaf network-prefix {
            type inet:ipv4-prefix;
            mandatory true;
        }
        leaf mask {
            type inet:ipv4-prefix;
            mandatory true;
        }
    }
    list route-info-list {
        description " Collision detect .";
        key "route-info-index";
```

Wang, et al.

Expires March 30, 2015

[Page 51]

```
leaf route-info-index {  
    type uint32;  
    mandatory true;  
}  
leaf router-id {  
    type inet:ipv4-address;  
    mandatory true;  
}  
list ip-address-list {  
    description " Collision detect .";  
    key "ip-address";  
    leaf ip-address {  
        type inet:ipv4-address;  
        mandatory true;  
    }  
}  
}  
}  
}  
}  
}  
}  
}  
}/*ospf model end */
```

6. IANA Considerations

This draft registers a URI in the IETF XML registry [RFC3688]. Following the format in [RFC3688](#), the following registration is requested:

URI: urn:huawei:params:xml:ns:yang:rt:i2rs:ospf-protocol";

Registrant Contact: The I2RS WG of IETF

XML: N/A, the request URI is in the XML namespace.

This document registres a Yang module in the Yang Module Names registry [[RFC6020](#)] with the following information:

name: IETF-i2rs-ospf-protocol

namespace: urn:ietf:params:xml:ns:yang:rt:i2rs:ospf

prefix:ospf-protocol

reference: RFC XXXX

Wang, et al.

Expires March 30, 2015

[Page 52]

7. Security Considerations

This document introduces no new security threat over the security threats posed by security requirements as stated in [[I-D.ietf-i2rs-architecture](#)]. (The authors would like feedback on the security issues.)

8. Acknowledgements

TBD

9. References

9.1. Informative References

- [RFC2119] Bradner, S., "Key words for use in RFCs to Indicate Requirement Levels", [BCP 14](#), [RFC 2119](#), March 1997.
- [RFC2328] Moy, J., "OSPF Version 2", STD 54, [RFC 2328](#), April 1998.
- [RFC5340] Coltun, R., Ferguson, D., Moy, J., and A. Lindem, "OSPF for IPv6", [RFC 5340](#), July 2008.
- [RFC5511] Farrel, A., "Routing Backus-Naur Form (RBNF): A Syntax Used to Form Encoding Rules in Various Routing Protocol Specifications", [RFC 5511](#), April 2009.

9.2. Normative References

- [I-D.hares-i2rs-info-model-policy]
Hares, S. and W. Wu, "An Information Model for Basic Network Policy", [draft-hares-i2rs-info-model-policy-03](#) (work in progress), July 2014.
- [I-D.hares-i2rs-usecase-reqs-summary]
Hares, S., "Summary of I2RS Use Case Requirements", [draft-hares-i2rs-usecase-reqs-summary-00](#) (work in progress), July 2014.
- [I-D.ietf-i2rs-architecture]
Atlas, A., Halpern, J., Hares, S., Ward, D., and T. Nadeau, "An Architecture for the Interface to the Routing System", [draft-ietf-i2rs-architecture-05](#) (work in progress), July 2014.

[I-D.ietf-i2rs-rib-info-model]

Bahadur, N., Folkes, R., Kini, S., and J. Medved, "Routing Information Base Info Model", [draft-ietf-i2rs-rib-info-model-03](#) (work in progress), May 2014.

[RFC3688] Mealling, M., "The IETF XML Registry", [BCP 81](#), [RFC 3688](#), January 2004.

[RFC6020] Bjorklund, M., "YANG - A Data Modeling Language for the Network Configuration Protocol (NETCONF)", [RFC 6020](#), October 2010.

Authors' Addresses

Lixing Wang
Huawei
Huawei Bld., No.156 Beiqing Rd.
Beijing 10095
China

Email: wanglixing@huawei.com

Susan Hares
Huawei
7453 Hickory Hill
Saline, MI 48176
USA

Email: shares@ndzh.com

Nan Wu
Huawei
Huawei Bld., No.156 Beiqing Rd.
Beijing 100095
China

Email: eric.wu@huawei.com

