

DIME  
Internet-Draft  
Intended status: Informational  
Expires: April 24, 2014

H. Tschofenig, Ed.  
Nokia Solutions and Networks  
J. Korhonen  
Broadcom  
G. Zorn  
Network Zen  
K. Pillay  
Oracle Communications  
October 21, 2013

Diameter AVP Level Security: Scenarios and Requirements  
draft-ietf-dime-e2e-sec-req-01.txt

#### Abstract

This specification discusses requirements for providing Diameter security at the level of individual Attribute Value Pairs.

#### Status of This Memo

This Internet-Draft is submitted in full conformance with the provisions of BCP 78 and BCP 79.

Internet-Drafts are working documents of the Internet Engineering Task Force (IETF). Note that other groups may also distribute working documents as Internet-Drafts. The list of current Internet-Drafts is at <http://datatracker.ietf.org/drafts/current/>.

Internet-Drafts are draft documents valid for a maximum of six months and may be updated, replaced, or obsoleted by other documents at any time. It is inappropriate to use Internet-Drafts as reference material or to cite them other than as "work in progress."

This Internet-Draft will expire on April 24, 2014.

#### Copyright Notice

Copyright (c) 2013 IETF Trust and the persons identified as the document authors. All rights reserved.

This document is subject to BCP 78 and the IETF Trust's Legal Provisions Relating to IETF Documents (<http://trustee.ietf.org/license-info>) in effect on the date of publication of this document. Please review these documents carefully, as they describe your rights and restrictions with respect to this document. Code Components extracted from this document must include Simplified BSD License text as described in Section 4.e of

the Trust Legal Provisions and are provided without warranty as described in the Simplified BSD License.

## Table of Contents

1. Introduction . . . . .	2
2. Terminology . . . . .	3
3. Security Threats . . . . .	3
4. Scenarios for Diameter AVP-Level Protection . . . . .	4
5. Requirements . . . . .	6
6. Open Issues . . . . .	7
7. Security Considerations . . . . .	8
8. IANA Considerations . . . . .	8
9. Acknowledgments . . . . .	8
10. References . . . . .	8
10.1. Normative References . . . . .	8
10.2. Informative References . . . . .	8
Authors' Addresses . . . . .	9

## 1. Introduction

The Diameter Base specification [2] offers security protection between neighboring Diameter peers and mandates that either TLS (for TCP), DTLS (for SCTP), or IPsec is used. These security protocols offer a wide range of security properties, including entity authentication, data-origin authentication, integrity, confidentiality protection and replay protection. They also support a large number of cryptographic algorithms, algorithm negotiation, and different types of credentials.

The need to also offer additional security protection of AVPs between non-neighboring Diameter nodes was recognized very early in the work on Diameter. This led to work on Diameter security using the Cryptographic Message Syntax (CMS) [3]. Due to lack of deployment interest at that time (and the complexity of the developed solution) the specification was, however, never completed.

In the meanwhile Diameter had received a lot of deployment interest from the cellular operator community and because of the sophistication of those deployments the need for protecting Diameter AVPs between non-neighboring nodes re-surfaced. Since early 2000 (when the work on [3] was discontinued) the Internet community had seen advances in cryptographic algorithms (for example, authenticated encryption algorithms) and new security building blocks were developed.

This document collects requirements for developing a solution to protect Diameter AVPs.

2. Terminology


The key words 'MUST', 'MUST NOT', 'REQUIRED', 'SHALL', 'SHALL NOT', 'SHOULD', 'SHOULD NOT', 'RECOMMENDED', 'MAY', and 'OPTIONAL' in this specification are to be interpreted as described in [1].

This document re-uses terminology from the Diameter base specification [2].

In the figures below we use the symbols 'AVP' and '{AVP}k'. AVP refers to an unprotected AVP and {AVP}k refers to an AVP that experiences security protection (using key "k") without further distinguishing between integrity and confidentiality protection.

3. Security Threats

The follow description aims to illustrate various security threats that raise the need for protecting Diameter Attribute Value Pairs (AVPs). Figure 1 illustrates an example Diameter topology where a Diameter clients want to interact with the example.com home domain. To interconnect the two visited networks a AAA interconnection provider, labeled as AAA Broker, is used.

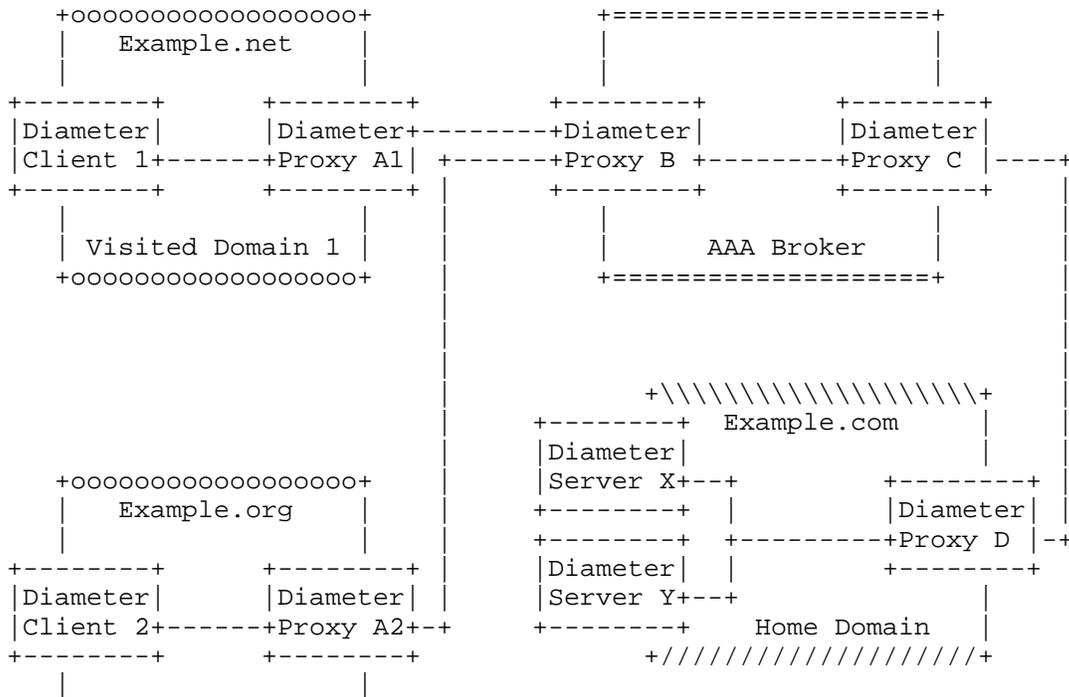

```
| Visited Domain 2 |  
+oooooooooooooooooooo+
```

Figure 1: Example Diameter Deployment.

**Eavesdropping:** Some Diameter applications carry information that is only intended for consumption by end points, either by the Diameter client or by the Diameter server but not by intermediaries. As an example, consider the Diameter EAP application [4] that allows keying material for the protection of air interface between the end device and the network access server to be carried from the Diameter server to the Diameter client (using the EAP-Master-Session-Key AVP). The content of the EAP-Master-Session-Key AVP would benefit from protection against eavesdropping by intermediaries. Other AVPs might also carry sensitive personal data that, when collected by intermediaries, allow for traffic analysis.

In context of the deployment shown in Figure 1 the adversary could, for example, be in the AAA broker network.

**Injection and Manipulation:** The Diameter base specification mandates security protection between neighboring nodes but Diameter agents may be compromised or misconfigured and inject/manipulate AVPs. To detect such actions additional security protection needs to be applied at the Diameter layer.

Nodes that could launch such an attack are any Diameter agents along the end-to-end communication path.

**Impersonation:** Imagine a case where a Diameter message from Example.net contains information claiming to be from Example.org. This would either require strict verification at the edge of the AAA broker network or cryptographic assurance at the Diameter layer to prevent a successful impersonation attack.

Any Diameter realm could launch such an attack aiming for financial benefits or to disrupt service availability.

#### 4. Scenarios for Diameter AVP-Level Protection

This scenario outlines a number of cases for deploying security protection of individual Diameter AVPs.

In the first scenario, shown in Figure 2, end-to-end security protection is provided between the Diameter client and the Diameter server. Diameter AVPs exchanged between these two Diameter nodes are protected.



Figure 2: End-to-End Diameter AVP Security Protection.

In the second scenario, shown in Figure 3, a Diameter proxy acts on behalf of the Diameter client with regard to security protection. It applies security protection to outgoing Diameter AVPs and verifies incoming AVPs.

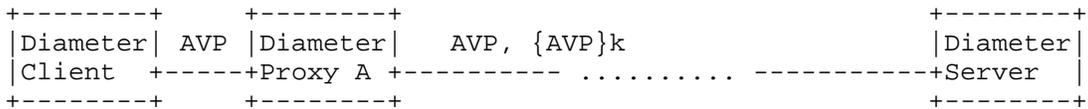


Figure 3: Middle-to-End Diameter AVP Security Protection.

In the third scenario shown in Figure 4 a Diameter proxy acts on behalf of the Diameter server.



Figure 4: End-to-Middle Diameter AVP Security Protection.

The fourth and the final scenario (see Figure 5) is a combination of the end-to-middle and the middle-to-end scenario shown in Figure 4 and in Figure 3. From a deployment point of view this scenario is easier to accomplish for two reasons: First, Diameter clients and Diameter servers remain unmodified. This ensures that no modifications are needed to the installed Diameter infrastructure. Second, key management is also simplified since fewer number of key pairs need to be negotiated and provisioned.

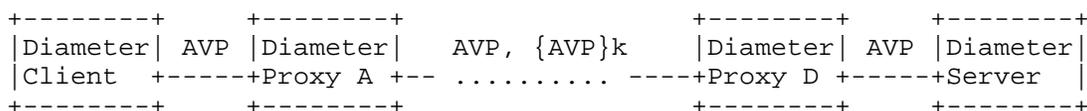


Figure 5: Middle-to-Middle Diameter AVP Security Protection.

Various security threats are mitigated by selectively applying security protection for individual Diameter AVPs. Without protection there is the possibility for password sniffing, confidentiality violation, AVP insertion, deletion or modification. Additionally, applying digital signature offers non-repudiation capabilities; a feature not yet available in today's Diameter deployment. Modification of certain Diameter AVPs may not necessarily be the act of malicious behavior but could also be the result of misconfiguration. An over-aggressively configured firewalled Diameter proxy may also remove certain AVPs. In most cases data origin authentication and integrity protection of AVPs will provide most benefits for existing deployments with minimal overhead and (potentially) operating in a full-backwards compatible manner.

5. Requirements

Requirement #1: Solutions MUST support an extensible set of cryptographic algorithms.

Motivation: Crypto-agility is the ability of a protocol to adapt to evolving cryptographic algorithms and security requirements. This may include the provision of a modular mechanism to allow cryptographic algorithms to be updated without substantial disruption to deployed implementations.

Requirement #2: Solutions MUST support confidentiality, integrity, and data-origin authentication. Solutions for integrity protection MUST work in a backwards-compatible way with existing Diameter applications.

Requirement #3: Solutions MUST support replay protection. Any Diameter node has an access to network time and thus can synchronise their clocks.

Requirement #4: Solutions MUST support the ability to delegate security functionality to another entity

Motivation: As described in Section 4 the ability to let a Diameter proxy to perform security services on behalf of all clients within the same administrative domain is important for

incremental deployability. The same applies to the other communication side where a load balancer terminates security services for the servers it interfaces.

Requirement #5: Solutions MUST be able to selectively apply their cryptographic protection to certain Diameter AVPs.

Motivation: Some Diameter applications assume that certain AVPs are added, removed, or modified by intermediaries. As such, it MUST be possible to apply security protection selectively.

Requirement #6: Solutions MUST recommend a mandatory-to-implement cryptographic algorithm.

Motivation: For interoperability purposes it is beneficial to have a mandatory-to-implement cryptographic algorithm specified (unless profiles for specific usage environments specify otherwise).

Requirement #7: Solutions MUST support symmetric keys and asymmetric keys.

Motivation: Symmetric and asymmetric cryptographic algorithms provide different security services. Asymmetric algorithms, for example, allow non-repudiation services to be offered.

Requirement #8: A solution for dynamic key management MUST be included in the overall solution framework. However, it is assumed that no "new" key management protocol needs to be developed; instead existing ones are re-used, if at all possible. Rekeying could be triggered by (a) management actions and (b) expiring keying material.

Requirement #9: The ability to statically provisioned keys (symmetric as well as asymmetric keys) has to be supported to simplify management for small-scale deployments that typically do not have a back-end network management infrastructure.

## 6. Open Issues

Open Issue #1: Capability/Policy Discovery: This document talks about selectively protecting Diameter AVPs between different Diameter nodes. A Diameter node has to be configured such that it applies security protection to a certain number of AVPs. A number of policy related questions arise: What keying material should be used so that the intended recipient is also able to verify it? What AVPs shall be protected so that the result is not rejected by the recipient? In case of confidentiality protection the Diameter

node encrypting AVPs needs to know ahead of time what other node is intended to decrypt them. Should the list of integrity protected AVP be indicated in the protected payload itself (or is it known based on out-of-band information)? Is this policy / capability information assumed to be established out-of-band (manually) or is there a protocol mechanism to distribute this information?

Open Issue #2: Command-Line Support: Should solutions allow the provisioning of long-term shared symmetric credentials via a command-line interface / text file? This allows easier management for small-scale deployments.

## 7. Security Considerations

This entire document focused on the discussion of new functionality for securing Diameter AVPs selectively between non-neighbor nodes.

## 8. IANA Considerations

This document does not require actions by IANA.

## 9. Acknowledgments

We would like to thank Guenther Horn, Martin Dolly, for his review comments.

## 10. References

### 10.1. Normative References

- [1] Bradner, S., "Key words for use in RFCs to Indicate Requirement Levels", BCP 14, RFC 2119, March 1997.
- [2] Fajardo, V., Arkko, J., Loughney, J., and G. Zorn, "Diameter Base Protocol", RFC 6733, October 2012.

### 10.2. Informative References

- [3] Calhoun, P., Farrell, S., and W. Bulley, "Diameter CMS Security Application", draft-ietf-aaa-diameter-cms-sec-04 (work in progress), March 2002.
- [4] Eronen, P., Hiller, T., and G. Zorn, "Diameter Extensible Authentication Protocol (EAP) Application", RFC 4072, August 2005.

Authors' Addresses

Hannes Tschofenig (editor)  
Nokia Solutions and Networks  
Linnoitustie 6  
Espoo 02600  
Finland

Phone: +358 (50) 4871445  
Email: Hannes.Tschofenig@gmx.net  
URI: <http://www.tschofenig.priv.at>

Jouni Korhonen  
Broadcom  
Porkkalankatu 24  
Helsinki 00180  
Finland

Email: [jouni.nospam@gmail.com](mailto:jouni.nospam@gmail.com)

Glen Zorn  
Network Zen  
227/358 Thanon Sanphawut  
Bang Na Bangkok 10260  
Thailand

Email: [glenzorn@gmail.com](mailto:glenzorn@gmail.com)

Kervin Pillay  
Oracle Communications  
100 Crosby Drive  
Bedford, Massachusetts 01730  
USA

Email: [kervin.pillay@oracle.com](mailto:kervin.pillay@oracle.com)