

Network Working Group Peter Ashwood-Smith (Nortel Networks Corp.)
Internet Draft Ayan Banerjee (Calient Networks)
Expiration Date: May 2002 Lou Berger (Movaz Networks)
Corporation) Greg Bernstein (Ciena Networks)
John Drake (Calient Networks)
Yanhe Fan (Axiowave Corp.)
Don Fedyk (Nortel Networks, Inc.)
Kireeti Kompella (Juniper Networks, Inc.)
Eric Mannie (EBONE Networks)
Jonathan P. Lang (Calient Inc.)
Bala Rajagopalan (Tellium, Inc.)
Yakov Rekhter (Juniper Networks, Inc.)
Debanjan Saha (Tellium, Inc.)
Vishal Sharma (Metanoia Systems)
George Swallow (Cisco Inc.)
Z. Bo Tang (Tellium, Inc.)
November
2001

Generalized MPLS Signaling - CR-LDP Extensions

[draft-ietf-mpls-generalized-cr-ldp-05.txt](#)

Status of this Memo

This document is an Internet-Draft and is in full conformance with all provisions of [Section 10 of RFC2026](#). Internet-Drafts are working

documents of the Internet Engineering Task Force (IETF), its areas, and its working groups. Note that other groups may also distribute working documents as Internet-Drafts.

Internet-Drafts are draft documents valid for a maximum of six months

and may be updated, replaced, or obsoleted by other documents at any time. It is inappropriate to use Internet-Drafts as reference material or to cite them other than as "work in progress."

To view the current status of any Internet-Draft, please check the "1id-abstracts.txt" listing contained in an Internet-Drafts Shadow Directory, see <http://www.ietf.org/shadow.html>.

Abstract

This document describes extensions to CR-LDP signaling required to support Generalized MPLS. Generalized MPLS extends MPLS to encompass time-division (e.g. SONET ADMs), wavelength (optical lambdas) and spatial switching (e.g. incoming port or fiber to outgoing port or fiber). This document presents a CR-LDP specific description of the extensions. An RSVP-TE specific description can be found in [GMPLS-[RSVP](#)]. A generic functional description is presented in [[GMPLS-SIG](#)].

Berger, Ashwood-Smith, editors
1]

[Page

Contents

1	Introduction
3	
2	Label Related Formats
3	
2.1	Generalized Label Request
4	
2.1.1	Procedures
4	
2.1.2	Bandwidth Encoding
5	
2.2	Generalized Label
5	
2.2.1	Procedures
5	
2.3	Waveband Switching
6	
2.3.1	Procedures
6	
2.4	Suggested Label
7	
2.5	Label Set
8	
2.5.1	Procedures
8	
3	Bidirectional LSPs
9	
3.1	Procedures
9	
4	Notification on Label Error
10	
5	Explicit Label Control
11	
5.1	Procedures
11	
6	Protection TLV
12	
6.1	Procedures
12	
7	Administrative Status Information
13	
7.1	Admin Status TLV
13	
7.2	REQUEST and MAPPING Message Procedures
13	
7.2.1	Deletion procedure
14	
7.3	Notification Message Procedures
14	
7.3.1	Compatibility and Error Procedures
15	

8	Control Channel Separation
15	
8.1	Interface Identification
15	
8.2	Procedures
16	
8.3	Errored Interface Identification
17	
8.3.1	IF_ID Status TLVs
17	
8.3.2	Procedures
18	
9	Fault Handling
18	
10	Acknowledgments
19	
11	Security Considerations
19	
12	IANA Considerations
19	
13	References
20	
14	Authors' Addresses
20	

Internet Draft [draft-ietf-mpls-generalized-cr-ldp-05.txt](#) November 2001

[Editor's note: changes to be removed prior to publication as an RFC.]
Changes from previous version:

- o Revised Admin Status Usage
- o Clarified text related to interface bundling
(To be consistent with updated bundling draft.)
- o Added IANA Considerations
- o Minor editorial changes and clarifications

[1. Introduction](#)

Generalized MPLS extends MPLS from supporting packet (PSC) interfaces and switching to include support of three new classes of interfaces and switching: Time-Division Multiplex (TDM), Lambda Switch (LSC) and Fiber-Switch (FSC). A functional description of the extensions to MPLS signaling needed to support the new classes of interfaces and switching is provided in [[GMPLS-SIG](#)]. This document presents CR-LDP

specific formats and mechanisms needed to support all four classes of interfaces. RSVP-TE extensions can be found in [[GMPLS-RSVP](#)].

[GMPLS-SIG] should be viewed as a companion document to this document. The format of this document parallels [[GMPLS-SIG](#)]. It should be noted that the RSVP-TE specific version of Generalized

MPLS

includes RSVP specific support for rapid failure notification, see [Section 4](#) [[GMPLS-RSVP](#)]. For CR-LDP there is not currently a similar mechanism. When a failure is detected it will be propagated with RELEASE/WITHDRAW messages radially outward from the point of failure.

Resources are to be released in this phase and actual resource information may be fed back to the source using a feedback mechanisms.

The key words "MUST", "MUST NOT", "REQUIRED", "SHALL", "SHALL NOT", "SHOULD", "SHOULD NOT", "RECOMMENDED", "MAY", and "OPTIONAL" in this document are to be interpreted as described in [[RFC2119](#)].


2. Label Related Formats

This section defines formats for a generalized label request, a generalized label, support for waveband switching, suggested label and label sets.

2.1. Generalized Label Request

A REQUEST message SHOULD contain as specific an LSP Encoding Type as possible to allow the maximum flexibility in switching by transit LSRs. A Generalized Label Request TLV is set by the ingress node, transparently passed by transit nodes, and used by the egress node.

The format of a Generalized Label Request is:

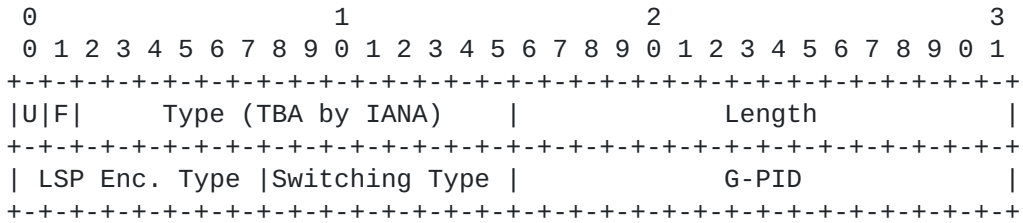

See [\[GMPLS-SIG\]](#) for a description of parameters.

2.1.1. Procedures

A node processing a REQUEST message containing a Generalized Label Request must verify that the requested parameters can be satisfied by the incoming interface, the node and by the outgoing interface. The node may either directly support the LSP or it may use a tunnel (FA), i.e., another class of switching. In either case, each parameter must be checked.

Note that local node policy dictates when tunnels may be used and when they may be created. Local policy may allow for tunnels to be dynamically established or may be solely administratively controlled.

For more information on tunnels and processing of ER hops when using tunnels see [\[MPLS-HIERARCHY\]](#).

Transit and egress nodes MUST verify that the node itself and, where appropriate, that the outgoing interface or tunnel can support the requested LSP Encoding Type. If encoding cannot be supported, the node MUST generate a NOTIFICATION message, with a "Routing problem/Unsupported Encoding" indication.

Nodes MUST verify that the type indicated in the Switching Type parameter is supported on the corresponding incoming interface. If the type cannot be supported, the node MUST generate a NOTIFICATION message with a "Routing problem/Switching Type" indication.

The G-PID parameter is normally only examined at the egress. If the indicated G-PID cannot be supported then the egress MUST generate a

NOTIFICATION message, with a "Routing problem/Unsupported GPID" indication. In the case of PSC and when penultimate hop popping (PHP) is requested, the penultimate hop also examines the (stored)

G- PID during the processing of the MAPPING message. In this case if the G-PID is not supported, then the penultimate hop MUST generate a NOTIFICATION message with a "Routing problem/Unacceptable label value" indication. The generated NOTIFICATION message MAY include an Acceptable Label Set, see [Section 4](#).

When an error message is not generated, normal processing occurs.

In the transit case this will typically result in a REQUEST message being propagated. In the egress case and PHP special case this will typically result in a MAPPING message being generated.


2.1.2. Bandwidth Encoding

Bandwidth encodings are carried in the CR-LDP Traffic Parameters TLV.

See [\[GMPLS-SIG\]](#) for a definition of values to be used for specific signal types. These values are set in the Peak and Committed Data Rate fields of the Traffic Parameters TLV. Other bandwidth/service related parameters in the TLV are ignored and carried transparently.

2.2. Generalized Label

The format of a Generalized Label is:

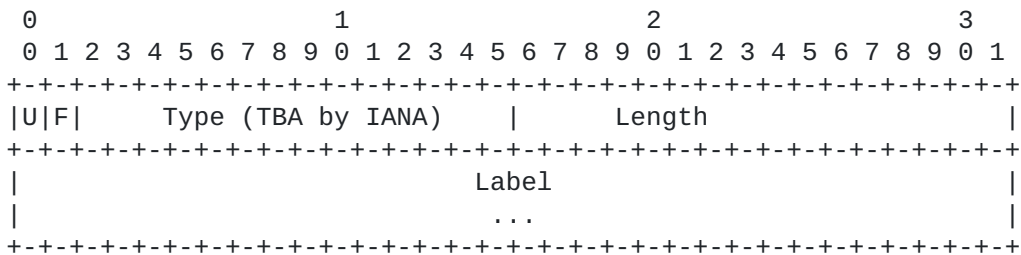

See [\[GMPLS-SIG\]](#) for a description of parameters and encoding of labels.

2.2.1. Procedures

The Generalized Label travels in the upstream direction in MAPPING messages.

The presence of both a generalized and normal label TLV in a MAPPING

Berger, Ashwood-Smith, editors
5]

[Page


message is a protocol error and should be treated as a malformed message by the recipient.

The recipient of a MAPPING message containing a Generalized Label verifies that the values passed are acceptable. If the label is unacceptable then the recipient MUST generate a NOTIFICATION message with a "Routing problem/MPLS label allocation failure" indication. The generated NOTIFICATION message MAY include an Acceptable Label Set, see [Section 4](#).

2.3. Waveband Switching

Waveband switching uses the same format as the generalized label, see [section 2.2](#). The type TBA is assigned for the Waveband Label.

In the context of waveband switching, the generalized label has the following format:

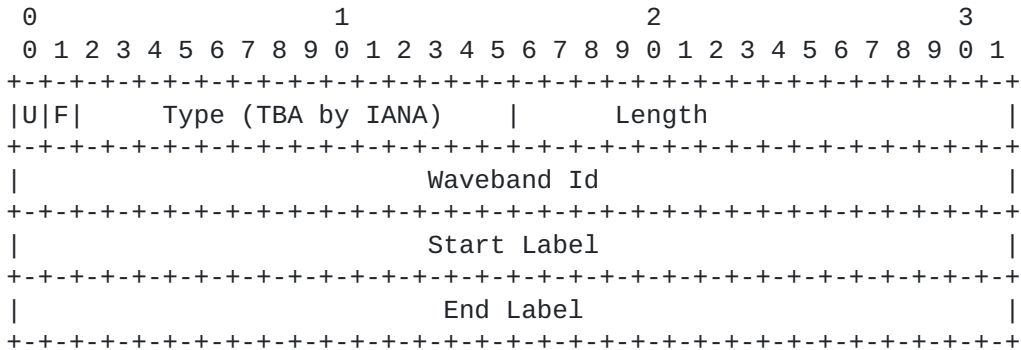

See [\[GMPLS-SIG\]](#) for a description of parameters.

2.3.1. Procedures

The procedures defined in [Section 2.2.1](#) apply to waveband switching. This includes generating a NOTIFICATION message with a "Routing problem/MPLS label allocation failure" indication if any of the label fields are unrecognized or unacceptable.

Additionally, when a waveband is switched to another waveband, it is possible that the wavelengths within the waveband will be mirrored about a center frequency. When this type of switching is employed, the start and end label in the waveband label TLV MUST be flipped before forwarding the label TLV with the new waveband Id. In this manner an egress/ingress LSR that receives a waveband label which has

Berger, Ashwood-Smith, editors
6]

[Page

these values inverted, knows that it must also invert its egress association to pick up the proper wavelengths. Without this mechanism and with an odd number of mirrored switching operations, the egress LSRs will not know that an input wavelength of say L1 will emerge from the waveband tunnel as L100.

This operation MUST be performed in both directions when a bidirectional waveband tunnel is being established.

2.4. Suggested Label


The format of a suggested label is identical to a generalized label. It is used in REQUEST messages. Suggested Label uses type = 0x904.

Errors in received Suggested Labels MUST be ignored. This includes any received inconsistent or unacceptable values.

Per [\[GMPLS-SIG\]](#), if a downstream node passes a label value that differs from the suggested label upstream, the upstream LSR MUST either reconfigure itself so that it uses the label specified by the downstream node or generate a NOTIFICATION message with a "Routing problem/Unacceptable label value" indication. Furthermore, an ingress node SHOULD NOT transmit data traffic using a suggested label until the downstream node passes corresponding a label upstream.

2.5. Label Set

The format of a Label Set is:

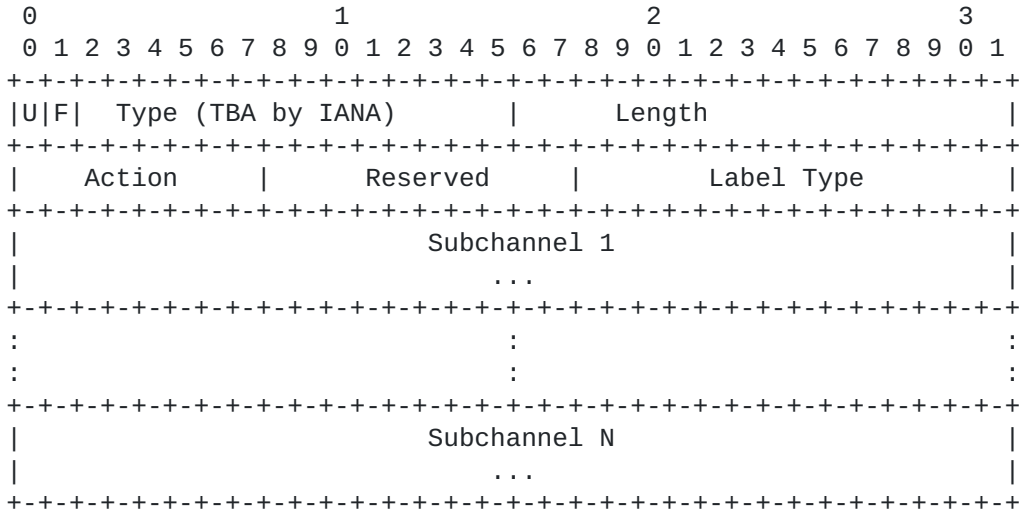

Label Type: 14 bits

Indicates the type and format of the labels carried in the TLV.

Values match the TLV type of the appropriate Label TLV.

See [\[GMPLS-SIG\]](#) for a description of other parameters.

2.5.1. Procedures

A Label Set is defined via one or more Label Set TLVs. Specific labels/subchannels can be added to or excluded from a Label Set via Action zero (0) and one (1) TLVs respectively. Ranges of labels/subchannels can be added to or excluded from a Label Set via Action two (2) and three (3) TLVs respectively. When the Label Set TLVs only list labels/subchannels to exclude, this implies that all other labels are acceptable.

The absence of any Label Set TLVs implies that all labels are acceptable. A Label Set is included when a node wishes to restrict the label(s) that may be used downstream.

On reception of a REQUEST message, the receiving node will restrict its choice of labels to one, which is in the Label Set. Nodes capable of performing label conversion may also remove the Label Set prior to forwarding the REQUEST message. If the node is unable to

pick a label from the Label Set or if there is a problem parsing the Label Set TLVs, then the request is terminated and a NOTIFICATION message with a "Routing problem/Label Set" indication MUST be generated. It is a local matter if the Label Set is stored for later selection on the MAPPING message or if the selection is made immediately for propagation in the MAPPING message.

On reception of a REQUEST message, the Label Set represented in the message is compared against the set of available labels at the downstream interface and the resulting intersecting Label Set is forwarded in a REQUEST message. When the resulting Label Set is empty, the REQUEST must be terminated, and a NOTIFICATION message, and a "Routing problem/Label Set" indication MUST be generated. Note that intersection is based on the physical labels (actual wavelength/band values) which may have different logical values on different links, as a result it is the responsibility of the node to map these values so that they have a consistent physical meaning, or to drop the particular values from the set if no suitable logical label value exists.

When processing a MAPPING message at an intermediate node, the label propagated upstream MUST fall within the Label Set.

Note, on reception of a MAPPING message a node that is incapable of performing label conversion has no other choice than to use the same physical label (wavelength/band) as received in the MAPPING message. In this case, the use and propagation of a Label Set will significantly reduce the chances that this allocation will fail.

3. Bidirectional LSPs

Bidirectional LSP setup is indicated by the presence of an Upstream Label in the REQUEST message. An Upstream Label has the same format as the generalized label, see [Section 2.2](#). Upstream Label uses type=
TBA

3.1. Procedures

The process of establishing a bidirectional LSP follows the establishment of a unidirectional LSP with some additions. To support bidirectional LSPs an Upstream Label is added to the REQUEST message. The Upstream Label MUST indicate a label that is valid for forwarding at the time the REQUEST message is sent.

When a REQUEST message containing an Upstream Label is received, the receiver first verifies that the upstream label is acceptable. If the label is not acceptable, the receiver MUST issue a NOTIFICATION

message with a "Routing problem/Unacceptable label value" indication.

The generated NOTIFICATION message MAY include an Acceptable Label Set, see [Section 4](#).

An intermediate node must also allocate a label on the outgoing interface and establish internal data paths before filling in an outgoing Upstream Label and propagating the REQUEST message. If an intermediate node is unable to allocate a label or internal resources, then it MUST issue a NOTIFICATION message with a "Routing problem/Label allocation failure" indication.

Terminator nodes process REQUEST messages as usual, with the exception that the upstream label can immediately be used to transport data traffic associated with the LSP upstream towards the initiator.

When a bidirectional LSP is removed, both upstream and downstream labels are invalidated and it is no longer valid to send data using the associated labels.

4. Notification on Label Error

This section defines the Acceptable Label Set TLV to support Notification on Label Error per [[GMPLS-SIG](#)]. An Acceptable Label Set

TLV uses a type value of TBA. The remaining contents of the TLV have the identical format as the Label Set TLV, see [Section 2.5](#).

Acceptable Label Set TLVs may be carried in NOTIFICATION messages. The procedures for defining an Acceptable Label Set follow the procedures for defining a Label Set, see [Section 2.5.1](#).

Specifically, an Acceptable Label Set is defined via one or more Acceptable Label Set TLVs. Specific labels/subchannels can be added to or excluded from an Acceptable Label Set via Action zero (0) and one (1) TLVs respectively. Ranges of labels/subchannels can be added

to or excluded from an Acceptable Label Set via Action two (2) and three (3) TLVs respectively. When the Acceptable Label Set TLVs only

list labels/subchannels to exclude, this implies that all other labels are acceptable.

The inclusion of Acceptable Label Set TLVs is optional. If included,


the NOTIFICATION message SHOULD contain a "Routing problem/Unacceptable label value" indication. The absence of Acceptable Label Set TLVs does not have any specific meaning.

Berger, Ashwood-Smith, editors
10]

[Page

5. Explicit Label Control

The Label ER-Hop TLV is defined as follows:

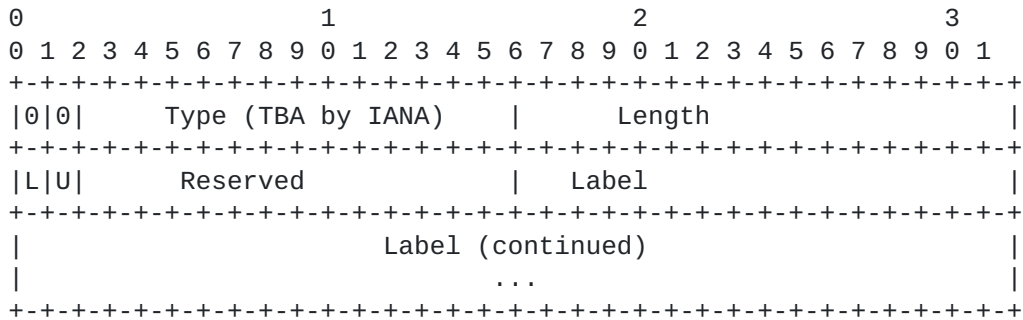

See [\[GMPLS-SIG\]](#) for a description of L, U and Label parameters.

5.1. Procedures

The Label ER-Hop follows a ER-Hop containing the IP address, or the interface identifier [\[MPLS-UNNUM\]](#), associated with the link on which it is to be used. Up to two label ER-Hops may be present, one for the downstream label and one for the upstream label. The following SHOULD result in "Bad EXPLICIT_ROUTE" errors:

- If the first label ER-Hop is not preceded by a ER-Hop containing an IP address, or a interface identifier [\[MPLS-UNNUM\]](#), associated with an output link.
- For a label ER-Hop to follow a ER-Hop that has the L-bit set
- On unidirectional LSP setup, for there to be a label ER-Hop with the U-bit set
- For there to be two label ER-Hops with the same U-bit values

To support the label ER-Hop, a node must check to see if the ER-Hop following its associate address/interface is a label ER-Hop. If it is, one ER-Hop is examined for unidirectional LSPs and two ER-Hops for bidirectional LSPs. If the U-bit of the ER-Hop being examined is

clear (0), then value of the label is copied into a new Label Set TLV. This Label Set TLV MUST be included on the corresponding outgoing REQUEST message.

If the U-bit of the ER-Hop being examined is set (1), then value of the label is label to be used for upstream traffic associated with the bidirectional LSP. If this label is not acceptable, a "Bad EXPLICIT_ROUTE" error SHOULD be generated. If the label is acceptable, the label is copied into a new Upstream Label TLV. This Upstream Label TLV MUST be included on the corresponding outgoing

REQUEST message.

After processing, the label ER-Hops are removed from the ER.

Note an implication of the above procedures is that the label ER-Hop should never be the first ER-Hop in a newly received message. If the label ER-Hop is the first ER-Hop on a received ER, then it SHOULD be treated as a "Bad strict node" error.

Procedures by which an LSR at the head-end of an LSP obtains the information needed to construct the Label ER-Hop are outside the scope of this document.

6. Protection TLV

The use of the Protection TLV is optional. The TLV is included to indicate specific protection attributes of an LSP.

The format of Protection Information TLV is:

```

      0                    1                    2                    3
      0 1 2 3 4 5 6 7 8 9 0 1 2 3 4 5 6 7 8 9 0 1 2 3 4 5 6 7 8 9 0 1
+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+
|U|F|      Type (TBA by IANA)      |      Length      |
+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+
|S|      Reserved      | Link Flags|
+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+
```

See [[GMPLS-SIG](#)] for a description of parameters.

6.1. Procedures

Transit nodes processing a REQUEST message containing a Protection TLV MUST verify that the requested protection can be satisfied by the outgoing interface or tunnel (FA). If it cannot, the node MUST generate a NOTIFICATION message, with a "Routing problem/Unsupported Link Protection" indication.

7. Administrative Status Information


Administrative Status Information is carried in the Admin Status TLV.

The TLV provides information related to the administrative state of a particular LSP. The information is used in two ways. In the first, the TLV is carried in REQUEST and MAPPING messages to indicate the administrative state of an LSP. In the second, the TLV is carried in Notification message to request a change to the administrative state of an LSP.

7.1. Admin Status TLV

The use of the Admin Status TLV is optional. It uses Type = TBA. The format of the TLV is:

The format of Admin Status TLV in REQUEST, MAPPING and Notification Messages is:

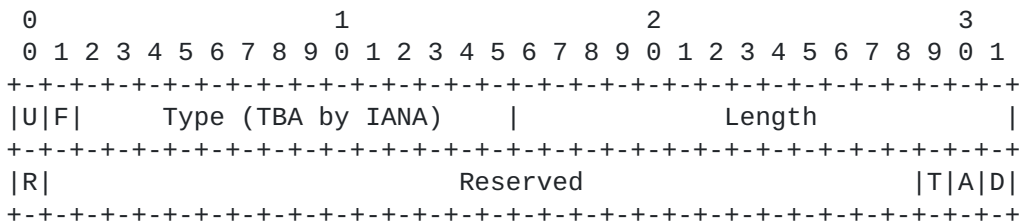

See [\[GMPLS-SIG\]](#) for a description of parameters.

7.2. REQUEST and MAPPING Message Procedures

The Admin Status TLV is used to notify each node along the path of the status of the LSP. Each node processes status information based on local policy and then propagated in the corresponding outgoing messages. The TLV is inserted in REQUEST messages at the discretion of the ingress node. The absence of the TLV is the equivalent to receiving a TLV containing values all set to zero.

Transit nodes receiving a REQUEST message containing an Admin Status TLV, update their local state, take any appropriate local action based on the indicated status and then propagate the received Admin Status TLV in the outgoing REQUEST message.

Edge nodes receiving a REQUEST message containing an Admin Status TLV, also update their local state and take any appropriate local

action based on the indicated status. When the ADMIN Status TLV is received with the R bit set, the receiving edge node should reflect the received values in a corresponding MAPPING message.

R Specifically, if an egress node receives a Request message with the bit of the Admin_Status TLV set and the node the node SHOULD send a Mapping message containing an Admin_Status TLV with the same values set, with the exception of the R bit, as received in the corresponding Request message.

7.2.1. Deletion procedure

In some circumstances, particularly optical networks, it is useful to set the administrative status of an LSP before tearing it down.

In such circumstances the procedure SHOULD be followed when deleting an LSP from the ingress: The ingress node precedes an LSP deletion by

inserting an Admin Status TLV in a Notification Message setting the Reflect (R) and Delete (D) bits. Transit nodes process the Admin Status TLV by passing the Notification message. The egress node May respond with a Notification message with the Admin Status TLV. Upon receiving the Admin Status TLV with the Delete (D) bit set in the Notification message, the egress SHOULD respond with a LABEL

WITHDRAW message and normal CR-LDP processing takes place.

In such circumstances the procedure SHOULD be followed when deleting an LSP from the egress: The egress node indicates its desire for deletion by inserting an Admin Status TLV in a Notification message and setting Delete (D) bit. Transit nodes process the Admin Status TLV as described above. Upon receiving the Admin Status TLV with the

the Delete (D) bit set in the Notification message, the ingress node sends a LABEL RELEASE message downstream to remove the LSP and normal CR-LDP processing takes place.

7.3. Notification Message Procedures

Subsequent messaging Admin Status messaging may be performed by Notification Messages. The ingress may begin the propagation of a Notification Message with an Admin Status TLV. Each subsequent node propagates the Notification with the Admin Status TLV from the ingress to the egress and then the egress node returns the Notification messages back Upstream carrying the Admin Status TLV.

Intermediate and egress nodes may trigger the setting of

administrative status via the use of Notification messages. To accomplish this, an intermediate or egress node generates a

Berger, Ashwood-Smith, editors
14]

[Page

Notification message with the corresponding upstream notify session information. The Admin Status TLV MUST be included in the session information, with the appropriate bit or bits set. The Reflect (R) bit MUST NOT be set.

An ingress or egress node receiving a Notification message containing an Admin Status TLV with the Delete (D) bit set, SHOULD initiate the deletion procedure described in the previous section.

7.3.1. Compatibility and Error Procedures

Some special processing is required in order to cover the case of nodes that do not support the Admin Status TLV and other error conditions. Specifically, a node that sends a Notification message containing an Admin Status TLV with the Down (D) bit set MUST verify that it receives a corresponding LABEL RELEASE message within a configurable period of time. By default this period of time SHOULD be 30 seconds. If the node does not receive such a LABEL RELEASE message, it SHOULD send a Label Release message downstream and a LABEL WITHDRAW message upstream.

8. Control Channel Separation

This section provides the protocol specific formats and procedures to required support a control channel not being in-band with a data channel.

8.1. Interface Identification

The choice of the data interface to use is always made by the sender of the REQUEST message. The choice of the data interface is indicated

by the sender of the REQUEST message by including the data channel's interface identifier in the message using a new Interface TLV type.


For bidirectional LSPs, the sender chooses the data interface in each

direction. In all cases but bundling [[MPLS-BUNDLE](#)] the upstream interface is implied by the downstream interface. For bundling, the REQUEST sender explicitly identifies the component interface used in each direction.


Berger, Ashwood-Smith, editors
15]

[Page

The format of IPV4 Interface ID in REQUEST, MAPPING Messages is:

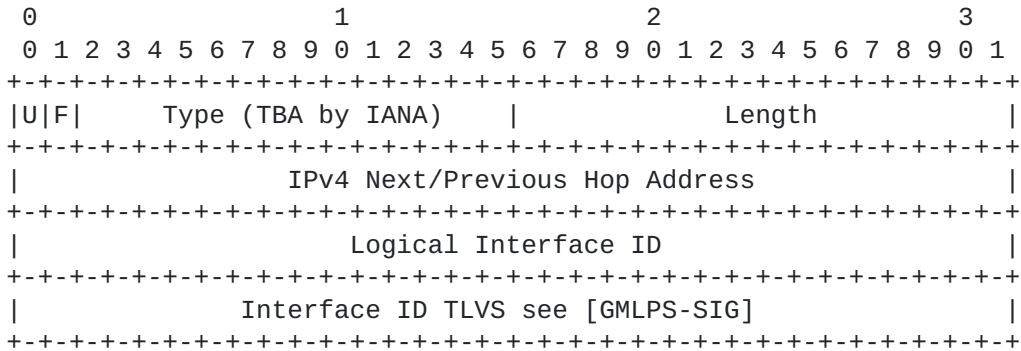

The format of IPV6 Interface ID TLV in REQUEST, MAPPING Messages is:

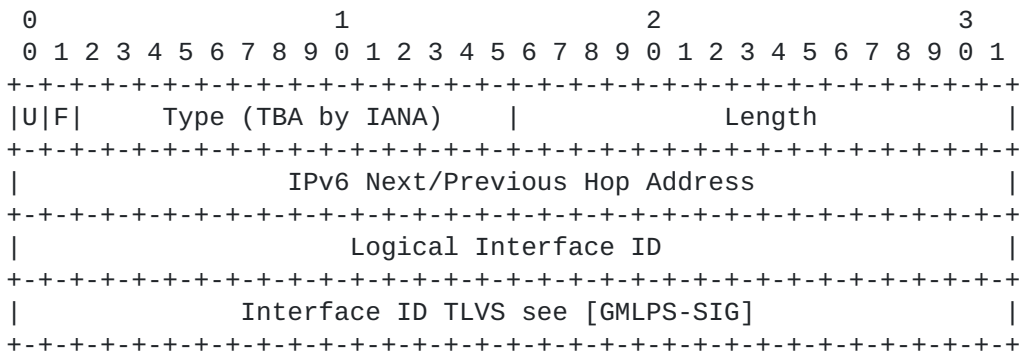

See [\[GMPLS-SIG\]](#) for a description of parameters.

See [\[CR-LDP\]](#) for a description of signaling address. See [\[GMPLS-SIG\]](#) for a description of parameters and encoding of TLVs.

8.2. Procedures

An IF_ID TLV is used on links where there is not a one-to-one association of a control channel to a data channel, see [\[GMPLS-SIG\]](#).

The LDP session uses the IF_ID TLV to identify the data channel(s) associated with the LSP. For a unidirectional LSP, a downstream data channel MUST be indicated. For bidirectional LSPs, a common downstream and upstream data channel is normally indicated. In the special case where a bidirectional LSP that traverses a bundled link, it is possible to specify a downstream data channel that differs from the upstream data channel. Data channels are specified from the view

point of the sender of the Path message. The IF_ID TLV SHOULD NOT
be
used when no TLVs are needed.

Berger, Ashwood-Smith, editors
16]

[Page

A node receiving one or more IF_ID TLVs in a REQUEST message saves their values and returns them in the subsequent MAPPING message sent to the node that originated the TLVs.


As with [MPLS-TE], the node originating an IF_ID TLV must ensure that the selected outgoing interface is consistent with the outgoing ER TLV. A node that receives an IF_ID TLV SHOULD check whether the information carried in this TLV is consistent with the information carried in a received ER TLV, and if not it MUST send a LABEL ABORT Message with the status code of "Bad Explicit Routing TLV Error" toward the sender.

8.3. Errored Interface Identification


There are cases where it is useful to indicate a specific interface associated with an error. To support these cases the IF_ID Status TLV are defined.

8.3.1. IF_ID Status TLVs

The format of the IPv4 IF_ID Status TLV is:

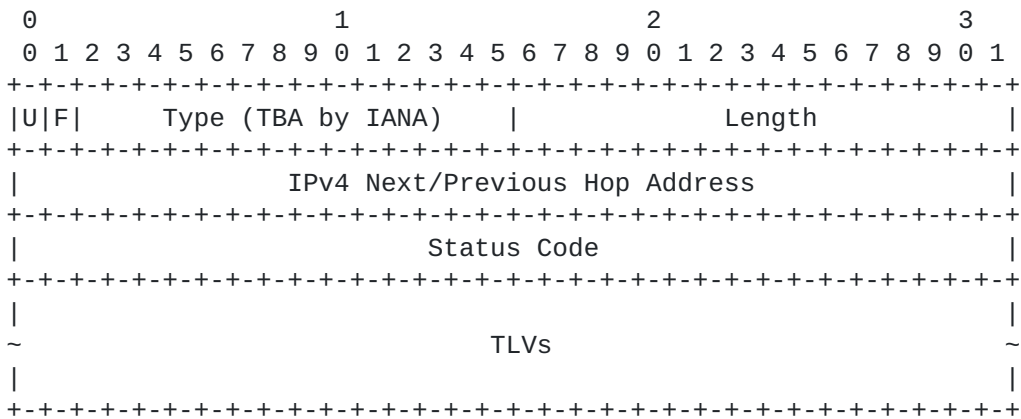

The format of the IPv6 IF_ID Status TLV is:

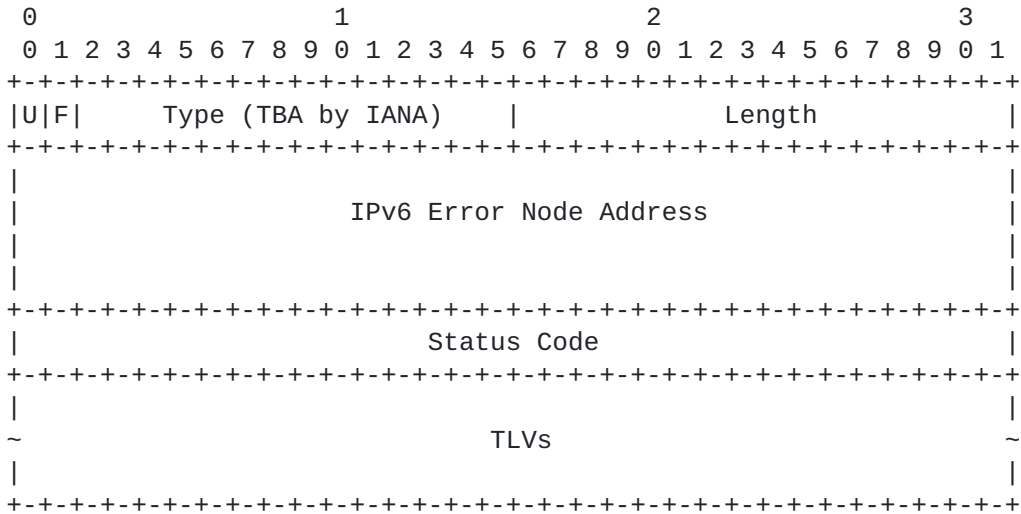

See [\[RFC3036\]](#) for a description of status code value fields.
 See [\[GMPLS-SIG\]](#) for a description of parameters and encoding of TLVs.

8.3.2. Procedures

Nodes wishing to indicate that an error is related to a specific interface SHOULD use the appropriate IF_ID Status TLV in the corresponding LABEL WITHDRAW or LABEL RELEASE message. IF_ID Status TLV SHOULD be generated and processed as any other Status TLV, see [\[RFC3036\]](#).

9. Fault Handling

In optical transport networks, failures in the out-of-fiber signaling communication or optical control plane should not have service impact on the existing optical connections. Under such circumstances, a mechanism MUST exist to detect a signaling communication failure and a recovery procedure SHALL guarantee connection integrity at both ends of the signaling channel.

The LDP Fault tolerant draft [\[LDP-FT\]](#) specifies the procedures for recovering LDP and CR-LDP sessions under failure. Please refer to his draft for procedures on recovering optical connections. Currently the Fault tolerant draft covers many of the common failure modes for a separated control and data plane.

10. Acknowledgments

This draft is the work of numerous authors and consists of a composition of a number of previous drafts in this area. A list of the drafts from which material and ideas were incorporated follows:

[draft-saha-rsvp-optical-signaling-00.txt](#)
[draft-lang-mpls-rsvp-oxc-00.txt](#)
[draft-kompella-mpls-optical-00.txt](#)
[draft-fan-mpls-lambda-signaling-00.txt](#)

Valuable comments and input were received from a number of people, notably Adrian Farrel.

11. Security Considerations

This draft introduce no new security considerations to [[CR-LDP](#)].

12. IANA Considerations

This draft uses the LDP [[RFC 3031](#)] name spaces, which require assignment for the following TLVs.

- o Generalized Label Request (TLV TBA)
- o Generalized Label (TLV TBA)
- o Upstream Label (TLV TBA)
- o Label Set (TLV TBA)
- o Waveband Label (TLV TBA)
- o ER-Hop (TLV TBA)
- o Acceptable Label Set (TLV TBA)
- o Admin Status (TLV TBA)
- o Interface ID (TLV TBA)
- o IPV4 Interface ID (TLV TBA)
- o IPV6 Interface ID (TLV TBA)
- o IPV4 IF_ID Status (TLV TBA)
- o IPV6 IF_ID Status (TLV TBA)

13. References

- [CR-LDP] Jamoussi et al., "Constraint-Based LSP Setup using LDP", Internet Draft, [draft-ietf-mpls-cr-ldp-05.txt](#), Jul., 2001.
- [RFC3036] Andersson et al., "LDP Specification", [RFC 3036](#).
- [MPLS-HIERARCHY] Kompella, K., and Rekhter, Y., "LSP Hierarchy with MPLS TE", Internet Draft, [draft-ietf-mpls-lsp-hierarchy-02.txt](#), Sep., 2001.
- [MPLS-UNNUM] Kompella, K., Rekhter, Y., Kullberg, A., "Signalling Unnumbered Links in CR-LDP", Internet Draft, [draft-ietf-mpls-crldp-unnum-02.txt](#), Sep. 2001
- [GMPLS-RSVP] Ashwood-Smith, P. et al, "Generalized MPLS Signaling - RSVP-TE Extensions", Internet Draft, [draft-ietf-mpls-generalized-rsvp-te-06.txt](#), November 2001.
- [GMPLS-SIG] Ashwood-Smith, P. et al, "Generalized MPLS - Signaling Functional Description", Internet Draft, [draft-ietf-mpls-generalized-signaling-07.txt](#), November 2001.
- [LDP-FT] Farrel, A. et al, "Fault Tolerance for LDP and CR-LDP", Internet Draft, [draft-ietf-mpls-ldp-ft-02.txt](#), May 2001.
- [MPLS-BUNDLE] Kompella, K., Rekhter, Y., and Berger, L., "Link Bundling in MPLS Traffic Engineering", Internet Draft, [draft-kompella-mpls-bundle-05.txt](#), Sep., 2001.
- [RFC2119] Bradner, S., "Key words for use in RFCs to Indicate Requirement Levels," [RFC 2119](#).

14. Authors' Addresses

Peter Ashwood-Smith
Nortel Networks Corp.
P.O. Box 3511 Station C,
Ottawa, ON K1Y 4H7
Canada
Phone: +1 613 763 4534
Email: petera@nortelnetworks.com

Ayan Banerjee
Calient Networks
5853 Rue Ferrari
San Jose, CA 95138
Phone: +1 408 972-3645
Email: abanerjee@calient.net

Lou Berger
Movaz Networks, Inc.
7926 Jones Branch Drive
Suite 615
McLean VA, 22102
Phone: +1 703 847-1801
Email: lberger@movaz.com

Greg Bernstein
Ciena Corporation
10480 Ridgeview Court
Cupertino, CA 94014
Phone: +1 408 366 4713
Email: greg@ciena.com

John Drake
Calient Networks
5853 Rue Ferrari
San Jose, CA 95138
Phone: +1 408 972 3720
Email: jdrake@calient.net

Yanhe Fan
Axiowave Networks, Inc.
200 Nickerson Road
Marlborough, MA 01752
Phone: + 1 774 348 4627
Email: yfan@axiowave.com

Don Fedyk
Nortel Networks Corp.
600 Technology Park
Billerica MA 01821
Phone: +1 978 288 3041
Fax: +1 978 288 0620
Email: dwfedyk@nortelnetworks.com

Kireeti Kompella
Juniper Networks, Inc.
1194 N. Mathilda Ave.
Sunnyvale, CA 94089
Email: kireeti@juniper.net

Jonathan P. Lang
Calient Networks
25 Castilian
Goleta, CA 93117
Email: jplang@calient.net

Eric Mannie
EBONE
Terhulpesteenweg 6A
1560 Hoeilaart - Belgium
Phone: +32 2 658 56 52
Mobile: +32 496 58 56 52
Fax: +32 2 658 51 18
Email: eric.mannie@ebone.com

Bala Rajagopalan
Tellium, Inc.
2 Crescent Place
P.O. Box 901
Oceanport, NJ 07757-0901
Phone: +1 732 923 4237
Fax: +1 732 923 9804
Email: braja@tellium.com

Yakov Rekhter
Juniper Networks, Inc.
Email: yakov@juniper.net

Debanjan Saha
Tellium Optical Systems
2 Crescent Place
Oceanport, NJ 07757-0901
Phone: +1 732 923 4264
Fax: +1 732 923 9804
Email: dsaha@tellium.com

Vishal Sharma
Metanoia, Inc.
335 Elan Village Lane, Unit 203
San Jose, CA 95134-2539
Phone: +1 408-943-1794
Email: v.sharma@ieee.org

George Swallow
Cisco Systems, Inc.
250 Apollo Drive
Chelmsford, MA 01824
Voice: +1 978 244 8143
Email: swallow@cisco.com

Z. Bo Tang
Tellium, Inc.
2 Crescent Place
P.O. Box 901
Oceanport, NJ 07757-0901
Phone: +1 732 923 4231
Fax: +1 732 923 9804
Email: btang@tellium.com

Generated on: Wed Nov 21 15:23:23 EST 2001