

6lo
Internet-Draft
Updates: 4944 (if approved)
Intended status: Standards Track
Expires: February 7, 2016

P. Thubert, Ed.
Cisco
C. Bormann
Uni Bremen TZI
L. Toutain
IMT-TELECOM Bretagne
R. Cragie
ARM
August 06, 2015

A Routing Header Dispatch for 6LoWPAN
draft-thubert-6lo-routing-dispatch-06

Abstract

This specification introduces a new context switch mechanism for 6LoWPAN compression, expressed in terms of Pages. A new 6LoWPAN dispatch type is proposed in a new Page 1 for use in 6LoWPAN Route-Over topologies, that initially covers the needs of RPL (RFC6550) data packets compression. This specification defines a method to compress RPL Option (RFC6553) information and Routing Header type 3 (RFC6554), an efficient IP-in-IP technique and is extensible for more applications.

Status of This Memo

This Internet-Draft is submitted in full conformance with the provisions of BCP 78 and BCP 79.

Internet-Drafts are working documents of the Internet Engineering Task Force (IETF). Note that other groups may also distribute working documents as Internet-Drafts. The list of current Internet-Drafts is at <http://datatracker.ietf.org/drafts/current/>.

Internet-Drafts are draft documents valid for a maximum of six months and may be updated, replaced, or obsoleted by other documents at any time. It is inappropriate to use Internet-Drafts as reference material or to cite them other than as "work in progress."

This Internet-Draft will expire on February 7, 2016.

Copyright Notice

Copyright (c) 2015 IETF Trust and the persons identified as the document authors. All rights reserved.

This document is subject to BCP 78 and the IETF Trust's Legal Provisions Relating to IETF Documents (<http://trustee.ietf.org/license-info>) in effect on the date of publication of this document. Please review these documents carefully, as they describe your rights and restrictions with respect to this document. Code Components extracted from this document must include Simplified BSD License text as described in Section 4.e of the Trust Legal Provisions and are provided without warranty as described in the Simplified BSD License.

Table of Contents

1. Introduction	2
2. Terminology	5
3. Updating RFC 4944	5
3.1. New Pagel Dispatch	6
3.2. New Routing Header Dispatch (6LoRH)	6
3.3. Sur-Compression Mechanisms	6
4. Placement Of The New Dispatch Types	7
4.1. Placement Of The Pagel Dispatch	7
4.2. Placement Of The 6LoRH	7
5. 6LoWPAN Routing Header General Format	8
5.1. Elective Format	8
5.2. Critical Format	9
6. The Routing Header Type 3 (RH3) 6LoRH	9
7. The RPL Packet Information 6LoRH	11
7.1. Compressing the RPLInstanceID	12
7.2. Compressing the SenderRank	12
7.3. The Overall RPI-6LoRH encoding	13
8. The IP-in-IP 6LoRH	15
9. The BIER 6LoRH	17
10. Security Considerations	18
11. IANA Considerations	18
12. Acknowledgments	19
13. References	19
13.1. Normative References	19
13.2. Informative References	20
Authors' Addresses	21

1. Introduction

The design of Low Power and Lossy Networks (LLNs) is generally focused on saving energy, which is the most constrained resource of all. The other constraints, such as the memory capacity and the duty cycling of the LLN devices, derive from that primary concern. Energy is often available from primary batteries that are expected to last for years, or is scavenged from the environment in very limited quantities. Any protocol that is intended for use in LLNs must be

designed with the primary concern of saving energy as a strict requirement.

Controlling the amount of data transmission is one possible venue to save energy. In a number of LLN standards, the frame size is limited to much smaller values than the IPv6 maximum transmission unit (MTU) of 1280 bytes. In particular, an LLN that relies on the classical Physical Layer (PHY) of IEEE 802.14.5 [IEEE802154] is limited to 127 bytes per frame. The need to compress IPv6 packets over IEEE 802.14.5 led to the 6LoWPAN Header Compression [RFC6282] work (6LoWPAN-HC).

Innovative Route-over techniques have been and are still being developed for routing inside a LLN. In a general fashion, such techniques require additional information in the packet to provide loop prevention and to indicate information such as flow identification, source routing information, etc.

For reasons such as security and the capability to send ICMP errors back to the source, an original packet must not be tampered with, and any information that must be inserted in or removed from an IPv6 packet must be placed in an extra IP-in-IP encapsulation. This is the case when the additional routing information is inserted by a router on the path of a packet, for instance a mesh root, as opposed to the source node. This is also the case when some routing information must be removed from a packet that will flow outside the LLN.

As an example, the Routing Protocol for Low Power and Lossy Networks [RFC6550] (RPL) is designed to optimize the routing operations in constrained LLNs. As part of this optimization, RPL requires the addition of RPL Packet Information (RPI) in every packet, as defined in Section 11.2 of [RFC6550].

The RPL Option for Carrying RPL Information in Data-Plane Datagrams [RFC6553] specification indicates how the RPI can be placed in a RPL Option for use in an IPv6 Hop-by-Hop header. This representation demands a total of 8 bytes when in most cases the actual RPI payload requires only 19 bits. Since the Hop-by-Hop header must not flow outside of the RPL domain, it must be removed from packets that leave the domain, and be inserted in packets entering the domain. In both cases, this operation implies an IP-in-IP encapsulation.

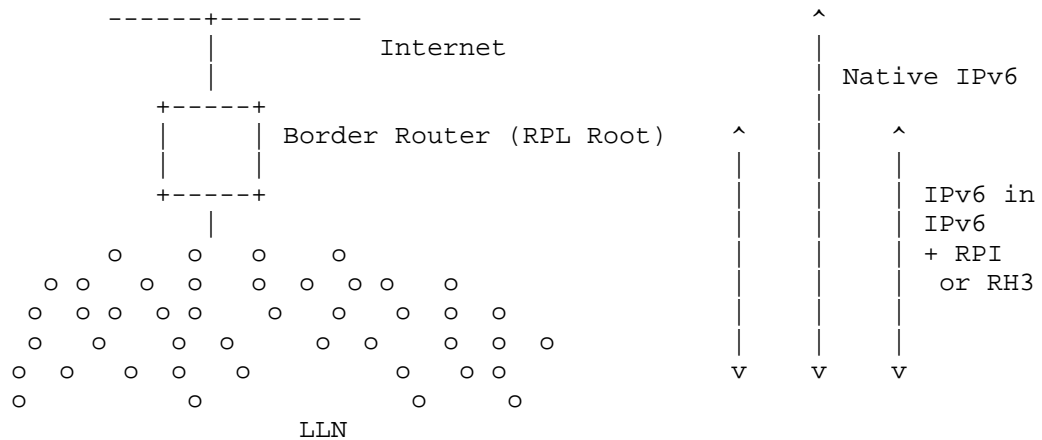


Figure 1: IP-in-IP Encapsulation within the LLN

Additionally, in the case of the Non-Storing Mode of Operation (MOP), RPL requires a Routing Header type 3 (RH3) as defined in the IPv6 Routing Header for Source Routes with RPL [RFC6554] specification, for all packets that are routed down a RPL graph. With Non-Storing RPL, even if the source is a node in the same LLN, the packet must first reach up the graph to the root so that the root can insert the RH3 to go down the graph. In any fashion, whether the packet was originated in a node in the LLN or outside the LLN, and regardless of whether the packet stays within the LLN or not, as long as the source of the packet is not the root itself, the source-routing operation also implies an IP-in-IP encapsulation at the root to insert the RH3.

6TiSCH [I-D.ietf-6tisch-architecture] specifies the operation of IPv6 over the TimeSlotted Channel Hopping [I-D.ietf-6tisch-tsch] (TSCH) mode of operation of IEEE 802.14.5. The architecture requires the use of both RPL and the 6lo adaptation layer framework ([RFC4944], [RFC6282]) over IEEE 802.14.5. Because it inherits the constraints on the frame size from the MAC layer, 6TiSCH cannot afford to spend 8 bytes per packet on the RPI. Hence the requirement for a 6LoWPAN header compression of the RPI.

The type of information that needs to be present in a packet inside the LLN but not outside of the LLN varies with the routing operation, but there is overall a need for an extensible compression technique that would simplify the IP-in-IP encapsulation, when needed, and optimally compress existing routing artifacts found in LLNs.

This specification extends 6LoWPAN [RFC4944] and in particular reuses the Mesh Header formats that are defined for the Mesh-under use cases so as to carry routing information for Route-over use cases. The

specification includes the formats necessary for RPL and is extensible for additional formats.

2. Terminology

The key words "MUST", "MUST NOT", "REQUIRED", "SHALL", "SHALL NOT", "SHOULD", "SHOULD NOT", "RECOMMENDED", "NOT RECOMMENDED", "MAY", and "OPTIONAL" in this document are to be interpreted as described in [RFC2119].

The Terminology used in this document is consistent with and incorporates that described in 'Terminology in Low power And Lossy Networks' [RFC7102] and [RFC6550].

The terms Route-over and Mesh-under are defined in [RFC6775].

Other terms in use in LLNs are found in [RFC7228].

The term "byte" is used in its now customary sense as a synonym for "octet".

3. Updating RFC 4944

This draft adapts 6LoWPAN while maintaining backward compatibility with IPv6 over IEEE 802.15.4 [RFC4944] by introducing a concept of context in the 6LoWPAN parser, a context being identified by a Page number, and defines 16 Pages.

Pages are delimited in a 6LoWPAN packet by a dispatch value that indicates the next current Page. The Page number is encoded in a Dispatch Value Bit Pattern of 1111xxxx where xxxx is the Page number, 0 to 15, as follows:

```
0
0 1 2 3 4 5 6 7
+---+---+---+---+
|1|1|1|1|Page Nb|
+---+---+---+---+
```

Figure 2: Page encoding

Values of the Dispatch byte defined in [RFC4944] are considered as belonging to a Page 0 parsing context, which is the default and does not need to be signaled explicitly at the beginning of a 6LoWPAN packet. That way, backward compatibility with existing implementations is ensured.

Note: This specification does not use the Escape Dispatch, which extends Page 0 to more values, but rather allocates another Dispatch Bit Pattern (1111xxxx), in all Pages including Page 0 and Pages defined in future specifications, to indicate the next parsing context represented by its Page number.

3.1. New Page1 Dispatch

This draft defines a new Page1 Dispatch with a Dispatch Value of 11110001 that indicates a context switch in the 6LoWPAN parser to a Page 1.

The Dispatch bits defined in Page 0 by [RFC4944] are free to be reused in Page 1.

On the other hand, the Dispatch bits defined in Page 0 for the Compression Format for IPv6 Datagrams over IEEE 802.15.4-Based Networks [RFC6282] are defined with the same values in Page 1 so there is no need to switch context back from Page 1 to Page 0 to address LOWPAN_IPHC and LOWPAN_NHC.

3.2. New Routing Header Dispatch (6LoRH)

This specification introduces a new 6LoWPAN Routing Header (6LoRH) to carry IPv6 routing information. The 6LoRH may contain source routing information such as a compressed form of RH3, as well as other sorts of routing information such as the RPL Packet Information and IP-in-IP encapsulation.

The 6LoRH is expressed in a 6LoWPAN packet as a Type-Length-Value (TLV) field, which is extensible for future uses. The proposed BIER bitmap encoding in Section 9 is an example of extension.

Section 5.1 of the [RFC4944] specification defines various Dispatch Types and Headers, and in particular a Mesh Header that corresponds to a bit pattern 10xxxxxx (in Page 0).

This specification uses the same bit pattern 10xxxxxx in Page 1 for the canonical form of 6LoRH Dispatch that is detailed in Section 5

3.3. Sur-Compression Mechanisms

It is expected that virtual-link-specific sur-compression mechanisms may be applied in the future that merge Dispatch values from multiple Pages into a single octet, attempting to keep the dispatch bits settings in their canonical form as much as possible.

Considering that the Mesh-Under and the Route-Over modes are generally mutually exclusive, it is expected that the new 6LoRH Dispatch introduced in this specification can be left in its canonical form through sur-compression technique.

A dispatch space of equivalent size to the Mesh Header was reserved in [RFC4944] for external specifications, Not A LowPan (NALP), hoping that such specification could coexist harmlessly on a same network as a early 6LoWPAN.

A sur-compression technique may alternatively use the NALP space for 6LoRH, in which case bit patterns represented as 10xxxxxx in this specification will be mapped directly to 00xxxxxx.

4. Placement Of The New Dispatch Types

4.1. Placement Of The Page1 Dispatch

In a zone of a packet where Page 1 is active, which means once a Page1 Dispatch is parsed, and as long as no other Page Dispatch is parsed, the parsing of the packet MUST follow this specification if the 6LoRH Bit Pattern [Section 5] is found.

Mesh Headers represent Layer-2 information and are processed before any Layer-3 information that is encoded in Page 1. If a 6LoWPAN packet requires a Mesh header, the Mesh Header MUST always be placed in the packet before the first Page1 Dispatch, if any.

For the same reason, Fragments Headers as defined in [RFC4944] MUST always be placed in the packet before the first Page1 Dispatch, if any.

It must be noted that the NALP Dispatch Bit Pattern as defined in [RFC4944] is only defined for the first octet in the packet. Switching back to Page 0 for NALP inside a 6LoWPAN packet appears non-sensical.

It results that there is no need so far for restoring the Page 0 parsing context after a context was switched to Page 1, so the value for the Page0 Dispatch of 11110000 may not actually be seen in packets following the 6LoWPAN specifications that are available at the time of this writing.

4.2. Placement Of The 6LoRH

With this specification, the 6LoRH [Section 5] is only defined in Page 1, so it MUST be placed in the packet in a zone where the Page 1 context is active.

One or more 6LoRHs MAY be placed in a 6LoWPAN packet and MUST always be placed before the LOWPAN_IPHC [RFC6282].

A 6LoRH being placed in a Page 1 context, it MUST always be placed after any Fragmentation Header and/or Mesh Header [RFC4944], even if a sur-compression mechanism is used that elides the Page Dispatches.

5. 6LoWPAN Routing Header General Format

In its canonical form, the 6LoRH reuses in Page 1 the Dispatch Value Bit Pattern of 10xxxxxx that is defined in Page 0 for the Mesh Header in [RFC4944].

The Dispatch Value Bit Pattern is split in two forms of 6LoRH:

Elective (6LoRHE) that may be skipped if not understood

Critical (6LoRHC) that may not be ignored

5.1. Elective Format

In its canonical form, the 6LoRHE uses the Dispatch Value Bit Pattern of 101xxxxx.

A 6LoRHE may be ignored and skipped in parsing.

If it is ignored, the 6LoRHE is forwarded with no change inside the LLN.

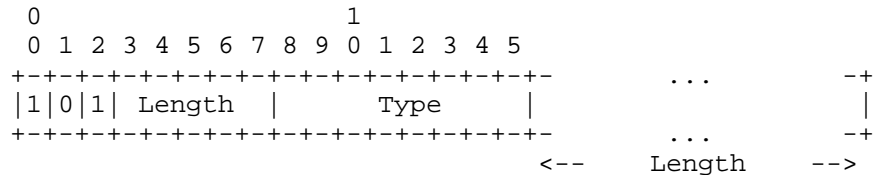



Figure 3: Elective 6LoWPAN Routing Header

Length:

Length of the 6LoRHE expressed in bytes, excluding the first 2 bytes. This is done to enable a node to skip a 6LoRH that it does not support and/or cannot parse, for instance if the Type is not known.

Type:

Type of the 6LoRHE

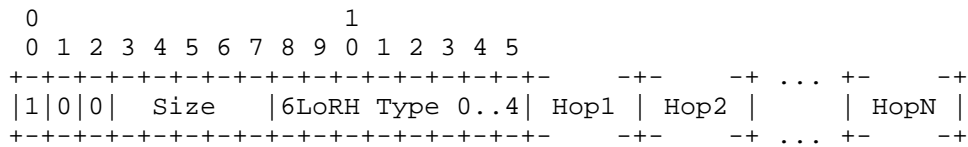

Size indicates the number of compressed addresses

Figure 5: The RH3-6LoRH

The values for the RH3-6LoRH Type are an enumeration, 0 to 4. The form of compression is indicated by the Type as follows:

Type	Size Unit
0	1
1	2
2	4
3	8
4	16

Figure 6: The RH3-6LoRH Types

In the case of a RH3-6LoRH, the TSE field is used as a Size, which encodes the number of hops minus 1; so a Size of 0 means one hop, and the maximum that can be encoded is 32 hops. (If more than 32 hops need to be expressed, a sequence of RH3-6LoRH can be employed.)

The next Hop is indicated in the first entry of the first RH3-6LoRH. Upon reception, the entry is checked whether it refers to the processing router itself. If it so, the entry is removed from the RH3-6LoRH and the Size is decremented. If the Size is now zero, the whole RH3-6LoRH is removed. If there is no more RH3-6LoRH, the processing node is the last router on the way, which may or may not be collocated with the final destination.

The last hop in the last RH3-6LoRH is the last router prior to the destination in the LLN. So even when there is a RH3-6LoRH in the frame, the address of the final destination is in the LoWPAN_IPHC [RFC6282].

If some bits of the first address in the RH3-6LoRH can be derived from the final destination is in the LoWPAN_IPHC, then that address may be compressed, otherwise is expressed in full. Next addresses only need to express the delta from the previous address.

All addresses in a RH3-6LoRH are compressed in a same fashion, down to the same number of bytes per address. In order to get different forms of compression, multiple consecutive RH3-6LoRH must be used.

7. The RPL Packet Information 6LoRH

[RFC6550], Section 11.2, specifies the RPL Packet Information (RPI) as a set of fields that are to be added to the IP packets for the purpose of Instance Identification, as well as Loop Avoidance and Detection.

In particular, the SenderRank, which is the scalar metric computed by an specialized Objective Function such as [RFC6552], indicates the Rank of the sender and is modified at each hop. The SenderRank allows to validate that the packet progresses in the expected direction, either upwards or downwards, along the DODAG.

RPL defines the RPL Option for Carrying RPL Information in Data-Plane Datagrams [RFC6553] to transport the RPI, which is carried in an IPv6 Hop-by-Hop Options Header [RFC2460], typically consuming eight bytes per packet.

With [RFC6553], the RPL option is encoded as six Octets; it must be placed in a Hop-by-Hop header that consumes two additional octets for a total of eight. In order to limit its range to the inside the RPL domain, the Hop-by-Hop header must be added to (or removed from) packets that cross the border of the RPL domain.

The 8-bytes overhead is detrimental to the LLN operation, in particular with regards to bandwidth and battery constraints. These bytes may cause a containing frame to grow above maximum frame size, leading to Layer 2 or 6LoWPAN [RFC4944] fragmentation, which in turn cause even more energy spending and issues discussed in the LLN Fragment Forwarding and Recovery [I-D.thubert-6lo-forwarding-fragments].

An additional overhead comes from the need, in certain cases, to add an IP-in-IP encapsulation to carry the Hop-by-Hop header. This is needed when the router that inserts the Hop-by-Hop header is not the source of the packet, so that an error can be returned to the router. This is also the case when a packet originated by a RPL node must be stripped from the Hop-by-Hop header to be routed outside the RPL domain.

This specification defines an IPinIP-6LoRH in Section 8 for that purpose, but it must be noted that stripping a 6LoRH does not require a manipulation of the packet in the LOWPAN_IPHC, and thus, if the

source address in the LOWPAN_IPHC is the node that inserted the IPinIP-6LoRH then this alone does not mandate an IPinIP-6LoRH.

As a result, a RPL packet may bear only a RPI-6LoRH and no IPinIP-6LoRH. In that case, the source and destination of the packet are located in the LOWPAN_IPHC.

As with [RFC6553], the fields in the RPI include an 'O', an 'R', and an 'F' bit, an 8-bit RPLInstanceID (with some internal structure), and a 16-bit SenderRank.

The remainder of this section defines the RPI-6LoRH, a Critical 6LoWPAN Routing Header that is designed to transport the RPI in 6LoWPAN LLNs.

7.1. Compressing the RPLInstanceID

RPL Instances are discussed in [RFC6550], Section 5. A number of simple use cases will not require more than one instance, and in such a case, the instance is expected to be the global Instance 0. A global RPLInstanceID is encoded in a RPLInstanceID field as follows:

```

  0 1 2 3 4 5 6 7
+---+---+---+---+---+
|0|      ID      | Global RPLInstanceID in 0..127
+---+---+---+---+---+
```

Figure 7: RPLInstanceID Field Format for Global Instances

For the particular case of the global Instance 0, the RPLInstanceID field is all zeros. This specification allows to elide a RPLInstanceID field that is all zeros, and defines a I flag that, when set, signals that the field is elided.

7.2. Compressing the SenderRank

The SenderRank is the result of the DAGRank operation on the rank of the sender; here the DAGRank operation is defined in [RFC6550], Section 3.5.1, as:

$$\text{DAGRank}(\text{rank}) = \text{floor}(\text{rank} / \text{MinHopRankIncrease})$$

If MinHopRankIncrease is set to a multiple of 256, the least significant 8 bits of the SenderRank will be all zeroes; by eliding those, the SenderRank can be compressed into a single byte. This idea is used in [RFC6550] by defining DEFAULT_MIN_HOP_RANK_INCREASE as 256 and in [RFC6552] that defaults MinHopRankIncrease to DEFAULT_MIN_HOP_RANK_INCREASE.

7.3. The Overall RPI-6LoRH encoding

Since the I flag is not set, the TSE field does not need to be a length expressed in bytes. The field is fully reused for control bits so as to encode the O, R and F flags from the RPI, and the I and K flags that indicate the compression that is taking place.

The RPI-6LoRH is immediately followed by the RPLInstanceID field, unless that field is fully elided, and then the SenderRank, which is either compressed into one byte or fully in-lined as the whole 2 bytes. The I and K flags in the RPI-6LoRH indicate whether the RPLInstanceID is elided and/or the SenderRank is compressed and depending on these bits, the Length of the RPI-6LoRH may vary as described hereafter.

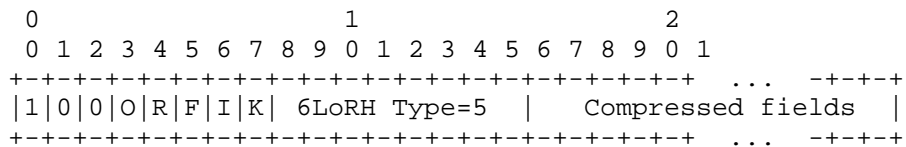


Figure 8: The Generic RPI-6LoRH Format

The O, R, and F bits as defined in [RFC6550], Section 11.2.

If it is set, the Instance ID is elided and the RPLInstanceID is the Global RPLInstanceID 0. If it is not set, the octet immediately following the type field contains the RPLInstanceID as specified in [RFC6550] section 5.1.

K bit:

If it is set, the SenderRank is be compressed into one octet, and the lowest significant octet is elided. If it is not set, the SenderRank, is fully inlined as 2 octets.

In Figure 9, the RPLInstanceID is the Global RPLInstanceID 0, and the MinHopRankIncrease is a multiple of 256 so the least significant byte is all zeros and can be elided:

```

      0               1               2
0 1 2 3 4 5 6 7 8 9 0 1 2 3 4 5 6 7 8 9 0 1 2 3
+-----+-----+-----+-----+-----+-----+
|1|0|0|0|R|F|1|1| 6LoRH Type=5 | SenderRank |
+-----+-----+-----+-----+-----+-----+
I=1, K=1

```

Figure 9: The most compressed RPI-6LoRH

In Figure 10, the RPLInstanceID is the Global RPLInstanceID 0, but both bytes of the SenderRank are significant so it can not be compressed:

```

      0               1               2               3
0 1 2 3 4 5 6 7 8 9 0 1 2 3 4 5 6 7 8 9 0 1 2 3 4 5 6 7 8 9 0 1
+-----+-----+-----+-----+-----+-----+-----+-----+
|1|0|0|0|R|F|1|0| 6LoRH Type=5 | SenderRank |
+-----+-----+-----+-----+-----+-----+-----+
I=1, K=0

```

Figure 10: Eliding the RPLInstanceID

In Figure 11, the RPLInstanceID is not the Global RPLInstanceID 0, and the MinHopRankIncrease is a multiple of 256:

```

      0               1               2               3
0 1 2 3 4 5 6 7 8 9 0 1 2 3 4 5 6 7 8 9 0 1 2 3 4 5 6 7 8 9 0 1
+-----+-----+-----+-----+-----+-----+-----+-----+
|1|0|0|0|R|F|0|1| 6LoRH Type=5 | RPLInstanceID | SenderRank |
+-----+-----+-----+-----+-----+-----+-----+
I=0, K=1

```

Figure 11: Compressing SenderRank

In Figure 12, the RPLInstanceID is not the Global RPLInstanceID 0, and both bytes of the SenderRank are significant:

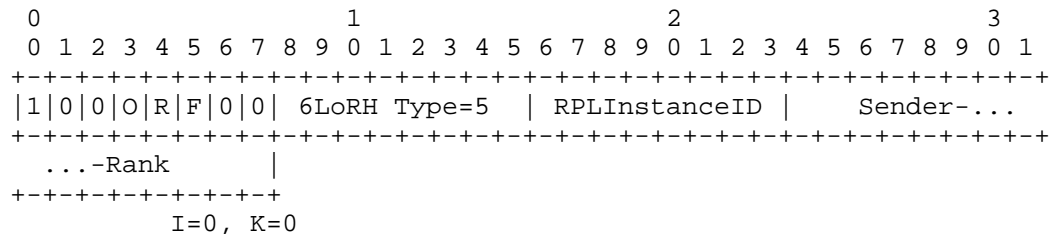


Figure 12: Least compressed form of RPI-6LoRH

A typical packet in RPL non-storing mode going down the RPL graph requires an IPinIP encapsulating the RH3, whereas the RPI is usually omitted, unless it is important to indicate the RPLInstanceID. To match this structure, an optimized IPinIP 6LoRH is defined in Section 8.

And the types include the setting of I and K as follows:

Type	I	K
5	0	0
6	0	1
7	1	0
8	1	1

Figure 13: The RPI-6LoRH Types

8. The IP-in-IP 6LoRH

The IP-in-IP 6LoRH (IPinIP-6LoRH) is an Elective 6LoWPAN Routing Header that provides a compressed form for the encapsulating IPv6 Header in the case of an IP-in-IP encapsulation.

An IPinIP encapsulation is used to insert a field such as a Routing Header or an RPI at a router that is not the source of the packet. In order to send an error back regarding the inserted field, the address of the router that performs the insertion must be provided.

The encapsulation can also enable a router down the path removing a field such as the RPI, but this can be done in the compressed form by removing the RPI-6LoRH, so an IPinIP-6LoRH encapsulation is not required for that sole purpose.

This field is not critical for routing so the Type can be ignored, and the TSE field contains the Length in bytes.

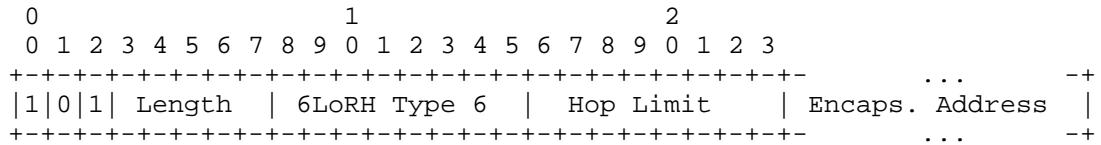


Figure 14: The IPinIP-6LoRH

The Length of an IPinIP-6LoRH is expressed in bytes and MUST be at least 1, to indicate a Hop Limit (HL), that is decremented at each hop. When the HL reaches 0, the packet is dropped per [RFC2460]

If the Length of an IPinIP-6LoRH is exactly 1, then the Encapsulator Address is elided, which means that the Encapsulator is a well-known router, for instance the root in a RPL graph.

If the Length of an IPinIP-6LoRH is strictly more than 1, then an Encapsulator Address is placed in a compressed form after the Hop Limit field. The value of the Length indicates which compression is performed on the Encapsulator Address. For instance, a Size of 3 indicates that the Encapsulator Address is compressed to 2 bytes.

When it cannot be elided, the destination IP address of the IP-in-IP header is transported in a RH3-6LoRH as the first address of the list.

With RPL, the destination address in the IP-in-IP header is implicitly the root in the RPL graph for packets going upwards, and the destination address in the IPHC for packets going downwards. If the implicit value is correct, the destination IP address of the IP-in-IP encapsulation can be elided.

If the final destination of the packet is a leaf that does not support this specification, then the chain of 6LoRH must be stripped by the RPL/6LR router to which the leaf is attached. In that example, the destination IP address of the IP-in-IP header cannot be elided.

In the special case where the 6LoRH is used to route 6LoWPAN fragments, the destination address is not accessible in the IPHC on all fragments and can be elided only for the first fragment and for packets going upwards.

9. The BIER 6LoRH

(Note that the current contents of this section is a proof of concept only; the details for this encoding need to be developed in parallel with defining the semantics of a constrained version of BIER.)

The Bit Index Explicit Replication (BIER) 6LoRH (BIER-6LoRH) is an Elective 6LoWPAN Routing Header that provides a variable-size container for a BIER Bitmap. BIER can be used to route downwards a RPL graph towards one or more LLN node, as discussed in the BIER Architecture [I-D.wijnands-bier-architecture] specification. The capability to parse the BIER Bitmap is necessary to forward the packet so the Type cannot be ignored.

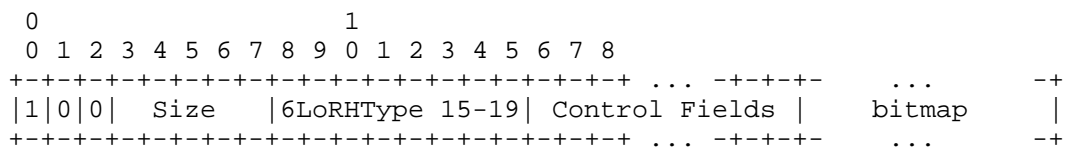


Figure 15: The BIER-6LoRH

The Type for a BIER-6LoRH indicates the size of words used to build the bitmap and whether the bitmap is operated as an uncompressed bit-by-bit mapping, or as a Bloom filter.

In the bit-by-bit case, each bit is mapped in an unequivocal fashion with a single addressable resource in the network. This may rapidly lead to large bitmaps, and BIER allows to divide a network into groups that partition the network so that a given bitmap is locally significant to one group only. This specification allows to encode a 1-byte Group ID in the BIER-6LoRH Control Fields.

A Bloom Filter can be seen as a compression technique for the bitmap. A Bloom Filter may generate false positives, which, in the case of BIER, result in undue forwarding of a packet down a path where no listener exists.

As an example, the Constrained-Cast [I-D.bergmann-bier-ccast] specification employs Bloom Filters as a compact representation of a match or non-match for elements in a large set.

In the case of a Bloom Filter, a number of Hash functions must be run to obtain a multi-bit signature of an encoded element. This specification allows to signal an Identifier of the Hash functions being used to generate a certain bitmap, so as to enable a migration scenario where Hash functions are renewed. A Hash ID is signaled as

a 1-byte value, and, depending on the Type, there may be up to 2 or up to 8 Hash IDs passed in the BIER-6LoRH Control Fields associated with a Bloom Filter bitmap, as follows:

Type	encoding	Control Fields	Word Size
15	bit-by-bit	none	32 bits
16	Bloom filter	2* 1-byte HashID	32 bits
17	bit-by-bit	none	128 bits
18	Bloom filter	8* 1-byte HashID	128 bits
19	bit-by-bit	1-byte GroupID	128 bits

Figure 16: The BIER-6LoRH Types

In order to address a potentially large number of devices, the bitmap may grow very large. Yet, the maximum frame size for a given MAC layer may limit the number of bits that can be dedicated to routing. The Size indicates the number of words in the bitmap minus one, so a size of 0 means one word, a Size of 1 means 64 2 words, up to a size of 31 which means 32 words.

10. Security Considerations

The security considerations of [RFC4944], [RFC6282], and [RFC6553] apply.

Using a compressed format as opposed to the full in-line format is logically equivalent and does not create an opening for a new threat when compared to [RFC6550], [RFC6553] and [RFC6554].

11. IANA Considerations

This document creates a IANA registry for the 6LoWPAN Routing Header Type, and assigns the following values:

```

0..4 : RH3-6LoRH [RFCthis]

5 : RPI-6LoRH [RFCthis]

6 : IPinIP-6LoRH [RFCthis]

15..19 : BIER-6LoRH [RFCthis]
```

12. Acknowledgments

The authors wish to thank Martin Turon, James Woodyatt, Samita Chakrabarti, Jonathan Hui, Gabriel Montenegro and Ralph Droms for constructive reviews to the design in the 6lo Working Group. The overall discussion involved participants to the 6MAN, 6TiSCH and ROLL WGs, thank you all. Special thanks to the chairs of the ROLL WG, Michael Richardson and Ines Robles, and Brian Haberman, Internet Area A-D, and Adrian Farrel, Routing Area A-D, for driving this complex effort across Working Groups and Areas.

13. References

13.1. Normative References

- [IEEE802154]
IEEE standard for Information Technology, "IEEE std. 802.15.4, Part. 15.4: Wireless Medium Access Control (MAC) and Physical Layer (PHY) Specifications for Low-Rate Wireless Personal Area Networks", 2015.
- [RFC2119] Bradner, S., "Key words for use in RFCs to Indicate Requirement Levels", BCP 14, RFC 2119, DOI 10.17487/RFC2119, March 1997, <<http://www.rfc-editor.org/info/rfc2119>>.
- [RFC2460] Deering, S. and R. Hinden, "Internet Protocol, Version 6 (IPv6) Specification", RFC 2460, DOI 10.17487/RFC2460, December 1998, <<http://www.rfc-editor.org/info/rfc2460>>.
- [RFC4944] Montenegro, G., Kushalnagar, N., Hui, J., and D. Culler, "Transmission of IPv6 Packets over IEEE 802.15.4 Networks", RFC 4944, DOI 10.17487/RFC4944, September 2007, <<http://www.rfc-editor.org/info/rfc4944>>.
- [RFC6282] Hui, J., Ed. and P. Thubert, "Compression Format for IPv6 Datagrams over IEEE 802.15.4-Based Networks", RFC 6282, DOI 10.17487/RFC6282, September 2011, <<http://www.rfc-editor.org/info/rfc6282>>.
- [RFC6550] Winter, T., Ed., Thubert, P., Ed., Brandt, A., Hui, J., Kelsey, R., Levis, P., Pister, K., Struik, R., Vasseur, JP., and R. Alexander, "RPL: IPv6 Routing Protocol for Low-Power and Lossy Networks", RFC 6550, DOI 10.17487/RFC6550, March 2012, <<http://www.rfc-editor.org/info/rfc6550>>.

- [RFC6552] Thubert, P., Ed., "Objective Function Zero for the Routing Protocol for Low-Power and Lossy Networks (RPL)", RFC 6552, DOI 10.17487/RFC6552, March 2012, <<http://www.rfc-editor.org/info/rfc6552>>.
- [RFC6553] Hui, J. and JP. Vasseur, "The Routing Protocol for Low-Power and Lossy Networks (RPL) Option for Carrying RPL Information in Data-Plane Datagrams", RFC 6553, DOI 10.17487/RFC6553, March 2012, <<http://www.rfc-editor.org/info/rfc6553>>.
- [RFC6554] Hui, J., Vasseur, JP., Culler, D., and V. Manral, "An IPv6 Routing Header for Source Routes with the Routing Protocol for Low-Power and Lossy Networks (RPL)", RFC 6554, DOI 10.17487/RFC6554, March 2012, <<http://www.rfc-editor.org/info/rfc6554>>.
- [RFC7102] Vasseur, JP., "Terms Used in Routing for Low-Power and Lossy Networks", RFC 7102, DOI 10.17487/RFC7102, January 2014, <<http://www.rfc-editor.org/info/rfc7102>>.
- [RFC7228] Bormann, C., Ersue, M., and A. Keranen, "Terminology for Constrained-Node Networks", RFC 7228, DOI 10.17487/RFC7228, May 2014, <<http://www.rfc-editor.org/info/rfc7228>>.

13.2. Informative References

- [I-D.bergmann-bier-ccast]
Bergmann, O., Bormann, C., and S. Gerdes, "Constrained-Cast: Source-Routed Multicast for RPL", draft-bergmann-bier-ccast-00 (work in progress), November 2014.
- [I-D.ietf-6tisch-architecture]
Thubert, P., "An Architecture for IPv6 over the TSCH mode of IEEE 802.15.4", draft-ietf-6tisch-architecture-08 (work in progress), May 2015.
- [I-D.ietf-6tisch-tsch]
Watteyne, T., Palattella, M., and L. Grieco, "Using IEEE802.15.4e TSCH in an IoT context: Overview, Problem Statement and Goals", draft-ietf-6tisch-tsch-06 (work in progress), March 2015.
- [I-D.thubert-6lo-forwarding-fragments]
Thubert, P. and J. Hui, "LLN Fragment Forwarding and Recovery", draft-thubert-6lo-forwarding-fragments-02 (work in progress), November 2014.

[I-D.wijnands-bier-architecture]

Wijnands, I., Rosen, E., Dolganow, A., Przygienda, T., and S. Aldrin, "Multicast using Bit Index Explicit Replication", draft-wijnands-bier-architecture-05 (work in progress), March 2015.

[RFC6775]

Shelby, Z., Ed., Chakrabarti, S., Nordmark, E., and C. Bormann, "Neighbor Discovery Optimization for IPv6 over Low-Power Wireless Personal Area Networks (6LoWPANs)", RFC 6775, DOI 10.17487/RFC6775, November 2012, <<http://www.rfc-editor.org/info/rfc6775>>.

Authors' Addresses

Pascal Thubert (editor)
Cisco Systems
Village d'Entreprises Green Side
400, Avenue de Roumanille
Batiment T3
Biot - Sophia Antipolis 06410
FRANCE

Phone: +33 4 97 23 26 34
Email: pthubert@cisco.com

Carsten Bormann
Universitaet Bremen TZI
Postfach 330440
Bremen D-28359
Germany

Phone: +49-421-218-63921
Email: cabo@tzi.org

Laurent Toutain
Institut MINES TELECOM; TELECOM Bretagne
2 rue de la Chataigneraie
CS 17607
Cesson-Sevigne Cedex 35576
France

Email: Laurent.Toutain@telecom-bretagne.eu

Robert Cragie
ARM Ltd.
110 Fulbourn Road
Cambridge CB1 9NJ
UK

Email: robert.cragie@gridmerge.com