

TSVWG
Internet-Draft
Updates: [6363](#) (if approved)
Intended status: Standards Track
Expires: March 23, 2019

V. Roca
INRIA
A. Begen
Networked Media
September 19, 2018

**Forward Error Correction (FEC) Framework Extension to Sliding Window
Codes
draft-ietf-tsvwg-fecframe-ext-05**

Abstract

[RFC 6363](#) describes a framework for using Forward Error Correction (FEC) codes to provide protection against packet loss. The framework supports applying FEC to arbitrary packet flows over unreliable transport and is primarily intended for real-time, or streaming, media. However FECFRAME as per [RFC 6363](#) is restricted to block FEC codes. The present document updates FECFRAME to support FEC Codes based on a sliding encoding window, in addition to Block FEC Codes, in a backward compatible way. During multicast/broadcast real-time content delivery, the use of sliding window codes significantly improves robustness in harsh environments, with less repair traffic and lower FEC-related added latency.

Status of This Memo

This Internet-Draft is submitted in full conformance with the provisions of [BCP 78](#) and [BCP 79](#).

Internet-Drafts are working documents of the Internet Engineering Task Force (IETF). Note that other groups may also distribute working documents as Internet-Drafts. The list of current Internet-Drafts is at <https://datatracker.ietf.org/drafts/current/>.

Internet-Drafts are draft documents valid for a maximum of six months and may be updated, replaced, or obsoleted by other documents at any time. It is inappropriate to use Internet-Drafts as reference material or to cite them other than as "work in progress."

This Internet-Draft will expire on March 23, 2019.

Copyright Notice

Copyright (c) 2018 IETF Trust and the persons identified as the document authors. All rights reserved.

This document is subject to [BCP 78](#) and the IETF Trust's Legal Provisions Relating to IETF Documents (<https://trustee.ietf.org/license-info>) in effect on the date of publication of this document. Please review these documents carefully, as they describe your rights and restrictions with respect to this document. Code Components extracted from this document must include Simplified BSD License text as described in Section 4.e of the Trust Legal Provisions and are provided without warranty as described in the Simplified BSD License.

Table of Contents

1.	Introduction	2
2.	Definitions and Abbreviations	4
3.	Summary of Architecture Overview	7
4.	Procedural Overview	10
4.1.	General	10
4.2.	Sender Operation with Sliding Window FEC Codes	10
4.3.	Receiver Operation with Sliding Window FEC Codes	13
5.	Protocol Specification	15
5.1.	General	15
5.2.	FEC Framework Configuration Information	16
5.3.	FEC Scheme Requirements	16
6.	Feedback	16
7.	Transport Protocols	17
8.	Congestion Control	17
9.	Implementation Status	17
10.	Security Considerations	17
11.	Operations and Management Considerations	18
12.	IANA Considerations	18
13.	Acknowledgments	18
14.	References	18
14.1.	Normative References	18
14.2.	Informative References	18
Appendix A.	About Sliding Encoding Window Management (non Normative)	20
	Authors' Addresses	21

[1.](#) Introduction

Many applications need to transport a continuous stream of packetized data from a source (sender) to one or more destinations (receivers) over networks that do not provide guaranteed packet delivery. In particular packets may be lost, which is strictly the focus of this document: we assume that transmitted packets are either lost (e.g., because of a congested router, of a poor signal-to-noise ratio in a wireless network, or because the number of bit errors exceeds the correction capabilities of the physical-layer error correcting code)

or received by the transport protocol without any corruption (i.e., the bit-errors, if any, have been fixed by the physical-layer error correcting code and therefore are hidden to the upper layers).

For these use-cases, Forward Error Correction (FEC) applied within the transport or application layer, is an efficient technique to improve packet transmission robustness in presence of packet losses (or "erasures"), without going through packet retransmissions that create a delay often incompatible with real-time constraints. The FEC Building Block defined in [\[RFC5052\]](#) provides a framework for the definition of Content Delivery Protocols (CDPs) that make use of separately defined FEC schemes. Any CDP defined according to the requirements of the FEC Building Block can then easily be used with any FEC Scheme that is also defined according to the requirements of the FEC Building Block.

Then FECFRAME [\[RFC6363\]](#) provides a framework to define Content Delivery Protocols (CDPs) that provide FEC protection for arbitrary packet flows over an unreliable datagram service transports such as UDP. It is primarily intended for real-time or streaming media applications, using broadcast, multicast, or on-demand delivery.

However [\[RFC6363\]](#) only considers block FEC schemes defined in accordance with the FEC Building Block [\[RFC5052\]](#) (e.g., [\[RFC6681\]](#), [\[RFC6816\]](#) or [\[RFC6865\]](#)). These codes require the input flow(s) to be segmented into a sequence of blocks. Then FEC encoding (at a sender or an encoding middlebox) and decoding (at a receiver or a decoding middlebox) are both performed on a per-block basis. This approach has major impacts on FEC encoding and decoding delays. The data packets of continuous media flow(s) may be passed to the transport layer immediately, without delay. But the block creation time, that depends on the number of source symbols in this block, impacts both the FEC encoding delay (since encoding requires that all source symbols be known), and mechanically the packet loss recovery delay at a receiver (since no repair symbol for the current block can be generated and therefore received before that time). Therefore a good value for the block size is necessarily a balance between the maximum FEC decoding latency at the receivers (which must be in line with the most stringent real-time requirement of the protected flow(s), hence an incentive to reduce the block size), and the desired robustness against long loss bursts (which increases with the block size, hence an incentive to increase this size).

This document updates [\[RFC6363\]](#) in order to also support FEC codes based on a sliding encoding window (A.K.A. convolutional codes) [\[RFC8406\]](#). This encoding window, either of fixed or variable size, slides over the set of source symbols. FEC encoding is launched whenever needed, from the set of source symbols present in the

sliding encoding window at that time. This approach significantly reduces FEC-related latency, since repair symbols can be generated and passed to the transport layer on-the-fly, at any time, and can be regularly received by receivers to quickly recover packet losses. Using sliding window FEC codes is therefore highly beneficial to real-time flows, one of the primary targets of FECFRAME. [RLC-ID] provides an example of such FEC Scheme for FECFRAME, built upon the simple sliding window Random Linear Codes (RLC).

This document is fully backward compatible with [RFC6363]. Indeed:

- o this extension does not prevent nor compromise in any way the support of block FEC codes. Both types of codes can nicely co-exist, just like different block FEC schemes can co-exist;
- o any receiver, for instance a legacy receiver that only supports block FEC schemes, can easily identify the FEC Scheme used in a FECFRAME session. This is made possible with the FEC Encoding ID that identifies the FEC Scheme used and which is carried in the FEC Framework Configuration Information (see [section 5.5 of \[RFC6363\]](#)). For instance, when the Session Description Protocol (SDP) is used to carry the FEC Framework Configuration Information, the FEC Encoding ID can be communicated in the "encoding-id=" parameter of a "fec-repair-flow" attribute [RFC6364]. This mechanism is the basic approach for a FECFRAME receiver to determine whether or not it supports the FEC Scheme used in a given FECFRAME session;

This document leverages on [RFC6363] and re-uses its structure. It proposes new sections specific to sliding window FEC codes whenever required. The only exception is [Section 3](#) that provides a quick summary of FECFRAME in order to facilitate the understanding of this document to readers not familiar with the concepts and terminology.

2. Definitions and Abbreviations

The following list of definitions and abbreviations is copied from [RFC6363], adding only the Block/sliding window FEC Code and Encoding/Decoding Window definitions (tagged with "ADDED"):

Application Data Unit (ADU): The unit of source data provided as payload to the transport layer.

ADU Flow: A sequence of ADUs associated with a transport-layer flow identifier (such as the standard 5-tuple {source IP address, source port, destination IP address, destination port, transport protocol}).

AL-FEC: Application-layer Forward Error Correction.

Application Protocol: Control protocol used to establish and control the source flow being protected, e.g., the Real-Time Streaming Protocol (RTSP).

Content Delivery Protocol (CDP): A complete application protocol specification that, through the use of the framework defined in this document, is able to make use of FEC schemes to provide FEC capabilities.

FEC Code: An algorithm for encoding data such that the encoded data flow is resilient to data loss. Note that, in general, FEC codes may also be used to make a data flow resilient to corruption, but that is not considered in this document.

Block FEC Code: (ADDED) An FEC Code that operates on blocks, i.e., for which the input flow MUST be segmented into a sequence of blocks, FEC encoding and decoding being performed independently on a per-block basis.

Sliding Window FEC Code: (ADDED) An FEC Code that can generate repair symbols on-the-fly, at any time, from the set of source symbols present in the sliding encoding window at that time. These codes are also known as convolutional codes.

FEC Framework: A protocol framework for the definition of Content Delivery Protocols using FEC, such as the framework defined in this document.

FEC Framework Configuration Information: Information that controls the operation of the FEC Framework.

FEC Payload ID: Information that identifies the contents of a packet with respect to the FEC Scheme.

FEC Repair Packet: At a sender (respectively, at a receiver), a payload submitted to (respectively, received from) the transport protocol containing one or more repair symbols along with a Repair FEC Payload ID and possibly an RTP header.

FEC Scheme: A specification that defines the additional protocol aspects required to use a particular FEC code with the FEC Framework.

FEC Source Packet: At a sender (respectively, at a receiver), a payload submitted to (respectively, received from) the transport

protocol containing an ADU along with an optional Explicit Source FEC Payload ID.

Repair Flow: The packet flow carrying FEC data.

Repair FEC Payload ID: A FEC Payload ID specifically for use with repair packets.

Source Flow: The packet flow to which FEC protection is to be applied. A source flow consists of ADUs.

Source FEC Payload ID: A FEC Payload ID specifically for use with source packets.

Source Protocol: A protocol used for the source flow being protected, e.g., RTP.

Transport Protocol: The protocol used for the transport of the source and repair flows, using an unreliable datagram service such as UDP.

Encoding Window: (ADDED) Set of Source Symbols available at the sender/coding node that are used to generate a repair symbol, with a Sliding Window FEC Code.

Decoding Window: (ADDED) Set of received or decoded source and repair symbols available at a receiver that are used to decode erased source symbols, with a Sliding Window FEC Code.

Code Rate: The ratio between the number of source symbols and the number of encoding symbols. By definition, the code rate is such that $0 < \text{code rate} \leq 1$. A code rate close to 1 indicates that a small number of repair symbols have been produced during the encoding process.

Encoding Symbol: Unit of data generated by the encoding process. With systematic codes, source symbols are part of the encoding symbols.

Packet Erasure Channel: A communication path where packets are either lost (e.g., in our case, by a congested router, or because the number of transmission errors exceeds the correction capabilities of the physical-layer code) or received. When a packet is received, it is assumed that this packet is not corrupted (i.e., in our case, the bit-errors, if any, are fixed by the physical-layer code and therefore hidden to the upper layers).

Repair Symbol: Encoding symbol that is not a source symbol.

Source Block: Group of ADUs that are to be FEC protected as a single block. This notion is restricted to Block FEC Codes.

Source Symbol: Unit of data used during the encoding process.

Systematic Code: FEC code in which the source symbols are part of the encoding symbols.

The key words "MUST", "MUST NOT", "REQUIRED", "SHALL", "SHALL NOT", "SHOULD", "SHOULD NOT", "RECOMMENDED", "MAY", and "OPTIONAL" in this document are to be interpreted as described in [\[RFC2119\]](#).

The key words "MUST", "MUST NOT", "REQUIRED", "SHALL", "SHALL NOT", "SHOULD", "SHOULD NOT", "RECOMMENDED", "NOT RECOMMENDED", "MAY", and "OPTIONAL" in this document are to be interpreted as described in [BCP 14](#) [\[RFC2119\]](#) [\[RFC8174\]](#) when, and only when, they appear in all capitals, as shown here.

[3.](#) Summary of Architecture Overview

The architecture of [\[RFC6363\]](#), [Section 3](#), equally applies to this FECFRAME extension and is not repeated here. However we provide hereafter a quick summary to facilitate the understanding of this document to readers not familiar with the concepts and terminology.

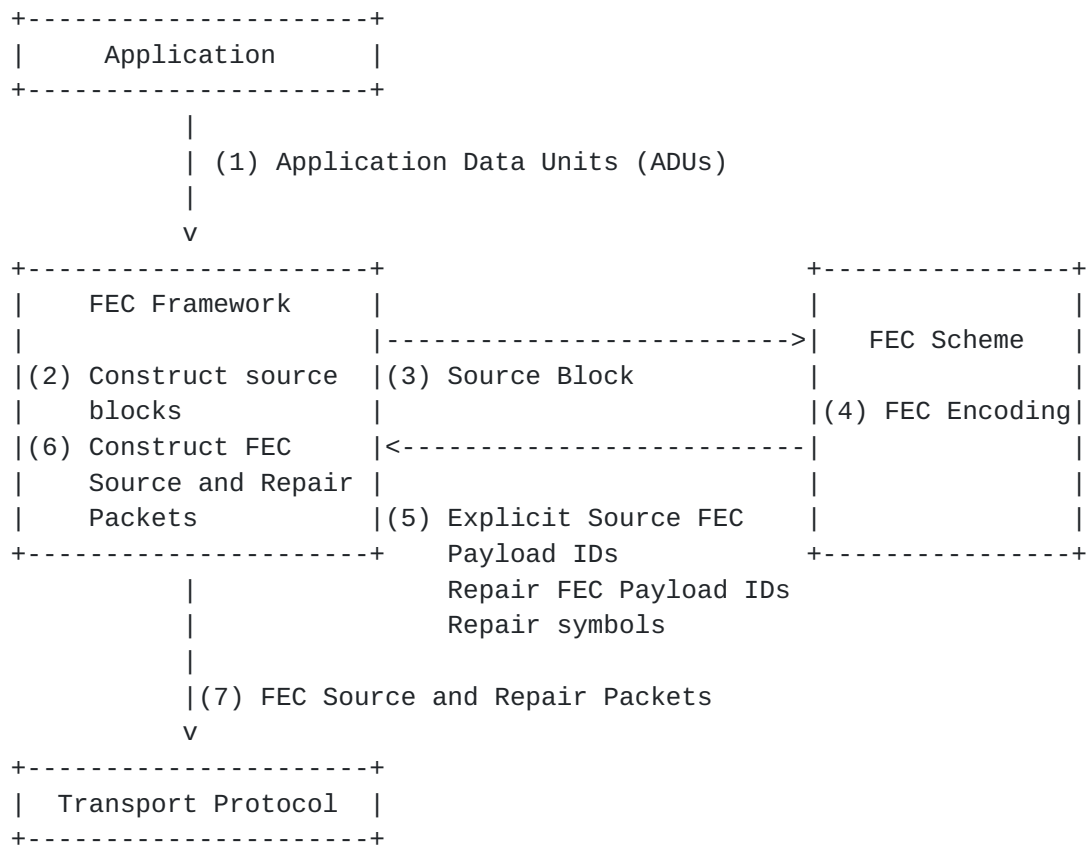


Figure 1: FECFRAME architecture at a sender.

The FECFRAME architecture is illustrated in Figure 1 from the sender's point of view, in case of a block FEC Scheme. It shows an application generating an ADU flow (other flows, from other applications, may co-exist). These ADUs, of variable size, must be somehow mapped to source symbols of fixed size. This is the goal of an ADU to symbols mapping process that is FEC Scheme specific (see below). Once the source block is built, taking into account both the FEC Scheme constraints (e.g., in terms of maximum source block size) and the application's flow constraints (e.g., in terms of real-time constraints), the associated source symbols are handed to the FEC Scheme in order to produce an appropriate number of repair symbols. FEC Source Packets (containing ADUs) and FEC Repair Packets (containing one or more repair symbols each) are then generated and sent using an appropriate transport protocol (more precisely [\[RFC6363\], Section 7](#), requires a transport protocol providing an unreliable datagram service, such as UDP). In practice FEC Source Packets may be passed to the transport layer as soon as available, without having to wait for FEC encoding to take place. In that case a copy of the associated source symbols needs to be kept within FECFRAME for future FEC encoding purposes.

At a receiver (not shown), FECFRAME processing operates in a similar way, taking as input the incoming FEC Source and Repair Packets received. In case of FEC Source Packet losses, the FEC decoding of the associated block may recover all (in case of successful decoding) or a subset potentially empty (otherwise) of the missing source symbols. After source symbol to ADU mapping, when lost ADUs are recovered, they are then assigned to their respective flow (see below). ADUs are returned to the application(s), either in their initial transmission order (in that case ADUs received after an erased one will be delayed until FEC decoding has taken place) or not (in that case each ADU is returned as soon as it is received or recovered), depending on the application requirements.

FECFRAME features two subtle mechanisms:

- o ADUs to source symbols mapping: in order to manage variable size ADUs, FECFRAME and FEC Schemes can use small, fixed size symbols and create a mapping between ADUs and symbols. To each ADU this mechanism prepends a length field (plus a flow identifier, see below) and pads the result to a multiple of the symbol size. A small ADU may be mapped to a single source symbol while a large one may be mapped to multiple symbols. The mapping details are FEC Scheme dependant and must be defined in the associated document;
- o Assignment of decoded ADUs to flows in multi-flow configurations: when multiple flows are multiplexed over the same FECFRAME instance, a problem is to assign a decoded ADU to the right flow (UDP port numbers and IP addresses traditionally used to map incoming ADUs to flows are not recovered during FEC decoding). To make it possible, at the FECFRAME sending instance, each ADU is prepended with a flow identifier (1 byte) during the ADU to source symbols mapping (see above). The flow identifiers are also shared between all FECFRAME instances as part of the FEC Framework Configuration Information. This (flow identifier + length + application payload + padding), called ADUI, is then FEC protected. Therefore a decoded ADUI contains enough information to assign the ADU to the right flow.

A few aspects are not covered by FECFRAME, namely:

- o [\[RFC6363\] section 8](#) does not detail any congestion control mechanism, but only provides high level normative requirements;
- o the possibility of having feedbacks from receiver(s) is considered out of scope, although such a mechanism may exist within the application (e.g., through RCTP control messages);

- o flow adaptation at a FECFRAME sender (e.g., how to set the FEC code rate based on transmission conditions) is not detailed, but it needs to comply with the congestion control normative requirements (see above).

4. Procedural Overview

4.1. General

The general considerations of [\[RFC6363\], Section 4.1](#), that are specific to block FEC codes are not repeated here.

With a Sliding Window FEC Code, the FEC Source Packet MUST contain information to identify the position occupied by the ADU within the source flow, in terms specific to the FEC Scheme. This information is known as the Source FEC Payload ID, and the FEC Scheme is responsible for defining and interpreting it.

With a Sliding Window FEC Code, the FEC Repair Packets MUST contain information that identifies the relationship between the contained repair payloads and the original source symbols used during encoding. This information is known as the Repair FEC Payload ID, and the FEC Scheme is responsible for defining and interpreting it.

The Sender Operation ([\[RFC6363\], Section 4.2.](#)) and Receiver Operation ([\[RFC6363\], Section 4.3](#)) are both specific to block FEC codes and therefore omitted below. The following two sections detail similar operations for Sliding Window FEC codes.

4.2. Sender Operation with Sliding Window FEC Codes

With a Sliding Window FEC Scheme, the following operations, illustrated in Figure 2 for the generic case (non-RTP repair flows), and in Figure 3 for the case of RTP repair flows, describe a possible way to generate compliant source and repair flows:

1. A new ADU is provided by the application.
2. The FEC Framework communicates this ADU to the FEC Scheme.
3. The sliding encoding window is updated by the FEC Scheme. The ADU to source symbols mapping as well as the encoding window management details are both the responsibility of the FEC Scheme and MUST be detailed there. [Appendix A](#) provides non normative hints about what FEC Scheme designers need to consider;
4. The Source FEC Payload ID information of the source packet is determined by the FEC Scheme. If required by the FEC Scheme,

the Source FEC Payload ID is encoded into the Explicit Source FEC Payload ID field and returned to the FEC Framework.

5. The FEC Framework constructs the FEC Source Packet according to [\[RFC6363\]](#) Figure 6, using the Explicit Source FEC Payload ID provided by the FEC Scheme if applicable.
6. The FEC Source Packet is sent using normal transport-layer procedures. This packet is sent using the same ADU flow identification information as would have been used for the original source packet if the FEC Framework were not present (e.g., the source and destination addresses and UDP port numbers on the IP datagram carrying the source packet will be the same whether or not the FEC Framework is applied).
7. When the FEC Framework needs to send one or several FEC Repair Packets (e.g., according to the target Code Rate), it asks the FEC Scheme to create one or several repair packet payloads from the current sliding encoding window along with their Repair FEC Payload ID.
8. The Repair FEC Payload IDs and repair packet payloads are provided back by the FEC Scheme to the FEC Framework.
9. The FEC Framework constructs FEC Repair Packets according to [\[RFC6363\]](#) Figure 7, using the FEC Payload IDs and repair packet payloads provided by the FEC Scheme.
10. The FEC Repair Packets are sent using normal transport-layer procedures. The port(s) and multicast group(s) to be used for FEC Repair Packets are defined in the FEC Framework Configuration Information.

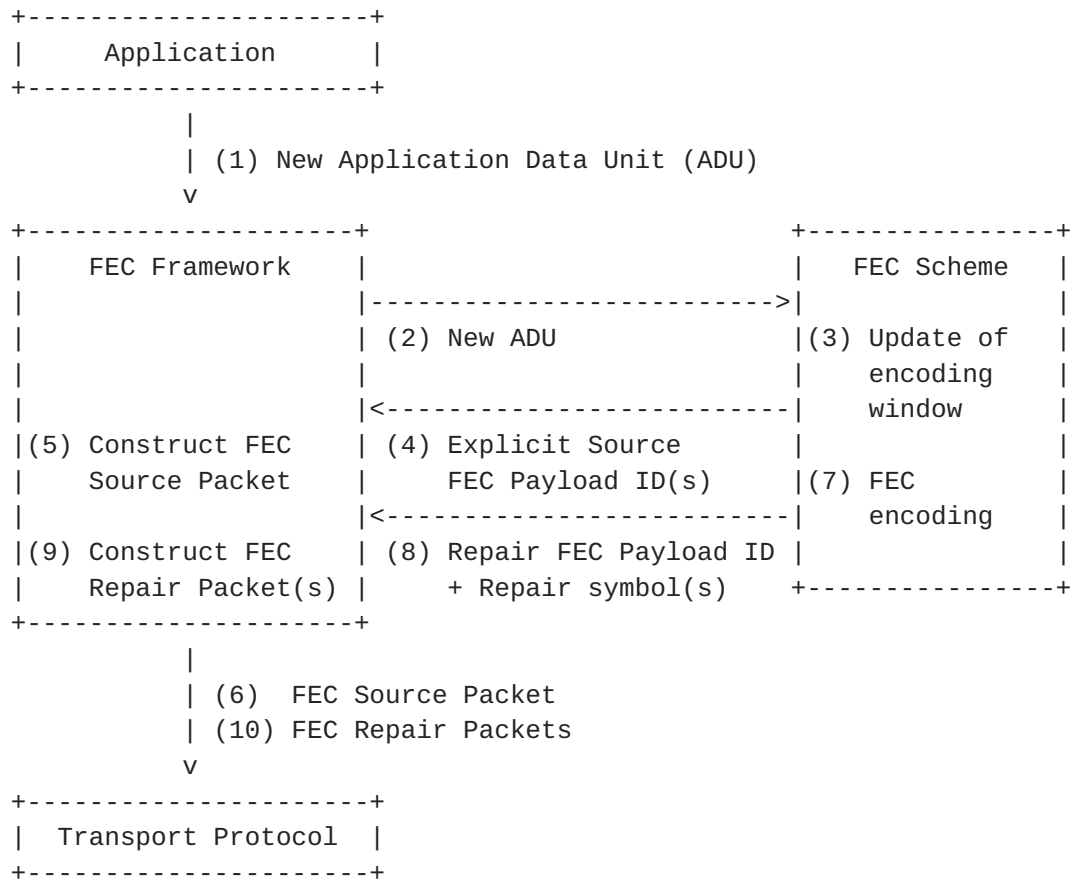


Figure 2: Sender Operation with Sliding Window FEC Codes

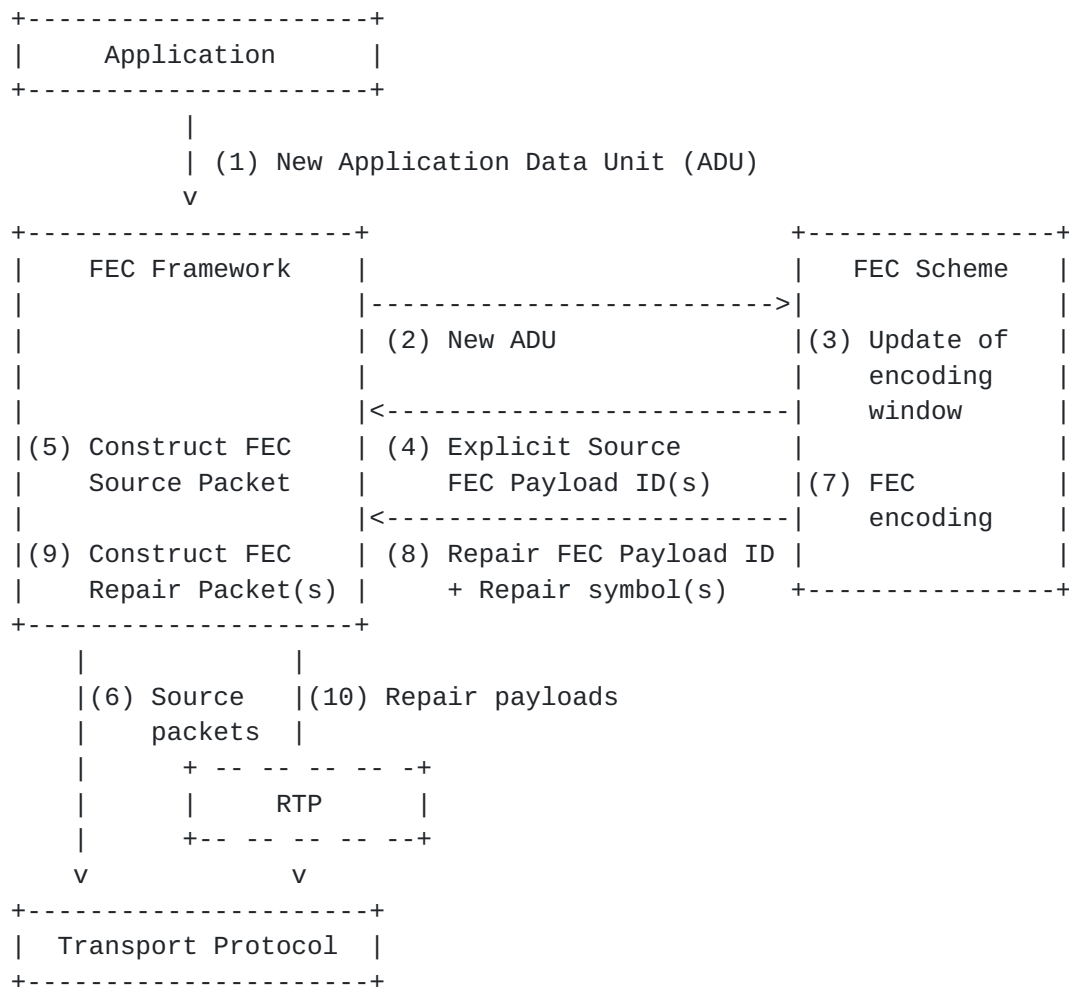


Figure 3: Sender Operation with Sliding Window FEC Codes and RTP Repair Flows

4.3. Receiver Operation with Sliding Window FEC Codes

With a Sliding Window FEC Scheme, the following operations, illustrated in Figure 4 for the generic case (non-RTP repair flows), and in Figure 5 for the case of RTP repair flows. The only differences with respect to block FEC codes lie in steps (4) and (5). Therefore this section does not repeat the other steps of [\[RFC6363\]](#), [Section 4.3](#), "Receiver Operation". The new steps (4) and (5) are:

4. The FEC Scheme uses the received FEC Payload IDs (and derived FEC Source Payload IDs when the Explicit Source FEC Payload ID field is not used) to insert source and repair packets into the decoding window in the right way. If at least one source packet is missing and at least one repair packet has been received and the rank of the associated linear system permits it, then FEC decoding can be performed in order to recover missing source

payloads. The FEC Scheme determines whether source packets have been lost and whether enough repair packets have been received to decode any or all of the missing source payloads.

5. The FEC Scheme returns the received and decoded ADUs to the FEC Framework, along with indications of any ADUs that were missing and could not be decoded.

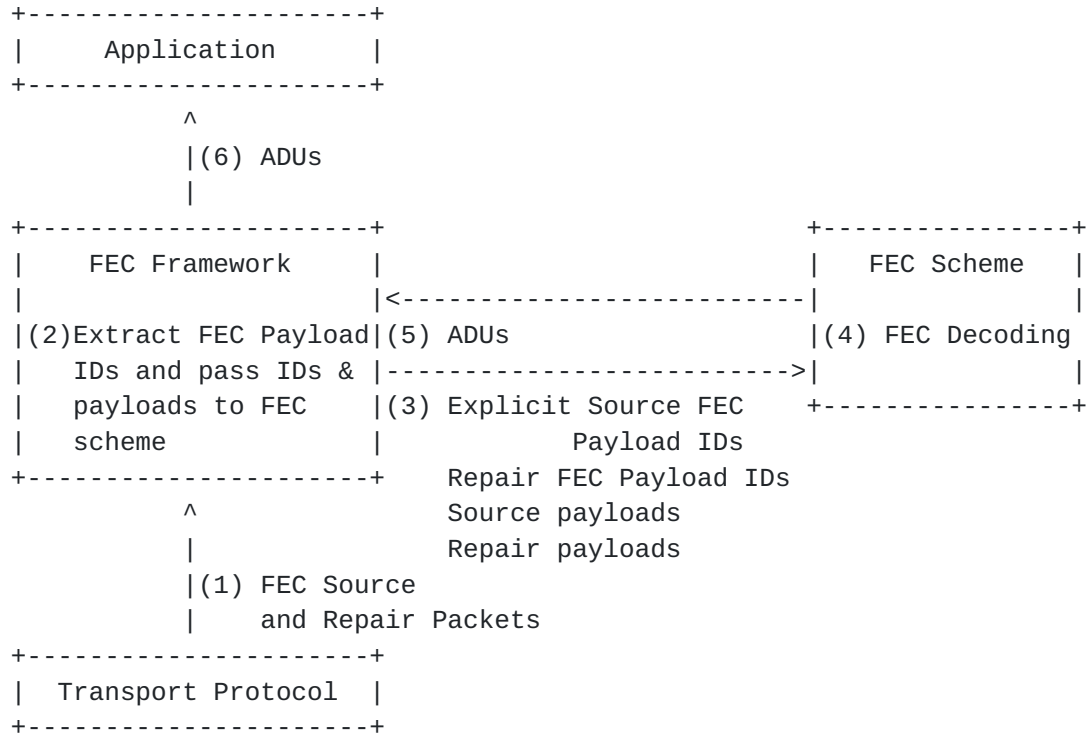


Figure 4: Receiver Operation with Sliding Window FEC Codes

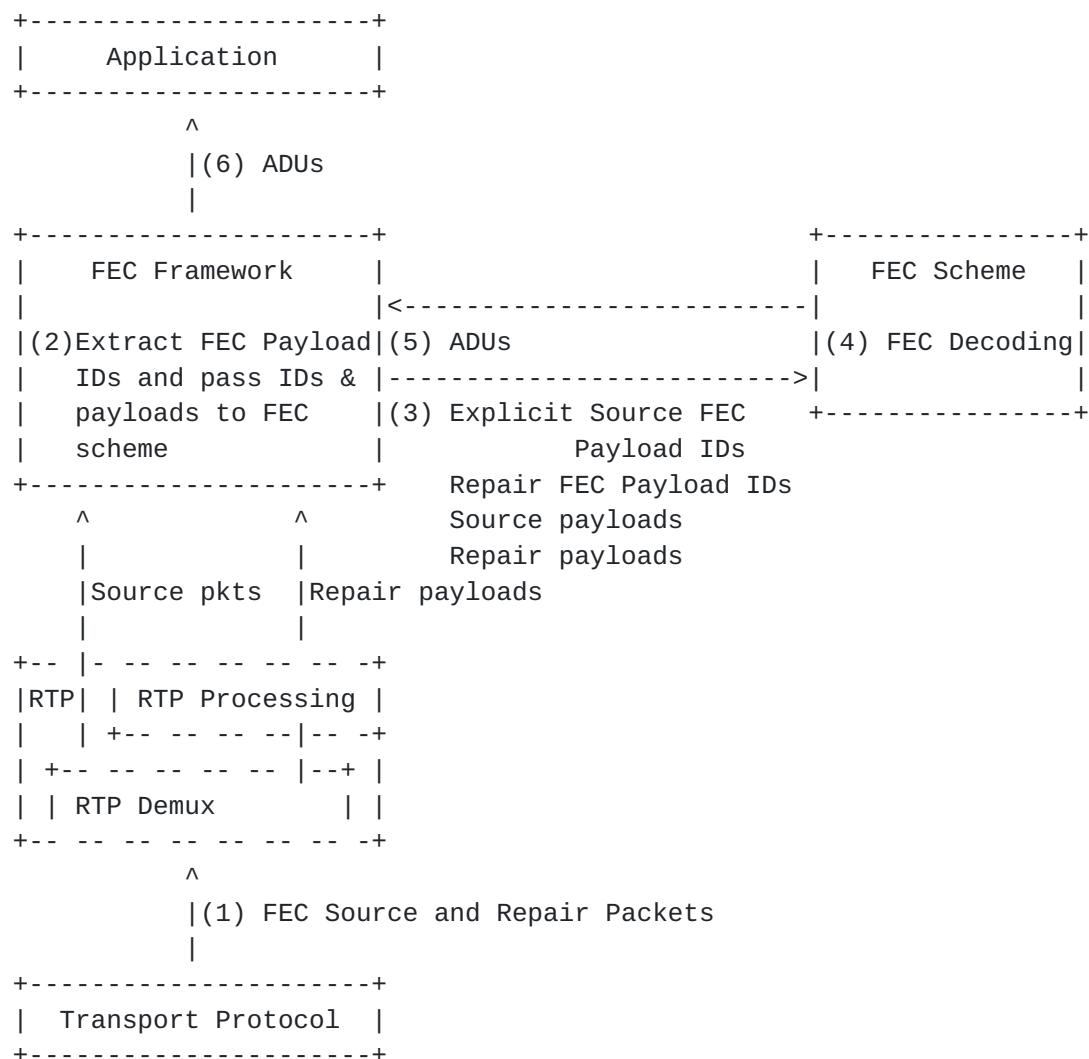


Figure 5: Receiver Operation with Sliding Window FEC Codes and RTP Repair Flows

5. Protocol Specification

5.1. General

This section discusses the protocol elements for the FEC Framework specific to Sliding Window FEC schemes. The global formats of source data packets (i.e., [RFC6363], Figure 6) and repair data packets (i.e., [RFC6363], Figures 7 and 8) remain the same with Sliding Window FEC codes. They are not repeated here.

5.2. FEC Framework Configuration Information

The FEC Framework Configuration Information considerations of [\[RFC6363\], Section 5.5](#), equally applies to this FECFRAME extension and is not repeated here.

5.3. FEC Scheme Requirements

The FEC Scheme requirements of [\[RFC6363\], Section 5.6](#), mostly apply to this FECFRAME extension and are not repeated here. An exception though is the "full specification of the FEC code", item (4), that is specific to block FEC codes. The following item (4-bis) applies in case of Sliding Window FEC schemes:

4-bis. A full specification of the Sliding Window FEC code

This specification MUST precisely define the valid FEC-Scheme-Specific Information values, the valid FEC Payload ID values, and the valid packet payload sizes (where packet payload refers to the space within a packet dedicated to carrying encoding symbols).

Furthermore, given valid values of the FEC-Scheme-Specific Information, a valid Repair FEC Payload ID value, a valid packet payload size, and a valid encoding window (i.e., a set of source symbols), the specification MUST uniquely define the values of the encoding symbol (or symbols) to be included in the repair packet payload with the given Repair FEC Payload ID value.

Additionally, the FEC Scheme associated to a Sliding Window FEC Code:

- o MUST define the relationships between ADUs and the associated source symbols (mapping);
- o MUST define the management of the encoding window that slides over the set of ADUs. [Appendix A](#) provides non normative hints about what FEC Scheme designers need to consider;
- o MUST define the management of the decoding window, consisting of a system of linear equations (in case of a linear FEC code);

6. Feedback

The discussion of [\[RFC6363\], Section 6](#), equally applies to this FECFRAME extension and is not repeated here.

7. Transport Protocols

The discussion of [\[RFC6363\], Section 7](#), equally applies to this FECFRAME extension and is not repeated here.

8. Congestion Control

The discussion of [\[RFC6363\], Section 8](#), equally applies to this FECFRAME extension and is not repeated here.

9. Implementation Status

Editor's notes: RFC Editor, please remove this section motivated by [RFC 7942](#) before publishing the RFC. Thanks!

An implementation of FECFRAME extended to Sliding Window codes exists:

- o Organisation: Inria
- o Description: This is an implementation of FECFRAME extended to Sliding Window codes and supporting the RLC FEC Scheme [\[RLC-ID\]](#). It is based on: (1) a proprietary implementation of FECFRAME, made by Inria and Expway for which interoperability tests have been conducted; and (2) a proprietary implementation of RLC Sliding Window FEC Codes.
- o Maturity: the basic FECFRAME maturity is "production", the FECFRAME extension maturity is "under progress".
- o Coverage: the software implements a subset of [\[RFC6363\]](#), as specialized by the 3GPP eMBMS standard [\[MBMSTS\]](#). This software also covers the additional features of FECFRAME extended to Sliding Window codes, in particular the RLC FEC Scheme.
- o Lincensing: proprietary.
- o Implementation experience: maximum.
- o Information update date: March 2018.
- o Contact: vincent.roca@inria.fr

10. Security Considerations

This FECFRAME extension does not add any new security consideration. All the considerations of [\[RFC6363\], Section 9](#), apply to this document as well.

11. Operations and Management Considerations

This FECFRAME extension does not add any new Operations and Management Consideration. All the considerations of [\[RFC6363\]](#), [Section 10](#), apply to this document as well.

12. IANA Considerations

A FEC Scheme for use with this FEC Framework is identified via its FEC Encoding ID. It is subject to IANA registration in the "FEC Framework (FECFRAME) FEC Encoding IDs" registry. All the rules of [\[RFC6363\]](#), [Section 11](#), apply and are not repeated here.

13. Acknowledgments

The authors would like to thank Christer Holmberg, David Black, Gorry Fairhurst, and Emmanuel Lochin for their valuable feedbacks on this document. This document being an extension to [\[RFC6363\]](#), the authors would also like to thank Mark Watson as the main author this RFC.

14. References

14.1. Normative References

- [RFC2119] Bradner, S., "Key words for use in RFCs to Indicate Requirement Levels", [BCP 14](#), [RFC 2119](#), DOI 10.17487/RFC2119, March 1997, <<https://www.rfc-editor.org/info/rfc2119>>.
- [RFC6363] Watson, M., Begen, A., and V. Roca, "Forward Error Correction (FEC) Framework", [RFC 6363](#), DOI 10.17487/RFC6363, October 2011, <<https://www.rfc-editor.org/info/rfc6363>>.
- [RFC8174] Leiba, B., "Ambiguity of Uppercase vs Lowercase in [RFC 2119](#) Key Words", [BCP 14](#), [RFC 8174](#), DOI 10.17487/RFC8174, May 2017, <<https://www.rfc-editor.org/info/rfc8174>>.

14.2. Informative References

- [MBMSTS] 3GPP, "Multimedia Broadcast/Multicast Service (MBMS); Protocols and codecs", 3GPP TS 26.346, March 2009, <<http://ftp.3gpp.org/specs/html-info/26346.htm>>.
- [RFC5052] Watson, M., Luby, M., and L. Vicisano, "Forward Error Correction (FEC) Building Block", [RFC 5052](#), DOI 10.17487/RFC5052, August 2007, <<https://www.rfc-editor.org/info/rfc5052>>.

- [RFC6364] Begen, A., "Session Description Protocol Elements for the Forward Error Correction (FEC) Framework", [RFC 6364](#), DOI 10.17487/RFC6364, October 2011, <<https://www.rfc-editor.org/info/rfc6364>>.
- [RFC6681] Watson, M., Stockhammer, T., and M. Luby, "Raptor Forward Error Correction (FEC) Schemes for FECFRAME", [RFC 6681](#), DOI 10.17487/RFC6681, August 2012, <<https://www.rfc-editor.org/info/rfc6681>>.
- [RFC6816] Roca, V., Cunche, M., and J. Lacan, "Simple Low-Density Parity Check (LDPC) Staircase Forward Error Correction (FEC) Scheme for FECFRAME", [RFC 6816](#), DOI 10.17487/RFC6816, December 2012, <<https://www.rfc-editor.org/info/rfc6816>>.
- [RFC6865] Roca, V., Cunche, M., Lacan, J., Bouabdallah, A., and K. Matsuzono, "Simple Reed-Solomon Forward Error Correction (FEC) Scheme for FECFRAME", [RFC 6865](#), DOI 10.17487/RFC6865, February 2013, <<https://www.rfc-editor.org/info/rfc6865>>.
- [RFC8406] Adamson, B., Adjih, C., Bilbao, J., Firoiu, V., Fitzek, F., Ghanem, S., Lochin, E., Masucci, A., Montpetit, M-J., Pedersen, M., Peralta, G., Roca, V., Ed., Saxena, P., and S. Sivakumar, "Taxonomy of Coding Techniques for Efficient Network Communications", [RFC 8406](#), DOI 10.17487/RFC8406, June 2018, <<https://www.rfc-editor.org/info/rfc8406>>.
- [RLC-ID] Roca, V. and B. Teibi, "Sliding Window Random Linear Code (RLC) Forward Erasure Correction (FEC) Scheme for FECFRAME", Work in Progress, Transport Area Working Group (TSVWG) [draft-ietf-tsvwg-rlc-fec-scheme](#) (Work in Progress), September 2018, <<https://tools.ietf.org/html/draft-ietf-tsvwg-rlc-fec-scheme>>.

Appendix A. About Sliding Encoding Window Management (non Normative)

The FEC Framework does not specify the management of the sliding encoding window which is the responsibility of the FEC Scheme. This annex only provides a few non normative hints.

Source symbols are added to the sliding encoding window each time a new ADU is available at the sender, after the ADU to source symbol mapping specific to the FEC Scheme.

Source symbols are removed from the sliding encoding window, for instance:

- o after a certain delay, when an "old" ADU of a real-time flow times out. The source symbol retention delay in the sliding encoding window should therefore be initialized according to the real-time features of incoming flow(s) when applicable;
- o once the sliding encoding window has reached its maximum size (there is usually an upper limit to the sliding encoding window size). In that case the oldest symbol is removed each time a new source symbol is added.

Several considerations can impact the management of this sliding encoding window:

- o at the source flows level: real-time constraints can limit the total time source symbols can remain in the encoding window;
- o at the FEC code level: theoretical or practical limitations (e.g., because of computational complexity) can limit the number of source symbols in the encoding window;
- o at the FEC Scheme level: signaling and window management are intrinsically related. For instance, an encoding window composed of a non sequential set of source symbols requires an appropriate signaling to inform a receiver of the composition of the encoding window, and the associated transmission overhead can limit the maximum encoding window size. On the opposite, an encoding window always composed of a sequential set of source symbols simplifies signaling: providing the identity of the first source symbol plus their number is sufficient, which creates a fixed and relatively small transmission overhead.

Authors' Addresses

Vincent Roca
INRIA
Univ. Grenoble Alpes
France

E-Mail: vincent.roca@inria.fr

Ali Begen
Networked Media
Konya
Turkey

E-Mail: ali.begen@networked.media

