

Network Working Group
Internet-Draft
Intended status: Standards Track
Expires: January 17, 2013

H. Asaeda
Keio University
R. Huang
Q. Wu
Huawei
July 16, 2012

RTCP XR Blocks for Synchronization Delay and Offset Metrics Reporting
draft-asaeda-xrblock-rtcp-xr-synchronization-07

Abstract

This document defines two RTCP XR Report Blocks and associated with SDP parameters that allow the reporting of synchronization delay and offset metrics for use in a range of RTP applications.

Status of this Memo

This Internet-Draft is submitted in full conformance with the provisions of [BCP 78](#) and [BCP 79](#).

Internet-Drafts are working documents of the Internet Engineering Task Force (IETF). Note that other groups may also distribute working documents as Internet-Drafts. The list of current Internet-Drafts is at <http://datatracker.ietf.org/drafts/current/>.

Internet-Drafts are draft documents valid for a maximum of six months and may be updated, replaced, or obsoleted by other documents at any time. It is inappropriate to use Internet-Drafts as reference material or to cite them other than as "work in progress."

This Internet-Draft will expire on January 17, 2013.

Copyright Notice

Copyright (c) 2012 IETF Trust and the persons identified as the document authors. All rights reserved.

This document is subject to [BCP 78](#) and the IETF Trust's Legal Provisions Relating to IETF Documents (<http://trustee.ietf.org/license-info>) in effect on the date of publication of this document. Please review these documents carefully, as they describe your rights and restrictions with respect to this document. Code Components extracted from this document must include Simplified BSD License text as described in Section 4.e of the Trust Legal Provisions and are provided without warranty as described in the Simplified BSD License.

Internet-Draft

SDO Report Blocks

July 2012

Table of Contents

1.	Introduction	3
2.	Terminology	3
2.1.	Standards Language	3
3.	Applicability	4
4.	RTP Flows Initial Synchronization Delay Report Block	4
4.1.	Metric Block Structure	5
4.2.	Definition of Fields in RTP Flow Initial Synchronization Delay Metrics Block	5
5.	RTP Flows Synchronization Offset Metrics Block	6
5.1.	Metric Block Structure	6
5.2.	Definition of Fields in RTP Flow General Synchronization Offset Metrics Block	6
6.	SDP Signaling	7
7.	IANA Considerations	7
8.	Security Considerations	8
9.	Acknowledgements	8
10.	References	9
10.1.	Normative References	9
10.2.	Informative References	9
Appendix A.	Change Log	9
A.1.	draft-asaeda-xrblock-rtcp-xr-synchronization-07	9
A.2.	draft-asaeda-xrblock-rtcp-xr-synchronization-06	10
A.3.	draft-asaeda-xrblock-rtcp-xr-synchronization-05	10
A.4.	draft-asaeda-xrblock-rtcp-xr-synchronization-04	10
A.5.	draft-asaeda-xrblock-rtcp-xr-synchronization-03	10
A.6.	draft-asaeda-xrblock-rtcp-xr-synchronization-02	10
A.7.	draft-asaeda-xrblock-rtcp-xr-synchronization-01	10
A.8.	draft-asaeda-xrblock-rtcp-xr-synchronization-00	11
	Authors' Addresses	11

1. Introduction

This draft defines two new block types to augment those defined in [\[RFC3611\]](#), for use in a range of RTP applications.

The first new block type supports reporting of Initial Synchronization Delay to establish multimedia session. Information is recorded about time difference between the start of RTP sessions and the time the RTP receiver acquires all components of RTP sessions in the multimedia session [\[RFC6051\]](#).

The second new block type supports reporting of the relative synchronization offset time of two arbitrary streams (e.g., between audio and video streams), with the same RTCP CNAME included in RTCP SDES packets [\[RFC3550\]](#). Information is recorded about the synchronization offset time of each RTP stream relative to the reference RTP stream with the same CNAME and General Synchronization Offset of zero.

These metrics belong to the class of terminal related transport level metrics defined in [\[MONARCH\]](#).

2. Terminology

2.1. Standards Language

The key words "MUST", "MUST NOT", "REQUIRED", "SHALL", "SHALL NOT", "SHOULD", "SHOULD NOT", "RECOMMENDED", "MAY", and "OPTIONAL" in this document are to be interpreted as described in [RFC 2119](#) [\[RFC2119\]](#).

In addition, the following terms are defined:

Initial Synchronization Delay:

A multimedia session comprises a set of concurrent RTP sessions

among a common group of participants, using one RTP session for each media type. Initial synchronization Delay is the average time for receiver to synchronize the components of a multimedia session [[RFC6051](#)].

Synchronization Offset:

The absolute delay variance of the measured RTP stream relative to the reference RTP stream in the multimedia session.

[3.](#) Applicability

The report blocks defined in this document could be used by dedicated network monitoring applications.

When joining each session in layered video sessions [[RFC6190](#)] or the multimedia session, a receiver may not synchronize playout across the multimedia session or layered video session until RTCP SR packets have been received on all of the component RTP sessions. The component RTP session are referred to as each RTP session for each media type in multimedia session or separate RTP session for each layer in the layered video session. For unicast session, the delay due to negotiation of NAT pinholes, firewall holes, quality-of-service, and media security keys is contributed to such initial synchronization playout. For multicast session, such initial synchronization delay varies with the session bandwidth, the number of members, and the number of senders in the session. The RTP flow Initial synchronization delay block can be used to report the initial synchronization delay to receive all the RTP streams belonging to the same multimedia session or layered video session. In the absence of packet loss, the initial synchronization delay equals to the average time taken to receive the first RTCP packet in the RTP session with the longest RTCP reporting interval. In the presence of packet loss, the media synchronization needs to be based on the in-band mapping of RTP and NTP-format timestamps [[RFC6051](#)] or wait until the reporting interval has passed, and the next RTCP SR packet is sent.

In an RTP multimedia session, there can be an arbitrary number of streams carried in different RTP sessions, with the same RTCP CNAME.

These streams may be not synchronized with each other. For example, one audio stream and one video stream belong to the same session and audio stream are transmitted lag behind video stream for multiple tens of milliseconds. The RTP Flows Synchronization Offset block can be used to report such synchronization offset between video stream and audio stream.

[4.](#) RTP Flows Initial Synchronization Delay Report Block

This block is sent by RTP receivers and reports Initial synchronization delay beyond the information carried in the standard RTCP packet format. Information is recorded about time difference between the start of RTP sessions and the time the RTP receiver acquires all components of RTP sessions [[RFC6051](#)].

[4.1.](#) Metric Block Structure

The RTP Flows Initial Synchronization Delay Report Block has the following format:

```

      0                               1                               2                               3
      0 1 2 3 4 5 6 7 8 9 0 1 2 3 4 5 6 7 8 9 0 1 2 3 4 5 6 7 8 9 0 1
+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+
|      BT=RFISD      |      Reserved      |      Block length=2      |
+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+
|                                     SSRC of Source                                     |
+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+
|                                     Initial Synchronization Delay                                     |
+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+

```

[4.2.](#) Definition of Fields in RTP Flow Initial Synchronization Delay Metrics Block

Block type (BT): 8 bits

The Statistics Summary Report Block is identified by the constant <RFISD>.

Block length: 16 bits

The constant 2, in accordance with the definition of this field in [Section 3 of RFC 3611](#) [[RFC3611](#)].

SSRC of Source: 32 bits

The SSRC of the media source SHALL be set to the value of the SSRC identifier carried in an arbitrary RTP stream belonging to the same multimedia session.

Initial Synchronization Delay: 32 bits

The average delay, expressed in units of 1/65536 seconds, from the RTCP packets received on all of the components RTP sessions to the beginning of session [[RFC6051](#)]. The value is calculated based on the information contained in RTCP SR packets or the in-band mapping of RTP and NTP-format timestamps [[RFC6051](#)]. If there is no packet loss, the initial synchronization delay is expected to be equal to the average time taken to receive the first RTCP packet in the RTP session with the longest RTCP reporting interval.

If the measurement is unavailable, the value of this field with all bits set to 1 SHOULD be reported.


[5.](#) RTP Flows Synchronization Offset Metrics Block

In the RTP multimedia sessions, there can be an arbitrary number of streams and each stream (e.g., audio stream or video stream) is sent in a separate RTP stream. The receiver associates RTP streams to be synchronized by means of RTCP CNAME contained in the RTCP Source Description (SDS) packets [[RFC3550](#)].

This block is sent by RTP receivers and reports synchronization offset of the arbitrary two RTP streams that needs to be synchronized in the RTP multimedia session. Information is recorded about the actual delay variance of the measured RTP stream relative to the reference RTP stream with the same CNAME. The reference RTP stream can be chosen as the arbitrary stream with minimum delay according to the common criterion defined in section 6.2.2.1 of [[Y.1540](#)].

5.1. Metric Block Structure

The RTP Flow General Synchronization Offset Report Block has the following format:

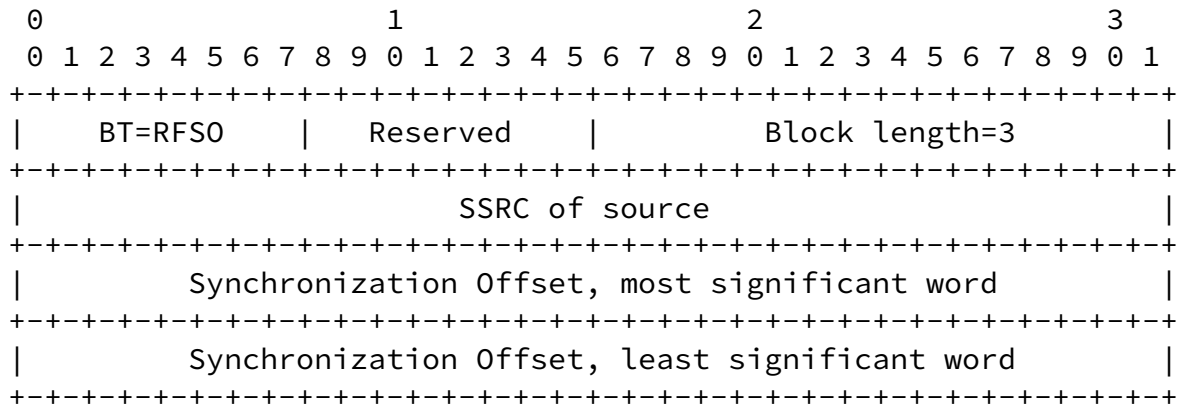

5.2. Definition of Fields in RTP Flow General Synchronization Offset Metrics Block

Block type (BT): 8 bits

The RTP Flow General Synchronization Offset Report Block is identified by the constant <RFS0>.

Block length: 16 bits

The constant 3, in accordance with the definition of this field in [Section 3 of RFC 3611](#) [[RFC3611](#)].

SSRC of Source: 32 bits

The SSRC of the media source SHALL be set to the value of the SSRC identifier of the reference RTP stream to which the XR relates.

Synchronization Offset: 64 bits

The synchronization offset of one RTP stream relative to the

reference RTP stream with the same CNAME. The Synchronization Offset of the reference stream should be zero. This value is calculated based on the interarrival time between an arbitrary RTP packet and the reference RTP packet with the same CNAME, and timestamps of this arbitrary RTP packet and the reference RTP packet with the same CNAME. The value of this field is represented using a 64-bit NTP-format timestamp as defined in [\[RFC5905\]](#), which is 64-bit unsigned fixed-point number with the integer part in the first 32 bits and the fractional part in the last 32 bits.

If the measurement is unavailable, the value of this field with all bits set to 1 SHOULD be reported.

[6.](#) SDP Signaling

Two new parameters are defined for the two report blocks defined in this document to be used with Session Description Protocol (SDP) [\[RFC4566\]](#) using the Augmented Backus-Naur Form (ABNF) [\[RFC5234\]](#). They have the following syntax within the "rtcp-xr" attribute [\[RFC3611\]](#):

```
rtcp-xr-attrib = "a=rtcp-xr:"  
                [xr-format *(SP xr-format)] CRLF  
xr-format = RTP-flows-init-syn-delay  
           / RTP-flows-syn-offset  
RTP-flows-init-syn-delay = "RTP-flows-init-syn-delay"  
                           ["=" max-size]  
RTP-flow-syn-offset = "RTP-flows-syn-offset"  
                     ["=" max-size]  
max-size = 1*DIGIT ; maximum block size in octets
```

Refer to [Section 5.1 of RFC 3611](#) [\[RFC3611\]](#) for a detailed description and the full syntax of the "rtcp-xr" attribute.

[7.](#) IANA Considerations

New report block types for RTCP XR are subject to IANA registration.

[Section 6.2 of \[RFC3611\]](#).

This document assigns two new block type values in the RTCP XR Block Type Registry:

Name: RFISD
Long Name: RTP Flows Initial Synchronization Delay
Value <RFISD>
Reference: [Section 4](#)

Name: RFSO
Long Name: RTP Flows Synchronization Offset Metrics Block
Value <RFSO>
Reference: [Section 5](#)

This document also registers two new SDP [[RFC4566](#)] parameters for the "rtcp-xr" attribute in the RTCP XR SDP Parameters Registry:

- * "RTP-flows-init-syn-delay"
- * "RTP-flows-syn-offset"

The contact information for the registrations is:

Qin Wu
sunseawq@huawei.com
101 Software Avenue, Yuhua District
Nanjing, Jiangsu 210012, China

[8.](#) Security Considerations

The new RTCP XR report blocks proposed in this document introduces no new security considerations beyond those described in [[RFC3611](#)].

[9.](#) Acknowledgements

The authors would like to thank Bill Ver Steeg, David R Oran, Ali Begen, Colin Perkins, Roni Even, Kevin Gross, Jing Zhao, Fernando Boronat Segui, Youqing Yang, Wenxiao Yu and Yinliang Hu for their valuable comments and suggestions on this document.

[10.](#) References

10.1. Normative References

- [RFC2119] Bradner, S., "Key words for use in RFCs to Indicate Requirement Levels", [BCP 14](#), [RFC 2119](#), March 1997.
- [RFC3550] Schulzrinne, H., Casner, S., Frederick, R., and V. Jacobson, "RTP: A Transport Protocol for Real-Time Applications", STD 64, [RFC 3550](#), July 2003.
- [RFC3611] Friedman, T., Caceres, R., and A. Clark, "RTP Control Protocol Extended Reports (RTCP XR)", [RFC 3611](#), November 2003.
- [RFC4566] Handley, M., Jacobson, V., and C. Perkins, "SDP: Session Description Protocol", [RFC 4566](#), July 2006.
- [RFC5234] Crocker, D. and P. Overell, "Augmented BNF for Syntax Specifications: ABNF", STD 68, [RFC 5234](#), January 2008.
- [RFC5905] Mills, D., Martin, J., Burbank, J., and W. Kasch, "Network Time Protocol Version 4: Protocol and Algorithms Specification", [RFC 5905](#), June 2010.
- [RFC6051] Perkins, C. and T. Schierl, "Rapid Synchronisation of RTP Flows", [RFC 6051](#), November 2010.
- [RFC6190] Wenger, S., Wang, Y., Schierl, T., and A. Eleftheriadis, "RTP Payload Format for Scalable Video Coding", [RFC 6190](#), May 2011.

10.2. Informative References

- [MONARCH] Wu, Q., "Monitoring Architectures for RTP", ID [draft-ietf-avtcore-monarch-13](#), May 2012.
- [Y.1540] ITU-T, "ITU-T Rec. Y.1540, IP packet transfer and availability performance parameters", November 2007.

Appendix A. Change Log

Note to the RFC-Editor: please remove this section prior to publication as an RFC.

A.1. [draft-asaeda-xrblock-rtcp-xr-synchronization-07](#)

Editorial changes are made from the previous version 06.

[A.2. draft-asaeda-xrblock-rtcp-xr-synchronization-06](#)

The following are the major changes compared to previous version 05:

- o Define synchronization offset as 64 bit NTP-format timestamp to meet synchronization resolution requirements for some RTP applications.
- o Add the definition of Initial Synchronization Delay in [section 2](#).
- o Other editorial changes.

[A.3. draft-asaeda-xrblock-rtcp-xr-synchronization-05](#)

The following are the major changes compared to previous version 04:

- o Remove per packet reporting and only report a single value of general synchronization offset.

[A.4. draft-asaeda-xrblock-rtcp-xr-synchronization-04](#)

The following are the major changes compared to previous version 03:

- o Add a definition for synchronization offset.
- o Use additional text in applicability section to clarify the difference between synchronization delay and offset.
- o Add a reference to tell how to select the reference stream.
- o Other Editorial Changes.

[A.5. draft-asaeda-xrblock-rtcp-xr-synchronization-03](#)

The following are the major changes compared to previous version 02:

- o Support multiple general synchronization offset reporting.
- o Other Editorial Changes.

[A.6. draft-asaeda-xrblock-rtcp-xr-synchronization-02](#)

The following are the major changes compared to previous version 01:

- o Clarify which synchronization is reported in [section 4](#) and 5.

- o Allow calculating the synchronization delay based on RTP header extension defined in [RFC6051](#)
- o Explain what the components of RTP session are in [section 3](#).

[A.7. draft-asaeda-xrblock-rtcp-xr-synchronization-01](#)

The following are the major changes compared to previous version:

Asaeda, et al.

Expires January 17, 2013

[Page 10]

Internet-Draft

SDO Report Blocks

July 2012

- o Separate Synchronization Delay and Offset Metrics Block into two independent block based on comments on the list.

[A.8. draft-asaeda-xrblock-rtcp-xr-synchronization-00](#)

The following are the major changes compared to previous version:

This document is separated from [draft-wu-xrblock-rtcp-xr-quality-monitoring-01](#) with some editorial changes and focuses on RTP Flow Initial Synchronization Delay and RTP Flows General Synchronization Offset.

Authors' Addresses

Hitoshi Asaeda
Keio University
Graduate School of Media and Governance
5322 Endo
Fujisawa, Kanagawa 252-0882
Japan

Email: asaeda@wide.ad.jp

Rachel Huang
Huawei Technologies Co., Ltd.
101 Software Avenue, Yuhua District
Nanjing, Jiangsu 210012
China

Email: Rachel@huawei.com

Qin Wu
Huawei Technologies Co., Ltd.
101 Software Avenue, Yuhua District
Nanjing, Jiangsu 210012
China

Email: sunseawq@huawei.com