

INTERNET-DRAFT
Intended Status: Standard Track

Sami Boutros
VMware
Ali Sajassi
Cisco Systems
John Drake
Juniper Networks
Jorge Rabadan
Nokia
Sam Aldrin
Google

Expires: September 7, 2019

March 6, 2019

EVPN control plane for Geneve
draft-boutros-bess-evpn-geneve-04.txt

Abstract

This document describes how Ethernet VPN (EVPN) control plane can be used with Network Virtualization Overlay over Layer 3 (NV03) Generic Network Virtualization Encapsulation (Geneve) encapsulation for NV03 solutions. EVPN control plane can also be used by a Network Virtualization Endpoints (NVEs) to express Geneve tunnel option TLV(s) supported in transmission and/or reception of Geneve encapsulated data packets.

Status of this Memo

This Internet-Draft is submitted to IETF in full conformance with the provisions of [BCP 78](#) and [BCP 79](#).

Internet-Drafts are working documents of the Internet Engineering Task Force (IETF), its areas, and its working groups. Note that other groups may also distribute working documents as Internet-Drafts.

Internet-Drafts are draft documents valid for a maximum of six months and may be updated, replaced, or obsoleted by other documents at any time. It is inappropriate to use Internet-Drafts as reference material or to cite them other than as "work in progress."

The list of current Internet-Drafts can be accessed at <http://www.ietf.org/lid-abstracts.html>

INTERNET DRAFT

EVPN control plane for Geneve

March 6, 2019

The list of Internet-Draft Shadow Directories can be accessed at
<http://www.ietf.org/shadow.html>

INTERNET DRAFT

EVPN control plane for Geneve

March 6, 2019

Copyright and License Notice

Copyright (c) 2019 IETF Trust and the persons identified as the document authors. All rights reserved.

This document is subject to [BCP 78](http://trustee.ietf.org/license-info) and the IETF Trust's Legal Provisions Relating to IETF Documents (<http://trustee.ietf.org/license-info>) in effect on the date of publication of this document. Please review these documents carefully, as they describe your rights and restrictions with respect to this document. Code Components extracted from this document must include Simplified BSD License text as described in Section 4.e of the Trust Legal Provisions and are provided without warranty as described in the Simplified BSD License.

Table of Contents

1	Introduction	3
1.1	Terminology	3
2	GENEVE extensions	4
2.1	Ethernet option TLV	4
3	BGP Extensions	6
3.1	Geneve Tunnel Option Types sub-TLV	6
4	Operation	7
5	Security Considerations	8
6	IANA Considerations	8
7	Acknowledgements	9
8	References	9
8.1	Normative References	9
8.2	Informative References	10
	Authors' Addresses	10

1 Introduction

The Network Virtualization over Layer 3 (NV03) solutions for network virtualization in data center (DC) environment are based on an IP-based underlay. An NV03 solution provides layer 2 and/or layer 3 overlay services for virtual networks enabling multi-tenancy and workload mobility. The NV03 working group have been working on different dataplane encapsulations. The Generic Network Virtualization Encapsulation [[GENEVE](#)] have been recently recommended to be the proposed standard for network virtualization overlay encapsulation.

This document describes how the EVPN control plane can signal Geneve encapsulation type in the BGP Tunnel Encapsulation Extended Community defined in [[TUNNEL-ENCAP](#)]. In addition, this document defines how to communicate the Geneve tunnel option types in a new BGP Tunnel Encapsulation Attribute sub-TLV. The Geneve tunnel options are encapsulated as TLVs after the Geneve base header in the Geneve packet as described in [[GENEVE](#)].

[[DT-ENCAP](#)] recommends that a control plane determines how Network Virtualization Edge devices (NVEs) use the GENEVE option TLVs when sending/receiving packets. In particular, the control plane negotiates the subset of option TLVs supported, their order and the total number of option TLVs allowed in the packets. This negotiation capability allows, for example, interoperability with hardware-based NVEs that can process fewer options than software-based NVEs.

This EVPN control plane extension will allow a Network Virtualization

Edge (NVE) to express what Geneve option TLV types it is capable to receive or to send over the Geneve tunnel to its peers.

In the datapath, a transmitting NVE MUST NOT encapsulate a packet destined to another NVE with any option TLV(s) the receiving NVE is not capable of processing.

1.1 Terminology

The key words "MUST", "MUST NOT", "REQUIRED", "SHALL", "SHALL NOT", "SHOULD", "SHOULD NOT", "RECOMMENDED", "NOT RECOMMENDED", "MAY", and "OPTIONAL" in this document are to be interpreted as described in [BCP 14](#) [[RFC2119](#)] [[RFC8174](#)] when, and only when, they appear in all capitals, as shown here.

Most of the terminology used in this documents comes from [[RFC7432](#)] and [[NV03-FRWK](#)].

NV03: Network Virtualization Overlay over Layer 3

Boutros

Expires September 7, 2019

[Page 4]

INTERNET DRAFT

EVPN control plane for Geneve

March 6, 2019

GENEVE: Generic Network Virtualization Encapsulation.

NVE: Network Virtualization Edge.

VNI: Virtual Network Identifier.

MAC: Media Access Control.

OAM: Operations, Administration and Maintenance.

PE: Provide Edge Node.

CE: Customer Edge device e.g., host or router or switch.

EVPN: Ethernet VPN.

EVI: An EVPN instance spanning the Provider Edge (PE) devices participating in that EVPN.

MAC-VRF: A Virtual Routing and Forwarding table for Media Access Control (MAC) addresses on a PE.

2. GENEVE extensions

This document adds some extensions to the [\[GENEVE\]](#) encapsulation that are relevant to the operation of EVPN.

[2.1](#) Ethernet option TLV

[EVPN-OVERLAY] describes when an ingress NVE uses ingress replication to flood unknown unicast traffic to the egress NVEs, the ingress NVE needs to indicate to the egress NVE that the Encapsulated packet is a BUM traffic type. This is required to avoid transient packet duplication in all-active multi-homing scenarios. For GENEVE encapsulation we need a bit for this purpose.

[RFC8317] uses MPLS label for leaf indication of BUM traffic originated from a leaf AC in an ingress NVE so that the egress NVEs can filter BUM traffic toward their leaf ACs. For GENEVE encapsulation we need a bit for this purpose.


Although the default mechanism for split-horizon filtering of BUM traffic on an Ethernet segment for IP-based encapsulations such as VxLAN, GPE, NVGRE, and GENEVE, is local-bias as defined in [section 8.3.1](#) of [\[EVPN-OVERLAY\]](#), there can be an incentive to leverage the same split-horizon filtering mechanism of [\[RFC7432\]](#) that uses a 20-bit MPLS label so that a) the a single filtering mechanism is used for all encapsulation types and b) the same PE can participate in a mix of MPLS and IP encapsulations. For this purpose a 20-bit label

field MAY be defined for GENEVE encapsulation. The support for this label is optional.

If an NVE wants to use local-bias procedure, then it sends the new option TLV without ESI-label (e.g., length=4):

```
0                               1                               2                               3
0 1 2 3 4 5 6 7 8 9 0 1 2 3 4 5 6 7 8 9 0 1 2 3 4 5 6 7 8 9 0 1
+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+
|   Option Class=Ethernet   |Type=0           |B|L|R| Len=0x1 |
+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+
```

If an NVE wants to use ESI-label, then it sends the new option TLV with ESI-label (e.g., length=8)

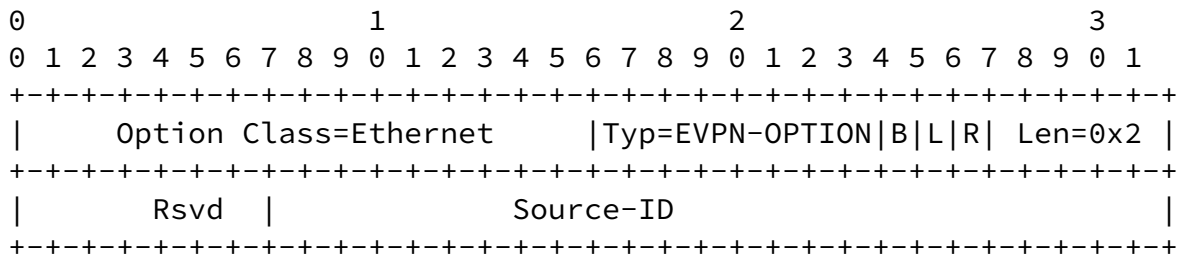

Where:

- Option Class is set to Ethernet (new Option Class requested to IANA)
- Type is set to EVPN-OPTION (new type requested to IANA) and C bit must be set.
- B bit is set to 1 for BUM traffic.
- L bit is set to 1 for Leaf-Indication.
- Source-ID is a 24-bit value that encodes the ESI-label value signaled on the EVPN Autodiscovery per-ES routes, as described in [RFC7432] for multi-homing and [RFC8317] for leaf-to-leaf BUM filtering. The ESI-label value is encoded in the high-order 20 bits of the Source-ESI field.

The egress NVEs that make use of ESIs in the data path (because they have a local multi-homed ES or support [RFC8317]) SHOULD advertise their Ethernet A-D per-ES routes along with the Geneve tunnel sub-TLV and in addition to the ESI-label Extended Community. The ingress NVE can then use the Ethernet option-TLV when sending GENEVE packets based on the [RFC7432] and [RFC8317] procedures. The egress NVE will use the Source-ID field in the received packets to make filtering decisions.

Note that [EVPN-OVERLAY] modifies the [RFC7432] split-horizon procedures for NV03 tunnels using the "local-bias" procedure. "Local-

bias" relies on tunnel IP source address checks (instead of ESI-labels) to determine whether a packet can be forwarded to a local ES.

While "local-bias" MUST be supported along with GENEVE encapsulation, the use of the Ethernet option-TLV is RECOMMENDED to follow the same procedures used by EVPN MPLS.

An ingress NVE using ingress replication to flood BUM traffic MUST

send B=1 in all the GENEVE packets that encapsulate BUM frames. An egress NVE SHOULD determine whether a received packet encapsulates a BUM frame based on the B bit. The use of the B bit is only relevant to GENEVE packets with Protocol Type 0x6558 (Bridged Ethernet).

3. BGP Extensions

As per [EVPN-OVERLAY] the BGP Encapsulation extended community defined in [TUNNEL-ENCAP] is included with all EVPN routes advertised by an egress NVE.

This document specifies a new BGP Tunnel Encapsulation Type for Geneve and a new Geneve tunnel option types sub-TLV as described below.

3.1 Geneve Tunnel Option Types sub-TLV

The Geneve tunnel option types is a new BGP Tunnel Encapsulation Attribute Sub-TLV.

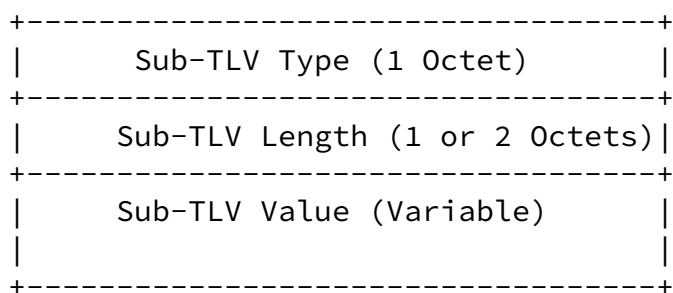


Figure 1: Geneve tunnel option types sub-TLV

The Sub-TLV Type field contains a value in the range from 192-252. To be allocated by IANA.

All NVEs and ASBRs are enabled for the EVPN SAFI and exchange EVPN routes. For inter-AS option B, the ASBRs re-advertise these routes with NEXT_HOP attribute set to their IP addresses as per [\[RFC4271\]](#).

NVE1 sets the BGP Encapsulation extended community defined in all EVPN routes advertised. NVE1 sets the BGP Tunnel Encapsulation Attribute Tunnel Type to Geneve tunnel encapsulation, and sets the Tunnel Encapsulation Attribute Tunnel sub-TLV for the Geneve tunnel option types with all the Geneve option types it can transmit and receive.

All other NVE(s) learn what Geneve option types are supported by NVE1 through the EVPN control plane. In the datapath, NVE2, NVE3 and NVE4 only encapsulate overlay packets with the Geneve option TLV(s) that NVE1 is capable of receiving.

A PE advertises the BGP Encapsulation extended community defined in [\[RFC5512\]](#) if it supports any of the encapsulations defined in [EVPN-OVERLAY]. A PE advertises the BGP Tunnel Encapsulation Attribute defined in [\[TUNNEL-ENCAP\]](#) if it supports Geneve encapsulation.

5. Security Considerations

The mechanisms in this document use EVPN control plane as defined in [\[RFC7432\]](#). Security considerations described in [\[RFC7432\]](#) are equally applicable.

This document uses IP-based tunnel technologies to support data plane transport. Security considerations described in [\[RFC7432\]](#) and in [\[EVPN-OVERLAY\]](#) are equally applicable.

6. IANA Considerations

IANA is requested to allocate the following:

BGP Tunnel Encapsulation Attribute
Tunnel Type:

XX Geneve Encapsulation

BGP Tunnel Encapsulation Attribute Sub-TLVs a Code point from the range of 192-252 for Geneve tunnel option types sub-TLV.

IANA is requested to assign a new option class from the "Geneve Option Class" registry for the Ethernet option TLV.

Option Class Description

Boutros

Expires September 7, 2019

[Page 9]

INTERNET DRAFT

EVPN control plane for Geneve

March 6, 2019

XXXX

Ethernet option

7. Acknowledgements

The authors wish to thank T. Sridhar, for his input, feedback, and helpful suggestions.

8. References

8.1 Normative References

[RFC2119] Bradner, S., "Key words for use in RFCs to Indicate Requirement Levels", [BCP 14](#), [RFC 2119](#), DOI 10.17487/RFC2119, March 1997, <<http://www.rfc-editor.org/info/rfc2119>>.

[RFC7432] Sajassi, A., Ed., Aggarwal, R., Bitar, N., Isaac, A., Uttaro, J., Drake, J., and W. Henderickx, "BGP MPLS-Based Ethernet VPN", [RFC 7432](#), DOI 10.17487/RFC7432, February 2015, <<http://www.rfc-editor.org/info/rfc7432>>.

[RFC8317] Sajassi, et al. "Ethernet-Tree (E-Tree) Support in Ethernet VPN (EVPN) and Provider Backbone Bridging EVPN (PBB-EVPN)", [RFC 8317](#), January 2018, <<http://www.rfc-editor.org/info/rfc8317>>.

[RFC4271] Rekhter, Y., Ed., Li, T., Ed., and S. Hares, Ed., "A Border Gateway Protocol 4 (BGP-4)", [RFC 4271](#), January 2006, <<http://www.rfc-editor.org/info/rfc4271>>.

[RFC5226] Narten, T. and H. Alvestrand, "Guidelines for Writing an IANA Considerations Section in RFCs", [BCP 26](#), [RFC 5226](#), May 2008, <<http://www.rfc-editor.org/info/rfc5226>>.

[GENEVE] Gross, et al. "Geneve: Generic Network Virtualization Encapsulation", [draft-ietf-nvo3-geneve-05](#), work in progress, September, 2017.

[DT-ENCAP] Boutros, et al. "NV03 Encapsulation Considerations", [draft-ietf-nvo3-encap-01](#), work in progress, October, 2017.

[TUNNEL-ENCAP] Rosen et al., "The BGP Tunnel Encapsulation Attribute", [draft-ietf-idr-tunnel-encaps-07](#), work in progress, July, 2017.

[EVPN-OVERLAY] Sajassi-Drake et al., "A Network Virtualization Overlay Solution using EVPN", [draft-ietf-bess-evpn-overlay-10.txt](#), work in progress, December, 2017

Boutros

Expires September 7, 2019

[Page 10]

INTERNET DRAFT

EVPN control plane for Geneve

March 6, 2019

[8.2](#) Informative References

[NV03-FRWK] Lasserre et al., "Framework for DC Network Virtualization", [RFC 7365](#), October 2014.

Authors' Addresses

Sami Boutros
VMware, Inc.
Email: boutross@vmware.com

Ali Sajassi
Cisco
Email: sajassi@cisco.com

John Drake
Juniper Networks
Email: jdrake@juniper.net

Jorge Rabadan
Nokia
Email: jorge.rabadan@nokia.com

Sam Aldrin
Google
Email: aldrin.ietf@gmail.com

Boutros

Expires September 7, 2019

[Page 11]