

BESS Working Group
Brissette
INTERNET-DRAFT
Sajassi
Intended Status: Proposed Standard
Systems

Patrice
Ali
Cisco
Bin

Wen

Comcast

Leyton
Wireless

Rabadan

Nokia

Expires: May 3, 2020
2019

Edward
Verizon
Jorge
October 31,

**EVPN multi-homing port-active load-balancing
draft-brissette-bess-evpn-mh-pa-04**

Abstract

The Multi-Chassis Link Aggregation Group (MC-LAG) technology enables the establishment of a logical link-aggregation connection with a redundant group of independent nodes. The purpose of multi-chassis LAG is to provide a solution to achieve higher network availability, while providing different modes of sharing/balancing of traffic.

EVPN

standard defines EVPN based MC-LAG with single-active and all-active multi-homing load-balancing mode. The current draft expands on existing redundancy mechanisms supported by EVPN and introduces support of port-active load-balancing mode. In the current document, port-active load-balancing mode is also referred to as per interface active/standby.

Status of this Memo

This Internet-Draft is submitted to IETF in full conformance with the provisions of [BCP 78](#) and [BCP 79](#).

Internet-Drafts are working documents of the Internet Engineering Task Force (IETF), its areas, and its working groups. Note that other groups may also distribute working documents as Internet-Drafts.

Internet-Drafts are draft documents valid for a maximum of six

months

and may be updated, replaced, or obsoleted by other documents at any time. It is inappropriate to use Internet-Drafts as reference material or to cite them other than as "work in progress."

Patrice Brissette
1]

Expires May 3, 2020

[Page

The list of current Internet-Drafts can be accessed at
<http://www.ietf.org/lid-abstracts.html>

The list of Internet-Draft Shadow Directories can be accessed at
<http://www.ietf.org/shadow.html>

Copyright and License Notice

Copyright (c) 2019 IETF Trust and the persons identified as the document authors. All rights reserved.

This document is subject to [BCP 78](#) and the IETF Trust's Legal Provisions Relating to IETF Documents (<http://trustee.ietf.org/license-info>) in effect on the date of publication of this document. Please review these documents carefully, as they describe your rights and restrictions with respect

to this document. Code Components extracted from this document must include Simplified BSD License text as described in Section 4.e of the Trust Legal Provisions and are provided without warranty as described in the Simplified BSD License.

Table of Contents

1	Introduction	
3		
1.1	Terminology	
4		
2.	Multi-Chassis Ethernet Bundles	
4		
3.	Port-active load-balancing procedure	
4		
4.	Algorithm to elect per port-active PE	
5		
4.1	Capability Flag	
5		
4.2	Modulo-based Designated Forwarder Algorithm	
6		
4.3	HRW Algorithm	
6		
4.4	Preferred-DF Algorithm	
6		
5.	Convergence considerations	
6		
6.	Applicability	
7		
7.	Overall Advantages	
7		
8	Security Considerations	

8
9 IANA Considerations
8
10 References
8
10.1 Normative References
8
10.2 Informative References
8
9 Authors' Addresses

1 Introduction

EVPN, as per [RFC7432], provides all-active per flow load balancing for multi-homing. It also defines single-active with service carving mode, where one of the PEs, in redundancy relationship, is active per service.

While these two multi-homing scenarios are most widely utilized in data center and service provider access networks, there are scenarios

where active-standby per interface multi-homing redundancy is useful and required. The main consideration for this mode of redundancy is the determinism of traffic forwarding through a specific interface rather than statistical per flow load balancing across multiple PEs providing multi-homing. The determinism provided by active-standby per interface is also required for certain QoS features to work. While using this mode, customers also expect minimized convergence during failures. A new term of load-balancing mode "port-active load-balancing" is then defined.

This draft describes how that new redundancy mode can be supported via EVPN.

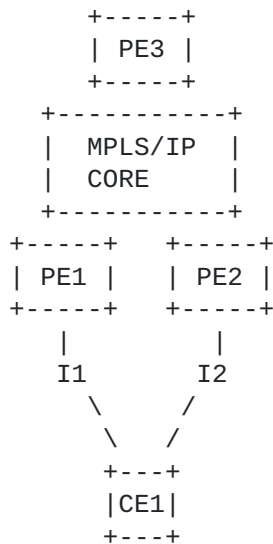


Figure 1. MC-LAG topology

Figure 1 shows a MC-LAG multi-homing topology where PE1 and PE2 are part of the same redundancy group providing multi-homing to CE1 via interfaces I1 and I2. Interfaces I1 and I2 are Bundle-Ethernet interfaces running LACP protocol. The core, shown as IP or MPLS enabled, provides wide range of L2 and L3 services. MC-LAG multi-homing functionality is decoupled from those services in the core and

Patrice Brissette
3]

Expires May 3, 2020

[Page

it focuses on providing multi-homing to CE. With per-port active/standby redundancy, only one of the two interface I1 or I2 would be in forwarding, the other interface will be in standby. This also implies that all services on the active interface are in active mode and all services on the standby interface operate in standby mode.

1.1 Terminology

The key words "MUST", "MUST NOT", "REQUIRED", "SHALL", "SHALL NOT", "SHOULD", "SHOULD NOT", "RECOMMENDED", "NOT RECOMMENDED", "MAY", and "OPTIONAL" in this document are to be interpreted as described in [BCP14](#) [[RFC2119](#)] [[RFC8174](#)] when, and only when, they appear in all capitals, as shown here.

2. Multi-Chassis Ethernet Bundles

When a CE is multi-homed to a set of PE nodes using the [802.1AX] Link Aggregation Control Protocol (LACP), the PEs must act as if they

were a single LACP speaker for the Ethernet links to form a bundle, and operate as a Link Aggregation Group (LAG). To achieve this, the PEs connected to the same multi-homed CE must synchronize LACP configuration and operational data among them. InterChassis Communicated-based Protocol (ICCP) has been used for that purpose. EVPN LAG simplifies greatly that solution. Along with the simplification comes few assumptions:

- CE device connected to Multi-homing PEs may has a single LAG with all its active links i.e. Links in the Ethernet Bundle operate in all-active load-balancing mode.
- Same LACP parameters MUST be configured on peering PEs such as system id, port priority and port key.

Any discrepancies from this list is left for future study. Furthermore, mis-configuration and mis-wiring detection across peering PEs are also left for further study.

3. Port-active load-balancing procedure

Following steps describe the proposed procedure with EVPN LAG to support port-active load-balancing mode:

- 1- The Ethernet-Segment Identifier (ESI) MUST be assigned per access interface as described in [[RFC7432](#)], which may be auto derived or manually assigned. Access interface MAY be a Layer-2 or Layer3 interface. The usage of ESI over L3 interfce is newly described in this document.

2- Ethernet-Segment MUST be configured in port-active load-balancing mode on peering PEs for specific access interface

3- Peering PEs MAY exchange only Ethernet-Segment route (Route Type-4) when ESI is configured on a Layer3 interface.

4- PEs in the redundancy group leverage the DF election defined in [RFC8584] to determine which PE keeps the port in active mode and which one(s) keep it in standby mode. While the DF election defined in [RFC8584] is per <ES, Ethernet Tag> granularity, for port-active mode of multi-homing, the DF election is done per <ES>. The details of this algorithm are described in [Section 4](#).

5- DF router MUST keep corresponding access interface in up and forwarding active state for that Ethernet-Segment

6- Non-DF routers MAY bring and keep peering access interface attached to it in operational down state. If the interface is running LACP protocol, then the non-DF PE MAY also set the LACP state to OOS (Out of Sync) as opposed to interface state down. This allows for better convergence on standby to active transition.

7- For EVPN-VPWS service, the usage of primary/backup bits of EVPN Layer2 attributes extended community [RFC8214] is highly recommended to achieve better convergence.

4. Algorithm to elect per port-active PE

The ES routes, running in port-active load-balancing mode, are advertised with a new capability in the DF Election Extended Community as defined in [RFC8584]. Moreover, the ES associated to the port leverages existing procedure of single-active, and signals single-active bit along with Ethernet-AD per-ES route. Finally, as in [RFC7432](#), the ESI-label based split-horizon procedures should be used to avoid transient echo'ed packets when L2 circuits are involved.

4.1 Capability Flag

[RFC8584] defines a DF Election extended community, and a Bitmap field to encode "capabilities" to use with the DF election algorithm in the DF algorithm field. Bitmap (2 octets) is extended by the following value:

```

          1 1 1 1 1 1
    0 1 2 3 4 5 6 7 8 9 0 1 2 3 4 5
+---+---+---+---+---+---+---+---+---+---+
|D|A|       |P|                               |
+---+---+---+---+---+---+---+---+---+

```

Patrice Brisette
5]

Expires May 3, 2020

[Page

Figure 2 - Amended Bitmap field in the DF Election Extended Community

- Bit 0: 'Don't Preempt' bit, as explained in [[PREF-DF](#)].
- Bit 1: AC-Influenced DF Election, as explained in [[RFC8584](#)].
- Bit 5: (corresponds to Bit 25 of the DF Election Extended Community and it is defined by this document):
P bit or 'Port Mode' bit (P hereafter), determines that the DF-Algorithm should be modified to consider the port only and not the Ethernet Tags.

4.2 Modulo-based Designated Forwarder Algorithm

The default DF Election algorithm, or modulus-based algorithm as in [[RFC7432](#)] and updated by [[RFC8584](#)], is used here, at the granularity of <ES> only. Given the fact, ES-Import RT community inherits from ESI only byte 1-7, many deployments differentiate ESI within these bytes only. For Modulo calculation, bytes [3-7] are used to determine the designated forwarder using Modulo-based DF assignment.

4.3 HRW Algorithm

Highest Random Weight (HRW) algorithm defined in [[RFC8584](#)] MAY also be used and signaled, and modified to operate at the granularity of <ES> rather than per <ES, VLAN>.

[[RFC8584](#)] describes computing a 32 bit CRC over the concatenation of Ethernet Tag and ESI. For port-active load-balancing mode, the Ethernet Tag is simply removed from the CRC computation.

4.4 Preferred-DF Algorithm

When the new capability 'Port-Mode' is signaled, the algorithm is modified to consider the port only and not any associated Ethernet Tags. Furthermore, the "port-based" capability MUST be compatible with the 'DP' capability (for non-revertive). The AC-DF bit MUST be set to zero. When an AC (sub-interface) goes down, it does not influence the DF election.

5. Convergence considerations

To improve the convergence, upon failure and recovery, when port-active load-balancing mode is used, some advanced synchronization between peering PEs may be required. Port-active is challenging in a sense that the "standby" port is in down state. It takes some time to bring a "standby" port in up-state and settle the network. For IRB and L3 services, ARP / ND cache may be synchronized. Moreover,

Patrice Brissette
6]

Expires May 3, 2020

[Page

associated VRF tables may also be synchronized. For L2 services, MAC table synchronization may be considered.

Finally, for Bundle-Ethernet interface where LACP is running the ability to set the "standby" port in "out-of-sync" state aka "warm-standby" can be leveraged.

6. Applicability

A common deployment is to provide L2 or L3 service on the PEs providing multi-homing. The services could be any L2 EVPN such as EVPN VPWS, EVPN [[RFC7432](#)], etc. L3 service could be in VPN context [[RFC4364](#)] or in global routing context. When a PE provides first hop routing, EVPN IRB could also be deployed on the PEs. The mechanism defined in this draft is used between the PEs providing the L2 and/or

L3 service, when the requirement is to use per port active.

A possible alternate solution is the one described in this draft is MC-LAG with ICCP [[RFC7275](#)] active-standby redundancy. However, ICCP requires LDP to be enabled as a transport of ICCP messages. There are

many scenarios where LDP is not required e.g. deployments with VXLAN or SRv6. The solution defined in this draft with EVPN does not mandate the need to use LDP or ICCP and is independent of the underlay encapsulation.

7. Overall Advantages

The use of port-active multi-homing brings the following benefits to EVPN networks:

- Open standards based per interface single-active redundancy mechanism that eliminates the need to run ICCP and LDP.
- Agnostic of underlay technology (MPLS, VXLAN, SRv6) and associated services (L2, L3, Bridging, E-LINE, etc).
- Provides a way to enable deterministic QOS over MC-LAG attachment circuits
- Fully compliant with [[RFC7432](#)], does not require any new protocol enhancement to existing EVPN RFCs.
- Can leverage various DF election algorithms e.g. modulo, HRW, etc.
- Replaces legacy MC-LAG ICCP-based solution, and offers following additional benefits:
 - Efficiently supports 1+N redundancy mode (with EVPN using BGP

Patrice Brissette
7]

Expires May 3, 2020

[Page

RR) where as ICCP requires full mesh of LDP sessions among PEs in redundancy group

- Fast convergence with mass-withdraw is possible with EVPN, no equivalent in ICCP

- Customers want per interface single-active redundancy, but don't want to enable LDP (e.g. they may be running VXLAN or SRv6 in the network). Currently there is no alternative to this.

8 Security Considerations

The same Security Considerations described in [[RFC7432](#)] are valid for this document.

9 IANA Considerations

This document solicits the allocation of the following values:

- o Bit 5 in the [[RFC8584](#)] DF Election Capabilities registry, with name "P"(port mode load-balancing) Capability" for port-active ES.

10 References

10.1 Normative References

[RFC7432] Sajassi, A., Ed., Aggarwal, R., Bitar, N., Isaac, A., Uttaro, J., Drake, J., and W. Henderickx, "BGP MPLS-Based Ethernet VPN", [RFC 7432](#), DOI 10.17487/RFC7432, February 2015, <<https://www.rfc-editor.org/info/rfc7432>>.

[RFC8214] Boutros, S., Sajassi, A., Salam, S., Drake, J., and J. Rabadan, "Virtual Private Wire Service Support in Ethernet VPN", [RFC 8214](#), DOI 10.17487/RFC8214, August 2017, <<https://www.rfc-editor.org/info/rfc8214>>.

[RFC8584] Rabadan, J., Ed., Mohanty, S., Ed., Sajassi, A., Drake, J., Nagaraj, K., and S. Sathappan, "Framework for Ethernet VPN Designated Forwarder Election Extensibility", [RFC 8584](#), DOI 10.17487/RFC8584, April 2019, <<https://www.rfc-editor.org/info/rfc8584>>.

10.2 Informative References

[RFC2119] Bradner, S., "Key words for use in RFCs to Indicate

Patrice Brissette
8]

Expires May 3, 2020

[Page

Requirement Levels", [BCP 14](#), [RFC 2119](#), DOI 10.17487/RFC2119, March 1997, <<https://www.rfc-editor.org/info/rfc2119>>.

[RFC8174] Leiba, B., "Ambiguity of Uppercase vs Lowercase in [RFC 2119](#) Key Words", [BCP 14](#), [RFC 8174](#), DOI 10.17487/RFC8174, May 2017, <<https://www.rfc-editor.org/info/rfc8174>>.

[RFC4364] Rosen, E. and Y. Rekhter, "BGP/MPLS IP Virtual Private Networks (VPNs)", [RFC 4364](#), DOI 10.17487/RFC4364, February 2006, <<https://www.rfc-editor.org/info/rfc4364>>.

[RFC7275] Martini, L., Salam, S., Sajassi, A., Bocci, M., Matsushima, S., and T. Nadeau, "Inter-Chassis Communication Protocol for Layer 2 Virtual Private Network (L2VPN) Provider Edge (PE) Redundancy", [RFC 7275](#), DOI 10.17487/RFC7275, June 2014, <<https://www.rfc-editor.org/info/rfc7275>>.

[PREF-DF] Rabadan et al. "Preference-based EVPN DF Election", [draft-ietf-bess-evpn-pref-df](#), work-in-progress, June, 2019.

Authors' Addresses

Patrice Brissette
Cisco Systems
EMail: pbrisset@cisco.com

Ali Sajassi
Cisco Systems
EMail: sajassi@cisco.com

Luc Andre Burdet
Cisco Systems
EMail: lburdet@cisco.com

Samir Thoria
Cisco Systems
EMail: sthoria@cisco.com

Jorge Rabadan
Nokia
Email: jorge.rabadan@nokia.com

Bin Wen

INTERNET DRAFT
2019

[draft-brissette-bess-evpn-mh-pa](#)

October 31,

Comcast

Email: Bin_Wen@comcast.com

Edward Leyton

Verizon

Email: edward.leyton@verizonwireless.com

