

INTAREA WG
Chakrabarti
Internet-Draft
Ericsson
Updates: [4861](#) (if approved)
Nordmark
Intended status: Standards Track
Systems
Expires: May 25, 2013
Wasserman
Security
2012

S.
E.
Cisco
M.
Painless
November 21,

**Efficiency aware IPv6 Neighbor Discovery Optimizations
draft-chakrabarti-nordmark-6man-efficient-nd-01**

Abstract

IPv6 Neighbor Discovery ([RFC 4861](#)) protocol has been designed for neighbor's address resolution, unreachability detection, address autoconfiguration, router advertisement and solicitation. With the progress of Internet adoption on various industries including home, wireless, m2m and Cellular(LTE) networks, there is a desire for optimizing the legacy IPv6 Neighbor Discovery protocol. This document describes a method of optimization by reducing multicast messages and introducing an IPv6 address Registration mechanism. Efficient IPv6 Neighbor Discovery protocol is useful for energy-efficient IPv6 networks and as well as Data Center and Home Networks.

The solution is capable of handling existing legacy IPv6 nodes in the network.

Status of this Memo

This Internet-Draft is submitted in full conformance with the provisions of [BCP 78](#) and [BCP 79](#).

Internet-Drafts are working documents of the Internet Engineering Task Force (IETF). Note that other groups may also distribute working documents as Internet-Drafts. The list of current Internet-Drafts is at <http://datatracker.ietf.org/drafts/current/>.

Internet-Drafts are draft documents valid for a maximum of six months and may be updated, replaced, or obsoleted by other documents at any time. It is inappropriate to use Internet-Drafts as reference material or to cite them other than as "work in progress."

This Internet-Draft will expire on May 25, 2013.

Copyright Notice

Copyright (c) 2012 IETF Trust and the persons identified as the document authors. All rights reserved.

Chakrabarti, et al.
1]

Expires May 25, 2013

[Page

This document is subject to [BCP 78](#) and the IETF Trust's Legal Provisions Relating to IETF Documents (<http://trustee.ietf.org/license-info>) in effect on the date of publication of this document. Please review these documents carefully, as they describe your rights and restrictions with respect to this document. Code Components extracted from this document must include Simplified BSD License text as described in Section 4.e of the Trust Legal Provisions and are provided without warranty as described in the Simplified BSD License.

Table of Contents

1.	Introduction	4
2.	Definition Of Terms	5
3.	Assumptions for efficiency-aware Neighbor Discovery	7
4.	The set of Requirements for efficiency and optimization	7
5.	Basic Operations	7
6.	Applicability Statement	8
7.	New Neighbor Discovery Options and Messages	9
7.1.	Address Registration Option	9
7.2.	Refresh and De-registration	10
7.3.	A New Router Advertisement Flag	11
8.	Efficiency-aware Neighbor Discovery Messages	11
9.	Efficiency-aware Host Behavior	13
10.	The Energy Aware Default Router (NEAR) Behavior	13
10.1.	Router Configuration Modes	14
11.	NCE Management in efficiency-aware Routers	15
11.1.	Handling ND DOS Attack	16
12.	Mixed-Mode Operations	17
13.	Bootstrapping	18
14.	Handling Sleepy Nodes	19
15.	Duplicate Address Detection	19
16.	Use Case Analysis	19
16.1.	Data Center Routers on the link	19
16.2.	Edge Routers and Home Networks	20
16.3.	M2M Networks	20
16.4.	Cellular and Wi-fi Networks	20

17.	Mobility Considerations	20
18.	Other Considerations	21
18.1.	Detecting Network Attachment(DNA)	21
18.2.	Proxying for Efficiency-Aware hosts	21
18.3.	DHCPv6 Interaction	21
19.	Updated Neighbor Discovery Constants	22
20.	Security Considerations	22
21.	IANA Considerations	22
22.	Changelog	22
23.	Acknowledgements	23
24.	References	23
24.1.	Normative References	23
24.2.	Informative References	24
Authors'	Addresses	25

1. Introduction

IPv6 ND [[ND](#)] is based on multicast signaling messages on the local link in order to avoid broadcast messages. Following power-on and initialization of the network in IPv6 Ethernet networks, a node joins the solicited-node multicast address on the interface and then performs duplicate address detection (DAD) for the acquired link-local address by sending a solicited-node multicast message to the link. After that it sends multicast router solicitation (RS) messages to the all-router address to solicit router advertisements. Once the host receives a valid router advertisement (RA) with the "A"

flag, it autoconfigures the IPv6 address with the advertised prefix in the router advertisement (RA). Besides this, the IPv6 routers usually send router advertisements periodically on the network. RAs are sent to the all-node multicast address. The minimum RA interval range can be 3sec to 600sec depending on applications. Nodes send Neighbor Solicitation (NS) and Neighbor Advertisement (NA) messages to resolve the IPv6 address of the destination on the link. These NS/NA messages are also often multicast messages and it is assumed that the node is on the same link and relies on the fact that the destination node is always powered and generally available.

The periodic RA messages in IPv6 ND [[ND](#)], and NS/NA messages require all IPv6 nodes in the link to be in listening mode even when they are

in idle cycle. It requires energy for the sleepy nodes which may otherwise be sleeping during the idle period. Non-sleepy nodes also save energy if instead of continuous listening, they actually proactively synchronize their states with one or two entities in the network. With the explosion of Internet-of-things and machine to machine communication, more and more devices would be using IPv6 addresses in the near future.

IPv6 Neighbor Discovery Optimization for 6LoWPAN [[6LOWPAN-ND](#)] addresses many of the concerns described above by optimizing the Router advertisement, minimizing periodic multicast packets in the network and introducing two new options - one for node registration and another for prefix dissemination in a network where all nodes in the network are uniquely identified by their 64-bit Interface Identifier. EUI-64 identifiers are recommended as unique Interface Identifiers, however if the network is isolated from the Internet, uniqueness of the identifiers may be obtained by other mechanisms such as a random number generator with lowest collision rate. Although, the ND optimization [[6LOWPAN-ND](#)] applies to 6LoWPAN [[LOWPAN](#)] network, the concept is mostly applicable to a power-aware IPv6 network. Therefore, this document generalizes the address registration and multicast reduction in [[6LOWPAN-ND](#)] to all IPv6 links.

Thus optimizing the regular IPv6 Neighbor Discovery [[ND](#)] to minimize total number of related signaling messages without losing generality of Neighbor Discovery, autoconfiguration and reliable host-router communication, are desirable in any efficient IPv6 networks such as Home, Enterprise networks, Data Centers and Operator's Cellular/Wireless networks.

The optimization will be highly effective for links and nodes which do not support multicast and as well as for a multicast network without MLD snooping switches. Moreover, in the MLD-snooping networks the MLD switches will deal with less number of multicasts.

The goal of this document is to provide an efficient Neighbor Discovery Protocol in classic IPv6 subnets and links. Research indicates that often networked-nodes require more energy than stand-alone nodes because a node's energy usage depends on network messages

it receives and responds. While reducing energy consumption is essential for battery operated nodes in some machines, saving energy actually a cost factor in business in general as the explosion of more device usage is leading to usage of more servers and network infrastructure in all sectors of the society and business. Thus this

document introduces the node registration concept discussed in 6LoWPAN [[LOWPAN](#)], without handling the 'multi-level subnets' scenarios that are not the typical usecases in classic IPv6 subnets.

In the process, the node registration method is also deemed to be useful for preventing Neighbor Discovery denial of service (ND DOS) attacks.

The proposed changes can be used in two different ways. In one case all the hosts and routers on a link implement the new mechanisms, which gives the maximum benefits. In another case the link has a mixture of new hosts and/or routers and legacy [[RFC4861](#)] hosts and routers, operating in a mixed-mode providing some of the benefits.

In the following sections the document describes the basic operations

of registration methods, optimization of Neighbor Discovery messages,

interoperability with legacy IPv6 implementations and provides a section on use-case scenarios where it can be typically applicable.

2. Definition Of Terms

The key words "MUST", "MUST NOT", "REQUIRED", "SHALL", "SHALL NOT", "SHOULD", "SHOULD NOT", "RECOMMENDED", "MAY", and "OPTIONAL" in this document are to be interpreted as described in [[RFC2119](#)].

multi-level Subnets:

It is a wireless link determined by one IPv6 off-link prefix in a network where in order to reach a destination with same prefix a packet may have to travel through one more 'intermediate' routers which relays the packet to the next 'intermediate' router or the host in its own.

Border Router(BR):

A border router is typically located at the junction Internet and Home Network. An IPv6 router with one interface connected to

IPv6

subnet and other interface connecting to a non-classic IPv6 interface such as 6LoWPAN interface. Border router is usually

the

gateway to the IPv6 network or Internet.

Efficiency-Aware Network:

An Efficiency-Aware network is composed of network elements that are sensitive to energy usage or number of signalling messages in the network. An efficiency-aware network may also contain links that do not support multicast or it does not have MLD snooping capabilities and yet the network likes to communicate most efficiently with minimum number of signaling messages. Data center networks with virtual machines, cellular IPv6 networks,

any

IPv6 networks with energy-sensitive nodes are examples of Efficiency-Aware networks.

IPv6 ND-efficiency-aware Router(NEAR):

It is the default Router of the single hop IPv6 subnet. This router implements the optimizations specified in this document. This router should be able to handle both legacy IPv6 nodes and nodes that sends registration request.

Efficiency-Aware Host(EAH):

A host in a IPv6 network is considered a IPv6 node without routing

and forwarding capability. The EAH is the host which implements the host functionality for optimized Neighbor Discovery mentioned in this document.

Legacy IPv6 Host:

A host in a IPv6 network is considered a IPv6 node without routing

and forwarding capability and implements [RFC 4861](#) host functions.

Legacy IPv6 Router:

An IPv6 Router which implements [RFC 4861](#) Neighbor Discovery protocols.

EUI-64:

It is the IEEE defined 64-bit extended unique identifier formed by

concatenation of 24-bit or 36-bit company id value by IEEE Registration Authority and the extension identifier within that company-id assignment. The extension identifiers are 40-bit (for 24-bit company-id) or 28-bit (for the 36-bit company-id) respectively.

3. Assumptions for efficiency-aware Neighbor Discovery

- o The efficiency-aware nodes in the network carry unique interface ID in the network in order to form the auto-configured IPv6 address uniquely. An EUI-64 interface ID required for global communication.
- o All nodes are single IPv6-hop away from their default router in the subnet.
- o /64-bit IPv6 prefix is used for Stateless Auto-address configuration (SLAAC). The IPv6 Prefix may be distributed with Router Advertisement (RA) from the default router to all the nodes in that link.

4. The set of Requirements for efficiency and optimization

- o Node Registration: Node initiated Registration and address allocation is done in order to avoid periodic multicast Router Advertisement messages and often Neighbor Address resolution can be skipped as all packets go via the default router which now knows about all the registered nodes. Node Registration enables reduction of all-node and solicited-node multicast messages in the subnet.
- o Address allocation of registered nodes [[ND](#)] are performed using IPv6 Autoconfiguration [[AUTOCONF](#)].
- o Host initiated Registration and Refresh is done by sending a Router Solicitation and then a Neighbor Solicitation Message using Address Registration Option (described below).
- o The node registration may replace the requirement of doing Duplicate Address Detection.
- o Sleepy hosts are supported by this Neighbor Discovery procedures as they are not woken up periodically by Router Advertisement multicast messages or Neighbor Solicitation multicast messages. Sleepy nodes may wake up in its own schedule and send unicast registration refresh messages when needed.
- o Since this document requires formation of an IPv6 address with a unique 64-bit Interface ID(EUI-64) is required for global IPv6 addresses, if the network is an isolated one and uses ULA [[ULA](#)] as its IPv6 address then the deployment should make sure that each MAC address in that network has unique address and can provide a unique 64-bit ID for each node in the network.
- o /64-bit Prefix is required to form the IPv6 address.
- o MTU requirement is same as IPv6 network.

5. Basic Operations

In the efficient-nd IPv6 Network, the NEAR routers are the default

routers for the efficiency-aware hosts (EAH). During the startup or joining the network the host does not wait for the Router Advertisements as the NEAR routers do not perform periodic multicast RA as per [RFC 4861](#). Instead, the EAH sends a multicast RS to find out a NEAR router in the network. The RS message is the same as in [RFC 4861](#). The advertising routers in the link responds to the RS message with RA with Prefix Information Option and any other options configured in the network. If EAH hosts will look for a RA from a NEAR (E-flag) and choose a NEAR as its default router and consequently sends a unicast Neighbor Solicitation Message with ARO option in order to register itself with the default router. The EAH does not do Duplicate Address Detection or NS Resolution of addresses. NEAR maintains a binding of registered nodes and registration life-time information along with the neighbor Cache information. The NEAR is responsible for forwarding all the messages from its EAH including on-link messages from one EAH to another. For details of protocol operations please see the sections below.

When a IPv6 network consists of both legacy hosts and EAH, and if the NEAR is configured for 'mixed mode' operation, it should be able to handle ARO requests and send periodic RA. Thus it should be able to serve both efficiency-aware hosts and legacy hosts. Similarly, a legacy host compatible EAH falls back to [RFC 4861](#) host behavior if a NEAR is not present in the link. See the section on 'Mixed Mode Operations' for details below.

6. Applicability Statement

This document aims to guide the implementors to choose an appropriate IPv6 neighbor discovery and Address configuration procedures suitable for any efficient IPv6 network. These optimization is equally useful for the energy-sensitive, non-multicast links and for classical IPv6 networks i.e home networks, Data-Center IPv6 overlay networks where saving Neighbor Discovery messages will reduce cost and increase bandwidth availability. See use cases towards the end of the document.

Note that the specification allows 'Mixed-mode' operation in the efficiency-aware nodes for backward compatibility and transitioning to a complete efficiency-aware network of hosts and routers. Though the efficiency-aware only nodes will minimize the ND signalling and DOS attacks in the LAN.

Applicability of this solution is limited to the legacy IPv6 nodes and subnets and it optimizes the generic IPv6 signaling activities

at
network layer. However, further optimization at the application
layers are possible for increased efficiency based on particular

usecases and applications.

7. New Neighbor Discovery Options and Messages

This section will discuss the registration and de-registration procedure of the hosts in the network.

7.1. Address Registration Option

The Address Registration Option (ARO) is useful for avoiding Duplicate Address Detection messages since it requires a unique ID for registration. The address registration is used for maintaining reachability of the node or host by the router. This option is exactly the same as in [[6LOWPAN-ND](#)] which is reproduced here for the benefits of the readers.

The routers keep track of host IP addresses that are directly reachable and their corresponding link-layer addresses. This is useful for lossy and lowpower networks and as well as wired networks.

An Address Registration Option (ARO) can be included in unicast Neighbor Solicitation (NS) messages sent by hosts. Thus it can be included in the unicast NS messages that a host sends as part of Neighbor Unreachability Detection to determine that it can still reach a default router. The ARO is used by the receiving router to reliably maintain its Neighbor Cache. The same option is included in corresponding Neighbor Advertisement (NA) messages with a Status field indicating the success or failure of the registration. This option is always host initiated.

The ARO is required for reliability and power saving. The lifetime field provides flexibility to the host to register an address which should be usable (the reachability information may be propagated to the routing protocols) during its intended sleep schedule of nodes that switches to frequent sleep mode.

The sender of the NS also includes the EUI-64 of the interface it is registering an address from. This is used as a unique ID for the detection of duplicate addresses. It is used to tell the difference between the same node re-registering its address and a different node (with a different EUI-64) registering an address that is already in use by someone else. The EUI-64 is also used to deliver an NA carrying an error Status code to the EUI-64 based link-local IPv6 address of the host.


When the ARO is used by hosts an SLLA option MUST be included and the address that is to be registered MUST be the IPv6 source address of

the Neighbor Solicitation message.

Chakrabarti, et al.
9]

Expires May 25, 2013

[Page

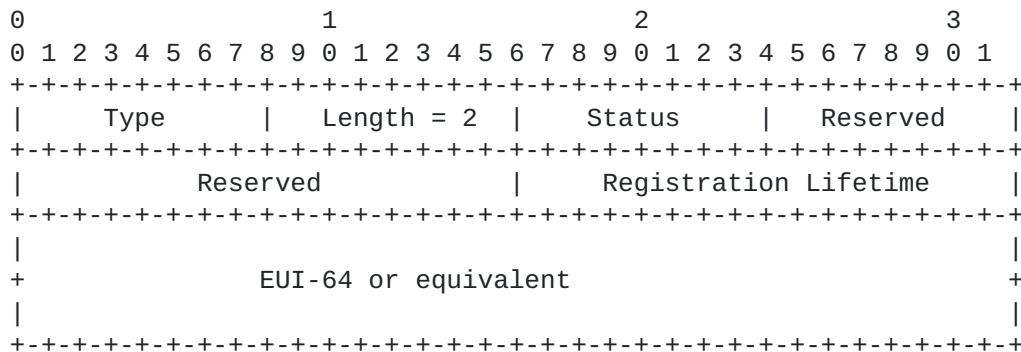

Fields:

- Type: 33 (See [[6LOWPAN-ND](#)])
- Length: 8-bit unsigned integer. The length of the option in units of 8 bytes. Always 2.
- Status: 8-bit unsigned integer. Indicates the status of a registration in the NA response. MUST be set to 0 in NS messages. See below.
- Reserved: This field is unused. It MUST be initialized to zero by the sender and MUST be ignored by the receiver.
- Registration Lifetime: 16-bit unsigned integer. The amount of time in a unit of 60 seconds that the router should retain the Neighbor Cache entry for the sender of the NS

that

includes this option.

EUI-64: 64 bits. This field is used to uniquely identify the interface of the registered address by including the EUI-64 identifier assigned to it unmodified.

The Status values used in Neighbor Advertisements are:

Status	Description
0	Success
1	Duplicate Address
2	Neighbor Cache Full
3-255	Allocated using Standards Action [RFC2434]

Table 1

7.2. Refresh and De-registration

A host SHOULD send a Registration message in order to renew its registration before its registration lifetime expires in order to continue its connectivity with the network. If anytime, the node

decides that it does not need the default router's service anymore, it MUST send a de-registration message - i.e, a registration message with lifetime being set to zero. A mobile host SHOULD first de-register with the default router before it moves away from the subnet.

7.3. A New Router Advertisement Flag

A new Router Advertisement flag [RF] is needed in order to distinguish a router advertisement from a efficiency-aware default router or a legacy IPv6 router. This flag is ignored by the legacy IPv6 hosts. EAH hosts use this flag in order to discover a NEAR router if it receives multiple RA from both legacy and NEAR routers.

```
  0 1 2 3 4 5 6 7
  +--+--+--+--+--+
  |M|O|H|Prf|P|E|R|
  +--+--+--+--+--+
```

The 'E' bit above MUST be 1 when a IPv6 router implements and configures the efficiency-aware Router behavior for Neighbor Discovery as per this document. All other cases E bit is 0.

The legacy IPv6 hosts will ignore the E bit in RA advertisement.

All

EAH MUST look for E bit in RA in order to determine the efficiency-aware support in the default router in the link.

This document assumes that an implementation will have configuration knobs to determine whether it is running in classical IPv6 ND [ND]

or

Optimized Energy Aware ND (this document) mode or both(Mixed mode).

8. Efficiency-aware Neighbor Discovery Messages

Router Advertisement(RA): Periodic RAs SHOULD be avoided. Only solicited RAs are RECOMMENDED. An RA MUST contain the Source Link-layer Address option containing Router's link-layer address (this is optional in [ND]). An RA MUST carry

Prefix

information option with L bit being unset,

so

that hosts do not multicast any NS messages as part of address resolution. A new flag (E-flag) is introduced in the RA in order to characterize the efficiency-aware mode support. Unlike RFC4861 which suggests

includes
to
Router Solicitation(RS):
described
network,
Default Router Selection:
Neighbor Solicitation (NS):
Neighbor Advertisement (NA):
Redirect Messages:
MTU option:
Address Resolution:
treated
next-hop

multicast Router Advertisements, this specification optimizes the exchange by always unicasting RAs in response to RS. This is possible since the RS always

a SLLA option, which is used by the router

unicast the RA.

Upon system startup, the node sends a multicast or link broadcast (when multicast is not supported at the link-layer) RS to find out the available routers in the link. An RS may be sent at other times as

in [section 6.3.7 of RFC 4861](#). A Router Solicitation MUST carry Source Link-layer Address option. Since no periodic RAs are allowed in the efficiency-aware IPv6

the host may send periodic unicast RS to the routers. The time-periods for the RS varies on the deployment scenarios and the Default Router Lifetime advertised in the RAs.

Same as in [section 6.3.6 of RFC 4861](#)[\[ND\]](#).

Neighbor solicitation is used between the hosts and the default-router as part of NUD and registering the host's address(es). An NS message MUST use the Address Registration option in order to accomplish the registration.

As defined in [\[ND\]](#) and ARO option.

A router SHOULD NOT send a Redirect message to a host since the link has non-transitive reachability. The host behavior is same as described in [section 8.3 of RFC 4861](#)[\[ND\]](#), i.e. a host MUST NOT send or accept redirect messages when in efficiency-aware mode.

Same as in [RFC 4861](#)[\[ND\]](#)

As per the [RFC 4861](#).

No NS/NA are sent as the prefixes are

as off-link. Thus no address resolution is performed at the hosts. The routers keep track of Neighbor Solicitations with Address Registration options(ARO) and create an extended neighbor cache of reachable addresses. The router also knows the

link-local address and corresponding link-layer address when it wants to route a packet.

Neighbor Unreachability Detection(NUD): NUD is performed in "forward-progress" fashion as described in [section 7.3.1 of RFC 4861\[ND\]](#). However, if Address Registration Option is used, the NUD SHOULD be combined with the Re-registration of the node. This way no extra message for NUD is required.

9. Efficiency-aware Host Behavior

A host sends Router Solicitation at the system startup and also when it suspects that one of its default routers have become unreachable(after NUD fails). The EAH MUST process the E-bit in RA as described in this document. The EAH MUST use ARO option to register with the neighboring NEAR router.

A host SHOULD be able to autoconfigure its IPv6 addresses using the IPv6 prefix obtained from Router Advertisement. The host SHOULD form

its link-local address from the EUI-64 as specified by IEEE Registration Authority and [RFC 2373](#). If this draft feature is implemented and configured, the host MUST NOT re-direct Neighbor Discovery messages. The host does not require to join solicited-node multicast address but it MUST join the all-node multicast address.

A host always sends packets to (one of) its default router(s). This is accomplished by the routers never setting the 'L' flag in the Prefix options.

The host is unable to forward routes or participate in a routing protocol. A legacy IPv6 Host compliant EAH SHOULD be able to fall back to [RFC 4861](#) host behavior if there is no efficiency-aware router (NEAR) in the link.

The efficiency-aware host MUST NOT send or accept re-direct messages. It does not join solicited node multicast address.

10. The Energy Aware Default Router (NEAR) Behavior

The main purpose of the default router in the context of this document is to receive and process the registration request, forward packets from one neighbor to the other, informs the routing protocol about the un-availability of the registered nodes if the routing protocol requires this information for the purpose of mobility or fast convergence. A default router (NEAR) behavior may be observed in one or more interfaces of a Border Router(BR).

A Border Router normally may have multiple interfaces and connects the nodes in a link like a regular IPv6 subnet(s) or acts as a gateway between separate networks such as Internet and home networks . The Border Router is responsible for distributing one or more /64 prefixes to the nodes to identify a packet belonging to the particular network. One or more of the interfaces of the Border Router may be connected with the efficiency-aware hosts or a efficiency-aware router(NEAR).

The efficiency-aware default router MUST not send periodic RA unless it is configured to support both legacy IPv6 and efficiency-aware hosts. If the Router is configured for efficiency-aware hosts support, it MUST send Router Advertisements with E-bit flag ON and MUST NOT set 'L' bit in the advertisements.

The router SHOULD NOT garbage collect Registered Neighbor Cache entries since they need to retain them until the Registration Lifetime expires. If a NEAR receives a NS message from the same host

one with ARO and another without ARO then the NS message with ARO gets the precedence and the NS without ARO is ignored. This behavior

protects the router from Denial Of Service attacks. Similarly, if Neighbor Unreachability Detection on the router determines that the host is UNREACHABLE (based on the logic in [ND]), the Neighbor Cache entry SHOULD NOT be deleted but be retained until the Registration Lifetime expires. If an ARO arrives for an NCE that is in UNCREACHABLE state, that NCE should be marked as STALE.

A default router keeps a cache for all the nodes' IP addresses, created from the Address Registration processing.

10.1. Router Configuration Modes

An efficiency-aware Router(NEAR) MUST be able to configure in efficiency-aware-only mode where it will expect all hosts register with the router following RS; thus will not support legacy hosts. However, it will create legacy NCE for NS messages for other routers in the network. This mode is able to prevent ND flooding on the link.

An efficiency-aware Router(NEAR) SHOULD be able to have configuration

knob to configure itself in Mixed-Mode where it will support both efficiency-aware hosts and legacy hosts. However even in mixed-mode the router should check for duplicate entries in the NCE before creating a new ones and it should rate-limit creating new NCE based on requests from the same host MAC address.

The RECOMMENDED default mode of operation for the efficiency-aware router is Mixed-mode.

11. NCE Management in efficiency-aware Routers

The use of explicit registrations with lifetimes plus the desire to not multicast Neighbor Solicitation messages for hosts imply that we manage the Neighbor Cache entries slightly differently than in [ND]. This results in two different types of NCEs and the types specify how those entries can be removed:

Legacy: Entries that are subject to the normal rules in [ND] that allow for garbage collection when on memory. Legacy entries are created only when there is no duplicate NCE. In mixed-mode and efficiency-aware mode the legacy entries are converted to the registered entries upon successful processing of ARO. Legacy type can be considered as union of garbage-collectible and Tentative Type NCEs described in [6LOWPAN-ND].

Registered: Entries that have an explicit registered lifetime and are kept until this lifetime expires or they are explicitly unregistered.

Note that the type of the NCE is orthogonal to the states specified in [ND].

When a host interacts with a router by sending Router Solicitations that does not match with the existing NCE entry of any type, a Legacy NCE is first created. Once a node successfully registers with a Router the result is a Registered NCE. As Routers send RAs to legacy hosts, or receive multicast NS messages from other Routers the result is Legacy NCEs. There can only be one kind of NCE for an IP address at a time.

A Router Solicitation might be received from a host that has not yet registered its address with the router or from a legacy[ND] host in the Mixed-mode of operation.

In the 'Efficiency-aware' only mode the router MUST NOT modify an existing Neighbor Cache entry based on the SLLA option from the Router Solicitation. Thus, a router SHOULD create a tentative Legacy Neighbor Cache entry based on SLLA option when there is no match with the existing NCE. Such a legacy Neighbor Cache entry SHOULD be timed out in TENTATIVE_LEGACY_NCE_LIFETIME seconds unless a registration

converts it into a Registered NCE.

However, in 'Mixed-mode' operation, the router does not require to keep track of TENTATIVE_LEGACY_NCE_LIFETIME as it does not know if the RS request is from a legacy host or the efficiency-aware hosts.

However, it creates the legacy type of NCE and updates it to a registered NCE if the ARO NS request arrives corresponding to the legacy NCE. Successful processing of ARO will complete the NCE creation phase.

If ARO did not result in a duplicate address being detected, and the registration life-time is non-zero, the router creates and updates the registered NCE for the IPv6 address. If the Neighbor Cache is full and new entries need to be created, then the router SHOULD respond with a NA with status field set to 2. For successful creation of NCE, the router SHOULD include a copy of ARO and send NA to the requestor with the status field 0. A TLLA(Target Link Layer) Option is not required with this NA.

Typically for efficiency-aware routers (NEAR), the registration life-time and EUI-64 are recorded in the Neighbor Cache Entry along with the existing information described in [ND]. The registered NCE are meant to be ready and reachable for communication and no address resolution is required in the link. The efficiency-aware hosts will renew their registration to keep maintain the state of reachability of the NCE at the router. However the router may do NUD to the idle or unreachable hosts as per [ND].

11.1. Handling ND DOS Attack

IETF community has discussed possible issues with /64 DOS attacks on the ND networks when a attacker host can send thousands of packets to the router with a on-link destination address or sending RS messages to initiate a Neighbor Solicitation from the neighboring router which will create a number of INCOMPLETE NCE entries for non-existent nodes in the network resulting in table overflow and denial of service of the existing communications.

The efficiency-aware behavior documented in this specification avoids the ND DOS attacks by:

- o Having the hosts register with the default router
- o Having the hosts send their packets via the default router
- o Not resolving addresses for the Routing Solicitor by mandating SLLA option along with RS
- o Checking for duplicates in NCE before the registration
- o Checking against the MAC-address and EUI-64 id is possible now for NCE matches
- o On-link IPv6-destinations on a particular link must be registered else these packets are not resolved and extra NCEs are not created

It is recommended that Mixed-mode operation and legacy hosts SHOULD NOT be used in the IPv6 link in order to avoid the ND DOS attacks.

Chakrabarti, et al.
16]

Expires May 25, 2013

[Page

For the general case of Mixed-mode the router does not create INCOMPLETE NCEs for the registered hosts, but it follows the [ND] steps of NCE states for legacy hosts.

12. Mixed-Mode Operations

Mixed-Mode operation discusses the protocol behavior where the IPv6 subnet is composed with legacy IPv6 Neighbor Discovery compliant nodes and efficiency-aware IPv6 nodes implementing this specification.

The mixed-mode model SHOULD support the following configurations in the IPv6 link:

- o The legacy IPv6 hosts and efficiency-aware-hosts in the network and a NEAR router
- o legacy IPv6 default-router and efficiency-aware hosts(EAH) in the link
- o one router is in mixed mode and the link contains both legacy IPv6 hosts and EAH
- o A link contains both efficiency-aware IPv6 router and hosts and legacy IPv6 routers and hosts and each host should be able to communicate with each other.

In mixed-mode operation, a NEAR MUST be configured for mixed-mode in order to support the legacy IPv6 hosts in the network. In mixed-mode, the NEAR MUST act as proxy for Neighbor Solicitation for DAD and Address Resolution on behalf of its registered hosts on that link. It should follow the NCE management for the EAH as described in this document and follow [RFC 4861](#) NCE management for the legacy IPv6 hosts. Both in mixed-mode and efficiency-aware mode, the NEAR sets E-bit flag in the RA and does not set 'L' on-link bit.

If a NEAR receives NS message from the same host one with ARO and another without ARO then the NS message with ARO gets the precedence.

An efficiency-aware Host implementation SHOULD support falling back to legacy IPv6 node behavior when no efficiency-aware routers are available in the network during the startup. If the EAH was operational in efficiency-aware mode and it determines that the NEAR is no longer available, then it should send a RS and find an alternate default router in the link. If no efficiency-aware router is indicated from the RA, then the EAH SHOULD fall back into [RFC 4861](#) behavior. On the otherhand, in the efficiency-aware mode EAH SHOULD ignore multicast Router Advertisements(RA) sent by the legacy and Mixed-mode routers in the link.

The routers that are running on efficiency-aware mode or legacy mode

SHOULD NOT dynamically switch the mode without flushing the Neighbor Cache Entries.

13. Bootstrapping

If the network is a efficiency-aware IPv6 subnet, and the efficiency-aware Neighbor Discovery mechanism is used by the hosts and routers as described in this document. At the start, the node uses its link-local address to send Router Solicitation and then it sends the Node Registration message as described in this document in order to form the address. The Duplicate address detection process should be skipped if the network is guaranteed to have unique interface identifiers which is used to form an IPv6 address.

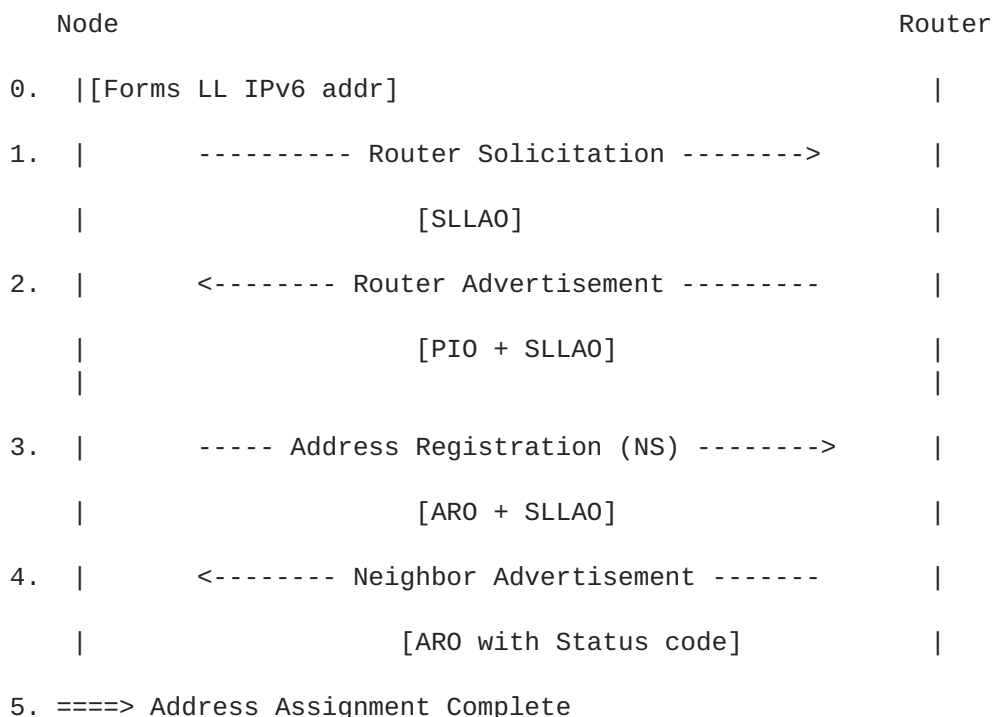


Figure 1: Neighbor Discovery Address Registration and bootstrapping

In the mixed mode operation, it is expected that logically there will be at least one legacy IPv6 router and another NEAR router present in the link. The legacy IPv6 router will follow [RFC 4861](#) behavior and NEAR router will follow the efficiency-aware behavior for registration, NCE maintenance, forwarding packets from a EAH and it will also act as a ND proxy for the legacy IPv6 hosts querying to

resolve a EAH node.

A legacy IPv6 host and EAH are not expected to see a difference in their bootstrapping if both legacy and efficiency-aware functionalities of routers are available in the network. It is RECOMMENDED that the EAH implementation SHOULD be able to behave like a legacy IPv6 host if it discovers that no efficiency-aware routing support is present in the link.

14. Handling Sleepy Nodes

The solution allows the sleepy nodes to complete its sleep schedule without waking up due to periodic Router Advertisement messages or due to Multicast Neighbor Solicitation for address resolution. The node registration lifetime SHOULD be synchronized with its sleep interval period in order to avoid waking up in the middle of sleep for registration refresh. Depending on the application, the registration lifetime SHOULD be equal to or integral multiple of a node's sleep interval period.

15. Duplicate Address Detection

In efficiency-aware mode, there is no need for Duplicate Address Detection(DAD) assuming that the deployment ensures unique 64bit identification availability for each registered host. In the event of collision of EUI64 field of ARO by two registration requests, the later request is denied if the first one is a valid request. The denied EAH node SHOULD pick another alternative IPv6 address to register to prevent further registration denial. The method of assignment of alternate IPv6 address is out of scope of this document.

16. Use Case Analysis

This section provides applicability scenarios where the efficiency-aware Neighbor Discovery will be most beneficial.

16.1. Data Center Routers on the link

Efficiency-aware Routers and hosts are useful in IPv6 networks in the

Data Center as they produce less signaling and also provides ways to minimize the ND flood of messages. Moreover, this mechanism will work with data-center nodes which are deliberately in sleep mode for saving energy.

This solution will work well in Data Center Virtual network and VM scenarios where number of VLANs are very high and ND signalings are undesirably high due the multicast messaging and periodic Router Advertisements and Neighbor Unreachability detections.

16.2. Edge Routers and Home Networks

An Edge Router in the network will also benefit implementing the efficiency-aware Neighbor Discovery behavior in order to save the signaling and keeping track of the registered nodes in its domain.

A

BNG sits at the operator's edge network and often the BNG has to handle a large number of home CPEs. If a BNG runs Neighbor

Discovery

protocol and acts as the default router for the CPE at home, this solution will be helpful for reducing the control messages and improving network performances.

The same solution can be run on CPE or Home Residential Gateways to assign IPv6 addresses to the wired and wireless home devices without the problem of ND flooding issues and consuming less power. It provides mechanism for the sleepy nodes to adjust their registration lifetime according to their sleep schedules.

16.3. M2M Networks

Any Machine-to-machine(M2M) networks such as IPv6 surveillance networks, wireless monitoring networks and other m2m networks desire for efficiency-aware control protocols and dynamic address allocation. The in-built address allocation and autoconfiguration mechanism in IPv6 along with the default router capability will be useful for the simple small-scale networks without having the burden of DHCPv6 service and Routing Protocols.

16.4. Cellular and Wi-fi Networks

The cellular and Wi-fi IPv6 devices can act as efficiency-aware hosts

and register with their nearest default router. This will reduce number of signalings and the registration method(ARO) will provide operators a mechanism for tracking the nodes in the default router.

17. Mobility Considerations

If the hosts move from one subnet to another, they MUST first de-register and then register themselves in the new subnet or network. If a node moves away without de-registration and returns to the network before the registration lifetime expires, its registration

is

still considered valid. For run-away nodes the registration expires after the lifetime expiry or due to unreachability whichever comes

first. Otherwise, the regular IPv6 Mobility [[IPV6M](#)] behavior applies.

18. Other Considerations

18.1. Detecting Network Attachment(DNA)

IPv6 DNA[DNA] uses unicast ND probes and link-layer indications to detect movement of its network attachments. Upon detecting link-layer indication, it sends a all-routers Solicitation message. When the node implements this document along with DNA, it MUST send ARO option with its Neighbor Solicitation unicast message if the candidate router advertisement indicates that the router is a NEAR router. If the candidate router is a legacy router then and it is the only choice then the EAH host adapt to the legacy behavior. However if EAH node implements DNA host capability as well, then it SHOULD give preference to the NEAR routers in its candidate list of routers.

Thus the ND optimization solution will work seamlessly with DNA implementations and no change is required in DNA solution because of Neighbor Discovery updates. It is a deployment and configuration consideration as to run the network in mixed mode or efficient-mode.

18.2. Proxying for Efficiency-Aware hosts

The efficient-ND SHOULD continue to support the legacy IPv6 Neighbor Solicitation requests in the mixed mode. The NEAR router SHOULD act as the ND proxy on behalf of EAH hosts for the legacy nodes' NS requests for EAH.

18.3. DHCPv6 Interaction

Co-existence with DHCP: For classical IPv6, if DHCPv6 or central address allocation mechanism is used, then Neighbor Discovery autoconfiguration is not used for global address allocation. However, link-local duplicate address detection, Neighbor solicitation, Neighbor unreachability detection are still used. Upon assignment of the IPv6-address from DHCPv6, a EAH node SHOULD then register the IP-address with the default router for avoiding Duplicate address detection and Address Resolution. For Legacy DHCPv6 nodes there is no change in behavior. NOTE: DHCPv6 Server MUST be notified by NEAR for its efficiency-aware service interfaces.

DHCPv6 server then SHOULD inform the DHCP requestor node about the default-router capability during the address assignment period.

Although the solution described in this document prevents unnecessary multicast messages in the IPv6 ND procedure, it does not affect

normal IPV6 multicast packets and ability of nodes to join and leave

Chakrabarti, et al.
21]

Expires May 25, 2013

[Page

the multicast group or forwarding multicast traffic or responding to multicast queries.

19. Updated Neighbor Discovery Constants

This section discusses the updated default values of ND constants based on [\[ND\] section 10](#). New and changed constants are listed only for efficiency-aware-nd implementation. These values SHOULD be configurable and tunable to fit implementations and deployment.

Router Constants:

MAX_RTR_ADVERTISEMENTS(NEW)	3 transmissions
MIN_DELAY_BETWEEN_RAS(CHANGED)	1 second
TENTATIVE_LEGACY_NCE_LIFETIME(NEW)	30 seconds

Host Constants:

MAX_RTR_SOLICITATION_INTERVAL(NEW)	60 seconds
------------------------------------	------------

Also refer to [\[ENH-ND\]](#) , [\[IMPAT-ND\]](#) and [\[6LOWPAN-ND\]](#) for further tuning of ND constants.

20. Security Considerations

These optimizations are not known to introduce any new threats against Neighbor Discovery beyond what is already documented for IPv6 [\[RFC 3756\]](#).

Section 11.2 of [\[ND\]](#) applies to this document as well.

This mechanism minimizes the possibility of ND /64 DOS attacks in efficiency-aware mode. See [Section 11.1](#).

21. IANA Considerations

A new flag (E-bit) in RA has been introduced. IANA assignment of the E-bit flag is required upon approval of this document.

22. Changelog

Changes from [draft-chakrabarti-nordmark-energy-aware-nd-02](#):

- o Replaced energy-aware with efficiency-aware which covers both energy efficiency and other operational efficiency

- o Added consideration for DNA, ND proxy and clarified that this is useful for networks with MLD-snooping switches as well
- o Added use-cases, Support for Mixed-mode operations and a diagram for bootstrapping scenario.
- o Clarified its applicability when DHCP is used for address allocation.

23. Acknowledgements

The primary idea of this document are from 6LoWPAN Neighbor Discovery document [[6LOWPAN-ND](#)] and the discussions from the 6lowpan working group members, chairs Carsten Bormann and Geoff Mulligan and through our discussions with Zach Shelby, editor of the [[6LOWPAN-ND](#)].

The inspiration of such a IPv6 generic document came from Margaret Wasserman who saw a need for such a document at the IOT workshop at Prague IETF.

The authors acknowledge the ND denial of service issues and key causes mentioned in the [draft-halpern-6man-nddos-mitigation](#) document by Joel Halpern. Thanks to Joel Halpern for pinpointing the problems that are now addressed in the NCE management section.

The authors like to thank Dave Thaler, Jari Arkko, Ylva Jading, Niklas J. Johnsson, Reda Nedjar, Purvi Shah, Jaume Rius Riu, Fredrik Garneij for their useful comments on this work.

24. References

24.1. Normative References

- [RFC2119] Bradner, S., "Key words for use in RFCs to Indicate Requirement Levels", [BCP 14](#), [RFC 2119](#), March 1997.
- [RFC2434] Narten, T. and H. Alvestrand, "Guidelines for Writing an IANA Considerations Section in RFCs", [BCP 26](#), [RFC 2434](#), October 1998.
- [6LOWPAN-ND] Shelby, Z., Chakrabarti, S., Nordmark, E., and C. Bormann, "ND Optimizations for 6LoWPAN", [RFC 6775](#), November 2012.
- [ND] Narten, T., Nordmark, E., Simpson, W., and H. Soliman, "Neighbor Discovery for IP version 6", [RFC 4861](#), September 2007.

- [LOWPAN] Montenegro, G. and N. Kushalnagar, "Transmission of IPv6 Packets over IEEE 802.15.4 networks", [RFC 4944](#), September 2007.
- [LOWPANG] Kushalnagar, N. and G. Montenegro, "6LoWPAN: Overview, Assumptions, Problem Statement and Goals", [RFC 4919](#), August 2007.

24.2. Informative References

- [IPV6] Deering, S. and R. Hinden, "Internet Protocol, Version 6 (IPv6), Specification", [RFC 2460](#), December 1998.
- [DNA] Krishnan, S. and G. Daley, "Simple Procedures for Detecting Network Attachments in IPv6", [RFC 6059](#), November 2010.
- [AUTOCONF] Thomson, S., Narten, T., and T. Jinmei, "IPv6 Stateless Autoconfiguration", [RFC 4862](#), September 2007.
- [SEND] Arkko, J., Kempf, J., Zill, B., and P. Nikander, "Secure Neighbor Discovery", [RFC 3971](#), March 2005.
- [AUTOADHOC] Baccelli, E. and M. Townsley, "IP Addressing Model in Adhoc Networks", [RFC 5889](#), September 2010.
- [NDDOS-halpern] Halpern, J., "IP Addressing Model in Adhoc Networks", [draft-halpern-6man-nddos-mitigation-00.txt](#) (work in progress), October 2011.
- [ENH-ND] Kumari, W., Gashinsky, I., Jaeggli, J., and K. Chittimaneni, "Neighbor Discovery Enhancement for DOS mitigation", [draft-gashinsky-6man-v6nd-enhance-02](#) (work in progress), October 2012.
- [IMPAT-ND] Nordmark, E. and I. Gashinsky, "Neighbor Unreachability Detection is too impatient", [draft-ietf-6man-impatient-nud-05](#) (work in progress), October 2012.
- [IEEE] IEEE Computer Society, "IEEE Std. 802.15.4-2003", , October 2003.
- [PD] Miwakawya, S., "Requirements for Prefix Delegation",

[RFC 3769](#), June 2004.

- [RF] Haberman, B. and B. Hinden, "IPv6 Router Advertisement Flags option", [RFC 5175](#), March 2008.
- [ULA] "Unique Local IPv6 Addresses", [RFC 4193](#).
- [IPV6M] Johnson, D., Perkins, C., and J. Arkko, "Mobility Support in IPv6", [RFC 6275](#), July 2011.

Authors' Addresses

Samita Chakrabarti
Ericsson
San Jose, CA
USA

Email: samita.chakrabarti@ericsson.com

Erik Nordmark
Cisco Systems
San Jose, CA
USA

Email: nordmark@cisco.com

Margaret Wasserman
Painless Security

Email: mrw@lilacglade.org

