

LSR  
Internet-Draft  
Intended status: Standards Track  
Expires: 8 May 2024

R. Chen  
D. Zhao  
ZTE Corporation  
P. Psenak  
K. Talaulikar  
Cisco Systems  
5 November 2023

**Prefix Flag Extension for OSPFv2 and OSPFv3  
draft-chen-lsr-prefix-extended-flags-03**

Abstract

Within OSPF, each prefix is advertised along with an 8-bit field of capabilities, by using the Prefix Options (OSPFv3) and the flag field in the OSPFv2 Extended Prefix TLV (OSPFv2). However, for OSPFv3, all the bits of the Prefix Options have already been assigned, and for OSPFv2, there are not many undefined bits left in the OSPFv2 Extended Prefix TLV.

This document solves the problem of insufficient existing flags, and defines the variable length Prefix attributes Sub-TLVs for OSPFv2 and OSPFv3 respectively for the extended flag fields.

Status of This Memo

This Internet-Draft is submitted in full conformance with the provisions of [BCP 78](#) and [BCP 79](#).

Internet-Drafts are working documents of the Internet Engineering Task Force (IETF). Note that other groups may also distribute working documents as Internet-Drafts. The list of current Internet-Drafts is at <https://datatracker.ietf.org/drafts/current/>.

Internet-Drafts are draft documents valid for a maximum of six months and may be updated, replaced, or obsoleted by other documents at any time. It is inappropriate to use Internet-Drafts as reference material or to cite them other than as "work in progress."

This Internet-Draft will expire on 8 May 2024.

Copyright Notice

Copyright (c) 2023 IETF Trust and the persons identified as the document authors. All rights reserved.

This document is subject to [BCP 78](#) and the IETF Trust's Legal Provisions Relating to IETF Documents (<https://trustee.ietf.org/license-info>) in effect on the date of publication of this document. Please review these documents carefully, as they describe your rights and restrictions with respect to this document. Code Components extracted from this document must include Revised BSD License text as described in Section 4.e of the [Trust Legal Provisions](#) and are provided without warranty as described in the Revised BSD License.

Table of Contents

- [1.](#) Introduction . . . . . [2](#)
- [1.1.](#) Requirements Language . . . . . [4](#)
- [2.](#) Variable length Prefix attributes Sub-TLVs . . . . . [4](#)
- [2.1.](#) OSPFv2 Prefix Attributes Sub-TLV . . . . . [4](#)
- [2.2.](#) OSPFv3 Prefix Attributes Sub-TLV . . . . . [5](#)
- [3.](#) Processing . . . . . [6](#)
- [4.](#) Backward Compatibility . . . . . [6](#)
- [5.](#) Acknowledgements . . . . . [6](#)
- [6.](#) IANA Considerations . . . . . [6](#)
- [6.1.](#) OSPFv2 Prefix Attributes Sub-TLV Registry . . . . . [6](#)
- [6.1.1.](#) OSPFv2 Prefix Extended Flags Field Registry . . . . . [7](#)
- [6.2.](#) OSPFv3 Prefix Attributes Sub-TLV Registry . . . . . [7](#)
- [6.2.1.](#) OSPFv3 Prefix Extended Flags Field Registry . . . . . [7](#)
- [7.](#) Security Considerations . . . . . [8](#)
- [8.](#) References . . . . . [8](#)
- [8.1.](#) Normative References . . . . . [8](#)
- [8.2.](#) Informative References . . . . . [8](#)
- Authors' Addresses . . . . . [9](#)

**1. Introduction**

Within OSPF, each prefix is advertised along with an 8-bit field of capabilities, by using the Prefix Options[RFC5340] and the flag field in the OSPFv2 Extended Prefix TLV [[RFC7684](#)]. However, for OSPFv3, all the bits of the Prefix Options have already been assigned, and for OSPFv2, there are not many undefined bits left in the OSPFv2 Extended Prefix TLV.

For OSPFv2, as defined in [[RFC7684](#)], the length of the Flag field is 8 bits, and there are only two bits left in the OSPFv2 Extended Prefix TLV that are undefined as shown in Table 1.



Value	Description	Reference
0x80	A	[RFC7684]
0x40	N	[RFC7684]
0x20	E-Flag(ELC Flag)	[RFC9089]
TBD	U	[I-D.ietf-lsr-igp-ureach-prefix-announce]
TBD	UP	[I-D.ietf-lsr-igp-ureach-prefix-announce]
TBD	AC	[I-D.chen-lsr-anycast-flag]

Table 1: OSPFv2 Extended Prefix TLV Flags (8 bits)

For OSPFv3, as defined in [RFC5340], the length of the Flag field is 8 bits, and all of the bits have already been defined as shown in Table 2.

Value	Description	Reference
0x01	NU-bit	[RFC5340]
0x02	LA-bit	[RFC5340]
0x04	Deprecated	[RFC5340]
0x08	P-bit	[RFC5340]
0x10	DN-bit	[RFC5340]
0x20	N-bit	[RFC8362]
0x40	E-Flag (ELC Flag)	[RFC9089]
0x80	AC-bit	[I-D.ietf-lsr-ospfv3-srv6-extensions]

Table 2: OSPFv3 Prefix Options (8 bits)



This document solves the problem of insufficient existing flags, and defines the variable length Prefix attributes Sub-TLVs for OSPFv2 and OSPFv3 respectively for the extended flag fields.

1.1. Requirements Language


The key words "MUST", "MUST NOT", "REQUIRED", "SHALL", "SHALL NOT", "SHOULD", "SHOULD NOT", "RECOMMENDED", "NOT RECOMMENDED", "MAY", and "OPTIONAL" in this document are to be interpreted as described in BCP 14 [RFC2119] [RFC8174] when, and only when, they appear in all capitals, as shown here.

2. Variable length Prefix attributes Sub-TLVs

This document creates the variable length Prefix attributes Sub-TLVs for OSPFv2 and OSPFv3 respectively. These Sub-TLVs specify the variable flag fields to advertise additional attributes associated with the prefix.

2.1. OSPFv2 Prefix Attributes Sub-TLV

The format of OSPFv2 Prefix Attributes Sub-TLV is:

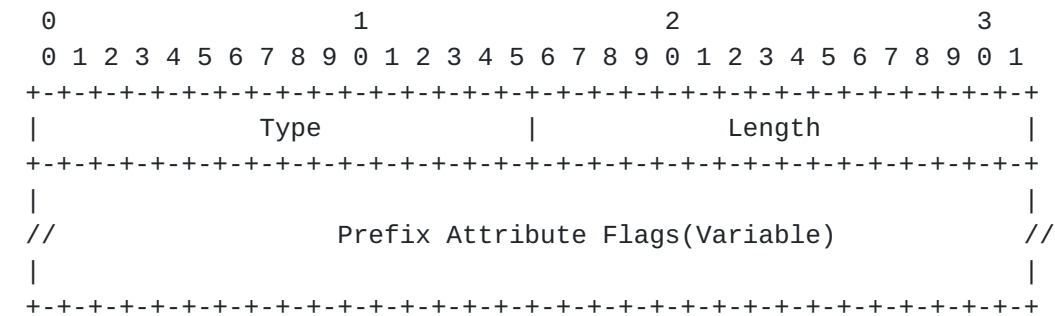

where:

Type: TBD1.

Length: Variable, dependent on the included Prefix Attribute Flags. It MUST be a multiple of 4 octets.

Prefix Attribute Flags: Variable. The extended flag fields. This contains an array of units of 32-bit flags numbered from the most significant as bit zero.

Currently, no bits are defined.

Unassigned bits MUST be set to zero on transmission and MUST be ignored on receipt.




Bits that are NOT transmitted MUST be treated as if they are set to 0 on receipt.

OSPFv2 Prefix Attributes Sub-TLV is a sub-TLV of the OSPFv2 Extended Prefix TLV as defined in [RFC7684].

2.2. OSPFv3 Prefix Attributes Sub-TLV

The format of OSPFv3 Prefix Attributes Sub-TLV is:

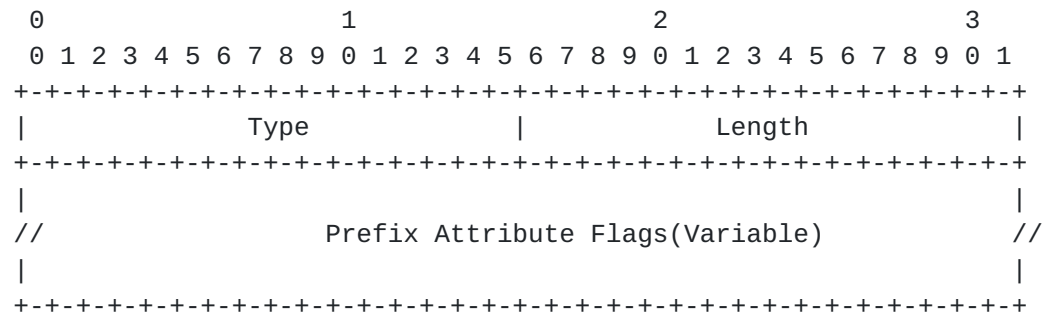

where:

Type: TBD2.

Length: Variable, dependent on the included Prefix Attribute Flags. It MUST be a multiple of 4 octets.

Prefix Attribute Flags: Variable. The extended flag fields. This contains an array of units of 32-bit flags numbered from the most significant as bit zero.

Currently, two new bits (U-Flag and UP-Flag) are defined as described in [I-D.ietf-lsr-igp-ureach-prefix-announce].

Unassigned bits MUST be set to zero on transmission and MUST be ignored on receipt.

Bits that are NOT transmitted MUST be treated as if they are set to 0 on receipt.

OSPFv3 Prefix Attributes Sub-TLV is a sub-TLV of the following OSPFv3 TLVs as defined in [RFC8362]:

- \* Intra-Area-Prefix TLV
- \* Inter-Area-Prefix TLV
- \* External-Prefix TLV





**3. Processing**

The Extended Flags field is an array of units of 32 flags that are allocated starting from the most significant bit. The bits of the Extended Flags field will be assigned by future documents. This document does not define any flags. Flags that an implementation is not supporting MUST be set to zero on transmission. Implementations that do not understand any particular flag MUST ignore the flag.

Note that devices MUST handle varying lengths of the Prefix attributes Sub-TLV.

If a device receives the Prefix attributes Sub-TLV of a length more than it currently supports or understands, it MUST ignore the bits beyond that length.

If a device receives the Prefix attributes Sub-TLV of a length less than the one supported by the implementation, it MUST act as if the bits beyond the length were not set.

**4. Backward Compatibility**

The Prefix attributes Sub-TLV defined in this document does not introduce any backward compatibility issues. An implementation that does not understand or support the Prefix attributes Sub-TLV MUST ignore the TLV.

Further, any additional bits in the OSPFv2/OSPFv3 Prefix Attributes Sub-TLV that are not understood by an implementation MUST be ignored.

**5. Acknowledgements**

TBD.

**6. IANA Considerations**

This document requests allocation for the following registry.

**6.1. OSPFv2 Prefix Attributes Sub-TLV Registry**

This document requests the allocation of "OSPFv2 Prefix Attributes" in the "OSPFv2 Extended Prefix TLV Sub-TLVs" registry:

Value	Description	Reference
TBD1	OSPFv2 Prefix Attributes	This document



**6.1.1. OSPFv2 Prefix Extended Flags Field Registry**

This document requests an allocation of "OSPFv2 Prefix Extended Flag Field" Registry under "Open Shortest Path First v2 (OSPFv2) Parameters". The new registry defines the bits in the 32-bit Flags field in the OSPFv2 Prefix Attributes Sub-TLV. New bits can be allocated via IETF Review or IESG Approval [[RFC8126](#)]. Each bit should be tracked with the following qualities:

- \* Bit number (counting from bit 0 as the most significant bit)
- \* Description
- \* Reference

No values are currently defined. Bits 0-31 are initially marked as "Unassigned". Bits with a higher ordinal than 31 will be added to the registry in future documents if necessary.

**6.2. OSPFv3 Prefix Attributes Sub-TLV Registry**

This document requests the allocation of "OSPFv3 Prefix Attributes" in the "OSPFv3 Extended-LSA Sub-TLVs" registry:

Value	Description	Reference
TBD2	OSPFv3 Prefix Attributes	This document

**6.2.1. OSPFv3 Prefix Extended Flags Field Registry**

This document requests an allocation of "OSPFv3 Prefix Extended Flag Field" registry under "Open Shortest Path First v3 (OSPFv3) Parameters". New bits can be allocated via IETF Review or IESG Approval [[RFC8126](#)]. Each bit should be tracked with the following qualities:

- \* Bit number (counting from bit 0 as the most significant bit)
- \* Description
- \* Reference

Bits 0-31 are initially marked as "Unassigned". Bits with a higher ordinal than 31 will be added to the registry in future documents if necessary.



## **7. Security Considerations**

Procedures and protocol extensions defined in this document do not affect the OSPFv2 , OSPFv3 security model. See the "Security Considerations" section of [[RFC7684](#)] for a discussion of OSPFv2 security, the "Security Considerations" section of [[RFC8362](#)] for a discussion of OSPFv3 security.

## **8. References**

### **8.1. Normative References**

- [RFC2119] Bradner, S., "Key words for use in RFCs to Indicate Requirement Levels", [BCP 14](#), [RFC 2119](#), DOI 10.17487/RFC2119, March 1997, <<https://www.rfc-editor.org/info/rfc2119>>.
- [RFC5340] Coltun, R., Ferguson, D., Moy, J., and A. Lindem, "OSPF for IPv6", [RFC 5340](#), DOI 10.17487/RFC5340, July 2008, <<https://www.rfc-editor.org/info/rfc5340>>.
- [RFC7684] Psenak, P., Gredler, H., Shakir, R., Henderickx, W., Tantsura, J., and A. Lindem, "OSPFv2 Prefix/Link Attribute Advertisement", [RFC 7684](#), DOI 10.17487/RFC7684, November 2015, <<https://www.rfc-editor.org/info/rfc7684>>.
- [RFC8126] Cotton, M., Leiba, B., and T. Narten, "Guidelines for Writing an IANA Considerations Section in RFCs", [BCP 26](#), [RFC 8126](#), DOI 10.17487/RFC8126, June 2017, <<https://www.rfc-editor.org/info/rfc8126>>.
- [RFC8174] Leiba, B., "Ambiguity of Uppercase vs Lowercase in [RFC 2119](#) Key Words", [BCP 14](#), [RFC 8174](#), DOI 10.17487/RFC8174, May 2017, <<https://www.rfc-editor.org/info/rfc8174>>.
- [RFC8362] Lindem, A., Roy, A., Goethals, D., Reddy Vallem, V., and F. Baker, "OSPFv3 Link State Advertisement (LSA) Extensibility", [RFC 8362](#), DOI 10.17487/RFC8362, April 2018, <<https://www.rfc-editor.org/info/rfc8362>>.

### **8.2. Informative References**



## [I-D.chen-lsr-anycast-flag]

Chen, R., Zhao, D., Psenak, P., and K. Talaulikar,  
"Updates to Anycast Property advertisement for OSPFv2",  
Work in Progress, Internet-Draft, [draft-chen-lsr-anycast-flag-04](https://datatracker.ietf.org/doc/html/draft-chen-lsr-anycast-flag-04), 23 July 2023,  
<<https://datatracker.ietf.org/doc/html/draft-chen-lsr-anycast-flag-04>>.

## [I-D.ietf-lsr-igp-ureach-prefix-announce]

Psenak, P., Filsfils, C., Litkowski, S., Voyer, D.,  
Dhamija, Hegde, S., Van de Velde, G., and G. S. Mishra,  
"IGP Unreachable Prefix Announcement", Work in Progress,  
Internet-Draft, [draft-ietf-lsr-igp-ureach-prefix-announce-01](https://datatracker.ietf.org/doc/html/draft-ietf-lsr-igp-ureach-prefix-announce-01), 22 October 2023,  
<<https://datatracker.ietf.org/doc/html/draft-ietf-lsr-igp-ureach-prefix-announce-01>>.

## [I-D.ietf-lsr-ospfv3-srv6-extensions]

Li, Z., Hu, Z., Talaulikar, K., and P. Psenak, "OSPFv3  
Extensions for SRv6", Work in Progress, Internet-Draft,  
[draft-ietf-lsr-ospfv3-srv6-extensions-15](https://datatracker.ietf.org/doc/html/draft-ietf-lsr-ospfv3-srv6-extensions-15), 21 June 2023,  
<<https://datatracker.ietf.org/doc/html/draft-ietf-lsr-ospfv3-srv6-extensions-15>>.

[RFC9089] Xu, X., Kini, S., Psenak, P., Filsfils, C., Litkowski, S.,  
and M. Bocci, "Signaling Entropy Label Capability and  
Entropy Readable Label Depth Using OSPF", [RFC 9089](https://www.rfc-editor.org/info/rfc9089),  
DOI 10.17487/RFC9089, August 2021,  
<<https://www.rfc-editor.org/info/rfc9089>>.

## Authors' Addresses

Ran Chen  
ZTE Corporation  
Nanjing  
China  
Email: chen.ran@zte.com.cn

Detao Zhao  
ZTE Corporation  
Nanjing  
China  
Email: zhao.detao@zte.com.cn





Peter Psenak  
Cisco Systems  
Slovakia  
Email: ppsenak@cisco.com

Ketan Talaulikar  
Cisco Systems  
India  
Email: ketant.ietf@gmail.com