

Workgroup: Network Working Group  
Internet-Draft:  
draft-chen-spring-sr-bind-protect-arch-00  
Published: 23 October 2023  
Intended Status: Standards Track  
Expires: 25 April 2024  
Authors: H. Chen      Z. Hu      W. Cheng  
         Futurewei   Huawei Technologies   China Mobile  
         A. Wang      G. Mishra  
         China Telecom   Verizon

## SR Path Binding Protection Architecture

### Abstract

This document describes a architecture of fast re-route protection for binding SIDs on SR paths including SRv6 paths and SR-MPLS paths. The SR paths are in a single domain or cross two domains. The two domains are administrated by one provider or two different providers.

### Requirements Language

The key words "MUST", "MUST NOT", "REQUIRED", "SHALL", "SHALL NOT", "SHOULD", "SHOULD NOT", "RECOMMENDED", "MAY", and "OPTIONAL" in this document are to be interpreted as described in [RFC2119] [RFC8174] when, and only when, they appear in all capitals, as shown here.

### Status of This Memo

This Internet-Draft is submitted in full conformance with the provisions of BCP 78 and BCP 79.

Internet-Drafts are working documents of the Internet Engineering Task Force (IETF). Note that other groups may also distribute working documents as Internet-Drafts. The list of current Internet-Drafts is at <https://datatracker.ietf.org/drafts/current/>.

Internet-Drafts are draft documents valid for a maximum of six months and may be updated, replaced, or obsoleted by other documents at any time. It is inappropriate to use Internet-Drafts as reference material or to cite them other than as "work in progress."

This Internet-Draft will expire on 25 April 2024.

### Copyright Notice

Copyright (c) 2023 IETF Trust and the persons identified as the document authors. All rights reserved.

This document is subject to BCP 78 and the IETF Trust's Legal Provisions Relating to IETF Documents (<https://trustee.ietf.org/license-info>) in effect on the date of publication of this document. Please review these documents carefully, as they describe your rights and restrictions with respect to this document. Code Components extracted from this document must include Revised BSD License text as described in Section 4.e of the Trust Legal Provisions and are provided without warranty as described in the Revised BSD License.

## Table of Contents

- [1. Introduction](#)
- [2. Example SR Path Binding Protections](#)
  - [2.1. Example Single Domain Network with SR Paths](#)
  - [2.2. Example Two Domain Network with SR Paths](#)
  - [2.3. Binding Protection Information Distribution](#)
    - [2.3.1. Single Domain](#)
    - [2.3.2. One Administrative Domain](#)
    - [2.3.3. Two Administrative Domains](#)
  - [2.4. Without Any Failure](#)
    - [2.4.1. Single Domain](#)
    - [2.4.2. Two Domains](#)
  - [2.5. Failure of Node in Single Domain](#)
    - [2.5.1. SR Path using Node SIDs](#)
    - [2.5.2. SR Path using Adjacency SIDs](#)
  - [2.6. Failure of Border in One Administrative Domain](#)
    - [2.6.1. SR Path using Node SIDs](#)
    - [2.6.2. SR Path using Adjacency SIDs](#)
  - [2.7. Failure of Border in Two Administrative Domains](#)
    - [2.7.1. SR Path using Node SIDs](#)
    - [2.7.2. SR Path using Adjacency SIDs](#)
- [3. Procedures](#)
  - [3.1. on Neighbor of Node with Binding SID](#)
  - [3.2. on Upstream Node of Node with Binding SID](#)
  - [3.3. Integrated Procedure](#)
- [4. Protocol Extensions](#)
- [5. Security Considerations](#)
- [6. Acknowledgements](#)
- [7. References](#)
  - [7.1. Normative References](#)
  - [7.2. Informative References](#)
- [Authors' Addresses](#)

### 1. Introduction

[[I-D.ietf-rtgwg-segment-routing-ti-lfa](#)] describes a segment routing (SR) fast re-route (FRR) mechanism that provides FRR protection for a node SID and adjacency SID of a node on an SR path by the direct

neighbor or say point of local repair (PLR) to the failure. [[I-D.hu-spring-segment-routing-proxy-forwarding](#)] proposes a mechanism that provides FRR protection for a binding SID of a transit node on a SR path within a single domain.

This document describes a architecture of fast re-route protection for binding SIDs on SR paths including SRv6 paths and SR-MPLS paths. The SR paths are in a single domain or cross two domains. The two domains are administrated by one provider or two different providers.

## **2. Example SR Path Binding Protections**


This section illustrates the FRR protection for binding SIDs of nodes on SR paths through examples. It shows the procedure on every node on two SR paths without any failure in three cases below:

1. Single Domain.
2. One Administrative Domain (OAD): One provider Administrates two Domains.
3. Two Administrative Domains (TAD): Two differnt providers Administrate two Domains.

In addition, when the node with binding SIDs fails, the procedure on each of the related node is illustrated in different cases for two different time periods.

### **2.1. Example Single Domain Network with SR Paths**

[Figure 1](#) shows an example single domain network with two SR paths. It is used to explain the mechanism of SR path binding protection in single domain.

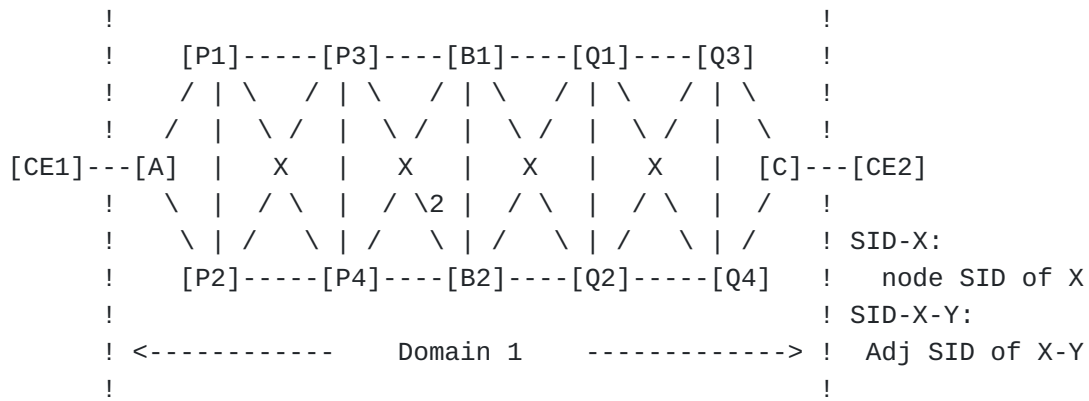

SR Path 1: A->P1->B1->BSID-B1(->Q1->Q3->C);BSID-B1 w/ SID-list 1  
SR Path 2: A->P1->P3->B1->BSID2-B1(->Q1->Q3->C);BSID2-B1 w/ SID-list 3  
SID-list 1: {SID-Q1,SID-Q3,SID-C}; SID-list 2: {SID-Q1,SID-Q3,SID-C}  
SID-list 3: {SID-B1-Q1,SID-Q3,SID-C}; SID-list 4: {SID-Q1,SID-Q3,SID-C}  
SID-list 5: {SID-B2,SID-Q1,SID-Q3,SID-C} - backup path for B1 on Path 1  
SID-list 6: {SID-B2,SID-Q1,SID-Q3,SID-C} - backup path for B1 on Path 2


Figure 1: Single Domain Network with SR Paths with Binding SIDs

The cost of each link is 1 by default, except for the cost of the link between P3 and B2 is 2 indicated by number 2 on the link. SR path 1 uses node SIDs. A Binding SID (BSID) of node B1, named BSID-B1, is associated with SID-list 1 {SID-Q1, SID-Q3, SID-C}. The path segment from node A to node B1 is represented by SID-P1 and SID-B1. The path segment from node B1 to node C is represented by BSID-B1 and SID-list 1 with which BSID-B1 is associated.

SR path 2 uses adjacency SIDs. Another Binding SID of B1, named BSID2-B1, is associated with SID-list 3 {SID-B1-Q1, SID-Q3, SID-C}. Note: BSID2-B1 is different from BSID-B1. The first SID in SID-list 3 is the adjacency SID of the adjacency from B1 to Q1. The path segment from node A to node B1 is represented by SID-A-P1, SID-P1-P3 and SID-P3-B1. The path segment from node B1 to node C is represented by BSID2-B1 and SID-list 3 with which BSID2-B1 is associated.

## 2.2. Example Two Domain Network with SR Paths

[Figure 2](#) shows an example two domain network with two SR paths. It is used to explain the mechanism of SR path across domains binding protection.

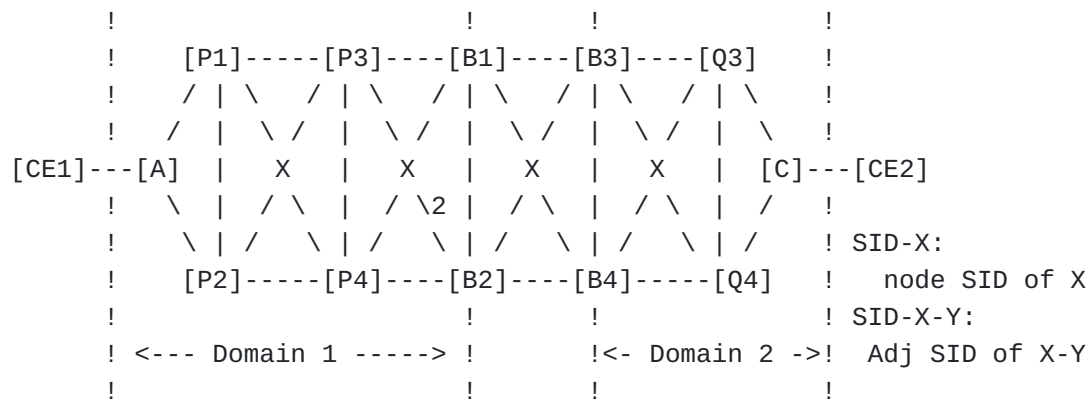

SR Path 1: A->P1->B1->B3->BSID-B3(->Q3->C);BSID-B3 w/ SID-list 1  
SR Path 2: A->P1->P3->B1->B3->BSID2-B3(->Q3->C);BSID2-B3 w/ SID-list 3  
SID-list 1: {SID-Q3,SID-C}; BSID-B4 w/ SID-list 2: {SID-Q3,SID-C}  
SID-list 3: {SID-B3-Q3,SID-C}; BSID2-B4 w/ SID-list 4: {SID-Q3,SID-C}  
SID-list 5: {SID-B4,SID-Q3,SID-C} -backup bath for B3 on Path 1 in OAD  
SID-list 6: {SID-B4,SID-Q3,SID-C} -backup bath for B3 on Path 2 in OAD  
SID-list 7: {SID-B4,BSID-B4} - backup bath for B3 on Path 1 in TAD  
SID-list 8: {SID-B4,BSID2-B4} - backup bath for B3 on Path 2 in TAD

Figure 2: Two domain Network with SR Paths with Binding SIDs of Borders

The cost of each link is 1 by default, except for the cost of the link between P3 and B2 is 2 indicated by number 2 on the link. SR path 1 crosses two domains (Domain 1 and Domain 2) and uses node SIDs. A Binding SID of border node B3, named BSID-B3, is associated with SID-list 1. The path segment from node A to node B3 is represented by SID-P1, SID-B1 and SID-B3. The path segment from node B3 to node C is represented by BSID-B3 and SID-list 1 with which BSID-B3 is associated.

For BSID-B3 associated with SID-list 1 on border node B3 along SR path 1, there is an alternate border node B4 corresponding to B3.

SR path 2 crosses two domains (Domain 1 and Domain 2) and uses adjacency SIDs. Another Binding SID of border node B3, named BSID2-B3, is associated with SID-list 3. Note: BSID2-B3 is different from BSID-B3. The first SID in SID-list 3 is the adjacency SID of the adjacency from B3 to Q3. The path segment from node A to node B3 is represented by SID-A-P1, SID-P1-P3, SID-P3-B1 and SID-B1-B3. The path segment from node B3 to node C is represented by BSID2-B3 and SID-list 3 with which BSID2-B3 is associated.

For BSID2-B3 associated with SID-list 3 on B3 for SR path 2, there is an alternate border node B4 corresponding to B3.

### 2.3. Binding Protection Information Distribution

This section describes the binding protection information distribution for three cases: Single Domain, OAD and TAD.

#### 2.3.1. Single Domain

One piece of information, which represents a backup path for the failure of node B1 with a BSID, is distributed.

For SR path 1, this one piece is BSID-B1, SID-list 5 and ID-B1 (i.e., Identifier (ID) of B1). SID-list 5 contains the SIDs for the backup path, which includes SID-B2 and SIDs for the path segment corresponding to SID-list 1 with which BSID-B1 is associated on B1. SID-list 5 is SID-B2 prepending SID-list 1 since the first SID in SID-list 1 is a node SID. SID-list 5 is {SID-B2, SID-Q1, SID-Q3, SID-C}.

This one piece (i.e., BSID-B1, SID-list 5 and ID-B1) is sent to the upstream neighbor (i.e., P3 on SR path 1) of B1. It is also sent to the closest upstream endpoint node (i.e., P1 on SR path 1) of B1 since B1 is a loose hop on SR path 1, which is indicated by node SID of B1 (i.e., SID-B1) on SR path 1.

For SR path 2, this one piece is BSID2-B1, SID-list 6 and ID-B1 (i.e., Identifier (ID) of B1). SID-list 6 contains the SIDs for the backup path, which includes SID-B2 and SIDs for the path segment corresponding to SID-list 3 with which BSID2-B1 is associated on B1. The first SID in SID-list 3 is the adjacency SID of the adjacency from B1 to Q1. SID-B2, SID-Q1 (the node SID of the remote node of the adjacency SID-B1-Q1), and the other SIDs in SID-list 3 constitutes SID-list 6, which is {SID-B2, SID-Q1, SID-Q3, SID-C}.

This one piece (i.e., BSID2-B1, SID-list 6 and ID-B1) is sent to the upstream neighbor (i.e., P3 on SR path 2) of B1. It is not sent to any other upstream node since B1 is not a loose hop on SR path 2.

#### 2.3.2. One Administrative Domain

When domain 1 and domain 2 are administrated by one provider, one piece of information is distributed. This one piece of information represents a backup path for the failure of border node B3.

For SR path 1, this one piece is BSID-B3, SID-list 5 and ID-B3 (i.e., Identifier (ID) of B3). SID-list 5 represents a backup path for the failure of B3. It contains the SIDs for the path segment to border node B4 and the path segment corresponding to SID-list 1 with which BSID-B3 is associated on B3. SID-list 5 is SID-B4 prepending SID-list 1 since the first SID in SID-list 1 is a node SID. It is {SID-B4, SID-Q3, SID-C}.

This one piece (i.e., BSID-B3, SID-list 5 and ID-B3) is sent to the upstream neighbor (i.e., B1 on SR path 1) of B3. The closest upstream endpoint node of B3 is B1 on SR path 1. The piece is not sent to B1 again.

For SR path 2, this one piece is BSID2-B3, SID-list 6 and ID-B3 (i.e., Identifier (ID) of B3). SID-list 6 represents a backup path for the failure of B3. It contains the SIDs for the path segment to border node B4 and the path segment corresponding to SID-list 3 with which BSID2-B3 is associated on B3. The first SID in SID-list 3 is the adjacency SID of the adjacency from B3 to Q3. SID-B4, SID-Q3 (the node SID of the remote node of the adjacency SID-B3-Q3), and the other SIDs in SID-list 3 constitutes SID-list 6, which is {SID-B4, SID-Q3, SID-C}.

This one piece (i.e., BSID2-B3, SID-list 6 and ID-B3) is sent to the upstream neighbor (i.e., B1 on SR path 2) of B3.

### **2.3.3. Two Administrative Domains**

When domain 1 and domain 2 are administrated by two different providers, the SIDs in domain 2 can not be distributed to any node in domain 1 except for the SIDs of border nodes such as B3 and B4 in domain 2. Thus SID-list 1 associated with BSID-B3 in SR path 1, which contains the SIDs in domain 2, can not be distributed to any node in domain 1. In this case, two pieces of information are distributed. These two pieces of information represent a backup path for the failure of border node B3 on SR path 1.

One piece is a binding SID of border node B4 (BSID-B4) associated with SID-list 2 corresponding to SID-list 1 with which BSID-B2 in SR path 1 is associated. SID-list 2 is SID-list 1 since the first SID in SID-list 1 is a node SID. This one piece (i.e., BSID-B4 and SID-list 2) is sent to alternate border node B4 corresponding to B3.

The other piece is BSID-B3, SID list 7 and ID-B3 (i.e., Identifier (ID) of B3). This other piece (i.e., BSID-B3, SID list 7 and ID-B3) is sent to the upstream neighbor (e.g., B1 on SR path 1) of B3. In addition, it is sent to the closest upstream endpoint node (e.g., B1 on SR path 1) of B3 if B3 is a loose hop and the endpoint node is not neighbor of B3.

BSID2-B3 in SR path 2 is associated with SID-list 3 {SID-B1-Q3, SID-C}. The two pieces of information representing a backup path for the failure of border node B3 on SR path 2 are as follows.

One piece is another binding SID of border node B4 (BSID2-B4) associated with SID-list 4 corresponding to SID-list 3. The first SID in SID-list 3 is the adjacency SID of the adjacency from B3 to Q3. The node SID of the remote node of the adjacency (SID-Q3) and

the other SIDs in SID-list 3 constitutes SID-list 4, which is {SID-Q3, SID-C}. This one piece (i.e., BSID2-B4 and SID-list 4) is sent to alternate border node B4 corresponding to B3.

The other piece is BSID2-B3, SID-list 8 and ID-B3 (i.e., Identifier (ID) of B3). This piece (i.e., BSID2-B3, SID-list 8 and ID-B3) is sent to the upstream neighbor (e.g., B1 on SR path 2) of B3. Since B3 is not a loose hop on SR path 2, this other piece is not sent to any other upstream node of B3 on SR path 2.

## 2.4. Without Any Failure

This section illustrates the procedure and the result of the procedure on every node on each of SR path 1 using node SIDs and SR path 2 using adjacency SIDs. Note: the path itself does not need to make up of all of the same type of SIDs, but rather the difference in behavior is on the point of repair if the top SID before the BSID is node SID or adjacency SID. The SID type preceding the SID before the BSID in the path is not relevant.

### 2.4.1. Single Domain

#### 2.4.1.1. SR Path using Node SIDs

[Figure 3](#) shows the result of the procedure on every node on SR path 1 in single domain using node SIDs without any failure.

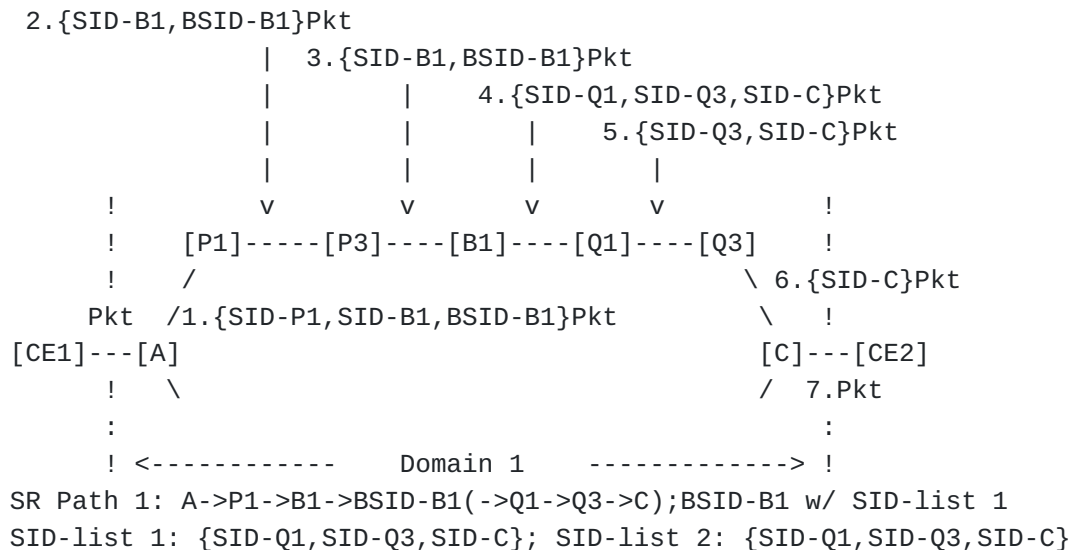


Figure 3: SR Path 1 in Single Domain in Normal Operations

The procedure on each node is below:

1. Node A as ingress of SR path 1 adds SID-P1, SID-B1 and BSID-B1 (binding SID (BSID) of B1) into a packet (Pkt) received from



CE1 and sends the packet with the SIDs to node P1. The packet sent to P1 is represented by "1. {SID-P1, SID-B1, BSID-B1}Pkt".

2. Node P1 pops its SID-P1 from the packet received, sends the packet with top SID (SID-B1) to P3 along the IGP shortest path to B1 according to its FIB entry for SID-B1. The packet sent to P3 is represented by "2. {SID-B1, BSID-B1}Pkt".
3. Node P3 sends the packet with top SID (SID-B1) to B1 along the IGP shortest path to B1. The packet sent to B1 is represented by "3. {SID-B1, BSID-B1}Pkt".
4. Node B1 pops its SID-B1 from the packet received, replaces its BSID-B1 with SID-list 1, and sends the packet to Q1 according to the top SID (SID-Q1) in the packet. The packet sent to Q1 is represented by "4. {SID-Q1, SID-Q3, SID-C}Pkt".
5. Node Q1 pops its SID-Q1 from the packet received, and sends the packet to node Q3 according to the top SID SID-Q3 in the packet. The packet sent to Q3 is represented by "5. {SID-Q3, SID-C}Pkt".
6. Node Q3 pops its SID-Q3 from the packet received, and sends the packet to node C according to the top SID SID-C in the packet. The packet sent to C is represented by "6. {SID-C}Pkt".
7. Node C pops its SID-C and gets the packet without any SIDs, which is represented by "7. Pkt".

#### 2.4.1.2. SR Path using Adjacency SIDs

[Figure 4](#) shows the result of the procedure on every node on SR path 2 in single domain using adjacency SIDs without any failure.

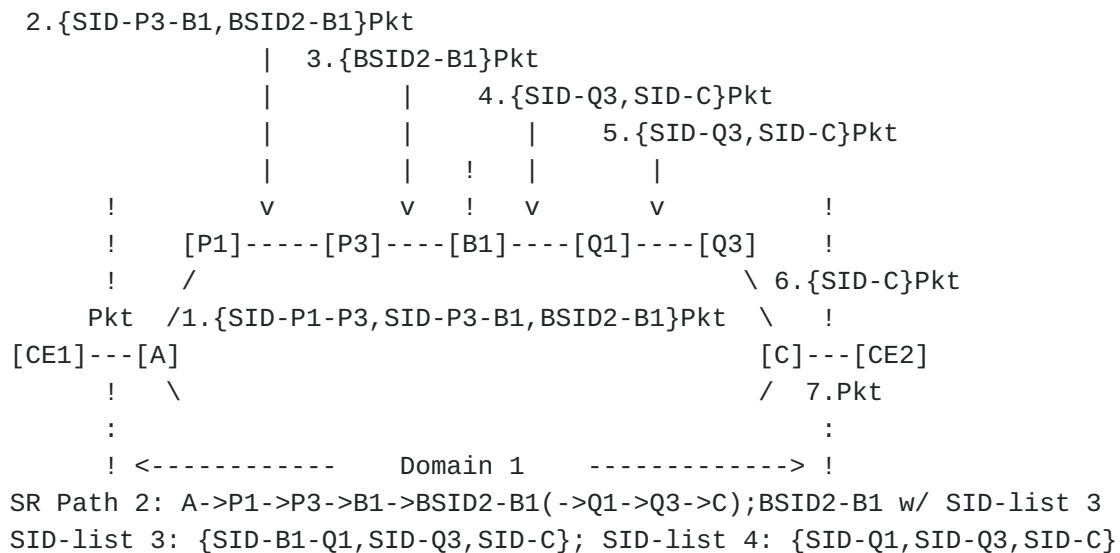


Figure 4: SR Path 2 in Single Domain in Normal Operations

The procedure on each node is below:

1. Node A as ingress of SR path 2 adds SID-P1-P3, SID-P3-B1 and BSID2-B1 into a packet (Pkt) received from CE1 and sends the packet with the SIDs to node P1. The packet sent to P1 is represented by "1. {SID-P1-P3, SID-P3-B1, BSID2-B1}Pkt".
2. Node P1 pops its SID-P1-P3 from the packet received, sends the packet to P3. The packet sent to P3 is represented by "2. {SID-P3-B1, BSID2-B1}Pkt".
3. Node P3 pops its SID-P3-B1 from the packet received, sends the packet to B1. The packet sent to B1 is represented by "3. {BSID2-B1}Pkt".
4. Node B1 replaces its BSID2-B1 with SID-list 3, pops its SID-B1-Q1, and sends the packet to Q1. The packet sent to Q1 is represented by "4. {SID-Q3, SID-C}Pkt".
5. Node Q1 sends the packet to node Q3 according to the top SID SID-Q3 in the packet. The packet sent to Q3 is represented by "5. {SID-Q3, SID-C}Pkt".
6. Node Q3 pops its SID-Q3 from the packet received, and sends the packet to node C according to the top SID SID-C in the packet. The packet sent to C is represented by "6. {SID-C}Pkt".
7. Node C pops its SID-C and gets the packet without any SIDs, which is represented by "7. Pkt".

#### 2.4.2. Two Domains

##### 2.4.2.1. SR Path using Node SIDs

[Figure 5](#) shows the result of the procedure on every node on SR path 1 across two domains using node SIDs without any failure.

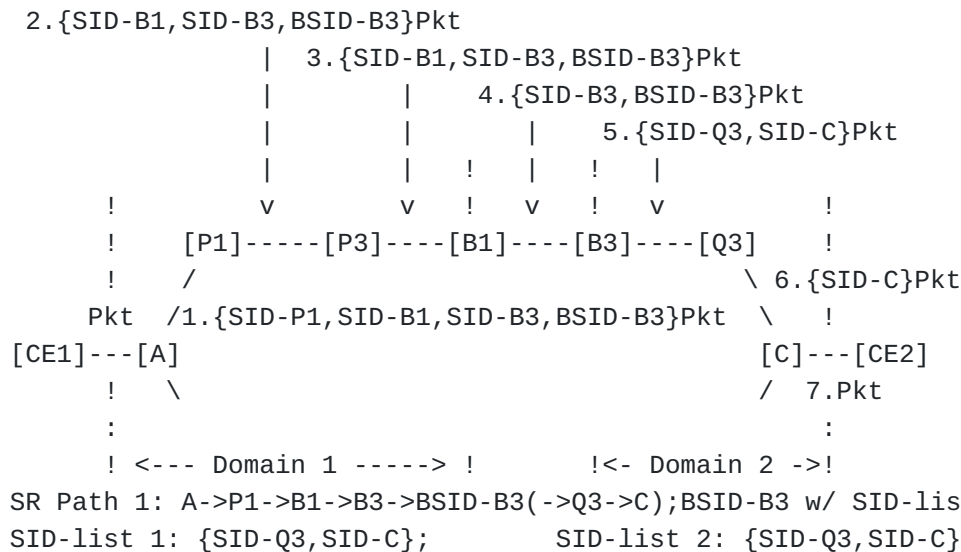


Figure 5: SR Path 1 across Two Domains in Normal Operations

The procedure on each node is below:

1. Node A as ingress of SR path 1 adds SID-P1, SID-B1, SID-B3 and BSID-B3 (binding SID (BSID) of B3) into a packet (Pkt) received from CE1 and sends the packet with the SIDs to node P1. The packet sent to P1 is represented by "1. {SID-P1, SID-B1, SID-B3, BSID-B3}Pkt".
2. Node P1 pops its SID-P1 from the packet received, sends the packet with top SID (SID-B1) to P3 along the IGP shortest path to B1 according to its FIB entry for SID-B1. The packet sent to P3 is represented by "2. {SID-B1, SID-B3, BSID-B3}Pkt".
3. Node P3 sends the packet with top SID (SID-B1) to B1 along the IGP shortest path to B1. The packet sent to B1 is represented by "3. {SID-B1, SID-B3, BSID-B3}Pkt".
4. Node B1 pops its SID-B1 from the packet received and sends the packet with top SID (SID-B3) to B3 along the routing path to B3. The packet sent to B3 is represented by "4. {SID-B3, BSID-B3}Pkt".
5. Node B3 pops its SID-B3 from the packet received, replaces its BSID-B3 with SID-list 1, and sends the packet to Q3 according to the top SID (SID-Q3) in the packet. The packet sent to Q3 is represented by "5. {SID-Q3, SID-C}Pkt".
6. Node Q3 pops its SID-Q3 from the packet received, and sends the packet to node C according to the top SID SID-C in the packet. The packet sent to C is represented by "6. {SID-C}Pkt".

- Node C pops its SID-C and gets the packet without any SIDs, which is represented by "7. Pkt".

#### 2.4.2.2. SR Path using Adjacency SIDs

Figure 6 shows the result of the procedure on every node on SR path 2 across two domains using adjacency SIDs without any failure.

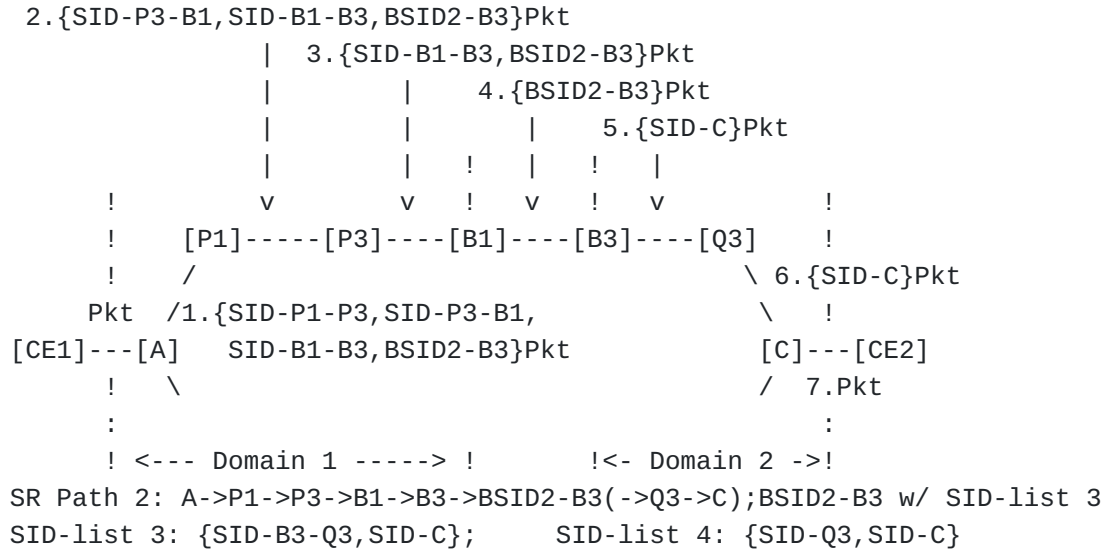


Figure 6: SR Path 2 across Two Domains in Normal Operations

The procedure on each node is below:

- Node A as ingress of SR path 2 adds SID-P1-P3, SID-P3-B1, SID-B1-B3 and BSID2-B3 into a packet (Pkt) received from CE1 and sends the packet with the SIDs to node P1. The packet sent to P1 is represented by "1. {SID-P1-P3, SID-P3-B1, SID-B1-B3, BSID2-B3}Pkt".
- Node P1 pops its SID-P1-P3 from the packet received, sends the packet to P3. The packet sent to P3 is represented by "2. {SID-P3-B1, SID-B1-B3, BSID2-B3}Pkt".
- Node P3 pops its SID-P3-B1 from the packet received, sends the packet to B1. The packet sent to B1 is represented by "3. {SID-B1-B3, BSID2-B3}Pkt".
- Node B1 pops its SID-B1-B3 from the packet received, sends the packet to B3. The packet sent to B3 is represented by "4. {BSID2-B3}Pkt".
- Node B3 replaces its BSID2-B3 with SID-list 3, pops its SID-B1-Q3, and sends the packet to Q3. The packet sent to Q3 is represented by "5. {SID-C}Pkt".

6. Node sends the packet to node C according to the top SID SID-C in the packet. The packet sent to C is represented by "6. {SID-C}Pkt".
7. Node C pops its SID-C and gets the packet without any SIDs, which is represented by "7. Pkt".

## 2.5. Failure of Node in Single Domain

This section illustrates the procedure and the result of the procedure on each of the related nodes on SR path 1 using node SIDs and SR path 2 using adjacency SIDs after node B1 with BSIDs in single domain failed.

### 2.5.1. SR Path using Node SIDs

This section illustrates the procedure and the result of the procedure on each of the related nodes on SR path 1 using node SIDs after node B1 with BSID-B1 failed.

#### 2.5.1.1. Before IGP Converges on Failure

[Figure 7](#) shows the result of executing procedure on each of the related nodes on SR path 1 when node B1 failed and before the IGP converges on the failure.

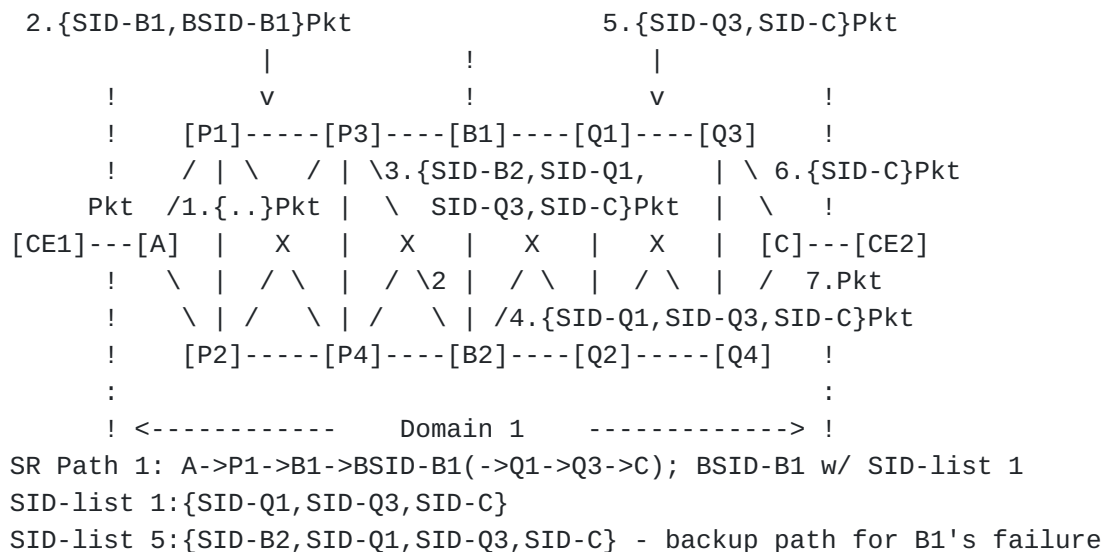


Figure 7: B1 on SR Path 1 failed and before IGP converges

The procedure and the result of the procedure on each of nodes A, P1, Q1, Q3 and C are the same as those described in [Section 2.4.1.1](#). The procedure and the result of the procedure on each of nodes P3 (neighbor of B1) and B2 are as follows.

3.

Neighbor P3 pops SID-B1 from the packet received, replaces BSID-B1 in the packet with SID-list 5 according to its FIB entry for BSID-B1 of node B1 with ID-B1, and sends the packet to B2 according to the top SID (i.e., SID-B2) in the packet without going through failed B1 using TI-LFA. The packet sent to B2 is represented by "3. {SID-B2, SID-Q1, SID-Q3, SID-C}Pkt".

4. Node B2 pops its SID (i.e., SID-B2) from the packet received, and sends the packet to Q1 according to the top SID (SID-Q1) in the packet. The packet sent to Q1 is represented by "4. {SID-Q1, SID-Q3, SID-C}Pkt".

### 2.5.1.2. After IGP Converges on Failure

[Figure 8](#) shows the result of executing procedure on each of the related nodes on SR path 1 when node B1 failed and after the IGP converges on the failure.

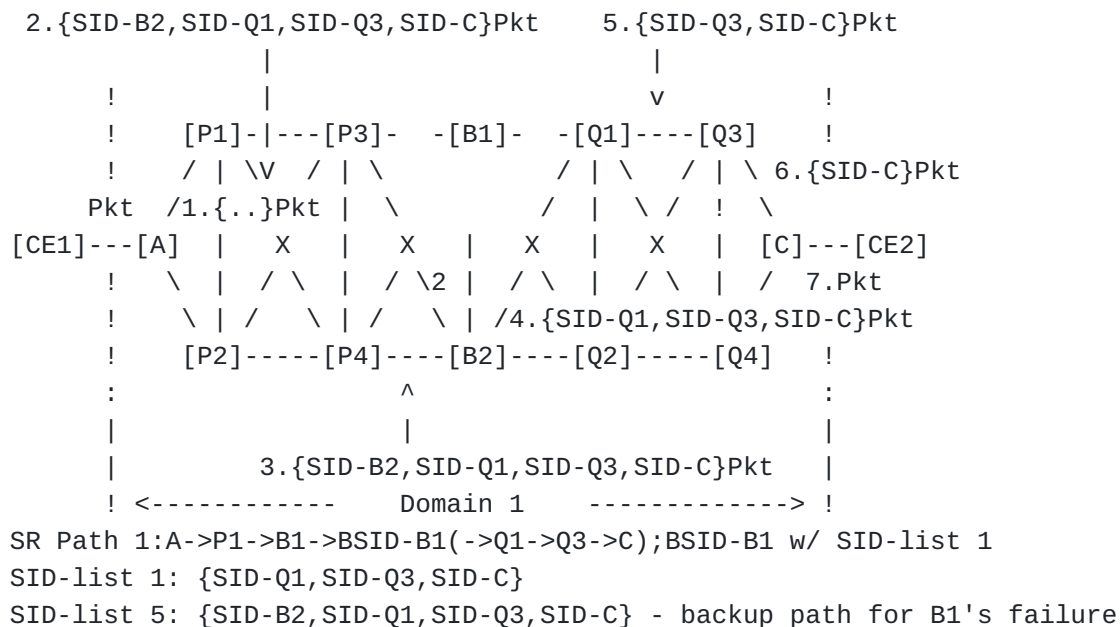


Figure 8: B1 on SR Path 1 failed and after IGP converges on failure

The procedure and the result of the procedure on each of nodes A, B2, Q1, Q3 and C are the same as those described in [Section 2.5.1.1](#). The procedure and the result of the procedure on each of nodes P1 and P4 are as follows.

2. Since upstream (or previous hop) node P1 of B1 along SR path 1 does not have a FIB entry for SID-B1 as top SID of the packet, node P1 pops SID-B1 from the packet, replaces BSID-B1 with SID-list 5 in the packet according to its FIB entry for BSID-B1 of node B1 with ID-B1, and sends the packet to P4 according to the

top SID (SID-B2) in the packet along the IGP shortest path to B2. The packet sent to P4 is represented by "2. {SID-B2, SID-Q1, SID-Q3, SID-C}Pkt".

- Node P4 sends the packet to B2 according to the top SID (SID-B2) in the packet received along the IGP shortest path. The packet sent to B2 is represented by "3. {SID-B2, SID-Q1, SID-Q3, SID-C} Pkt".

### 2.5.2. SR Path using Adjacency SIDs

This section illustrates the procedure and the result of the procedure on each of the related nodes on SR path 2 using adjacency SIDs after node B1 with BSID2-B1 failed.

#### 2.5.2.1. Before IGP Converges on Failure

[Figure 9](#) shows the result of executing procedure on each of the related nodes on SR path 2 when node B1 failed and before the IGP converges on the failure.

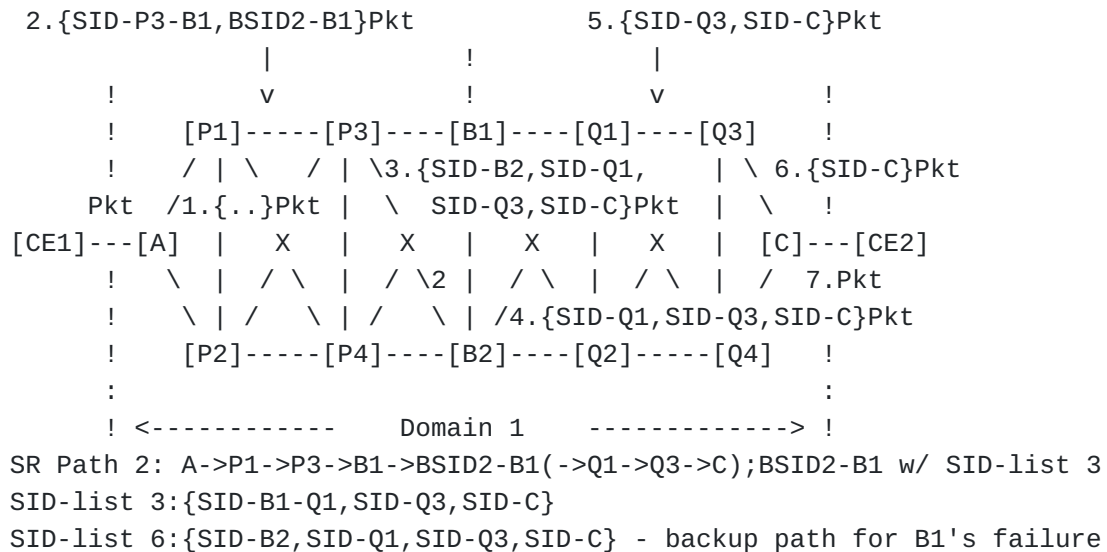


Figure 9: B1 on SR path 2 failed and before IGP converges

The procedure and the result of the procedure on each of nodes A, P1, Q1, Q3 and C are the same as those described in [Section 2.4.1.2](#). The procedure and the result of the procedure on each of nodes P3 (neighbor of B1) and B2 are as follows.

- Neighbor P3 pops its SID-P3-B1, replaces BSID2-B1 in the packet with SID-list 6 according to its FIB entry for BSID2-B1 of node B1 with ID-B1, and sends the packet to B2 according to the top SID (i.e., SID-B2) in the packet without going through failed B1

using TI-LFA. The packet sent to B2 is represented by "3. {SID-B2, SID-Q1, SID-Q3, SID-C}Pkt".

4. Node B2 pops its SID-B2 from the packet received, and sends the packet to Q1 according to the top SID (SID-Q1) in the packet. The packet sent to Q1 is represented by "4. {SID-Q1, SID-Q3, SID-C}Pkt".

#### **2.5.2.2. After IGP Converges on Failure**

The result of the procedure on each of the related nodes on SR path 2 using adjacency SIDs when node B1 failed and after the IGP converges on the failure is the same as the one described in [Section 2.5.2.1](#).

The procedure on node P3 is different from the one on P3 in [Section 2.5.2.1](#), which is as follows.

3. Node P3 sends the packet to B2 along the IGP shortest path according to the top SID (SID-B2) in the packet received. The packet sent to B2 is represented by "3. {SID-B2, SID-Q1, SID-Q3, SID-C}Pkt".

### **2.6. Failure of Border in One Administrative Domain**

This section illustrates the procedure and the result of the procedure on each of the related nodes on SR path 1 and SR path 2 across two domains after border node B3 failed, where the two domains are owned by one provider.


#### **2.6.1. SR Path using Node SIDs**

This section illustrates the procedure and the result of the procedure on each of the related nodes on SR path 1 across two domains using node SIDs after border node B3 failed.

##### **2.6.1.1. Before Convergence on Failure**

[Figure 10](#) shows the result of executing procedure on each of the related nodes on SR path 1 when border node B3 failed and before the routing convergence on the failure.



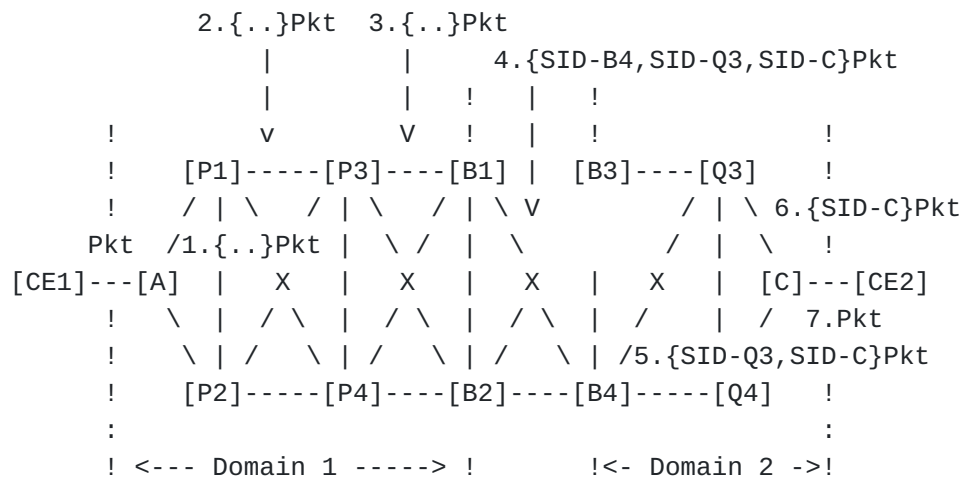

SR Path 1: A->P1->B1->B3->BSID-B3(->Q3->C);BSID-B3 w/ SID-list 1  
 SID-list 1:{SID-Q3,SID-C}  
 SID-list 5:{SID-B4,SID-Q3,SID-C} - backup path for B3's failure

Figure 10: B3 on SR Path 1 in OAD failed and before convergence

The procedure and the result of the procedure on each of nodes A, P1, P3, Q3 and C are the same as those described in [Section 2.4.2.1](#). The procedure and the result of the procedure on each of nodes B1 (neighbor of B3) and B4 (alternate border node) are as follows.

4. Neighbor B1 pops SID-B3 from the packet received, replaces BSID-B3 in the packet with SID-list 5 according to its FIB entry for BSID-B3 of node B3 with ID-B3, and sends the packet to B4 according to the top SID (i.e., SID-B4) in the packet without going through failed B3 using TI-LFA. The packet sent to B4 is represented by "4. {SID-B4, SID-Q3, SID-C}Pkt".
5. Border node B4 pops its SID (i.e., SID-B4) from the packet received, and sends the packet to Q3 according to the top SID (SID-Q3) in the packet. The packet sent to Q3 is represented by "5. {SID-Q3, SID-C}Pkt".

### 2.6.1.2. After Convergence on Failure

The procedure and the result of the procedure on each node of SR path 1 are the same as those described in [Section 2.6.1.1](#) except for the procedure on node B1 as follows.

4. Neighbor B1 pops SID-B3 from the packet received, replaces BSID-B3 in the packet with SID-list 5 according to its FIB entry for BSID-B3 of node B3 with ID-B3, and sends the packet to B4 according to the top SID (i.e., SID-B4) in the packet. The packet sent to B4 is represented by "4. {SID-B4, SID-Q3, SID-C}Pkt".

## 2.6.2. SR Path using Adjacency SIDs

This section illustrates the procedure and the result of the procedure on each of the related nodes on SR path 2 across two domains using adjacency SIDs after border node B3 failed.

### 2.6.2.1. Before Convergence on Failure

[Figure 11](#) shows the result of executing procedure on each of the related nodes on SR path 2 when border node B3 failed and before the convergence on the failure.

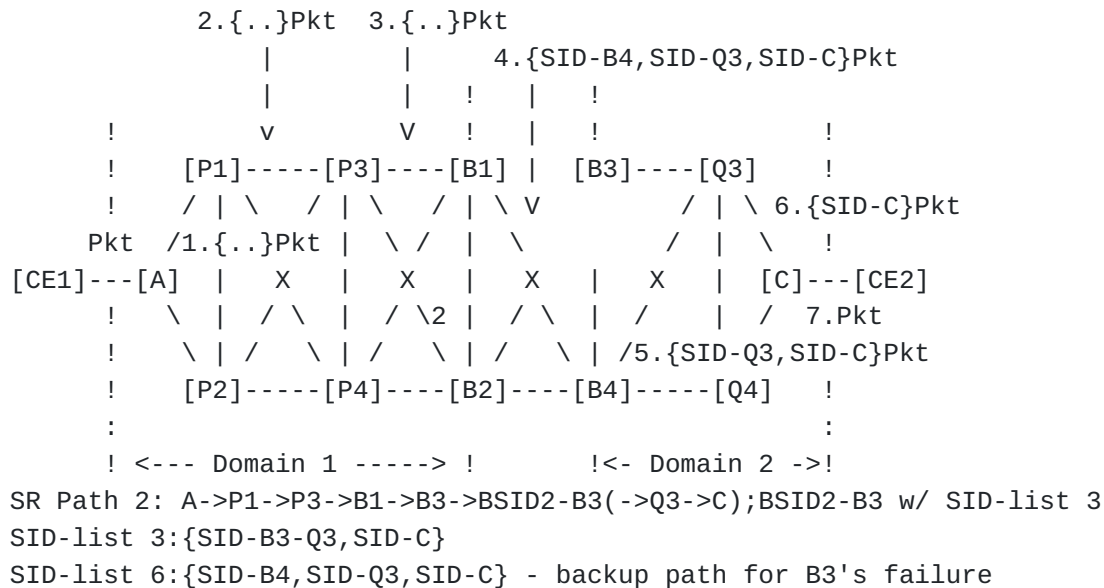


Figure 11: B3 on SR path 2 in OAD failed and before convergence

The procedure and the result of the procedure on each of nodes A, P1, P3, Q3 and C are the same as those described in [Section 2.4.2.2](#). The procedure and the result of the procedure on each of nodes B1 (neighbor of B3) and B4 (alternate border node) are as follows.

4. Neighbor B1 pops its SID-B1-B3, replaces BSID2-B3 in the packet with SID-list 6 according to its FIB entry for BSID2-B3 of node B3 with ID-B3, and sends the packet to B4 according to the top SID (i.e., SID-B4) in the packet without going through failed B3 using TI-LFA. The packet sent to B4 is represented by "4. {SID-B4, SID-Q3, SID-C}Pkt".
4. Border node B4 pops its SID-B4 from the packet received, and sends the packet to Q3 according to the top SID (SID-Q3) in the packet. The packet sent to Q3 is represented by "5. {SID-Q3, SID-C}Pkt".

### 2.6.2.2. After Convergence on Failure

The result of the procedure on each of the related nodes on SR path 2 using adjacency SIDs when border node B3 failed and after the convergence on the failure is the same as the one described in [Section 2.6.2.1](#).

The procedure on node B1 is different from the one on B1 in [Section 2.6.2.1](#), which is as follows.

4. Node B1 sends the packet to B4 along the normal routing path to B4 according to the top SID (SID-B4) in the packet received. The packet sent to B4 is represented by "4. {SID-B4, SID-Q3, SID-C} Pkt".

### 2.7. Failure of Border in Two Administrative Domains

This section illustrates the procedure and result of procedure on each of the related nodes on SR path 1 and SR path 2 across two domains after border node B3 failed, where two domains are administrated by two different providers.

#### 2.7.1. SR Path using Node SIDs

##### 2.7.1.1. Before Convergence on Failure

[Figure 12](#) shows the result of executing procedure on each of the related nodes on SR path 1 using node SIDs when border node B3 failed and before the convergence on the failure.

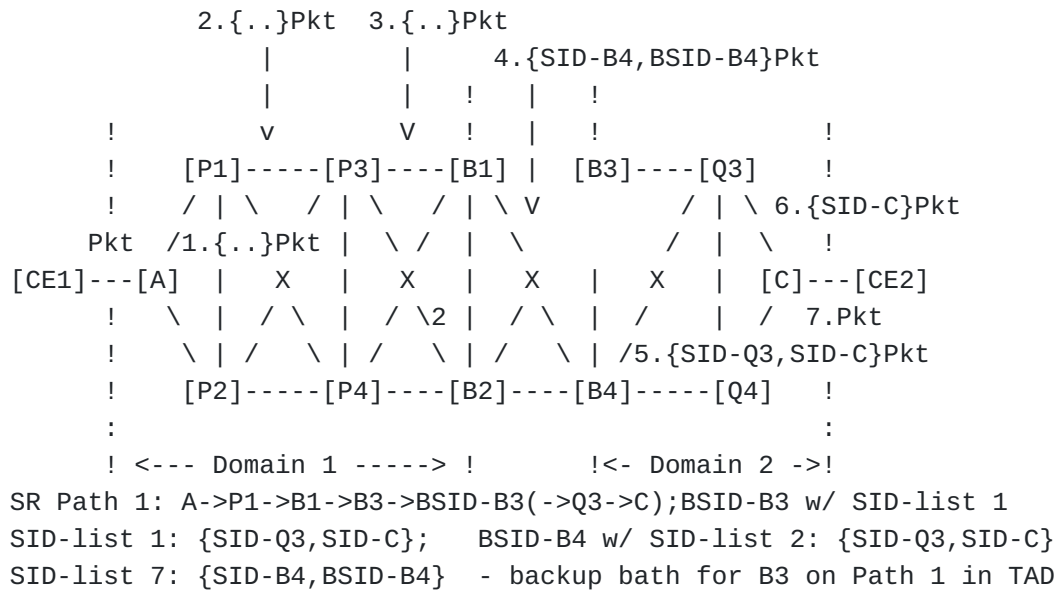


Figure 12: B3 on SR Path 1 in TAD failed and before convergence

The procedure and the result of the procedure on each of nodes A, P1, P3, Q3 and C are the same as those described in [Section 2.4.2.1](#). The procedure and the result of the procedure on each of nodes B1 (neighbor of B3) and B4 (alternate border) are described below.

4. Neighbor B1 pops SID-B3 from the packet received, replaces BSID-B3 in the packet with SID-list 7 according to its FIB entry for BSID-B3 of node B3 with ID-B3, and sends the packet to B4 according to the top SID (i.e., SID-B4) in the packet without going through failed B3 using TI-LFA. The packet sent to B4 is represented by "4. {SID-B4, BSID-B4}Pkt".
5. Border node B4 pops its SID-B4 from the packet received, replaces BSID-B4 with SID-list 2 according to its FIB entry for BSID-B4, and sends the packet to Q3 according to the top SID (SID-Q3) in the packet. The packet sent to Q3 is represented by "5. {SID-Q3, SID-C}Pkt".

#### **2.7.1.2. After Convergence on Failure**


The procedure and the result of the procedure on each node are the same as those described in [Section 2.7.1.1](#) except for the procedure on node B1 described below.

4. Since upstream node B1 of B3 along SR path 1 does not have a FIB entry for SID-B3 as top SID of the packet, node B1 pops SID-B3 from the packet, replaces BSID-B3 with SID-list 7 in the packet according to its FIB entry for BSID-B3 of node B3 with ID-B3, and sends the packet to B4 according to the top SID (SID-B4) in the packet. The packet sent to P4 is represented by "4. {SID-B4, BSID-B4}Pkt".

#### **2.7.2. SR Path using Adjacency SIDs**

##### **2.7.2.1. Before Convergence on Failure**

[Figure 13](#) shows the result of executing procedure on each of the related nodes on SR path 2 using adjacency SIDs when border node B3 failed and before the convergence on the failure.

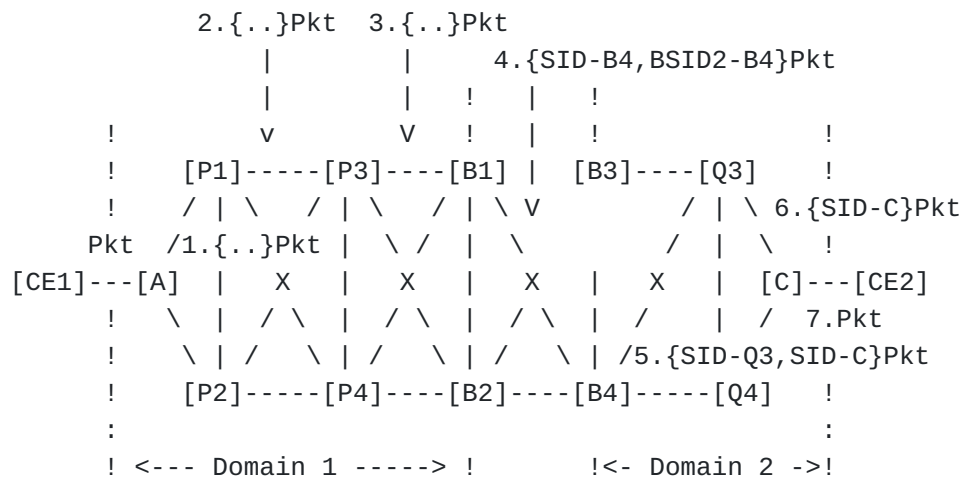

SR Path 2: A->P1->P3->B1->B3->BSID2-B3(->Q3->C);BSID2-B3 w/ SID-list 3  
 SID-list 3: {SID-B3-Q3,SID-C}; BSID2-B4 w/ SID-list 4: {SID-Q3,SID-C}  
 SID-list 8: {SID-B4,BSID2-B4} - backup bath for B3 on Path 2 in TAD

Figure 13: B3 on SR Path 2 in TAD failed and before convergence

The procedure and the result of the procedure on each of nodes A, P1, P3, Q3 and C are the same as those described in [Section 2.4.2.2](#). The procedure and the result of the procedure on each of nodes B1 (neighbor of B3) and B4 (alternate border) are as follows.

4. Neighbor B1 replaces BSID2-B3 in the packet received with SID-list 8 according to its FIB entry for BSID2-B3 of node B3 with ID-B3, and sends the packet to B4 according to the top SID (i.e., SID-B4) in the packet without going through failed B3 using TI-LFA. The packet sent to B4 is represented by "4. {SID-B4, BSID2-B4}Pkt".
5. Border node B4 pops its SID-B4 from the packet received, replaces BSID2-B4 with SID-list 4 according to its FIB entry for BSID2-B4, and sends the packet to Q3 according to the top SID (SID-Q3) in the packet. The packet sent to Q3 is represented by "5. {SID-Q3, SID-C}Pkt".

### 2.7.2.2. After Convergence on Failure

The procedure and result of executing procedure on each of the related nodes on SR path 2 when border node B3 failed and after the convergence on the failure are the same as those described in [Section 2.7.2.1](#).

The procedure on node B1 is different from the one on B1 in [Section 2.7.2.1](#), which is as follows.

4. Since upstream (neighbor) node B1 of B3 along SR path 2 does not have a FIB entry for SID-B1-B3 as top SID of the packet, node B1 replaces BSID2-B3 with SID-list 8 in the packet according to its

FIB entry for BSID2-B3 of node B3 with ID-B3, and sends the packet to B4 according to the top SID (SID-B4) in the packet. The packet sent to B4 is represented by "4. {SID-B4, BSID2-B4}Pkt".

### 3. Procedures

#### 3.1. on Neighbor of Node with Binding SID

When there is no failure, neighbor N of node B with binding SID on an SR path sends the packet to B. When neighbor N detects the failure of B, N pops top SID (SID-B or SID-N-B) from the packet, and does the following steps:

1. If the current top SID in the packet is a Binding SID of B (BSID-B), replaces BSID-B in the packet with a SID list and sends the packet toward the top SID of the packet without going through B. The SID list represents a backup path segment for the failure of B.
2. Otherwise (i.e., the current top SID in the packet is an adjacency SID of the node or a node SID of next hop), executes the corresponding action for the SID from [\[I-D.ietf-rtgwg-segment-routing-ti-lfa\]](#).

#### 3.2. on Upstream Node of Node with Binding SID

A upstream node of node B with binding SID on an SR path pops the top SID from the packet received if the top SID is a SID of the upstream node.

When there is no failure or B on an SR path failed and before the convergence on the failure of B, the upstream node sends the packet according to its FIB entry for the top SID in the packet.

After B failed and the convergence on the failure of B, the upstream node pops the node SID of B (SID-B) from the packet and does the following steps:

1. If the current top SID in the packet is a Binding SID of B (BSID-B), then executes the action indicated by the FIB entry for BSID-B of node B. The action is to replace BSID-B in the packet with a SID list and send the packet according to the current top SID in the packet. The SID list represents a backup path segment for the failure of B.
2. Otherwise (i.e., the current top SID in the packet is an adjacency SID of the node or a node SID of next hop), executes the corresponding action for the SID from [\[I-D.ietf-rtgwg-segment-routing-ti-lfa\]](#).

### 3.3. Integrated Procedure

A procedure running on a node that forwards the packet to be transported by an SR path in different cases is called an integrated procedure. The node is a border node or an internal node. The cases include normal case without any failure, a border or internal node failure.

Suppose that Packet = the packet received by node X. an integrated procedure running on node X is described in Pseudo code as shown in [Figure 14](#).

```
IF (X detects N's failure){//X:neighbor of N, before convergence
  Pops top SID from Packet; // pops SID-N or SID-X-N
  IF (top SID in Packet is Binding SID (BSID) of N) {
    Replace BSID in Packet with SID list;
  }
  Sends Packet without going N using TI-LFA for top SID in Packet;
} ELSE { //Normal or (N failed and after convergence on failure)
  IF (no FIB entry for top SID in Packet){ //N failed, after converges
    Pops top SID from Packet; //pops SID-N or SID-X-N
    IF (top SID in Packet is Binding SID (BSID) of N) {
      Replace BSID in Packet with SID list;
    }
  } //Normal case: there is FIB entry for top SID, N works
  Sends Packet using FIB entry for top SID in Packet;
}
```

Figure 14: Integrated Procedure

## 4. Protocol Extensions

This section describes the semantic of protocol extensions for distributing binding protection information for a node with a BSID in three cases: Single Domain, OAD and TAD.

For a Binding SID (BSID-B) of a node (e.g., transit node B1 in [Figure 1](#) or border node B3 in [Figure 2](#)) on a SR path, suppose that the following information is sent to (or received from) the node:

1. BSID-B, and
2. A list of SIDs (named SID-list a) associated with BSID-B, where the SIDs are in the downstream domain.

For Single Domain, one piece of information is distributed. This one piece is BSID-B, a new SID list (named SID-list c) and ID-B (Identifier of the node). SID-list c represents a backup path for

the failure of the node on the SR path. It contains the SIDs for the path segment corresponding to SID-list a.

This one piece (i.e., BSID-B, SID-list c and ID-B) is sent to the upstream neighbor of the node on the SR path. It is also sent to the closest upstream endpoint node (e.g., P1 on SR path 1 in [Figure 1](#)) of the node if the node is a loose hop on the SR path, which is indicated by node SID of the node (e.g., SID-B1) on the SR path. The node SID is used to reach the node (e.g., B1).

For OAD, one piece of information is distributed. This one piece is BSID-B, a new SID list (named SID-list c) and ID-B. SID-list c represents a backup path for the failure of the border node on the SR path. It contains the SIDs for the path segment to the alternate border node and the path segment corresponding to SID-list a. This piece is distributed in the same way as the one for Single Domain.

For TAD, two pieces of information are distributed.

**Piece 1.** BSID-aB, which is a Binding SID of an alternate border node (e.g., B4 in [Figure 2](#)), and a list of SIDs (named SID-list b) corresponding to SID-list a. SID-list b is SID-list a when the first SID in SID-list a is a node SID. when the first SID in SID-list a is an adjacency SID of an adjacency, the node SID of the remote node of the adjacency and the other SIDs in SID-list a constitutes SID-list b.

**Piece 2.** BSID-B, SID-list d {SID-aB, BSID-aB} and ID-B; where SID-aB is a node SID of the alternate border node, and ID-B is an Identifier (ID) of the border node.

These two pieces of information represent a backup path for the failure of the border node on the SR path.

Piece 1 (i.e., BSID-aB and SID-list b) is sent to the alternate border node. Piece 2 (i.e., BSID-B, SID-list d and ID-B) is distributed in the same way as the one for OAD.

In one option, the TE router ID of a node is used as the ID of the node.

When a protocol (such as PCE or BGP running on a controller) supports sending a binding (i.e., a BSID and a SID list) on a node, we may extend this protocol to distribute the binding protection information (refer to [[I-D.chen-pce-mbinding](#)] and [[I-D.chen-idr-mbinding](#)]). Alternatively, we may extend YANG and IGP to distribute the binding protection information.

Note: how to distribute binding protection information via which protocol is out of the scope of this document.



## 5. Security Considerations

TBD.

## 6. Acknowledgements

The authors would like to thank Andrew Stone for his comments to this work.

## 7. References

### 7.1. Normative References

- [RFC2119] Bradner, S., "Key words for use in RFCs to Indicate Requirement Levels", BCP 14, RFC 2119, DOI 10.17487/RFC2119, March 1997, <<https://www.rfc-editor.org/info/rfc2119>>.
- [RFC7356] Ginsberg, L., Previdi, S., and Y. Yang, "IS-IS Flooding Scope Link State PDUs (LSPs)", RFC 7356, DOI 10.17487/RFC7356, September 2014, <<https://www.rfc-editor.org/info/rfc7356>>.
- [RFC8174] Leiba, B., "Ambiguity of Uppercase vs Lowercase in RFC 2119 Key Words", BCP 14, RFC 8174, DOI 10.17487/RFC8174, May 2017, <<https://www.rfc-editor.org/info/rfc8174>>.
- [RFC8402] Filsfils, C., Ed., Previdi, S., Ed., Ginsberg, L., Decraene, B., Litkowski, S., and R. Shakir, "Segment Routing Architecture", RFC 8402, DOI 10.17487/RFC8402, July 2018, <<https://www.rfc-editor.org/info/rfc8402>>.
- [RFC8667] Previdi, S., Ed., Ginsberg, L., Ed., Filsfils, C., Bashandy, A., Gredler, H., and B. Decraene, "IS-IS Extensions for Segment Routing", RFC 8667, DOI 10.17487/RFC8667, December 2019, <<https://www.rfc-editor.org/info/rfc8667>>.

### 7.2. Informative References

- [I-D.chen-idr-mbinding] Chen, H., Decraene, B., Mishra, G. S., Fan, Y., Wang, A., and X. Liu, "BGP for Mirror Binding", Work in Progress, Internet-Draft, draft-chen-idr-mbinding-02, 10 May 2023, <<https://datatracker.ietf.org/doc/html/draft-chen-idr-mbinding-02>>.
- [I-D.chen-pce-mbinding] Chen, H., Decraene, B., Mishra, G. S., Wang, A., Liu, X., and L. Liu, "PCE for Mirror Binding", Work in Progress, Internet-Draft, draft-chen-pce-mbinding-02,

8 October 2023, <<https://datatracker.ietf.org/doc/html/draft-chen-pce-mbinding-02>>.

**[I-D.hu-spring-segment-routing-proxy-forwarding]**

Hu, Z., Chen, H., Yao, J., Bowers, C., Zhu, Y., and Y. Liu, "SR-TE Path Midpoint Restoration", Work in Progress, Internet-Draft, draft-hu-spring-segment-routing-proxy-forwarding-24, 21 August 2023, <<https://datatracker.ietf.org/doc/html/draft-hu-spring-segment-routing-proxy-forwarding-24>>.

**[I-D.ietf-rtgwg-segment-routing-ti-lfa]**

Litkowski, S., Bashandy, A., Filsfils, C., Francois, P., Decraene, B., and D. Voyer, "Topology Independent Fast Reroute using Segment Routing", Work in Progress, Internet-Draft, draft-ietf-rtgwg-segment-routing-ti-lfa-11, 30 June 2023, <<https://datatracker.ietf.org/doc/html/draft-ietf-rtgwg-segment-routing-ti-lfa-11>>.

**[I-D.ietf-spring-segment-protection-sr-te-paths]**

Hegde, S., Bowers, C., Litkowski, S., Xu, X., and F. Xu, "Segment Protection for SR-TE Paths", Work in Progress, Internet-Draft, draft-ietf-spring-segment-protection-sr-te-paths-05, 27 September 2023, <<https://datatracker.ietf.org/doc/html/draft-ietf-spring-segment-protection-sr-te-paths-05>>.

**[I-D.ietf-spring-segment-routing-policy]**

Filsfils, C., Talaulikar, K., Voyer, D., Bogdanov, A., and P. Mattes, "Segment Routing Policy Architecture", Work in Progress, Internet-Draft, draft-ietf-spring-segment-routing-policy-22, 22 March 2022, <<https://datatracker.ietf.org/doc/html/draft-ietf-spring-segment-routing-policy-22>>.

**Authors' Addresses**

Huaimo Chen  
Futurewei  
Boston, MA,  
United States of America

Email: [Huaimo.chen@futurewei.com](mailto:Huaimo.chen@futurewei.com)

Zhibo Hu  
Huawei Technologies  
Huawei Bld., No.156 Beiqing Rd.  
Beijing  
100095  
China

Email: [huzhibo@huawei.com](mailto:huzhibo@huawei.com)

Weiqiang Cheng  
China Mobile  
China

Email: [chengweiqiang@chinamobile.com](mailto:chengweiqiang@chinamobile.com)

Aijun Wang  
China Telecom  
Beiqijia Town, Changping District  
Beijing  
102209  
China

Email: [wangaj3@chinatelecom.cn](mailto:wangaj3@chinatelecom.cn)

Gyan S. Mishra  
Verizon  
13101 Columbia Pike  
Silver Spring, MD 20904  
United States of America

Phone: [301 502-1347](tel:3015021347)

Email: [gyan.s.mishra@verizon.com](mailto:gyan.s.mishra@verizon.com)