

SPRING Working Group  
Internet Draft  
Intended status: Standards Track  
Expires: July 10, 2024

W. Cheng  
China Mobile  
P. Ma  
China Telecom  
F. Ren  
China Unicom  
C. Lin  
New H3C Technologies  
L. Gong  
China Mobile  
S. Zadok  
Broadcom  
M.Wu  
CentecNetworks  
X. Wang  
Ruijie Networks Co., Ltd.  
January 10, 2024

**Encoding Network Slice Identification for SRv6**  
**draft-cheng-spring-srv6-encoding-network-sliceid-08**

Abstract

This document describes a method to encode network slicing identifier within SRv6 domain.

Status of this Memo

This Internet-Draft is submitted in full conformance with the provisions of [BCP 78](#) and [BCP 79](#).

Internet-Drafts are working documents of the Internet Engineering Task Force (IETF), its areas, and its working groups. Note that other groups may also distribute working documents as Internet-Drafts.

Internet-Drafts are draft documents valid for a maximum of six months and may be updated, replaced, or obsoleted by other documents at any time. It is inappropriate to use Internet-Drafts as reference material or to cite them other than as "work in progress."

The list of current Internet-Drafts can be accessed at <http://www.ietf.org/ietf/1id-abstracts.txt>

The list of Internet-Draft Shadow Directories can be accessed at <http://www.ietf.org/shadow.html>

This Internet-Draft will expire on July 10, 2024.

## Copyright Notice

Copyright (c) 2023 IETF Trust and the persons identified as the document authors. All rights reserved.

This document is subject to [BCP 78](#) and the IETF Trust's Legal Provisions Relating to IETF Documents (<http://trustee.ietf.org/license-info>) in effect on the date of publication of this document. Please review these documents carefully, as they describe your rights and restrictions with respect to this document. Code Components extracted from this document must include Simplified BSD License text as described in Section 4.e of the [Trust Legal Provisions](#) and are provided without warranty as described in the Simplified BSD License.

## Table of Contents

<a href="#">1.</a>	<a href="#">Introduction.....</a>	<a href="#">3</a>
<a href="#">1.1.</a>	<a href="#">Requirements Language.....</a>	<a href="#">3</a>
<a href="#">2.</a>	<a href="#">Slice Identifier.....</a>	<a href="#">3</a>
<a href="#">3.</a>	<a href="#">SLID Assignment.....</a>	<a href="#">3</a>
<a href="#">4.</a>	<a href="#">Per-Slice Forwarding.....</a>	<a href="#">5</a>
<a href="#">5.</a>	<a href="#">Example.....</a>	<a href="#">5</a>
<a href="#">6.</a>	<a href="#">Backward Compatibility.....</a>	<a href="#">6</a>
<a href="#">7.</a>	<a href="#">Acknowledgements.....</a>	<a href="#">7</a>
<a href="#">8.</a>	<a href="#">Security Considerations.....</a>	<a href="#">7</a>
<a href="#">9.</a>	<a href="#">IANA Considerations.....</a>	<a href="#">7</a>
<a href="#">10.</a>	<a href="#">References.....</a>	<a href="#">7</a>
<a href="#">10.1.</a>	<a href="#">Normative References.....</a>	<a href="#">7</a>
<a href="#">10.2.</a>	<a href="#">Informative References.....</a>	<a href="#">7</a>
	<a href="#">Authors' Addresses.....</a>	<a href="#">9</a>

## **1. Introduction**

SRv6 Network Programming [[RFC8986](#)] enables the creation of overlays with underlay optimization to be deployed in an SR domain [[RFC8402](#)].

As defined in [[RFC8754](#)], all inter-domain packets are encapsulated for the part of the packet journey that is within the SR domain. The outer IPv6 header [[RFC8200](#)] is originated by a node of the SR domain and is destined to a node of the SR domain.

This document describes a novel method to encode slice identifier in the outer IPv6 header of an SR domain. Unlike other proposed methods before, which will bring side effects on existed functions, by encoding network slicing identifier in the source IPv6 address of the outer header, this method avoids the drawbacks which previous proposals incur.

### **1.1. Requirements Language**

The key words "MUST", "MUST NOT", "REQUIRED", "SHALL", "SHALL NOT", "SHOULD", "SHOULD NOT", "RECOMMENDED", "NOT RECOMMENDED", "MAY", and "OPTIONAL" in this document are to be interpreted as described in [BCP 14](#) [[RFC2119](#)] [[RFC8174](#)] when, and only when, they appear in all capitals, as shown here.

## **2. Slice Identifier**

The Slice identifier (SLID) is a network slicing identifier encoded within the IPv6 packet that allows transit routers to apply the proper forwarding treatment with associated network resources.

[I-D.ietf-teas-ietf-network-slices] defines the network resource mapped to the network slice as NRP (Network Resource Partition). A NRP may be associated with a unique IETF network slice or a group of slices. In this document, SLID also refers to NRP-ID, which is used to identify the network resource used in the forwarding process.

## **3. SLID Assignment**

When an SR domain enables network slicing, the ingress PE should reserve least significant bits in a local IPv6 address for slicing use. The number of bits used to encode SLID is governed by local policy and uniform within the SR domain.

When a packet enters the SR domain from an ingress PE, the ingress PE encapsulates the packet in an outer IPv6 header and optional SRH as defined in [[RFC8754](#)]. The ingress PE MAY also classify the packet into a slice and set the slice identifier as follows:



- o Write this SLID in the least significant bits of source address of the outer IPv6 header.

- o Set the SLID Presence Indicator (SPI) in the outer IPv6 header.

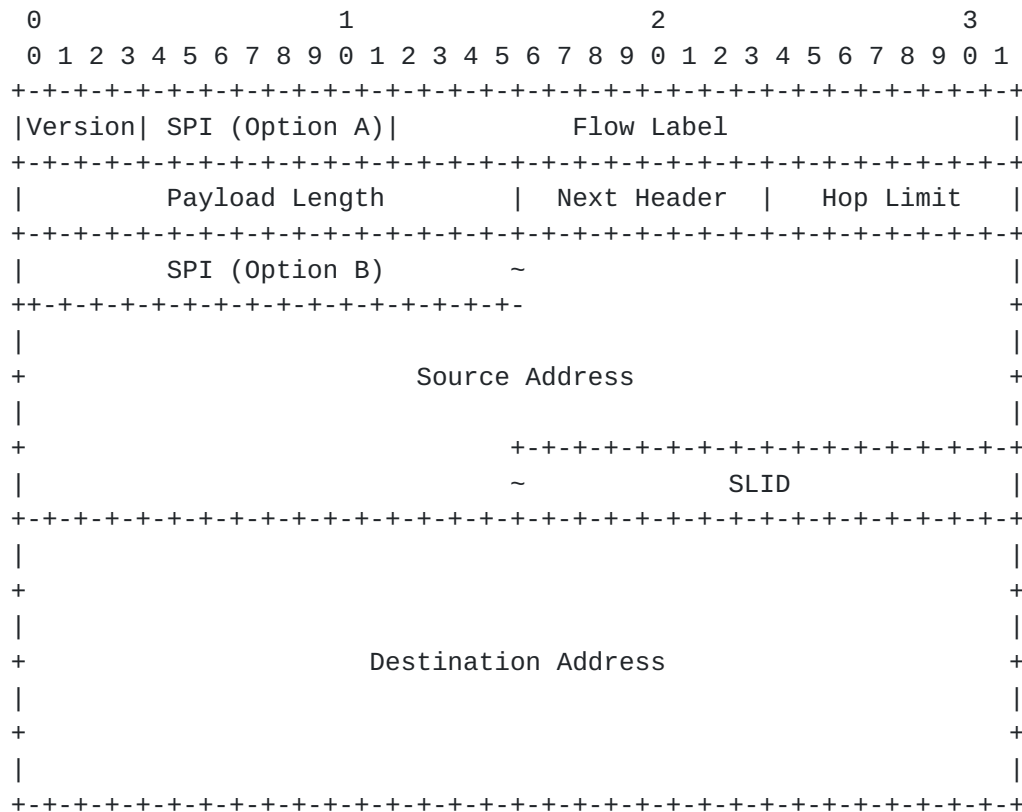


Figure 1: Encoding of SLID and SPI

The SPI is used to inform transit routers that a SLID is encoded in the packet. There are two possible places in the outer IPv6 header that may be used to encode SPI:

- o SPI Option A - Traffic Class: The SPI is encoded as a specific bit in the Traffic Class field. The choice of the SPI bit is governed by local policy and uniform within the SR domain.

```

Traffic Class
+-----+
| .....SPI Bit. |
+-----+

```

- o SPI Option B - Source Address: The SPI is encoded as a specific prefix covering the Source Address. The assignment of the SPI prefix is governed by local policy and uniform within the SR domain. Furthermore, some bits in the SPI prefix can be masked, which provides greater flexibility for network administrators to plan IPV6 addresses.

```

Source Address
+-----+-----+-----+-----+
| SPI Prefix | Node ID | Padding | SLID |
+-----+-----+-----+-----+

```

#### 4. Per-Slice Forwarding

Any router within the SR domain that forwards a packet with SPI set uses the SLID to select a slice and apply per-slice policies.

The most significant bit of SLID may be used to carry an S-flag, which is used to indicate whether the packet MUST be forwarded strictly using the network resource associated with the SLID. When the network resource associated with the SLID does not exist or is not available, if the S-flag is set to 1, the packet MUST be discarded, otherwise the packet SHOULD be forwarded using the default network resource or ignoring the SLID.

```

+-----+
|S|  SLID  |
+-----+

```

#### 5. Example

Figure 2 shows an example of network slice packet forwarding using the proposed encoding method. Assume the SPI is encoded using option B as the SPI prefix in Source Address.

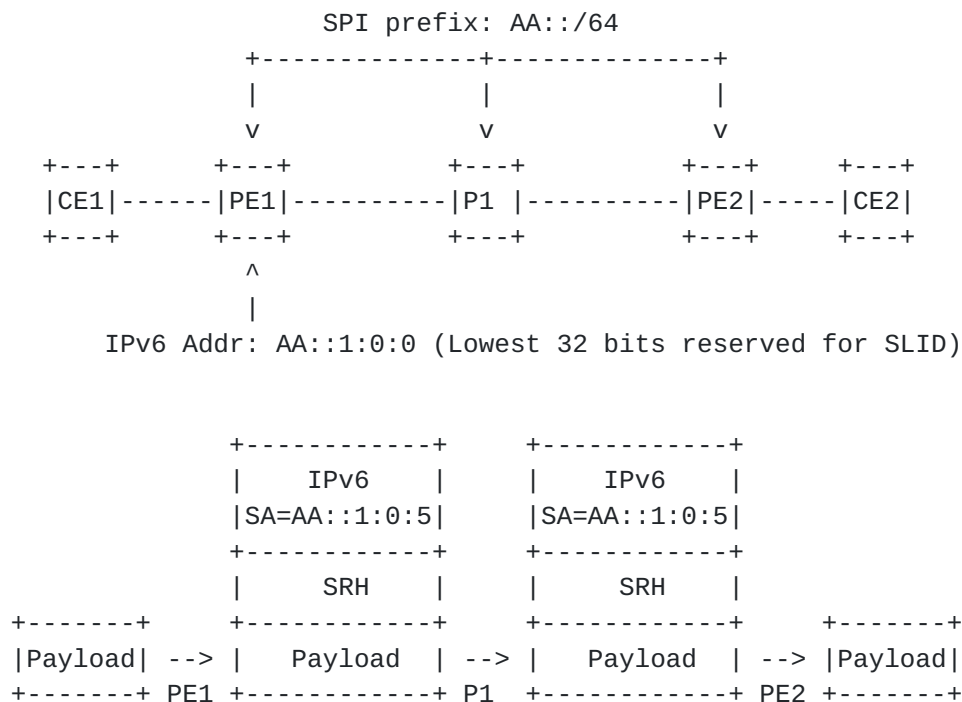


Figure 2: Packet Forwarding for Network Slice

The PE and P routers are configured to use the prefix AA::/64 as SPI. The IPv6 address AA::1:0:0 is assigned to PE1 as the source address used for network slicing. And the lowest 32 bits of the address is reserved for SLID.

PE1 encapsulates the network slice packet with an outer IPv6 header along with an SRH. The Source Address in the outer header is AA::1:0:5, in which the lowest 32 bits carries the SLID 5. P1 checks the Source Address and finds it matching the SPI prefix AA::/64. So, P1 parses SLID 5 from the Source Address, and uses the network resources associated with SLID 5 to forward the packet. PE2 decapsulates the outer IPv6 header and SRH.

## 6. Backward Compatibility

PE routers that do not set the SPI do not enable the SLID semantic of the IPv6 source address bits. Hence, SLID-aware routers would not attempt to classify these packets into a slice.

Any router that does not process the SPI nor the SLID forwards packets as usual.





## **7. Acknowledgements**

The authors would like to thank AAAA, BBBB and CCCC for their insightful feedback on this document.

## **8. Security Considerations**

TBD

## **9. IANA Considerations**

TBD

## **10. References**

### **10.1. Normative References**

- [RFC2119] Bradner, S., "Key words for use in RFCs to Indicate Requirement Levels", [BCP 14](#), [RFC 2119](#), March 1997.
- [RFC8174] Leiba, B., "Ambiguity of Uppercase vs Lowercase in [RFC 2119](#) Key Words", [BCP 14](#), [RFC 8174](#), May 2017
- [RFC8200] Deering, S., and Hinden, D., "Internet Protocol, Version 6 (IPv6) Specification", [RFC 8200](#), DOI 10.17487/RFC8200, July 2017, <<https://www.rfc-editor.org/info/rfc8200>>.
- [RFC8402] Filsfils, C., Ed., Previdi, S., Ed., Ginsberg, L., Decraene, B., Litkowski, S., and R. Shakir, "Segment Routing Architecture", [RFC 8402](#), DOI 10.17487/RFC8402, July 2018, <<https://www.rfc-editor.org/info/rfc8402>>.

### **10.2. Informative References**

- [RFC8754] Filsfils, C., Ed., Dukes, D., Ed., Previdi, S., Leddy, J., Matsushima, S., and D. Voyer, "IPv6 Segment Routing Header (SRH)", [RFC 8754](#), DOI 10.17487/RFC8754, March 2020, <<https://www.rfc-editor.org/info/rfc8754>>.
- [RFC8986] Filsfils, C., Ed., Camarillo, P., Ed., Leddy, J., Voyer, D., Matsushima, S., and Z. Li, "Segment Routing over IPv6 (SRv6) Network Programming", [RFC 8986](#), DOI 10.17487/RFC8986, February 2021, <<https://www.rfc-editor.org/info/rfc8986>>.

[I-D.ietf-teas-ietf-network-slices] Farrel, A., Drake, J., Rokui, R., Homma, S., Makhijani, K., Contreras, L. M., and J. Tantsura, "Framework for IETF Network Slices", Work inProgress, Internet-Draft, [draft-ietf-teas-ietf-network-slices-21](https://www.ietf.org/archive/id/draft-ietf-teas-ietf-network-slices-21), June 2023, <<https://www.ietf.org/archive/id/draft-ietf-teas-ietf-network-slices-21.txt>>.

## Authors' Addresses

Weiqiang Cheng  
China Mobile  
Beijing  
China  
Email: chengweiqiang@chinamobile.com

Peiyong Ma  
China Telecom  
Guangzhou  
China  
Email: mapeiy@chinatelecom.cn

Fenghua Ren  
China Unicom  
Beijing  
China  
Email: renfh3@chinaunicom.cn

Changwang Lin  
New H3C Technologies  
Beijing  
China  
Email: linchangwang.04414@h3c.com

Liyan Gong  
China Mobile  
Beijing  
China  
Email: gongliyan@chinamobile.com

Shay Zadok  
Broadcom  
Israel  
Email: shay.zadok@broadcom.com

Mingyu Wu  
CentecNetworks  
Suzhou Industrial Park  
China  
Email: wumy@centec.com

Xuewei Wang  
Ruijie Networks Co., Ltd.  
Beijing  
China  
Email: wangxuewei1@ruijie.com.cn