

Network Working Group
Internet-Draft
Expires: February 15, 2005

K. Chowdhury
Nortel Networks
P. Yegani
Cisco Systems
L. Madour
Ericsson
August 17, 2004

DHCPv6 Options for Broadcast and Multicast Control Servers
draft-chowdhury-dhc-bcmcv6-option-01.txt

Status of this Memo

By submitting this Internet-Draft, I certify that any applicable patent or other IPR claims of which I am aware have been disclosed, and any of which I become aware will be disclosed, in accordance with [RFC 3668](#).

Internet-Drafts are working documents of the Internet Engineering Task Force (IETF), its areas, and its working groups. Note that other groups may also distribute working documents as Internet-Drafts.

Internet-Drafts are draft documents valid for a maximum of six months and may be updated, replaced, or obsoleted by other documents at any time. It is inappropriate to use Internet-Drafts as reference material or to cite them other than as "work in progress."

The list of current Internet-Drafts can be accessed at <http://www.ietf.org/ietf/1id-abstracts.txt>.

The list of Internet-Draft Shadow Directories can be accessed at <http://www.ietf.org/shadow.html>.

This Internet-Draft will expire on February 15, 2005.

Copyright Notice

Copyright (C) The Internet Society (2004). All Rights Reserved.

Abstract

This document defines new options for Broadcast and Multicast Service controller discovery in an IP network. Broadcast and Multicast service over 3G wireless networks are being developed at the time of writing this document. Users of this service interact with a controller in the network to derive informations that are required to receive broadcast service. Dynamic Host Configuration Protocol can

be used to configure the controller IPv6 addresses in the user's devices. This document defines the related options and option codes.

Table of Contents

1.	Motivation	3
2.	Overview	4
3.	Terminology	5
4.	Broadcast Service Controller Options	6
4.1	Broadcast Service Controller Domain Name List option . . .	6
4.2	Broadcast Service Controller IPv6 address option	6
5.	Consideration for Client Operation	8
6.	Consideration for Server Operation	9
7.	Security Considerations	10
8.	IANA Considerations	11
9.	Acknowledgements	12
10.	Normative References	12
	Authors' Addresses	12
	Intellectual Property and Copyright Statements	14

1. Motivation


Dynamic Host Configuration Protocol can be used to configure various non-IP address type of parameters. These parameters are required for normal operation of various services that are offered over an IP network.

In 3G wireless network standards body such as 3GPP2 (www.3gpp2.org), broadcast and multicast service is being developed [[BCMCS](#)]. The service includes a controller component that is responsible for managing the service via interaction with the users and other network entities. The users of the service are required to know the IPv6 address of the controller entity so that they can download all the necessary information about a desired broadcast program. In a roaming environment static configuration of the controller IPv6 address becomes unrealistic. Therefore, DHCP [[RFC3315](#)] is considered to be a method to dynamically configure controller IPv6 address in the user's devices in the 3G wireless networks. DHCP can also be used to convey the fully qualified domain name of the broadcast service controller to the user. The user in turn makes DNS queries to obtain the IPv6 address of the associated broadcast service controller.

In order to allow the users to discover the broadcast controllers, the clients need to request for appropriate option codes from the DHC servers using Option-Request-Option and the DHC servers need to return corresponding configuration options that carry the broadcast and multicast service controller IPv6 address or Domain Name list. The motivation for this document is to define the necessary options and option codes.

2. Overview

The Broadcast and Multicast Service architecture in a 3G wireless network such as 3GPP2 has the following model:

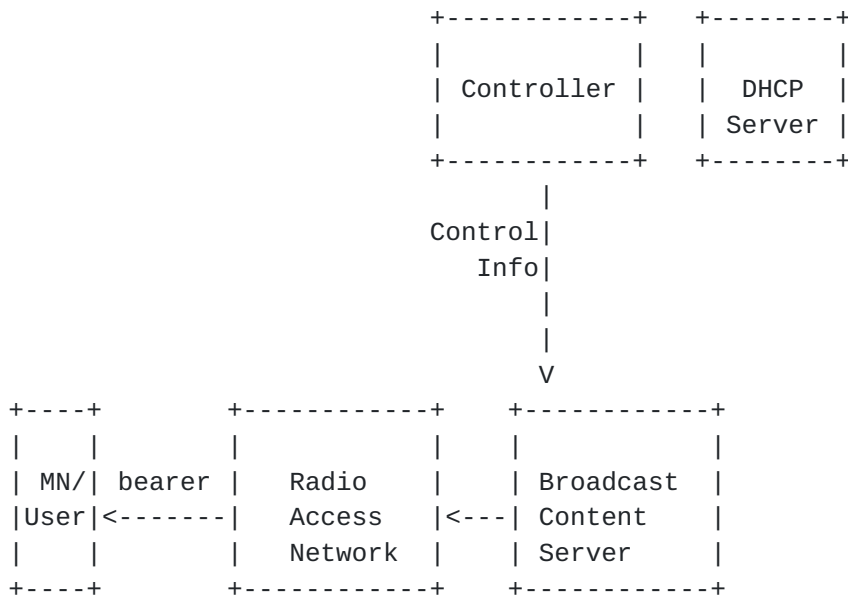

Note that this informative figure is shown here for broad understanding of how Broadcast and Multicast service works in a 3G radio network. The network elements except MN/user and the DHCP server are not relevant to the text in this document.

The user interacts with the Controller to request for broadcast/multicast program information from the network (e.g., scheduled time, multicast IP address, port numbers). The User may also be authenticated by the Controller while downloading the relevant program security related information (such as encryption key). These interactions happen via HTTP and XML. For details of Broadcast and Multicast Service operation in 3GPP2, see [[BCMCS](#)]. There may be more than one controller in the network. The user should discover the appropriate controller to request the relevant program information.

3. Terminology

The keywords "MUST", "MUST NOT", "REQUIRED", "SHALL", "SHALL NOT", "SHOULD", "SHOULD NOT", "RECOMMENDED", "MAY", and "OPTIONAL" in this document are to be interpreted as described in [RFC 2119](#).

4. Broadcast Service Controller Options

This section defines the configuration options for the controller of Broadcast Service. The options in the document are specified similar to [\[RFC3319\]](#).

4.1 Broadcast Service Controller Domain Name List option

The option length is followed by a sequence of labels, encoded according to [Section 3.1 of RFC 1035](#) [5].

The option MAY contain multiple domain names, but these domain names SHOULD be used to construct SRV lookups as specified in [\[BCMCS\]](#), rather than querying for different A records. The client MUST try the records in the order listed, applying the mechanism described in [\[BCMCS\]](#) for each entry. The client only resolves the subsequent domain names if attempts to contact the first one failed or yielded no common transport protocols between the client and the controller or denote a domain administratively prohibited by client's policy. Use of multiple domain names is not meant to replace the SRV records, but rather to allow a single DHCP server to indicate the broadcast controllers in the access provider's network.

The DHCPv6 option for Broadcast Service Controller Domain Names has the format shown below.

option-code: OPTION_BCMCS_SERVER_D (TBD)

option-length: Length of the 'Broadcast Control Server Domain Name List' field in octets; variable.

```

      0               1               2               3
    0 1 2 3 4 5 6 7 8 9 0 1 2 3 4 5 6 7 8 9 0 1 2 3 4 5 6 7 8 9 0 1
+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+
|      OPTION_BCMCS_SERVER_D      |      option-length      |
+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+
|      Broadcast Control Domain Name List      |
|                                     ...                                     |
+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+


```

4.2 Broadcast Service Controller IPv6 address option

This DHCP option SHALL carry one or more 128-bit IPv6 address(es) of the Broadcast Service Controller in a operators network.

option-code: OPTION_BCMCS_SERVER_A (TBD)

option-length: Length of the 'Broadcast Control Server IPv6 address' field in octets; variable.

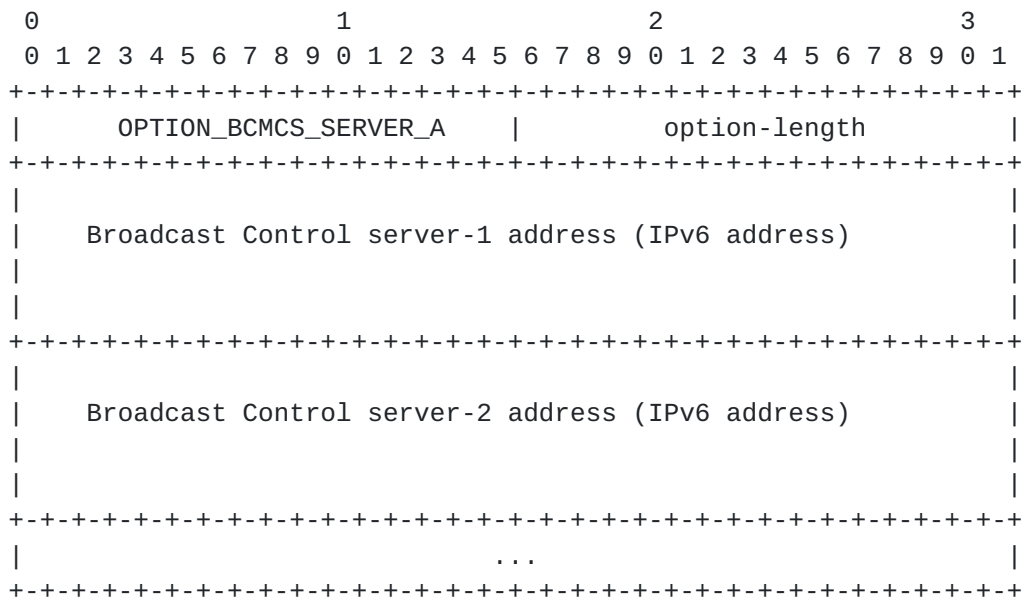

5. Consideration for Client Operation

A client MAY request either or both of the Broadcast Service Controller Domain Name List and the IPv6 Address options in the Options Request Option (ORO) as described in [[RFC3315](#)].

If a client receives both the Broadcast Service Controller Domain Name List and IPv6 Address options, it SHOULD use the Domain Name List option. In this case, the client MAY use the Broadcast Service Controller IPv6 Address option only if, no server in the Broadcast Service Controller Domain Name List can be resolved or reached.

6. Consideration for Server Operation

A server MAY send a client one or both of the Broadcast Service Controller Domain Name List and Broadcast Service Controller IPv6 Address options if the server is configured to do so.

If a client requests both options and the server is configured with both types of information, the server MAY send the client only one of these options if it is configured to do so. In this case the server SHOULD send the Broadcast Service Controller Domain Name List option.

A server configured with the Broadcast Service Controller IPv6 Address information MUST send a client the Broadcast Service Controller IPv6 Address option if that client requested only the Broadcast Service Controller IPv6 address option and not the Broadcast Service Controller Domain Name List option in the ORO ([RFC3315](#)).

If a client requests for the Broadcast Service Controller IPv6 option and the Server is configured only with the Domain Names, the Server MUST return the Domain Names List and vice versa.

The following table summarizes the server's response:

Client sends in ORO	Domain Name List	IPv6 Address List
Neither option	SHOULD	MAY
Domain Name List	MUST	MAY
IPv6 Address	MAY	MUST
Both options	SHOULD	MAY

7. Security Considerations

The security considerations in the base DHCPv6 spec [[RFC3315](#)] applies. An attacker may change information of the Broadcast Service Controller in packets that are in-transit from DHCP server to the MN, if integrity protection is not in place. In that event, the user of the Broadcast service may be diverted to a rogue broadcast service controller. In the absence of a mutual authentication procedure between MN and the Broadcast controller, the MN may receive wrong or fraudulent information about Broadcast Service.

8. IANA Considerations

The option codes `OPTION_BCMCS_SERVER_A`, `OPTION_BCMCS_SERVER_D` for Broadcast Service Controller Domain Name list and IPv6 address respectively Must be assigned by IANA.

9. Acknowledgements

Thanks to the following individuals for their review and constructive comments during the development of this document:

AC Mahendran, Jun Wang, Raymond Hsu, Jayshree Bharatia, Ralph Droms, Bernie Volz.

10 Normative References

- [BCMCS] 3GPP2, www.3gpp2.org, "X.P0022, Broadcast and Multicast Service in cdma2000 Wireless IP Network.", October 2003.
- [RFC1035] Mockapetris, P., "Domain names - implementation and specification", STD 13, [RFC 1035](#), November 1987.
- [RFC3315] Droms, R., Bound, J., Volz, B., Lemon, T., Perkins, C. and M. Carney, "Dynamic Host Configuration Protocol for IPv6 (DHCPv6)", [RFC 3315](#), July 2003.
- [RFC3319] Schulzrinne, H. and B. Volz, "Dynamic Host Configuration Protocol (DHCPv6) Options for Session Initiation Protocol (SIP) Servers", [RFC 3319](#), July 2003.

Authors' Addresses

Kuntal Chowdhury
Nortel Networks
2221 Lakeside Blvd.
Richardson, TX 75082
US

Phone: +1 972-685-7788
EMail: chowdury@nortelnetworks.com

Parviz Yegani
Cisco Systems
3625 Cisco Way
San Jose, CA 95134
US

Phone: +1 408-832-5729
EMail: pyegani@cisco.com

Lila Madour
Ericsson
8400, Decarie Blvd
Town of Mount Royal, Quebec H4P 2N2
CANADA

Phone: +1 514-345-7900
EMail: Lila.Madour@ericsson.com

Intellectual Property Statement

The IETF takes no position regarding the validity or scope of any Intellectual Property Rights or other rights that might be claimed to pertain to the implementation or use of the technology described in this document or the extent to which any license under such rights might or might not be available; nor does it represent that it has made any independent effort to identify any such rights. Information on the procedures with respect to rights in RFC documents can be found in [BCP 78](#) and [BCP 79](#).

Copies of IPR disclosures made to the IETF Secretariat and any assurances of licenses to be made available, or the result of an attempt made to obtain a general license or permission for the use of such proprietary rights by implementers or users of this specification can be obtained from the IETF on-line IPR repository at <http://www.ietf.org/ipr>.

The IETF invites any interested party to bring to its attention any copyrights, patents or patent applications, or other proprietary rights that may cover technology that may be required to implement this standard. Please address the information to the IETF at ietf-ipr@ietf.org.

Disclaimer of Validity

This document and the information contained herein are provided on an "AS IS" basis and THE CONTRIBUTOR, THE ORGANIZATION HE/SHE REPRESENTS OR IS SPONSORED BY (IF ANY), THE INTERNET SOCIETY AND THE INTERNET ENGINEERING TASK FORCE DISCLAIM ALL WARRANTIES, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO ANY WARRANTY THAT THE USE OF THE INFORMATION HEREIN WILL NOT INFRINGE ANY RIGHTS OR ANY IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE.

Copyright Statement

Copyright (C) The Internet Society (2004). This document is subject to the rights, licenses and restrictions contained in [BCP 78](#), and except as set forth therein, the authors retain all their rights.

Acknowledgment

Funding for the RFC Editor function is currently provided by the Internet Society.

