

Network Working Group
Internet-Draft
Intended status: Standards Track
Expires: September 10, 2015

Z. Cui
R. Winter
NEC
H. Shah
Ciena
S. Aldrin
Huawei Technologies
M. Daikoku
KDDI
March 9, 2015

**Use Cases and Requirements for MPLS-TP multi-failure protection
draft-cui-mpls-tp-mfp-use-case-and-requirements-04**

Abstract

For the Multiprotocol Label Switching Transport Profile (MPLS-TP) linear protection capable of 1+1 and 1:1 protection has already been defined in [RFC6378], [RFC7271] and [RFC7324]. That linear protection mechanism has not been designed for handling multiple, simultaneously occurring failures, e.g., multiple failures that affect the working and the protection entity during the same time period. In these situations currently defined protection mechanisms would fail.

This document introduces use cases and requirements for mechanisms that are capable of protecting against such failures. It does not specify a protection mechanism itself.

Status of This Memo

This Internet-Draft is submitted in full conformance with the provisions of [BCP 78](#) and [BCP 79](#).

Internet-Drafts are working documents of the Internet Engineering Task Force (IETF). Note that other groups may also distribute working documents as Internet-Drafts. The list of current Internet-Drafts is at <http://datatracker.ietf.org/drafts/current/>.

Internet-Drafts are draft documents valid for a maximum of six months and may be updated, replaced, or obsoleted by other documents at any time. It is inappropriate to use Internet-Drafts as reference material or to cite them other than as "work in progress."

This Internet-Draft will expire on September 10, 2015.

Copyright Notice

Copyright (c) 2015 IETF Trust and the persons identified as the document authors. All rights reserved.

This document is subject to [BCP 78](http://trustee.ietf.org/license-info) and the IETF Trust's Legal Provisions Relating to IETF Documents (<http://trustee.ietf.org/license-info>) in effect on the date of publication of this document. Please review these documents carefully, as they describe your rights and restrictions with respect to this document. Code Components extracted from this document must include Simplified BSD License text as described in Section 4.e of the Trust Legal Provisions and are provided without warranty as described in the Simplified BSD License.

Table of Contents

1.	Introduction	2
1.1.	Document scope	3
2.	Terminology and References	3
3.	General m:n protection scenario	4
4.	Use cases	5
4.1.	m:1 (m > 1) protection	5
4.1.1.	Pre-configuration	5
4.1.2.	On-demand configuration	6
4.2.	m:n (m, n > 1, n >= m > 1) protection	6
5.	Requirements	6
6.	Security Considerations	7
7.	Normative References	7
	Authors' Addresses	8

1. Introduction

Today's businesses require reliable network connectivity and access to corporate resources. Connections to and from business units, vendors and SOHOs are all equally important to keep the continuity when needed. Business runs all day, every day and even in off hours. So, the network connectivity needs to keep all the time. This is sometimes referred to five nines (99.999%) uptime in a time period. For this reason, ensuring survivability through careful network design and appropriate technical means is important.

In MPLS-TP networks, a basic survivability technique is available as specified in [[RFC6378](#)], [[RFC7271](#)] and [[RFC7324](#)]. That protocol however is limited to 1+1 and 1:1 protection and not designed to handle multiple failures that affect both the working and protection entity at the same time.

There are various situations where above multiple failures to be considered, e.g., after catastrophic events such as earthquakes or tsunamis. During the period after such events, network availability is crucial, in particular for high-priority services such as emergency telephone calls. Existing 1+1 or 1:n protection however is limited to cover single failures which has proven as not sufficient during past events.

Beyond the natural disaster case above, when a working entity or protection entity was closed for maintenance or construction work, the network service becomes vulnerable to single failure since one entity is already down. If a failure occurs during this time, an operator might not be able to meet service level agreements (SLA).

[RFC5654] establishes that MPLS-TP SHOULD MUST support 1+1 protection and 1:n protection (including 1:1 protection). This document provides an expansion of the basic requirements of MPLS-TP presented in [RFC5654] for supports m:1 and m:n protection for recovers user traffic after several failures occurred on both the working and protection entity at the same time.

1.1. Document scope

This document describes use cases and requirements for m:1 and m:n protection in MPLS-TP networks without the use of control plane protocols. Existing solutions based on a control plane such as GMPLS may be able to restore user traffic when multiple failures occur. Some networks however do not use full control plane operation for reasons such as service provider preferences, certain limitations or the requirement for fast service restoration (faster than achievable with control plane mechanisms). These networks are the focus of this document which defines a set of requirements for m:1 and m:n protection not based on control plane support.

2. Terminology and References

The key words "MUST", "MUST NOT", "REQUIRED", "SHALL", "SHALL NOT", "SHOULD", "SHOULD NOT", "RECOMMENDED", "MAY", and "OPTIONAL" in this document are to be interpreted as described in [RFC2119].

The terminology used in this document is based on the terminology defined in the MPLS-TP Survivability Framework document [RFC6372], which in turn is based on [RFC4427].

In particular, the following protection types are made in [RFC4427].

- o 1+1 protection

- o 1:n ($n \geq 1$) protection
- o m:n ($m, n > 1, n \geq m > 1$) protection

In this document, the following additional terminology is applied:

- o "broadcast bridge", defined in [[RFC4427](#)].
- o "selector bridge", defined in [[RFC4427](#)].
- o "working entity", defined in [[RFC4427](#)].
- o "protection entity", defined in [[RFC4427](#)].

This document defines a new protection type:

- o m:1 ($m > 1$) protection: A set of m protection entities protects a working entity.

3. General m:n protection scenario

The general underlying assumption of this work is that an m:n relationship between protection entity and working entity exists, i.e. there is no artificial limitation on the ratio between protection and working entities.

This general scenario is illustrated in Figure 1 which shows a protection domain with n working entities and m protection entities between Node A and Node Z.

At the Node A and in the absence of faults, traffic is transported over its respective working entity and may be simultaneously transported over one of its protection entities (in case of a broadcast bridge), or it is transported over its working entity and only in case of failure over one of the protection entities (in case of a selector bridge). At the Node Z, the traffic is selected from either its working entity or one of the protection entities.

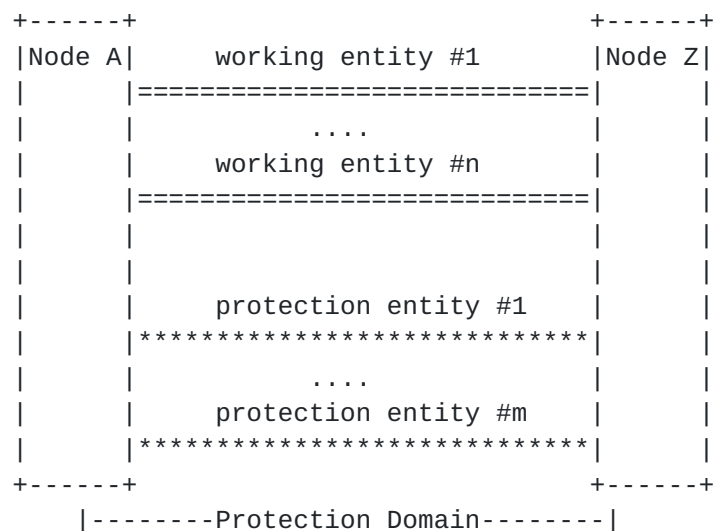


Figure 1: m:n protection domain

4. Use cases

4.1. m:1 ($m > 1$) protection

With MPLS-TP linear protection such as 1+1/1:1 protection, when a single failure is detected on the working entity, the service can be restored using the protection entity. During this time however, the traffic is unprotected until the working entity is restored.

m:1 protection can increase service availability and reduce operational pressure since multiple protection entities are available. For any $m > 1$, $m - 1$ protection entities may fail and the service still would have a protection entity available.

There are different ways to provision these alternative protection entities which are outlined in the following sub-sections.

4.1.1. Pre-configuration

The relationship between the working entity and the protection entities is part of the system configuration and needs to be configured before the working entity is being used. The same applies to additional protection entities.

Unprotected traffic can be transported over the m protection entities as long as these entities do not carry protected traffic.

4.1.2. On-demand configuration

The protection relationship between a working entity and a protection entity is configured while the system is in operation.

Additional protection entities are configured by either a control plane protocol or static configuration using a management system directly after failure detection and/or notification of either the working entity or the protection entity.

4.2. m:n (m, n > 1, n >= m > 1) protection

In order to reduce the cost of protection entities, in the m:n scenario, m dedicated protection transport entities are sharing protection resources for n working transport entities.

The bandwidth of each protection entity should be allocated in such a way that it may be possible to protect any of the n working entities in case at least one of the m protection entities is available. When a working entity is determined to be impaired, its traffic first must be assigned to an available protection transport entity followed by a transition from the working to the assigned protection entity at both the Node A and Node Z of the protected domain. It is noted that when more than m working entities are impaired, only m working entities can be protected.

5. Requirements

A number of recovery requirements are defined in [[RFC5654](#)]. These requirements however are limited to cover single failure case and not multiple, simultaneously occurring failures. This section extends the list of requirements to support multiple failures scenarios.

R1. MPLS-TP MUST support m:1 (m > 1) protection.

- 1 An m:1 protection mechanism MUST protect against multiple failures that are detected on both the working path and one or more protection paths.
- 2 Pre-configuration of protection paths SHOULD be supported.
- 3 On-demand protection path configuration MAY be supported.
- 4 On-demand protection resource activation MAY be supported.
- 5 A priority scheme MUST be provided, since a protection path has to be chosen out of two or more protection paths.

R2. MPLS-TP MUST support m:n ($m, n > 1, n \geq m > 1$) protection.

- 1 An m:n protection mechanism MUST protect against multiple failures that are simultaneously detected on both a working path and protection path or multiple working paths.
- 2 A priority scheme MUST be provided, since protection resources are shared by multiple working paths dynamically.

6. Security Considerations

General security considerations for MPLS-TP are covered in [[RFC5921](#)]. The security considerations for the generic associated control channel are described in [[RFC5586](#)].

The requirements described in this document are extensions to the requirements presented in [[RFC5654](#)] and does not introduce any new security risks.

7. Normative References

- [RFC2119] Bradner, S., "Key words for use in RFCs to Indicate Requirement Levels", [BCP 14](#), [RFC 2119](#), March 1997.
- [RFC4427] Mannie, E. and D. Papadimitriou, "Recovery (Protection and Restoration) Terminology for Generalized Multi-Protocol Label Switching (GMPLS)", [RFC 4427](#), March 2006.
- [RFC5586] Bocci, M., Vigoureux, M., and S. Bryant, "MPLS Generic Associated Channel", [RFC 5586](#), June 2009.
- [RFC5654] Niven-Jenkins, B., Brungard, D., Betts, M., Sprecher, N., and S. Ueno, "Requirements of an MPLS Transport Profile", [RFC 5654](#), September 2009.
- [RFC5921] Bocci, M., Bryant, S., Frost, D., Levrau, L., and L. Berger, "A Framework for MPLS in Transport Networks", [RFC 5921](#), July 2010.
- [RFC6372] Sprecher, N. and A. Farrel, "MPLS Transport Profile (MPLS-TP) Survivability Framework", [RFC 6372](#), September 2011.
- [RFC6378] Weingarten, Y., Bryant, S., Osborne, E., Sprecher, N., and A. Fulignoli, "MPLS Transport Profile (MPLS-TP) Linear Protection", [RFC 6378](#), October 2011.

- [RFC7271] Ryoo, J., Gray, E., van Helvoort, H., D'Alessandro, A., Cheung, T., and E. Osborne, "MPLS Transport Profile (MPLS-TP) Linear Protection to Match the Operational Expectations of Synchronous Digital Hierarchy, Optical Transport Network, and Ethernet Transport Network Operators", [RFC 7271](#), June 2014.
- [RFC7324] Osborne, E., "Updates to MPLS Transport Profile Linear Protection", [RFC 7324](#), July 2014.

Authors' Addresses

Zhenlong Cui
NEC

Email: c-sai@bx.jp.nec.com

Rolf Winter
NEC

Email: Rolf.Winter@neclab.eu

Himanshu Shah
Ciena

Email: hshah@ciena.com

Sam Aldrin
Huawei Technologies

Email: aldrin.ietf@gmail.com

Masahiro Daikoku
KDDI

Email: ms-daikoku@kddi.com

