

Workgroup: LSR Working Group

Internet-Draft:

draft-dong-lsr-sr-enhanced-vpn-07

Published: 30 January 2022

Intended Status: Standards Track

Expires: 3 August 2022

Authors: J. Dong

Z. Hu

Huawei Technologies

Huawei Technologies

Z. Li

X. Tang

R. Pang

Huawei Technologies

China Unicom

China Unicom

L. JooHeon S. Bryant

LG U+

Futurewei Technologies

IGP Extensions for Scalable Segment Routing based Enhanced VPN

Abstract

Enhanced VPN (VPN+) aims to provide enhanced VPN services to support some application's needs of enhanced isolation and stringent performance requirements. VPN+ requires integration between the overlay VPN connectivity and the characteristics provided by the underlay network. A Virtual Transport Network (VTN) is a virtual underlay network which has a customized network topology and a set of network resources allocated from the physical network. A VTN could be used to support one or a group of VPN+ services.

This document specifies the IGP mechanisms with necessary extensions to advertise the associated topology and resource attributes for scalable Segment Routing (SR) based VTNs. Each VTN can have a customized topology and a set of network resources allocated from the physical network. Multiple VTNs may shared the same topology, and multiple VTNs may share the same set of network resources on some network segments. A group of resource-aware SIDs are allocated for each VTN. This allows flexible combination of the network topology and network resource attributes to build a relatively large number of VTNs with a small number of logical topologies. The proposed mechanism is applicable to both Segment Routing with MPLS data plane (SR-MPLS) and segment routing with IPv6 data plane (SRv6). This document also describes the mechanisms of using dedicated VTN-ID in the data plane instead of the per-VTN resource-aware SIDs to further reduce the control plane overhead.

Requirements Language

The key words "MUST", "MUST NOT", "REQUIRED", "SHALL", "SHALL NOT", "SHOULD", "SHOULD NOT", "RECOMMENDED", "MAY", and "OPTIONAL" in this document are to be interpreted as described in [RFC 2119](#) [[RFC2119](#)].

Status of This Memo

This Internet-Draft is submitted in full conformance with the provisions of BCP 78 and BCP 79.

Internet-Drafts are working documents of the Internet Engineering Task Force (IETF). Note that other groups may also distribute working documents as Internet-Drafts. The list of current Internet-Drafts is at <https://datatracker.ietf.org/drafts/current/>.

Internet-Drafts are draft documents valid for a maximum of six months and may be updated, replaced, or obsoleted by other documents at any time. It is inappropriate to use Internet-Drafts as reference material or to cite them other than as "work in progress."

This Internet-Draft will expire on 3 August 2022.

Copyright Notice

Copyright (c) 2022 IETF Trust and the persons identified as the document authors. All rights reserved.

This document is subject to BCP 78 and the IETF Trust's Legal Provisions Relating to IETF Documents (<https://trustee.ietf.org/license-info>) in effect on the date of publication of this document. Please review these documents carefully, as they describe your rights and restrictions with respect to this document. Code Components extracted from this document must include Revised BSD License text as described in Section 4.e of the Trust Legal Provisions and are provided without warranty as described in the Revised BSD License.

Table of Contents

1. [Introduction](#)
2. [VTN Definition Advertisement](#)
3. [Advertisement of VTN Topology Attribute](#)
 - 3.1. [MTR based Topology Advertisement](#)
 - 3.2. [Flex-Algo based Topology Advertisement](#)
4. [Advertisement of VTN Resource Attribute](#)
 - 4.1. [Option 1: L2 Bundle based Approach](#)
 - 4.2. [Option 2: Per-VTN Link TE Attributes](#)
5. [Advertisement of VTN specific Data Plane Identifiers](#)
 - 5.1. [Advertisement of VTN-specific SR-MPLS SIDs](#)
 - 5.2. [Advertisement of VTN-specific SRv6 Locators and SIDs](#)
 - 5.2.1. [VTN-specific SRv6 Locators and End SIDs](#)
 - 5.2.2. [VTN-specific SRv6 End.X SIDs](#)
 - 5.3. [Advertisement of Dedicated Data Plane VTN IDs](#)
6. [Security Considerations](#)
7. [IANA Considerations](#)

- [8. Contributors](#)
- [9. Acknowledgments](#)
- [10. References](#)
 - [10.1. Normative References](#)
 - [10.2. Informative References](#)
- [Authors' Addresses](#)

1. Introduction

Enhanced VPN (VPN+) is an enhancement to VPN services to support the needs of new applications, particularly the applications that are associated with 5G services. These applications require enhanced isolation and have more stringent performance requirements than that can be provided with traditional overlay VPNs. These properties require integration between the underlay and the overlay networks. [\[I-D.ietf-teas-enhanced-vpn\]](#) specifies the framework of enhanced VPN and describes the candidate component technologies in different network planes and layers. An enhanced VPN can be used for 5G network slicing, and will also be of use in more generic scenarios.

To meet the requirement of different enhanced VPN services, a number of virtual underlay networks need to be created, each with a customized network topology and a set of network resources allocated from the physical network to meet the requirement of one or a group of VPN+ services. Such a virtual underlay network is called Virtual Transport Network (VTN) in [\[I-D.ietf-teas-enhanced-vpn\]](#).

[\[I-D.ietf-spring-resource-aware-segments\]](#) introduces resource-aware segments by associating existing type of SIDs with network resource attributes (e.g. bandwidth, processing or storage resources). These resource-aware SIDs retain their original functionality, with the additional semantics of identifying the set of network resources available for the packet processing action. [\[I-D.ietf-spring-sr-for-enhanced-vpn\]](#) describes the use of resource-aware segments to build SR based VTNs. To allow the network controller and network nodes to perform VTN-specific explicit path computation and/or shortest path computation, the group of resource-aware SIDs allocated by network nodes to each VTN and the associated topology and resource attributes need to be distributed using the control plane.

[\[I-D.dong-teas-nrp-scalability\]](#) analyzes the scalability requirements and the control plane and data plane scalability considerations of enhanced VPN, more specifically, the scalability of the VTNs. In order to support a relatively large number of VTNs in the network, one proposed approach is to separate the topology and resource attributes of the VTN in control plane, so that the advertisement and processing of each type of attribute could be decoupled. Multiple VTNs may shared the same topology, and multiple VTNs may share the same set of network resources on some network

segments, while the difference in either the topology or resource attributes makes them different VTNs. This allows flexible combination of network topology and network resource attributes to build a large number of VTNs with a relatively small number of logical topologies.


This document specifies the IGP control plane mechanisms with necessary extensions for scalable SR based VTNs. The proposed mechanism is applicable to both segment routing with MPLS data plane (SR-MPLS) and segment routing with IPv6 data plane (SRv6). This document also describes the mechanisms of using dedicated VTN-ID in the data plane instead of the per-VTN resource-aware SIDs to further reduce the control plane overhead.

In general this approach applies to both IS-IS and OSPF, while the specific protocol extensions and encodings are different. In the current version of this document, the required IS-IS extensions are described. The required OSPF extensions will be described in a future version or in a separate document.

2. VTN Definition Advertisement

According to [[I-D.ietf-teas-enhanced-vpn](#)], a VTN is associated with a customized network topology and a set of dedicated or shared network resources. Thus a VTN can be defined as the combination of a set of network attributes, which include the topology attribute and other attributes, such as the network resources. IS-IS Virtual Transport Network Definition (VTND) sub-TLV is used to advertise the definition of a VTN. It is a sub-TLV of the IS-IS Router-Capability TLV 242 as defined in [[RFC7981](#)].

The format of IS-IS VTND sub-TLV is as below:

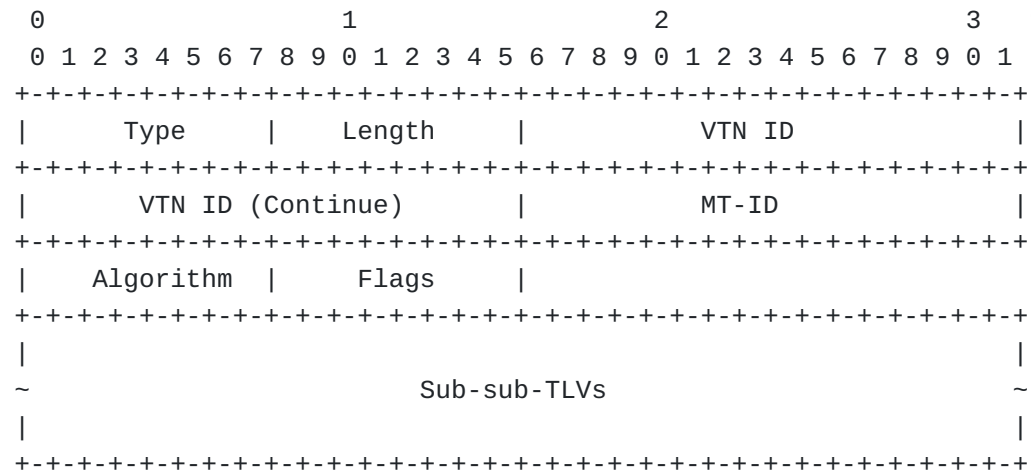

Where:

*Type: TBD

*Length: The length of the value field of the sub-TLV. It is variable dependent on the included sub-TLVs.

*VTN ID: A global significant 32-bit identifier which is used to identify a VTN.

*MT-ID: 16-bit field which indicates the multi-topology identifier as defined in [[RFC5120](#)]. The first 4-bit are set to zero.

*Algorithm: 8-bit identifier which indicates the algorithm which applies to this VTN. It can be either a normal algorithm [[RFC8402](#)] or a Flexible Algorithm [[I-D.ietf-lsr-flex-algo](#)].

*Flags: 8-bit flags. Currently all the flags are reserved for future use. They SHOULD be set to zero on transmission and MUST be ignored on receipt.

*Sub-sub-TLVs: optional sub-sub-TLVs to specify the additional attributes of a VTN. Currently no sub-sub-TLV is defined in this document.

The VTND Sub-TLV MAY be advertised in an LSP of any number. A node MUST NOT advertise more than one VTND Sub-TLV for a given VTN ID.

3. Advertisement of VTN Topology Attribute

This section describes the mechanisms used to advertise the topology attribute associated with SR based VTNs. Basically the topology of a VTN can be determined by the MT-ID and/or the algorithm ID included in the VTN definition. In practice, it could be described using two optional approaches.

The first approach is to use Multi-Topology Routing (MTR) [[RFC4915](#)] [[RFC5120](#)] with the segment routing extensions to advertise the topology associated with the SR based VTNs. Different algorithms MAY be used to further specify the computation algorithm or the metric type used for path computation within the topology. Multiple VTNs can be associated with the same <topology, algorithm>, and the IGP computation with the <topology, algorithm> tuple can be shared by these VTNs.

The second approach is to use Flex-Algo [[I-D.ietf-lsr-flex-algo](#)] to describe the topological constraints of SR based VTNs on a shared network topology (e.g. the default topology). Multiple VTNs can be associated with the same Flex-Algo, and the IGP computation with this Flex-Algo can be shared by these VTNs.

3.1. MTR based Topology Advertisement

Multi-Topology Routing (MTR) has been defined in [\[RFC4915\]](#) and [\[RFC5120\]](#) to create different network topologies in one network. It also has the capability of specifying customized attributes for each topology. The traditional use cases of multi-topology are to maintain separate topologies for unicast and multicast services, or to create different topologies for IPv4 and IPv6 in a network. There are some limitations when MTR is used with native IP forwarding, the considerations about MT based IP forwarding are described in [\[RFC5120\]](#).

MTR can be used with SR-MPLS data plane. [\[RFC8667\]](#) specifies the IS-IS extensions to support SR-MPLS data plane, in which the Prefix-SID sub-TLVs can be carried in IS-IS TLV 235 (MT IP Reachability) and TLV 237 (MT IPv6 IP Reachability), and the Adj-SID sub-TLVs can be carried in IS-IS TLV 222 (MT-ISN) and TLV 223 (MT IS Neighbor Attribute).

MTR can also be used with SRv6 data plane. [\[I-D.ietf-lsr-isis-srv6-extensions\]](#) specifies the IS-IS extensions to support SRv6 data plane, in which the MT-ID is carried in the SRv6 Locator TLV. The SRv6 End SIDs are carried as sub-TLVs in the SRv6 Locator TLV, and inherit the topology/algorithm from the parent locator. The SRv6 End.X SIDs are carried as sub-TLVs in the IS-IS TLV 222 (MT-ISN) and TLV 223 (MT IS Neighbor Attribute), and inherit the topology/algorithm from the parent locator.

These IGP extensions for SR-MPLS and SRv6 can be used to advertise and build the topology for a group of SR based VTNs.

An algorithm ID MAY be used to further specify the computation algorithm or the metric type used for path computation within the topology.

3.2. Flex- Algo based Topology Advertisement

[\[I-D.ietf-lsr-flex-algo\]](#) specifies the mechanisms to provide distributed computation of constraint-based paths, and how the SR-MPLS prefix-SIDs and SRv6 locators can be used to steer packets along the constraint-based paths.

The Flex-Algo Definition (FAD) can be used to describe the topological constraints for path computation on a network topology. According to the network nodes' participation of a Flex-Algo, and the rules of including or excluding specific Administrative Groups (colors) and the Shared Risk Link Groups (SRLGs), the topology of a VTN can be determined using the associated Flex-Algo on a particular topology (e.g. the default topology).

With the mechanisms defined in [\[RFC8667\]](#) [\[I-D.ietf-lsr-flex-algo\]](#), prefix-SID advertisement can be associated with a <topology, algorithm> tuple, in which the algorithm can be a Flex-Algo. This allows network nodes to use the prefix-SID to steer traffic along distributed computed paths according to the identified Flex-Algo in the topology.

[\[I-D.ietf-lsr-isis-srv6-extensions\]](#) specifies the IS-IS extensions to support SRv6 data plane, in which the SRv6 locators advertisement can be associated with a specific topology and a specific algorithm, which can be a Flex-Algo. With the mechanism defined in [\[I-D.ietf-lsr-flex-algo\]](#), The SRv6 locator can be used to steer traffic along distributed computed paths according to the identified Flex-Algo in the topology. In addition, topology/algorithm specific SRv6 End SID and End.X SID can be used to enforce traffic over the LFA computed backup path.

Multiple Flex-Algos MAY be defined to describe the topological constraints on a shared network topology (e.g. the default topology).

4. Advertisement of VTN Resource Attribute

This section specifies the mechanisms to advertise the network resource attributes associated with the VTNs. The mechanism of advertising the link resources and attributes associated with VTNs is described. The mechanism of advertising node resources and attributes associated with VTNs are for further study. Two optional approaches are described in the following sub-sections: the first option is the L2 Bundle [\[RFC8668\]](#) based approach, the second option is to extend IGP to advertise per-VTN link TE attributes.

4.1. Option 1: L2 Bundle based Approach

On a Layer-3 interface, each VTN can be allocated with a subset of link resources (e.g. bandwidth). A subset of link resources may be dedicated to a VTN, or may be shared by a group of VTNs. Each subset of link resource can be represented as a virtual layer-2 member link under the Layer-3 interface, and the Layer-3 interface is considered as a virtual Layer-2 bundle. The Layer-3 interface may also be a physical Layer 2 link bundle, in this case a subset of link resources allocated to a VTN may be provided by one of the physical Layer-2 member links.

[\[RFC8668\]](#) describes the IS-IS extensions to advertise the link attributes of the Layer 2 member links which comprise a Layer 3 interface. Such mechanism can be extended to advertise the attributes of each physical or virtual member links, and its associated VTNs.

A new flag "E" (Exclusive) is defined in the flag field of the Parent L3 Neighbor Descriptor in the L2 Bundle Member Attributes TLV (25).

```

      0 1 2 3 4 5 6 7
+---+---+---+---+
|P|E|           |
+---+---+---+---+

```

E flag: When the E flag is set, it indicates each member link under the Parent L3 link are used exclusively for one or a specific group of VTNs, and load sharing among the member links is not allowed. When the E flag is clear, it indicates load balancing and sharing among the member links are allowed.

A new VTN-IDs sub-TLV is carried under the L2 Bundle Attribute Descriptors to describe the mapping relationship between the VTNs and the virtual or physical member links. As one or more VTNs may use the same set of link resource on a specific network segment, these VTN IDs will be advertised under the same virtual or physical member link.

The format of the VTN-IDs Sub-TLV is as below:

```

      0                               1                               2                               3
      0 1 2 3 4 5 6 7 8 9 0 1 2 3 4 5 6 7 8 9 0 1 2 3 4 5 6 7 8 9 0 1
+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+
|      Type      |      Length      |      Flags      |
+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+
|                                     VTN ID #1                                     |
+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+
~                                     ...                                     ~
+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+
|                                     VTN ID #n                                     |
+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+

```

Where:

*Type: TBD

*Length: The length of the value field of the sub-TLV. It is variable dependent on the number of VTN IDs included.

*Flags: 16 bit flags. All the bits are reserved for future use, which SHOULD be set to 0 on transmission and MUST be ignored on receipt.

*VTN IDs: One or more 32-bit identifier to identify the VTNs this member link belongs to.

Each physical or virtual member link MAY be associated with a different group of VTNs. Thus each L2 Bundle Attribute Descriptor may carry the link local identifier and attributes of only one Layer 2 member link. Multiple L2 Bundle Attribute Descriptors will be used to carry the attributes and the associated VTN-IDs of all the Layer 2 member links.

The TE attributes of each virtual or physical member link, such as the bandwidth attributes and the SR SIDs, can be advertised using the mechanism as defined in [\[RFC8668\]](#).

4.2. Option 2: Per-VTN Link TE Attributes

A Layer-3 interface can participate in multiple VTNs, each of which is allocated with a subset of the forwarding resources of the interface. For each VTN, the associated resources can be described using per-VTN TE attributes. A new VTN-specific TE attribute sub-TLV is defined to advertise the link attributes associated with a VTN. This sub-TLV MAY be advertised as a sub-TLV of the following TLVs:

TLV-22 (Extended IS reachability) [\[RFC5305\]](#)


TLV-23 (IS Neighbor Attribute) [\[RFC5311\]](#)

TLV-141 (Inter-AS Reachability Information) [\[RFC5316\]](#)

TLV-222 (MT ISN) [\[RFC5120\]](#)

TLV-223 (MT IS Neighbor Attribute) [\[RFC5311\]](#)

The format of the sub-TLV is shown as below:

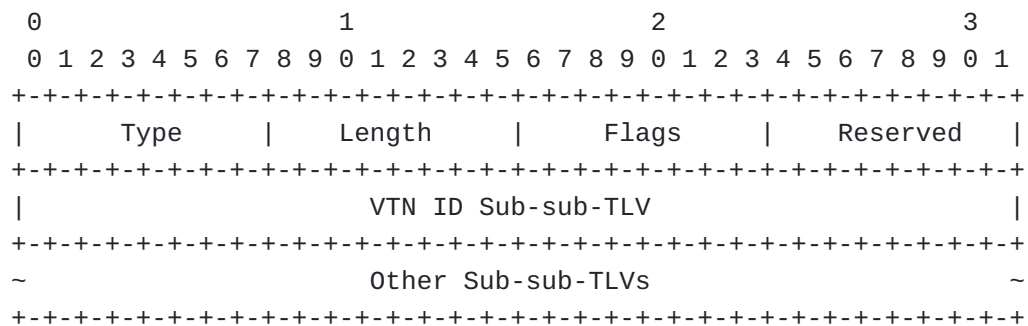

Where:

*Type: TBD

*Length: The length of the value field of the sub-TLV. It is variable dependent on the length of the Sub-sub-TLVs field.


*Flags: 8-bit flags. All the 8 bits are reserved for future use, which SHOULD be set to 0 on transmission and MUST be ignored on receipt.

*Reserved: 8-bit field reserved for future use, SHOULD be set to 0 on transmission and MUST be ignored on receipt.

*VTN ID Sub-sub-TLV: contains one or more VTN IDs which is associated with the same group of TE attributes.

*Other Sub-sub-TLVs: the TLVs which carry the TE attributes associated with the VTNs.

The format of the VTN ID sub-sub-TLV is shown as below:

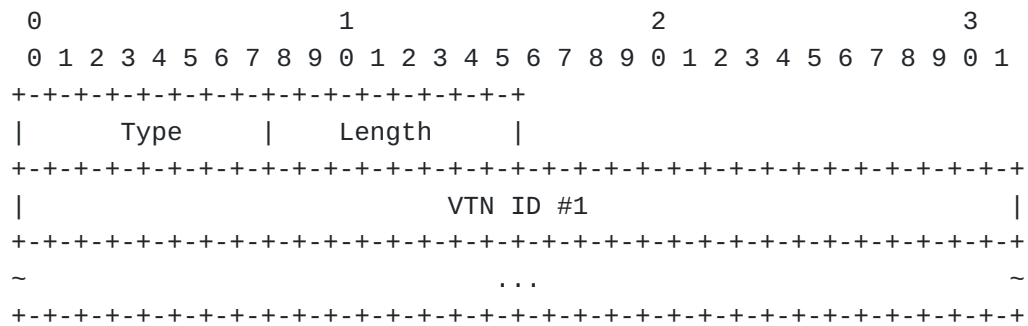


Where:

*Type: TBD

*Length: The length of the value field of the sub-sub-TLV. It is the number of the VTN IDs in the TLV multiplied by 4.

*VTN ID: A global significant 32-bit identifier which is used to identify a VTN.

One sub-sub-TLV "VTN bandwidth sub-sub-TLV" is defined in this document. Its format is shown as below:

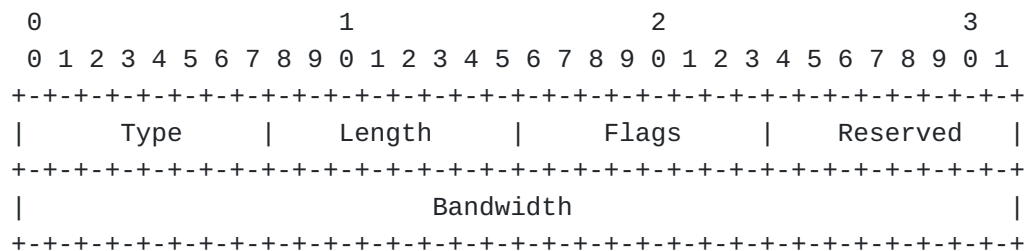

Where:

*Type: TBD

*Length: The length of the value field of the sub-sub-TLV. It is set to 6.

*Flags: 8-bit flags. All the 8 bits are reserved for future use, which SHOULD be set to 0 on transmission and MUST be ignored on receipt.

*Reserved: 8-bit field reserved for future use, SHOULD be set to 0 on transmission and MUST be ignored on receipt.

*Bandwidth: The bandwidth allocated to the VTN, encoded in 32 bits in IEEE floating point format.

The VTN-specific Bandwidth sub-sub-TLV is optional. This sub-sub-TLV SHOULD appear once at most in each VTN-specific TE attribute sub-TLV.

5. Advertisement of VTN specific Data Plane Identifiers

In order to steer packets to the VTN-specific paths which are computed taking the topology and network resources of the VTN as the constraints, some fields in the data packet needs to be used to infer or identify the VTN the packet belongs to. As multiple VTNs may share the same topology or Flex-Algo, the topology/Flex-Algo specific SR SIDs or Locators cannot be used to distinguish the packets which belong to different VTNs. Some additional data plane identifiers would be needed to identify the VTN a packet belongs to.

This section describes the mechanisms to advertise the VTN identifiers in different data plane encapsulations.

5.1. Advertisement of VTN-specific SR-MPLS SIDs

With SR-MPLS data plane, the VTN identification information can be implicitly carried in the VTN-specific SIDs. Each node SHOULD allocate a unique Prefix-SID for each VTN it participates in. On a Layer-3 interface, if each Layer 2 member link is associated with only one VTN, the adj-SIDs of the L2 member links could also identify the VTNs. If a member link is associated with multiple VTNs, VTN-specific adj-SIDs MAY need to be allocated to help the VTN-specific local protection.

A new VTN-specific prefix-SID sub-TLV is defined to advertise the prefix-SID and its associated VTN. This sub-TLV MAY be advertised as a sub-TLV of the following TLVs:


TLV-135 (Extended IPv4 Reachability) defined in [RFC5305].

TLV-235 (MT IP Reachability) defined in [RFC5120].

TLV-236 (IPv6 IP Reachability) defined in [RFC5308].

TLV-237 (MT IPv6 IP Reachability) defined in [RFC5120].

The format of the sub-TLV is shown as below:

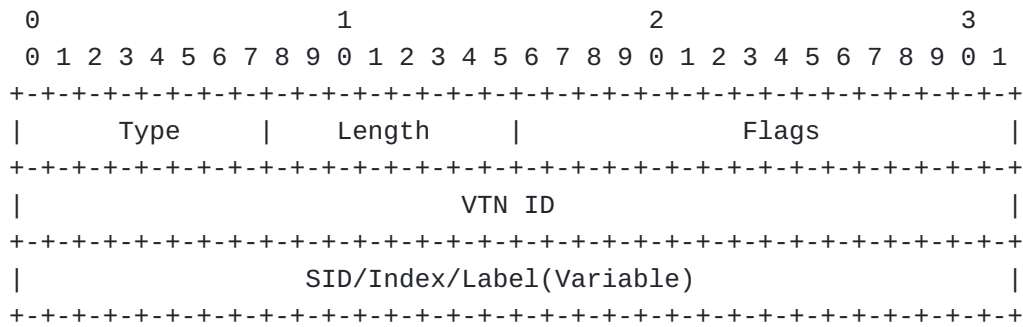

Where:

*Type: TBD

*Length: The length of the value field of the sub-TLV. It is variable dependent on the length of the SID/Index/Label field.

*Flags: 16-bit flags. The high-order 8 bits are the same as in the Prefix-SID sub-TLV defined in [RFC8667]. The lower-order 8 bits are reserved for future use, which SHOULD be set to 0 on transmission and MUST be ignored on receipt.

*VTN ID: A 32-bit identifier to identify the VTN this prefix-SID associates with.

*SID/Index/Label: The same as defined in [RFC8667].

One or more of VTN-specific Prefix-SID sub-TLVs MAY be carried in the Multi-topology IP Reachability TLVs (TLV 235 or TLV 237), the MT-ID of the TLV SHOULD be the same as the MT-ID in the definition of these VTNs.

A new VTN-specific Adj-SID sub-TLV is defined to advertise the adj-SID and its associated VTN. This sub-TLV may be advertised as a sub-TLV of the following TLVs:

Where:

*VTN ID: A 32-bit global identifier to identify the VTN this Locator associates with.

*All the other fields are the same as those defined in [[I-D.ietf-lsr-isis-srv6-extensions](#)].

The VTN-specific SRv6 End SIDs are carried in the VTN-specific SRv6 Locator TLV, and inherits the topology, algorithm and VTN from the parent VTN-specific Locator.

In another possible approach, when a group of VTNs share the same topology/algorithm, the topology/algorithm specific Locator is the covering prefix of a group of VTN-specific Locators. Then the advertisement of VTN-specific locators can be optimized to reduce the amount of Locator TLVs advertised in the control plane.

A new VTN locator-block sub-TLV under the SRv6 Locator TLV is defined to advertise a set of sub-blocks which follows the topology/algorithm specific Locator. Each VTN locator-block value is assigned to one of the VTNs which share the same topology/algorithm.

[illegible]

Where:

*Type: TBD

*Length: The length of the value field of the sub-TLV. It is variable dependent on the number of VTNs and the Block Length.

*Number of VTNs: The number of VTNs which share the same topology/algorithm specific Locator as the covering prefix.

identifiers used for topology based forwarding and the identifiers used for the VTN-specific processing. Thus a dedicated data plane VTN-ID could be encapsulated in the packet. One possible encapsulation of VTN-ID in IPv6 data plane is proposed in [[I-D.dong-6man-enhanced-vpn-vtn-id](#)]. One possible encapsulation of VTN-ID in MPLS data plane is proposed in [[I-D.li-mpls-enhanced-vpn-vtn-id](#)].

In that case, the VTN-ID encapsulated in data plane can have the same value as the VTN-ID in control plane, so that the overhead of advertising the mapping between the control plane VTN-IDs and the corresponding data plane identifiers could be saved.

6. Security Considerations

This document introduces no additional security vulnerabilities to IS-IS.

The mechanism proposed in this document is subject to the same vulnerabilities as any other protocol that relies on IGP.

7. IANA Considerations

IANA is requested to assign a new code point in the "sub-TLVs for TLV 242 registry".

Type: TBD1

Description: Virtual Transport Network Definition

IANA is requested to assign three new code points in the "sub-TLVs for TLVs 22, 23, 25, 141, 222, and 223 registry".

Type: TBD2

Description: Virtual Transport Network Identifiers

Type: TBD3

Description: VTN-specific TE attribute sub-TLV

Type: TBD4

Description: VTN-specific Adj-SID

IANA is requested to assign two new code points in the "Sub-TLVs for TLVs 27, 135, 235, 236 and 237 registry".

Type: TBD5

Description: VTN-specific Prefix-SID

Type: TBD6

Description: VTN locator-block

IANA is requested to assign a new code point in the "IS-IS TLV Codepoints registry".

Type: TBD7

Description: VTN-specific SRv6 Locator TLV

IANA is requested to assign a new code point in the "sub-sub-TLVs for SRv6 End SID and SRv6 End.X SID registry".

Type: TBD8

Description: VTN ID Sub-sub-TLV

8. Contributors

Hongjie Yang

Email: hongjie.yang@huawei.com

9. Acknowledgments

The authors would like to thank Mach Chen, Dean Cheng and Guoqi Xu for their review and discussion of this document.

10. References

10.1. Normative References

[I-D.ietf-lsr-flex-algo] Psenak, P., Hegde, S., Filsfils, C., Talaulikar, K., and A. Gulko, "IGP Flexible Algorithm", Work in Progress, Internet-Draft, draft-ietf-lsr-flex-algo-18, 25 October 2021, <<https://www.ietf.org/archive/id/draft-ietf-lsr-flex-algo-18.txt>>.

[I-D.ietf-lsr-isis-srv6-extensions] Psenak, P., Filsfils, C., Bashandy, A., Decraene, B., and Z. Hu, "IS-IS Extensions to Support Segment Routing over IPv6 Dataplane", Work in Progress, Internet-Draft, draft-ietf-lsr-isis-srv6-extensions-18, 20 October 2021, <<https://www.ietf.org/archive/id/draft-ietf-lsr-isis-srv6-extensions-18.txt>>.

[I-D.ietf-spring-resource-aware-segments] Dong, J., Bryant, S., Miyasaka, T., Zhu, Y., Qin, F., Li, Z., and F. Clad, "Introducing Resource Awareness to SR Segments", Work in Progress, Internet-Draft, draft-ietf-spring-resource-aware-segments-03, 12 July 2021,

<<https://www.ietf.org/archive/id/draft-ietf-spring-resource-aware-segments-03.txt>>.

[I-D.ietf-spring-sr-for-enhanced-vpn]

Dong, J., Bryant, S., Miyasaka, T., Zhu, Y., Qin, F., Li, Z., and F. Clad, "Segment Routing based Virtual Transport Network (VTN) for Enhanced VPN", Work in Progress, Internet-Draft, draft-ietf-spring-sr-for-enhanced-vpn-01, 12 July 2021, <<https://www.ietf.org/archive/id/draft-ietf-spring-sr-for-enhanced-vpn-01.txt>>.

[I-D.ietf-teas-enhanced-vpn] Dong, J., Bryant, S., Li, Z., Miyasaka, T., and Y. Lee, "A Framework for Enhanced Virtual Private Network (VPN+) Services", Work in Progress, Internet-Draft, draft-ietf-teas-enhanced-vpn-09, 25 October 2021, <<https://www.ietf.org/archive/id/draft-ietf-teas-enhanced-vpn-09.txt>>.

[RFC2119] Bradner, S., "Key words for use in RFCs to Indicate Requirement Levels", BCP 14, RFC 2119, DOI 10.17487/RFC2119, March 1997, <<https://www.rfc-editor.org/info/rfc2119>>.

[RFC4915] Psenak, P., Mirtorabi, S., Roy, A., Nguyen, L., and P. Pillay-Esnault, "Multi-Topology (MT) Routing in OSPF", RFC 4915, DOI 10.17487/RFC4915, June 2007, <<https://www.rfc-editor.org/info/rfc4915>>.

[RFC5120] Przygienda, T., Shen, N., and N. Sheth, "M-ISIS: Multi Topology (MT) Routing in Intermediate System to Intermediate Systems (IS-ISs)", RFC 5120, DOI 10.17487/RFC5120, February 2008, <<https://www.rfc-editor.org/info/rfc5120>>.

[RFC7981] Ginsberg, L., Previdi, S., and M. Chen, "IS-IS Extensions for Advertising Router Information", RFC 7981, DOI 10.17487/RFC7981, October 2016, <<https://www.rfc-editor.org/info/rfc7981>>.

[RFC8402] Filsfils, C., Ed., Previdi, S., Ed., Ginsberg, L., Decraene, B., Litkowski, S., and R. Shakir, "Segment Routing Architecture", RFC 8402, DOI 10.17487/RFC8402, July 2018, <<https://www.rfc-editor.org/info/rfc8402>>.

[RFC8667] Previdi, S., Ed., Ginsberg, L., Ed., Filsfils, C., Bashandy, A., Gredler, H., and B. Decraene, "IS-IS Extensions for Segment Routing", RFC 8667, DOI 10.17487/RFC8667, December 2019, <<https://www.rfc-editor.org/info/rfc8667>>.

[RFC8668]

Ginsberg, L., Ed., Bashandy, A., Filsfils, C., Nanduri, M., and E. Aries, "Advertising Layer 2 Bundle Member Link Attributes in IS-IS", RFC 8668, DOI 10.17487/RFC8668, December 2019, <<https://www.rfc-editor.org/info/rfc8668>>.

10.2. Informative References

[I-D.dong-6man-enhanced-vpn-vtn-id] Dong, J., Li, Z., Xie, C., Ma, C., and G. Mishra, "Carrying Virtual Transport Network (VTN) Identifier in IPv6 Extension Header", Work in Progress, Internet-Draft, draft-dong-6man-enhanced-vpn-vtn-id-06, 24 October 2021, <<https://www.ietf.org/archive/id/draft-dong-6man-enhanced-vpn-vtn-id-06.txt>>.

[I-D.dong-teas-nrp-scalability]

Dong, J., Li, Z., Gong, L., Yang, G., Guichard, J. N., Mishra, G., and F. Qin, "Scalability Considerations for Network Resource Partition", Work in Progress, Internet-Draft, draft-dong-teas-nrp-scalability-00, 17 December 2021, <<https://www.ietf.org/archive/id/draft-dong-teas-nrp-scalability-00.txt>>.

[I-D.li-mpls-enhanced-vpn-vtn-id] Li, Z. and J. Dong, "Carrying Virtual Transport Network Identifier in MPLS Packet", Work in Progress, Internet-Draft, draft-li-mpls-enhanced-vpn-vtn-id-01, 14 April 2021, <<https://www.ietf.org/archive/id/draft-li-mpls-enhanced-vpn-vtn-id-01.txt>>.

Authors' Addresses

Jie Dong
Huawei Technologies

Email: jie.dong@huawei.com

Zhibo Hu
Huawei Technologies

Email: huzhibo@huawei.com

Zhenbin Li
Huawei Technologies

Email: lizhenbin@huawei.com

Xiongyan Tang
China Unicom

Email: tangxy@chinaunicom.cn

Ran Pang
China Unicom

Email: pangran@chinaunicom.cn

Lee JooHeon
LG U+

Email: playgame@lguplus.co.kr

Stewart Bryant
Futurewei Technologies

Email: stewart.bryant@gmail.com