

CLUE WG
Internet-Draft
Intended status: Standards Track
Expires: August 5, 2013

R. Even
Huawei Technologies
J. Lennox
Vidyo
February 1, 2013

Mapping RTP streams to CLUE media captures
draft-even-clue-rtp-mapping-05.txt

Abstract

This document describes mechanisms and recommended practice for mapping RTP media streams defined in SDP to CLUE media captures.

Status of this Memo

This Internet-Draft is submitted in full conformance with the provisions of [BCP 78](#) and [BCP 79](#).

Internet-Drafts are working documents of the Internet Engineering Task Force (IETF). Note that other groups may also distribute working documents as Internet-Drafts. The list of current Internet-Drafts is at <http://datatracker.ietf.org/drafts/current/>.

Internet-Drafts are draft documents valid for a maximum of six months and may be updated, replaced, or obsoleted by other documents at any time. It is inappropriate to use Internet-Drafts as reference material or to cite them other than as "work in progress."

This Internet-Draft will expire on August 5, 2013.

Copyright Notice

Copyright (c) 2013 IETF Trust and the persons identified as the document authors. All rights reserved.

This document is subject to [BCP 78](#) and the IETF Trust's Legal Provisions Relating to IETF Documents (<http://trustee.ietf.org/license-info>) in effect on the date of publication of this document. Please review these documents carefully, as they describe your rights and restrictions with respect to this document. Code Components extracted from this document must include Simplified BSD License text as described in Section 4.e of the Trust Legal Provisions and are provided without warranty as described in the Simplified BSD License.

Table of Contents

1.	Introduction	3
2.	Terminology	3
3.	RTP topologies for CLUE	3
4.	Mapping CLUE Media Captures to RTP streams	5
4.1.	Review of current directions in MMUSIC, AVText and AVTcore	6
4.2.	Requirements of a solution	7
4.3.	Static Mapping	9
4.4.	Dynamic mapping	9
4.4.1.	RTP header extension	10
4.4.2.	Restricted approach	10
4.5.	Recommendations	11
5.	Application to CLUE Media Requirements	11
6.	Examples	13
6.1.	Static mapping	13
6.2.	Dynamic Mapping	16
7.	Acknowledgements	16
8.	IANA Considerations	16
9.	Security Considerations	17
10.	References	17
10.1.	Normative References	17
10.2.	Informative References	17
	Authors' Addresses	19

[1.](#) Introduction

Telepresence systems can send and receive multiple media streams. The CLUE framework [[I-D.ietf-clue-framework](#)] defines media captures as a source of Media, such as from one or more Capture Devices. A Media Capture (MC) may be the source of one or more Media streams. A Media Capture may also be constructed from other Media streams. A middle box can express Media Captures that it constructs from Media streams it receives.

SIP offer answer [[RFC3264](#)] uses SDP [[RFC4566](#)] to describe the RTP[RFC3550] media streams. Each RTP stream has a unique SSRC within its RTP session. The content of the RTP stream is created by an encoder in the endpoint. This may be an original content from a camera or a content created by an intermediary device like an MCU.

This document makes recommendations, for this telepresence architecture, about how RTP and RTCP streams should be encoded and transmitted, and how their relation to CLUE Media Captures should be communicated. The proposed solution supports multiple RTP topologies.

[2.](#) Terminology

The key words "MUST", "MUST NOT", "REQUIRED", "SHALL", "SHALL NOT", "SHOULD", "SHOULD NOT", "RECOMMENDED", "MAY", and "OPTIONAL" in this document are to be interpreted as described in [RFC2119](#)[[RFC2119](#)] and indicate requirement levels for compliant RTP implementations.

[3.](#) RTP topologies for CLUE

The typical RTP topologies used by Telepresence systems specify different behaviors for RTP and RTCP distribution. A number of RTP topologies are described in

[[I-D.westerlund-avtcore-rtp-topologies-update](#)]. For telepresence, the relevant topologies include point-to-point, as well as media mixers, media- switching mixers, and source-projection mixers.

In the point-to-point topology, one peer communicates directly with a single peer over unicast. There can be one or more RTP sessions, and each RTP session can carry multiple RTP streams identified by their SSRC. All SSRCs will be recognized by the peers based on the information in the RTCP SDES report that will include the CNAME and SSRC of the sent RTP streams. There are different point to point use cases as specified in CLUE use case

[[I-D.ietf-clue-telepresence-use-cases](#)]. There may be a difference

between the symmetric and asymmetric use cases. While in the symmetric use case the typical mapping will be from a Media capture device to a render device (e.g. camera to monitor) in the asymmetric case the render device may receive different capture information (RTP stream from a different camera) if it has fewer rendering devices (monitors). In some cases, a CLUE session which, at a high-level, is point-to-point may nonetheless have RTP which is best described by one of the mixer topologies below. For example, a CLUE endpoint can produce composited or switched captures for use by a receiving system with fewer displays than the sender has cameras.

In the Media Mixer topology, the peers communicate only with the mixer. The mixer provides mixed or composited media streams, using its own SSRC for the sent streams. There are two cases here. In the first case the mixer may have separate RTP sessions with each peer (similar to the point to point topology) terminating the RTCP sessions on the mixer; this is known as Topo-RTCP-Terminating MCU in [[RFC5117](#)]. In the second case, the mixer can use a conference-wide RTP session similar to [RFC 5117](#)'s Topo-mixer or Topo-Video-switching. The major difference is that for the second case, the mixer uses conference-wide RTP sessions, and distributes the RTCP reports to all the RTP session participants, enabling them to learn all the CNAMES and SSRCs of the participants and know the contributing source or sources (CSRCs) of the original streams from the RTP header. In the first case, the Mixer terminates the RTCP and the participants cannot know all the available sources based on the RTCP information. The conference roster information including conference participants, endpoints, media and media-id (SSRC) can be available using the conference event package [[RFC4575](#)] element.

In the Media-Switching Mixer topology, the peer to mixer communication is unicast with mixer RTCP feedback. It is conceptually similar to a compositing mixer as described in the previous paragraph, except that rather than compositing or mixing multiple sources, the mixer provides one or more conceptual sources selecting one source at a time from the original sources. The Mixer creates a conference-wide RTP session by sharing remote SSRC values as CSRCs to all conference participants.

In the Source-Projection Mixer topology, the peer to mixer communication is unicast with RTCP mixer feedback. Every potential sender in the conference has a source which is "projected" by the mixer into every other session in the conference; thus, every original source is maintained with an independent RTP identity to every receiver, maintaining separate decoding state and its original RTCP SDES information. However, RTCP is terminated at the mixer, which might also perform reliability, repair, rate adaptation, or transcoding on the stream. Senders' SSRCs may be renumbered by the

mixer. The sender may turn the projected sources on and off at any time, depending on which sources it thinks are most relevant for the receiver; this is the primary reason why this topology must act as an RTP mixer rather than as a translator, as otherwise these disabled sources would appear to have enormous packet loss. Source switching is accomplished through this process of enabling and disabling projected sources, with the higher-level semantic assignment of reason for the RTP streams assigned externally.

The above topologies demonstrate two major RTP/RTCP behaviors:

1. The mixer may either use the source SSRC when forwarding RTP packets, or use its own created SSRC. Still the mixer will distribute all RTCP information to all participants creating conference-wide RTP session/s. This allows the participants to learn the available RTP sources in each RTP session. The original source information will be the SSRC or in the CSRC depending on the topology. The point to point case behaves like this.
2. The mixer terminates the RTCP from the source, creating separate RTP sessions with the peers. In this case the participants will

not receive the source SSRC in the CSRC. Since this is usually a mixer topology, the source information is available from the SIP conference event package [[RFC4575](#)]. Subscribing to the conference event package allows each participant to know the SSRCs of all sources in the conference.

[4.](#) Mapping CLUE Media Captures to RTP streams

The different topologies described in [Section 3](#) support different SSRC distribution models and RTP stream multiplexing points.

Most video conferencing systems today can separate multiple RTP sources by placing them into separate RTP sessions using, the SDP description. For example, main and slides video sources are separated into separate RTP sessions based on the content attribute [[RFC4796](#)]. This solution works straightforwardly if the multiplexing point is at the UDP transport level, where each RTP stream uses a separate RTP session. This will also be true for mapping the RTP streams to Media Captures if each media capture uses a separate RTP session, and the consumer can identify it based on the receiving RTP port. In this case, SDP only needs to label the RTP session with an identifier that identifies the media capture in the CLUE description. In this case, it does not change the mapping even if the RTP session is switched using same or different SSRC. (The multiplexing is not at the SSRC level).

Even though Session multiplexing is supported by CLUE, for scaling reasons, CLUE recommends using SSRC multiplexing in a single or multiple sessions. So we need to look at how to map RTP streams to Media Captures when SSRC multiplexing is used.

When looking at SSRC multiplexing we can see that in various topologies, the SSRC behavior may be different:

1. The SSRCs are static (assigned by the MCU/Mixer), and there is an SSRC for each media capture encoding defined in the CLUE protocol. Source information may be conveyed using CSRC, or, in the case of topo-RTCP-Terminating MCU, is not conveyed.
2. The SSRCs are dynamic, representing the original source and are relayed by the Mixer/MCU to the participants.

In the above two cases the MCU/Mixer creates its own advertisement, with a virtual room capture scene.

Another case we can envision is that the MCU / Mixer relays all the capture scenes from all advertisements to all consumers. This means that the advertisement will include multiple capture scenes, each representing a separate TP room with its own coordinate system. A general tools for distributing roster information is by using an event package, for example by extending the conference event package.

4.1. Review of current directions in MMUSIC, AVText and AVTcore

Editor's note: This section provides an overview of the RFCs and drafts that can be used a base for a mapping solution. This section is for information only, and if the WG thinks that it is the right direction, the authors will bring the required work to the relevant WGs.

The solution needs to also support the simulcast case where more than one RTP session may be advertised for a Media Capture. Support of such simulcast is out of scope for CLUE.

When looking at the available tools based on current work in MMUSIC, AVTcore and AVText for supporting SSRC multiplexing the following documents are considered to be relevant.

SDP Source attribute [[RFC5576](#)] mechanisms to describe specific attributes of RTP sources based on their SSRC.

Negotiation of generic image attributes in SDP [[RFC6236](#)] provides the means to negotiate the image size. The image attribute can be used to offer different image parameters like size but in order to offer

multiple RTP streams with different resolutions it does it using separate RTP session for each image option.

[I-D.westerlund-avtcore-max-ssrc] proposes a signaling solution for how to use multiple SSRCs within one RTP session.

[I-D.westerlund-avtext-rtcp-sdes-srcname] provides an extension that may be send in SDP, as an RTCP SDES information or as an RTP header

extension that uniquely identifies a single media source. It defines an hierarchical order of the SRCNAME parameter that can be used to for example to describe multiple resolution from the same source (see section 5.1 of [[I-D.westerlund-avtcore-rtp-simulcast](#)]). Still all the examples are using RTP session multiplexing.

Other documents reviewed by the authors but are currently not used in a proposed solution include:

[[I-D.lennox-mmusic-sdp-source-selection](#)] specifies how participants in a multimedia session can request a specific source from a remote party.

[[I-D.westerlund-avtext-codec-operation-point](#)] (expired) extends the codec control messages by specifying messages that let participants communicate a set of codec configuration parameters.

Using the above documents it is possible to negotiate the max number of received and sent RTP streams inside an RTP session (m-line or bundled m-line). This allows also offering allowed combinations of codec configurations using different payload type numbers

Examples: max-recv-ssrc:{96:2 & 97:3} where 96 and 96 are different payload type numbers. Or max-send-ssrc{*:4}.

In the next sections, the document will propose mechanisms to map the RTP streams to media captures addressing.

[4.2.](#) Requirements of a solution

This section lists, more briefly, the requirements a media architecture for Clue telepresence needs to achieve, summarizing the discussion of previous sections. In this section, [RFC 2119](#) [[RFC2119](#)] language refers to requirements on a solution, not an implementation; thus, requirements keywords are not written in capital letters.

Media-1: It must not be necessary for a Clue session to use more than a single transport flow for transport of a given media type (video or audio).

Media-2: It must, however, be possible for a Clue session to use

multiple transport flows for a given media type where it is considered valuable (for example, for distributed media, or differential quality-of-service).

Media-3: It must be possible for a Clue endpoint or MCU to simultaneously send sources corresponding to static, to composited, and to switched captures, in the same transport flow. (Any given device might not necessarily be able send all of these source types; but for those that can, it must be possible for them to be sent simultaneously.)

Media-4: It must be possible for an original source to move among switched captures (i.e. at one time be sent for one switched capture, and at a later time be sent for another one).

Media-5: It must be possible for a source to be placed into a switched capture even if the source is a "late joiner", i.e. was added to the conference after the receiver requested the switched source.

Media-6: Whenever a given source is assigned to a switched capture, it must be immediately possible for a receiver to determine the switched capture it corresponds to, and thus that any previous source is no longer being mapped to that switched capture.

Media-7: It must be possible for a receiver to identify the actual source that is currently being mapped to a switched capture, and correlate it with out-of-band (non-Clue) information such as rosters.

Media-8: It must be possible for a source to move among switched captures without requiring a refresh of decoder state (e.g., for video, a fresh I-frame), when this is unnecessary. However, it must also be possible for a receiver to indicate when a refresh of decoder state is in fact necessary.

Media-9: If a given source is being sent on the same transport flow for more than one reason (e.g. if it corresponds to more than one switched capture at once, or to a static capture), it should be possible for a sender to send only one copy of the source.

Media-10: On the network, media flows should, as much as possible, look and behave like currently-defined usages of existing protocols; established semantics of existing protocols must not be redefined.

Media-11: The solution should seek to minimize the processing burden for boxes that distribute media to decoding hardware.

Media-12: If multiple sources from a single synchronization context are being sent simultaneously, it must be possible for a receiver to associate and synchronize them properly, even for sources that are mapped to switched captures.

[4.3.](#) Static Mapping

Static mapping is widely used in current MCU implementations. It is also common for a point to point symmetric use case when both endpoints have the same capabilities. For capture encodings with static SSRCS, it is most straightforward to indicate this mapping outside the media stream, in the CLUE or SDP signaling. An SDP source attribute [[RFC5576](#)] can be used to associate CLUE capture IDs with SSRCS in SDP. Each SSRC will have a captureID value that will be specified also in the CLUE media capture as an attribute. The provider advertisement could, if it wished, use the same SSRC for media capture encodings that are mutually exclusive. (This would be natural, for example, if two advertised captures are implemented as different configurations of the same physical camera, zoomed in or out.). [Section 6](#) provide an example of an SDP offer and CLUE advertisement.

[4.4.](#) Dynamic mapping

Dynamic mapping by tagging each media packet with the capture ID. This means that a receiver immediately knows how to interpret received media, even when an unknown SSRC is seen. As long as the media carries a known capture ID, it can be assumed that this media stream will replace the stream currently being received with that capture ID.

This gives significant advantages to switching latency, as a switch between sources can be achieved without any form of negotiation with the receiver. [[RFC5285](#)] recommends that header extensions must be used with caution.

However, the disadvantage in using a capture ID in the stream that it introduces additional processing costs for every media packet, as capture IDs are scoped only within one hop (i.e., within a cascaded conference a capture ID that is used from the source to the first MCU is not meaningful between two MCUs, or between an MCU and a receiver), and so they may need to be added or modified at every stage.

As capture IDs are chosen by the media sender, by offering a particular capture to multiple recipients with the same ID, this

requires the sender to only produce one version of the stream (assuming outgoing payload type numbers match). This reduces the

cost in the multicast case, although does not necessarily help in the switching case.

An additional issue with putting capture IDs in the RTP packets comes from cases where a non-CLUE aware endpoint is being switched by an MCU to a CLUE endpoint. In this case, we may require up to an additional 12 bytes in the RTP header, which may push a media packet over the MTU. However, as the MTU on either side of the switch may not match, it is possible that this could happen even without adding extra data into the RTP packet. The 12 additional bytes per packet could also be a significant bandwidth increase in the case of very low bandwidth audio codecs.

[4.4.1.](#) RTP header extension

The capture ID could be carried within the RTP header extension field, using [[RFC5285](#)]. This is negotiated within the SDP i.e.

```
a=extmap:1 urn:ietf:params:rtp-hdrex:clue-capture-id
```

Packets tagged by the sender with the capture ID will then contain a header extension as shown below

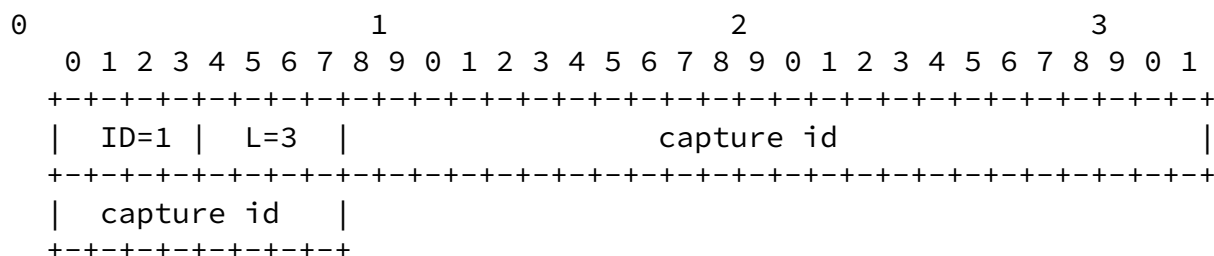


Figure : RTP header extension for encoding of the capture ID

To add or modify the capture ID can be an expensive operation, particularly if SRTP is used to authenticate the packet. Modification to the contents of the RTP header requires a reauthentication of the complete packet, and this could prove to be a limiting factor in the throughput of a multipoint device. However,

it may be that reauthentication is required in any case due to the nature of SDP. SDP permits the receiver to choose payload types, meaning that a similar option to modify the payload type in the packet header will cause the need to reauthenticate.

[4.4.2.](#) Restricted approach

The flaws of the Capture ID method (high latency switching of SSRC multiplexing, high computational cost on switching nodes) can be

Even & Lennox

Expires August 5, 2013

[Page 10]

Internet-Draft

RTP mapping to CLUE

February 2013

mitigated by sending Capture ID only on some packets of a stream. In this, the capture ID can be included in packets belonging to the first frame of media (typically an IDR/GDR) following a change in the dynamic mapping. Following this, the SSRC is used to map sources to capture IDs.

Note: in the dynamic case there is a need to verify how it will work if not all RTP streams of the same media type are multiplexed in a single RTP session.

[4.5.](#) Recommendations

The recommendation is that endpoints MUST support both the static declaration of capture encoding SSRCs, and the RTP header extension method of sharing capture IDs, with the extension in every media packet. For low bandwidth situations, this may be considered excessive overhead; in which case endpoints MAY support the approach where capture IDs are sent selectively. The SDP offer MAY specify the SSRC mapping to media capture. In the case of static mapping topologies there will be no need to use the header extensions in the media, since the SSRC for the RTP stream will remain the same during the call unless a collision is detected and handled according to [RFC5576](#) [[RFC5576](#)]. If the used topology uses dynamic mapping then the RTP header extension will be used to indicate the RTP stream switch for the media capture. In this case the SDP description may be used to negotiate the initial SSRC but this will be left for the implementation. Note that if the SSRC is defined explicitly in the SDP the SSRC collision should be handled as in [RFC5576](#).

[5.](#) Application to CLUE Media Requirements

The requirement section [Section 4.2](#) offers a number of requirements that are believed to be necessary for a CLUE RTP mapping. The solutions described in this document are believed to meet these requirements, though some of them are only possible for some of the topologies. (Since the requirements are generally of the form "it must be possible for a sender to do something", this is adequate; a sender which wishes to perform that action needs to choose a topology which allows the behavior it wants.

In this section we address only those requirements where the topologies or the association mechanisms treat the requirements differently.

Media-4: It must be possible for an original source to move among switched captures (i.e. at one time be sent for one switched capture, and at a later time be sent for another one).

This applies naturally for static sources with a Switched Mixer. For dynamic sources with a Source-Projecting Mixer, this just requires the capture tag in the header extension element to be updated appropriately.

Media-6: Whenever a given source is transmitted for a switched capture, it must be immediately possible for a receiver to determine the switched capture it corresponds to, and thus that any previous source is no longer being mapped to that switched capture.

For a Switched Mixer, this applies naturally. For a Source-Projecting mixer, this is done based on the header extension.

Media-7: It must be possible for a receiver to identify the original source that is currently being mapped to a switched capture, and correlate it with out-of-band (non-Clue) information such as rosters.

For a Switched Mixer, this is done based on the CSRC, if the mixer is providing CSRCs; if for a Source-Projecting Mixer, this is done based on the SSRC.

Media-8: It must be possible for a source to move among switched captures without requiring a refresh of decoder state (e.g., for video, a fresh I-frame), when this is unnecessary. However, it must also be possible for a receiver to indicate when a refresh of decoder

state is in fact necessary.

This can be done by a Source-Projecting Mixer, but not by a Switching Mixer. The last requirement can be accomplished through an FIR message [[RFC5104](#)], though potentially a faster mechanism (not requiring a round-trip time from the receiver) would be preferable.

Media-9: If a given source is being sent on the same transport flow to satisfy more than one capture (e.g. if it corresponds to more than one switched capture at once, or to a static capture as well as a switched capture), it should be possible for a sender to send only one copy of the source.

For a Source-Projecting Mixer, this can be accomplished by sending multiple dynamic capture IDs for the same source; this can also be done for an environment with a hybrid of mixer topologies and static and dynamic captures, described below in [Section 6](#). It is not possible for static captures from a Switched Mixer.

Media-12: If multiple sources from a single synchronization context are being sent simultaneously, it must be possible for a receiver to associate and synchronize them properly, even for sources that are mapped to switched captures.

For a Mixed or Switched Mixer topology, receivers will see only a single synchronization context (CNAME), corresponding to the mixer. For a Source-Projecting Mixer, separate projecting sources keep separate synchronization contexts based on their original CNAMEs, thus allowing independent synchronization of sources from independent rooms without needing global synchronization. In hybrid cases, however (e.g. if audio is mixed), all sources which need to be synchronized with the mixed audio must get the same CNAME (and thus a mixer-provided timebase) as the mixed audio.

[6](#). Examples

It is possible for a CLUE device to send multiple instances of the topologies in [Section 3](#) simultaneously. For example, an MCU which uses a traditional audio bridge with switched video would be a Mixer topology for audio, but a Switched Mixer or a Source-Projecting Mixer for video. In the latter case, the audio could be sent as a static

source, whereas the video could be dynamic.

More notably, it is possible for an endpoint to send the same sources both for static and dynamic captures. Consider the example in Section 11.1 of [[I-D.ietf-clue-framework](#)], where an endpoint can provide both three cameras (VC0, VC1, and VC2) for left, center, and right views, as well as a switched view (VC3) of the loudest panel.

It is possible for a consumer to request both the (VC0 - VC2) set and VC3. It is worth noting that the content of VC3 is, at all times, exactly the content of one of VC0, VC1, or VC2. Thus, if the sender uses the Source-Selection Mixer topology for VC3, the consumer that receives these three sources would not need to send any additional media traffic over just sending (VC0 - VC2).

In this case, the advertiser could describe VC0, VC1, and VC2 in its initial advertisement or SDP with static SSRCs, whereas VC3 would need to be dynamic. The role of VC3 would move among VC0, VC1, or VC2, indicated by the RTP header extension on those streams' RTP packets.

[6.1](#). Static mapping

Using the video capture example from the framework for a three camera system with four monitors where one is for the presentation stream [[I-D.ietf-clue-framework](#)] document:

- o VC0- (the camera-left camera stream, purpose=main, switched:no

- o VC1- (the center camera stream, purpose=main, switched:no
- o VC2- (the camera-right camera stream), purpose=main, switched:no
- o VC3- (the loudest panel stream), purpose=main, switched:yes
- o VC4- (the loudest panel stream with PiPs), purpose=main, composed=true; switched:yes
- o VC5- (the zoomed out view of all people in the room), purpose=main, composed=no; switched:no

- o VC6- (presentation stream), purpose=presentation, switched:no

Where the physical simultaneity information is:

{VC0, VC1, VC2, VC3, VC4, VC6}

{VC0, VC2, VC5, VC6}

In this case the provider can send up to six simultaneous streams and receive four one for each monitor. This is the maximum case but it can be further limited by the capture scene entries which may propose sending only three camera streams and one presentation, still since the consumer can select any media captures that can be sent simultaneously the offer will specify 6 streams where VC5 and VC1 are using the same resource and are mutually exclusive.

In the Advertisement there may be two capture scenes:

The first capture scene may have four entries:

{VC0, VC1, VC2}

{VC3}

{VC4}

{VC5}

The second capture scene will have the following single entry.

{VC6}

We assume that an intermediary will need to look at CLUE if want to have better decision on handling specific RTP streams for example based on them being part of the same capture scene so the SDP will not group streams by capture scene.

The SIP offer may be

m=video 49200 RTP/AVP 99

a=extmap:1 urn:ietf:params:rtp-hdrex:clue-capture-id / for support of dynamic mapping

a=rtpmap:99 H264/900000

a=max-send-ssrc:{*:6}

a=max-recv-ssrc:{*:4}

a=ssrc:11111 CaptureID:1

a=ssrc:22222 CaptureID:2

a=ssrc:33333 CaptureID:3

a=ssrc:44444 CaptureID:4

a=ssrc:55555 CaptureID:5

a=ssrc:66666 CaptureID:6

In the above example the provider can send up to five main streams and one presentation stream.

We define a new Media Capture ID attribute CaptureID which will have the mapping of the related RTP stream

Note that VC1 and VC5 have the same SSRC since they are using the same resource.

- o VC0- (the camera-left camera stream, purpose=main, switched:no, CaptureID =1
- o VC1- (the center camera stream, purpose=main, switched:no, CaptureID =2
- o VC2- (the camera-right camera stream), purpose=main, switched:no, CaptureID =3
- o VC3- (the loudest panel stream), purpose=main, switched:yes, CaptureID =4
- o VC4- (the loudest panel stream with PiPs), purpose=main, composed=true; switched:yes, CaptureID =5

- o VC5- (the zoomed out view of all people in the room),
purpose=main, composed=no; switched=no, CaptureID =2
- o VC6- (presentation stream), purpose=presentation, switched=no,
CaptureID =6

Note: We can allocate an SSRC for each MC which will not require the indirection of using a CaptureId. This will require if a switch to dynamic is done to provide information about which SSRC is being replaced by the new one.

[6.2.](#) Dynamic Mapping

For topologies that use dynamic mapping there is no need to provide the SSRCs in the offer (they may not be available if the offers from the sources will not include them when connecting to the mixer or remote endpoint) In this case the captureID (srcname) will be specified first in the advertisement.

The SIP offer may be

```
m=video 49200 RTP/AVP 99

a=extmap:1 urn:ietf:params:rtp-hdrex:clue-capture-id

a=rtpmap:99 H264/90000

a=max-send-ssrc:{*:4}

a=max-recv-ssrc:{*:4}
```

This will work for ssrc multiplex. It is not clear how it will work when RTP streams of the same media are not multiplexed in a single RTP session. How to know which encoding will be in which of the different RTP sessions.

[7.](#) Acknowledgements

The authors would like to thanks Allyn Romanow and Paul Witty for contributing text to this work.

[8.](#) IANA Considerations

TBD

Internet-Draft

RTP mapping to CLUE

February 2013

[9.](#) Security Considerations

TBD.

[10.](#) References

[10.1.](#) Normative References

[I-D.ietf-clue-framework]

Romanow, A., Duckworth, M., Pepperell, A., and B. Baldino, "Framework for Telepresence Multi-Streams", [draft-ietf-clue-framework-06](#) (work in progress), July 2012.

[I-D.lennox-clue-rtp-usage]

Lennox, J., Witty, P., and A. Romanow, "Real-Time Transport Protocol (RTP) Usage for Telepresence Sessions", [draft-lennox-clue-rtp-usage-04](#) (work in progress), June 2012.

[I-D.westerlund-avtcore-max-ssrc]

Westerlund, M., Burman, B., and F. Jansson, "Multiple Synchronization sources (SSRC) in RTP Session Signaling", [draft-westerlund-avtcore-max-ssrc-02](#) (work in progress), July 2012.

[I-D.westerlund-avtext-rtcp-sdes-srcname]

Westerlund, M., Burman, B., and P. Sandgren, "RTCP SDES Item SRCNAME to Label Individual Sources", [draft-westerlund-avtext-rtcp-sdes-srcname-01](#) (work in progress), July 2012.

[RFC2119] Bradner, S., "Key words for use in RFCs to Indicate Requirement Levels", [BCP 14](#), [RFC 2119](#), March 1997.

[10.2.](#) Informative References

[I-D.ietf-clue-telepresence-use-cases]

Romanow, A., Botzko, S., Duckworth, M., Even, R., and I.

Communications, "Use Cases for Telepresence Multi-streams", [draft-ietf-clue-telepresence-use-cases-04](#) (work in progress), August 2012.

[I-D.lennox-mmusic-sdp-source-selection]

Lennox, J. and H. Schulzrinne, "Mechanisms for Media Source Selection in the Session Description Protocol (SDP)", [draft-lennox-mmusic-sdp-source-selection-04](#) (work

Even & Lennox

Expires August 5, 2013

[Page 17]

Internet-Draft

RTP mapping to CLUE

February 2013

in progress), March 2012.

[I-D.westerlund-avtcore-rtp-simulcast]

Westerlund, M., Burman, B., Lindqvist, M., and F. Jansson, "Using Simulcast in RTP sessions", [draft-westerlund-avtcore-rtp-simulcast-01](#) (work in progress), July 2012.

[I-D.westerlund-avtcore-rtp-topologies-update]

Westerlund, M. and S. Wenger, "RTP Topologies", [draft-westerlund-avtcore-rtp-topologies-update-01](#) (work in progress), October 2012.

[I-D.westerlund-avtext-codec-operation-point]

Westerlund, M., Burman, B., and L. Hamm, "Codec Operation Point RTCP Extension", [draft-westerlund-avtext-codec-operation-point-00](#) (work in progress), March 2012.

[RFC3264] Rosenberg, J. and H. Schulzrinne, "An Offer/Answer Model with Session Description Protocol (SDP)", [RFC 3264](#), June 2002.

[RFC3550] Schulzrinne, H., Casner, S., Frederick, R., and V. Jacobson, "RTP: A Transport Protocol for Real-Time Applications", STD 64, [RFC 3550](#), July 2003.

[RFC4566] Handley, M., Jacobson, V., and C. Perkins, "SDP: Session Description Protocol", [RFC 4566](#), July 2006.

[RFC4575] Rosenberg, J., Schulzrinne, H., and O. Levin, "A Session Initiation Protocol (SIP) Event Package for Conference State", [RFC 4575](#), August 2006.

- [RFC4796] Hautakorpi, J. and G. Camarillo, "The Session Description Protocol (SDP) Content Attribute", [RFC 4796](#), February 2007.
- [RFC5104] Wenger, S., Chandra, U., Westerlund, M., and B. Burman, "Codec Control Messages in the RTP Audio-Visual Profile with Feedback (AVPF)", [RFC 5104](#), February 2008.
- [RFC5117] Westerlund, M. and S. Wenger, "RTP Topologies", [RFC 5117](#), January 2008.
- [RFC5285] Singer, D. and H. Desineni, "A General Mechanism for RTP Header Extensions", [RFC 5285](#), July 2008.

Even & Lennox

Expires August 5, 2013

[Page 18]

Internet-Draft

RTP mapping to CLUE

February 2013

- [RFC5576] Lennox, J., Ott, J., and T. Schierl, "Source-Specific Media Attributes in the Session Description Protocol (SDP)", [RFC 5576](#), June 2009.
- [RFC6236] Johansson, I. and K. Jung, "Negotiation of Generic Image Attributes in the Session Description Protocol (SDP)", [RFC 6236](#), May 2011.

Authors' Addresses

Roni Even
Huawei Technologies
Tel Aviv,
Israel

Email: roni.even@mail01.huawei.com

Jonathan Lennox
Vidyo, Inc.
433 Hackensack Avenue
Seventh Floor
Hackensack, NJ 07601
US

Email: jonathan@vidyo.com

Even & Lennox

Expires August 5, 2013

[Page 19]