

Network Working Group
Internet-Draft
Intended status: Standards Track
Expires: January 4, 2015

C. Filsfils, Ed.
S. Previdi, Ed.
A. Bashandy
Cisco Systems, Inc.
B. Decraene
S. Litkowski
Orange
M. Horneffer
Deutsche Telekom
I. Milojevic
Telekom Srbija
R. Shakir
British Telecom
S. Ytti
TDC Oy
W. Henderickx
Alcatel-Lucent
J. Tantsura
Ericsson
E. Crabbe
Google, Inc.
July 3, 2014

Segment Routing Architecture
draft-filsfils-spring-segment-routing-04

Abstract

Segment Routing (SR) leverages the source routing paradigm. A node steers a packet through an ordered list of instructions, called segments. A segment can represent any instruction, topological or service-based. A segment can have a local semantic to an SR node or global within an SR domain. SR allows to enforce a flow through any topological path and service chain while maintaining per-flow state only at the ingress node to the SR domain.

Segment Routing can be directly applied to the MPLS architecture with no change on the forwarding plane. A segment is encoded as an MPLS label. An ordered list of segments is encoded as a stack of labels. The segment to process is on the top of the stack. Upon completion of a segment, the related label is popped from the stack.

Segment Routing can be applied to the IPv6 architecture, with a new type of routing extension header. A segment is encoded as an IPv6 address. An ordered list of segments is encoded as an ordered list of IPv6 addresses in the routing extension header. The segment to

Internet-Draft

Segment Routing

July 2014

process is indicated by a pointer in the routing extension header. Upon completion of a segment, the pointer is incremented.

Requirements Language

The key words "MUST", "MUST NOT", "REQUIRED", "SHALL", "SHALL NOT", "SHOULD", "SHOULD NOT", "RECOMMENDED", "MAY", and "OPTIONAL" in this document are to be interpreted as described in [RFC 2119](#) [[RFC2119](#)].

Status of This Memo

This Internet-Draft is submitted in full conformance with the provisions of [BCP 78](#) and [BCP 79](#).

Internet-Drafts are working documents of the Internet Engineering Task Force (IETF). Note that other groups may also distribute working documents as Internet-Drafts. The list of current Internet-Drafts is at <http://datatracker.ietf.org/drafts/current/>.

Internet-Drafts are draft documents valid for a maximum of six months and may be updated, replaced, or obsoleted by other documents at any time. It is inappropriate to use Internet-Drafts as reference material or to cite them other than as "work in progress."

This Internet-Draft will expire on January 4, 2015.

Copyright Notice

Copyright (c) 2014 IETFTrust and the persons identified as the document authors. All rights reserved.

This document is subject to [BCP 78](#) and the IETF Trust's Legal Provisions Relating to IETF Documents (<http://trustee.ietf.org/license-info>) in effect on the date of publication of this document. Please review these documents carefully, as they describe your rights and restrictions with respect to this document. Code Components extracted from this document must include Simplified BSD License text as described in Section 4.e of the Trust Legal Provisions and are provided without warranty as described in the Simplified BSD License.

Table of Contents

1.	Introduction	3
1.1.	Companion Documents	4
2.	Terminology	5
3.	Link-State IGP Segments	7
3.1.	IGP Segment, IGP SID	7
3.2.	IGP-Prefix Segment, Prefix-SID	7
3.3.	IGP-Node Segment, Node-SID	8
3.4.	IGP-Anycast Segment, Anycast SID	9
3.5.	IGP-Adjacency Segment, Adj-SID	9
3.5.1.	Parallel Adjacencies	10
3.5.2.	LAN Adjacency Segments	11
3.6.	Binding Segment	11
3.6.1.	Mapping Server	11
3.6.2.	Tunnel Headend	11
3.6.3.	Mirroring Context	12
3.7.	Inter-Area Considerations	12
4.	BGP Peering Segments	13
5.	Multicast	14
6.	IANA Considerations	14
7.	Manageability Considerations	14
8.	Security Considerations	14
9.	Acknowledgements	14
10.	References	14
10.1.	Normative References	14
10.2.	Informative References	14
	Authors' Addresses	16

[1.](#) Introduction

With Segment Routing (SR), a node steers a packet through an ordered list of instructions, called segments. A segment can represent any instruction, topological or service-based. A segment can have a local semantic to an SR node or global within an SR domain. SR allows to enforce a flow through any path and service chain while

maintaining per-flow state only at the ingress node of the SR domain.

Segment Routing can be directly applied to the MPLS architecture ([RFC 3031](#)) with no change on the forwarding plane. A segment is encoded as an MPLS label. An ordered list of segments is encoded as a stack of labels. The active segment is on the top of the stack. A completed segment is popped off the stack. The addition of a segment is performed with a push.

In the Segment Routing MPLS instantiation, a segment could be of several types:

- o an IGP segment,
- o a BGP Peering segments,
- o an LDP LSP segment,
- o an RSVP-TE LSP segment,
- o a BGP LSP segment.

The first two (IGP and BGP Peering segments) types of segments defined in this document. The use of the last three types of segments is illustrated in [\[I-D.filsfils-spring-segment-routing-mpls\]](#).

Segment Routing can be applied to the IPv6 architecture ([RFC2460](#)), with a new type of routing extension header. A segment is encoded as an IPv6 address. An ordered list of segments is encoded as an ordered list of IPv6 addresses in the routing extension header. The active segment is indicated by a pointer in the routing extension header. Upon completion of a segment, the pointer is incremented. A segment can be inserted in the list and the pointer is updated accordingly.

Numerous use-cases illustrate the benefits of source routing either for FRR, OAM or Traffic Engineering reasons.

This document defines a set of instructions (called segments) that are required to fulfill the described use-cases. These segments can

either be used in isolation (one single segment defines the source route of the packet) or in combination (these segments are part of an ordered list of segments that define the source route of the packet).

1.1. Companion Documents

This document defines the SR architecture, its routing model, the IGP-based segments, the BGP-based segments and the service segments.

Use cases are described in

[[I-D.filsfils-spring-segment-routing-use-cases](#)],

[[I-D.ietf-spring-ipv6-use-cases](#)],

[[I-D.ietf-spring-resiliency-use-cases](#)], [[I-D.geib-spring-oam-usecase](#)]

and [[I-D.kumar-spring-sr-oam-requirement](#)].

Segment Routing for MPLS dataplane is documented in

[[I-D.filsfils-spring-segment-routing-mpls](#)].

Filsfils, et al.

Expires January 4, 2015

[Page 4]

Internet-Draft

Segment Routing

July 2014

Segment Routing for IPv6 dataplane is documented in

[[I-D.previdi-6man-segment-routing-header](#)].

IGP protocol extensions for Segment Routing are described in

[[I-D.ietf-isis-segment-routing-extensions](#)] and

[[I-D.ietf-ospf-segment-routing-extensions](#)]

The FRR solution for SR is documented in

[[I-D.francois-segment-routing-ti-lfa](#)].

The PCEP protocol extensions for Segment Routing are defined in

[[I-D.sivabalan-pce-segment-routing](#)].

The interaction between SR/MPLS with other MPLS Signaling planes is documented in [[I-D.filsfils-spring-segment-routing-ldp-interop](#)].

2. Terminology

Segment: a segment identifies an instruction

SID: a Segment Identifier

Segment List: ordered list of SID's encoding the topological and service source route of the packet. It is a stack of labels in the MPLS architecture. It is an ordered list of IPv6 addresses in the IPv6 architecture.

Active segment: the segment that MUST be used by the receiving router to process the packet. It is identified by a pointer in the IPv6 architecture. It is the top label in the MPLS architecture.

PUSH: the insertion of a segment at the head of the Segment list.

NEXT: the active segment is completed, the next segment becomes active.

CONTINUE: the active segment is not completed and hence remains active. The CONTINUE instruction is implemented as the SWAP instruction in the MPLS dataplane.

SR Global Block (SRGB): local property of an SR node. In the MPLS architecture, SRGB is the set of local labels reserved for global segments. In the IPv6 architecture, it is the set of locally relevant IPv6 addresses.

Global Segment: the related instruction is supported by all the SR-capable nodes in the domain. In the MPLS architecture, a Global Segment has a globally-unique index. The related local label at a

given node N is found by adding the globally-unique index to the SRGB of node N. In the IPv6 architecture, a global segment is a globally-unique IPv6 address.

Local Segment: the related instruction is supported only by the node originating it. In the MPLS architecture, this is a local label outside the SRGB. In the IPv6 architecture, this is a link-local address.

IGP Segment: the generic name for a segment attached to a piece of information advertised by a link-state IGP, e.g. an IGP prefix or an IGP adjacency.

IGP-prefix Segment, Prefix-SID: an IGP-Prefix Segment is an IGP segment attached to an IGP prefix. An IGP-Prefix Segment is always

global within the SR/IGP domain and identifies an instruction to forward the packet over the ECMP-aware shortest-path computed by the IGP to the related prefix. The Prefix-SID is the SID of the IGP-Prefix Segment.

IGP-Anycast: an IGP-Anycast Segment is an IGP-prefix segment which does not identify a specific router, but a set of routers. The terms "Anycast Segment" or "Anycast-SID" are often used as an abbreviation.

IGP-Adjacency: an IGP-Adjacency Segment is an IGP segment attached to an unidirectional adjacency or a set of unidirectional adjacencies. By default, an IGP-Adjacency Segment is local (unless explicitly advertised otherwise) to the node that advertises it.

IGP-Node: an IGP-Node Segment is an IGP-Prefix Segment which identifies a specific router (e.g. a loopback). The terms "Node Segment" or "Node-SID" are often used as an abbreviation.

SR Tunnel: a list of segments to be pushed on the packets directed on the tunnel. The list of segments can be specified explicitly or implicitly via a set of abstract constraints (latency, affinity, SRLG, ...). In the latter case, a constrained-based path computation is used to determine the list of segments associated with the tunnel. The computation can be local or delegated to a PCE server. An SR tunnel can be configured by the operator, provisioned via netconf or provisioned via PCEP. An SR tunnel can be used for traffic-engineering, OAM or FRR reasons.

Segment List Depth: the number of segments of an SR tunnel. The entity instantiating an SR Tunnel at a node N should be able to discover the depth insertion capability of the node N. The PCEP discovery capability is described in [\[I-D.sivabalan-pce-segment-routing\]](#).

[3.](#) Link-State IGP Segments

Within a link-state IGP domain, an SR-capable IGP node advertises segments for its attached prefixes and adjacencies. These segments are called IGP segments or IGP SIDs. They play a key role in Segment Routing and use-cases ([\[I-D.filsfils-spring-segment-routing-use-cases\]](#)) as they enable the expression of any topological path throughout the IGP domain. Such a

topological path is either expressed as a single IGP segment or a list of multiple IGP segments.

[3.1.](#) IGP Segment, IGP SID

The terms "IGP Segment" and "IGP SID" are the generic names for a segment attached to a piece of information advertised by a link-state IGP, e.g. an IGP prefix or an IGP adjacency.

[3.2.](#) IGP-Prefix Segment, Prefix-SID

An IGP-Prefix Segment is an IGP segment attached to an IGP prefix. An IGP-Prefix Segment is always global within the SR/IGP domain and identifies the ECMP-aware shortest-path computed by the IGP to the related prefix. The Prefix-SID is the SID of the IGP-Prefix Segment.

A packet injected anywhere within the SR/IGP domain with an active Prefix-SID will be forwarded along the shortest-path to that prefix.

The IGP signaling extension for IGP-Prefix segment includes the P-Flag. A Node N advertising a Prefix-SID SID-R for its attached prefix R resets the P-Flag to allow its connected neighbors to perform the NEXT operation while processing SID-R. This behavior is equivalent to Penultimate Hop Popping in MPLS. When set, the neighbors of N must perform the CONTINUE operation while processing SID-R.

While SR allows to attach a local segment to an IGP prefix (using the L-Flag), we specifically assume that when the terms "IGP-Prefix Segment" and "Prefix-SID" are used, the segment is global (the SID is allocated from the SRGB). This is consistent with [\[I-D.filsfils-spring-segment-routing-use-cases\]](#) as all the described use-cases require global segments attached to IGP prefixes.

A single Prefix-SID is allocated to an IGP Prefix in a topology.

In the context of multiple topologies, multiple Prefix-SID's MAY be allocated to the same IGP Prefix (e.g.: using the "algorithm" field in the IGP advertisement as described in [\[I-D.ietf-isis-segment-routing-extensions\]](#) and

SID MUST be associated with only one topology. In other words: a prefix, within a topology, MUST have only a single Prefix-SID.

A Prefix-SID is allocated from the SRGB according to a process similar to IP address allocation. Typically the Prefix-SID is allocated by policy by the operator (or NMS) and the SID very rarely changes.

The allocation process MUST NOT allocate the same Prefix-SID to different IP prefixes.

If a node learns a Prefix-SID having a value that falls outside the locally configured SRGB range, then the node MUST NOT use the Prefix-SID and SHOULD issue an error log warning for misconfiguration.

The required IGP protocol extensions are defined in [\[I-D.ietf-isis-segment-routing-extensions\]](#) and [\[I-D.ietf-ospf-segment-routing-extensions\]](#).

A node N attaching a Prefix-SID SID-R to its attached prefix R MUST maintain the following FIB entry:

Incoming Active Segment: SID-R
Ingress Operation: NEXT
Egress interface: NULL

A remote node M MUST maintain the following FIB entry for any learned Prefix-SID SID-R attached to IP prefix R:

Incoming Active Segment: SID-R
Ingress Operation:
 If the next-hop of R is the originator of R
 and instructed to remove the active segment: NEXT
 Else: CONTINUE
Egress interface: the interface towards the next-hop along
 the shortest-path to prefix R.

[3.3.](#) IGP-Node Segment, Node-SID

An IGP-Node Segment is a an IGP-Prefix Segment which identifies a specific router (e.g. a loopback). The N flag is set. The terms "Node Segment" or "Node-SID" are often used as an abbreviation.

A "Node Segment" or "Node-SID" is fundamental to SR. From anywhere in the network, it enforces the ECMP-aware shortest- path forwarding of the packet towards the related node as explained in [\[I-D.filsfils-spring-segment-routing-use-cases\]](#).

An IGP-Node-SID MUST NOT be associated with a prefix that is owned or advertised by more than one router within the same routing domain.

[3.4.](#) IGP-Anycast Segment, Anycast SID

An IGP-Anycast Segment is an IGP-prefix segment which does not identify a specific router, but a set of routers. The terms "Anycast Segment" or "Anycast-SID" are often used as an abbreviation.

An "Anycast Segment" or "Anycast SID" enforces the ECMP-aware shortest-path forwarding towards the closest node of the anycast set. This is useful to express macro-engineering policies or protection mechanisms as described in [\[I-D.filsfils-spring-segment-routing-use-cases\]](#).

The Anycast SID MUST be advertised with the N-flag unset.

[3.5.](#) IGP-Adjacency Segment, Adj-SID

An IGP-Adjacency Segment is an IGP segment attached to a unidirectional adjacency or a set of unidirectional adjacencies. By default, an IGP-Adjacency Segment is local to the node which advertises it. However, an Adjacency Segment can be global if advertised by the IGP as such. The SID of the IGP-Adjacency Segment is called the Adj-SID.

The adjacency is formed by the local node (i.e., the node advertising the adjacency in the IGP) and the remote node (i.e., the other end of the adjacency). The local node MUST be an IGP node. The remote node MAY be an adjacent IGP neighbor) or a non-adjacent neighbor (e.g.: a Forwarding Adjacency, [\[RFC4206\]](#)).

A packet injected anywhere within the SR domain with a segment list {SN, SNL}, where SN is the Node-SID of node N and SNL is an Adj-SID attached by node N to its adjacency over link L, will be forwarded along the shortest-path to N and then be switched by N, without any IP shortest-path consideration, towards link L. If the Adj-SID identifies a set of adjacencies, then the node N load-balances the traffic among the various members of the set.

Similarly, when using a global Adj-SID, a packet injected anywhere within the SR domain with a segment list {SNL}, where SNL is a global Adj-SID attached by node N to its adjacency over link L, will be forwarded along the shortest-path to N and then be switched by N, without any IP shortest-path consideration, towards link L. If the Adj-SID identifies a set of adjacencies, then the node N load-

balances the traffic among the various members of the set. The use of global Adj-SID allows to reduce the size of the segment list when

expressing a path at the cost of additional state (i.e.: the global Adj-SID will be inserted by all routers within the area in their forwarding table).

An "IGP Adjacency Segment" or "Adj-SID" enforces the switching of the packet from a node towards a defined interface or set of interfaces. This is key to theoretically prove that any path can be expressed as a list of segments as explained in [\[I-D.filsfils-spring-segment-routing-use-cases\]](#).

The encodings of the Adj-SID include the B-flag. When set, the Adj-SID benefits from a local protection.

The encodings of the Adj-SID include the L-flag. When set, the Adj-SID has local significance. By default the L-flag is set.

A node SHOULD allocate one Adj-SIDs for each of its adjacencies.

A node MAY allocate multiple Adj-SIDs to the same adjacency. An example is where the adjacency is established over a bundle interface. Each bundle member MAY have its own Adj-SID.

A node MAY allocate the same Adj-SID to multiple adjacencies.

Adjacency suppression MUST NOT be performed by the IGP.

A node MUST install a FIB entry for any Adj-SID of value V attached to data-link L:

Incoming Active Segment: V
Operation: NEXT
Egress Interface: L

The Adj-SID implies, from the router advertising it, the forwarding of the packet through the adjacency identified by the Adj-SID, regardless its IGP/SPF cost. In other words, the use of Adjacency Segments overrides the routing decision made by SPF algorithm.

[3.5.1.](#) Parallel Adjacencies

Adj-SIDs can be used in order to represent a set of parallel interfaces between two adjacent routers.

A node MUST install a FIB entry for any locally originated Adjacency Segment (Adj-SID) of value W attached to a set of link B with:

Incoming Active Segment: W

Ingress Operation: NEXT

Egress interface: loadbalance between any data-link within set B

[3.5.2.](#) LAN Adjacency Segments

In LAN subnetworks, link-state protocols define the concept of Designated Router (DR, in OSPF) or Designated Intermediate System (DIS, in IS-IS) that conduct flooding in broadcast subnetworks and that describe the LAN topology in a special routing update (OSPF Type2 LSA or IS-IS Pseudonode LSP).

The difficulty with LANs is that each router only advertises its connectivity to the DR/DIS and not to each other individual nodes in the LAN. Therefore, additional protocol mechanisms (IS-IS and OSPF) are necessary in order for each router in the LAN to advertise an Adj-SID associated to each neighbor in the LAN. These extensions are defined in [[I-D.ietf-isis-segment-routing-extensions](#)] and [[I-D.ietf-ospf-segment-routing-extensions](#)].

[3.6.](#) Binding Segment

[3.6.1.](#) Mapping Server

A Remote-Binding SID S advertised by the mapping server M for remote prefix R attached to non-SR-capable node N signals the same information as if N had advertised S as a Prefix-SID. Further details are described in the SR/LDP interworking procedures ([[I-D.filsfils-spring-segment-routing-ldp-interop](#)]).

The segment allocation and SRDB Maintenance rules are the same as those defined for Prefix-SID.

3.6.2. Tunnel Headend

The segment allocation and SRDB Maintenance rules are the same as those defined for Adj-SID. A tunnel attached to a head-end H acts as an adjacency attached to H.

Note: an alternative would consist in representing tunnels as forwarding-adjacencies ([\[RFC4206\]](#)). The Remote-Binding SID is preferred as it allows to advertise the presence of a tunnel without influencing the LSDB and the SPF computation.

3.6.3. Mirroring Context

TBD.

3.7. Inter-Area Considerations

In the following example diagram we assume an IGP deployed using areas and where SR has been deployed.

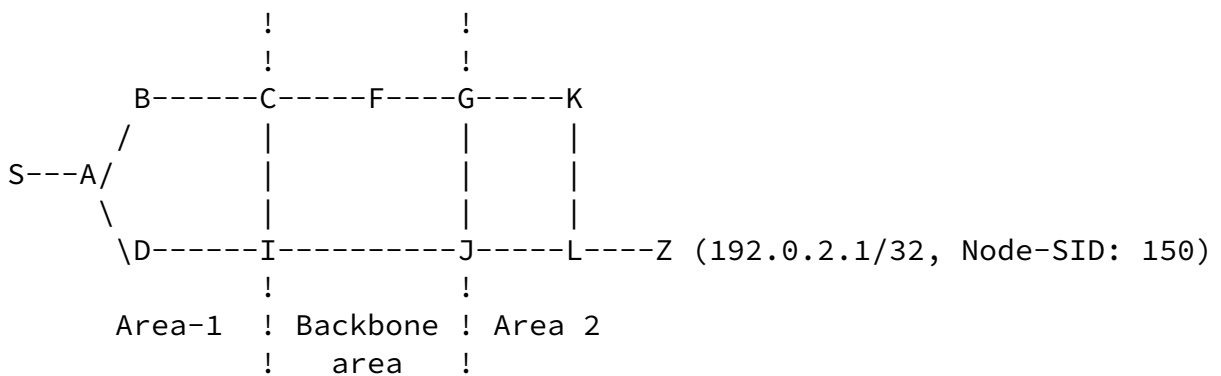


Figure 1: Inter-Area Topology Example

In area 2, node Z allocates Node-SID 150 to his local prefix 192.0.2.1/32. ABRs G and J will propagate the prefix into the backbone area by creating a new instance of the prefix according to

normal inter-area/level IGP propagation rules.

Nodes C and I will apply the same behavior when leaking prefixes from the backbone area down to area 1. Therefore, node S will see prefix 192.0.2.1/32 with Prefix-SID 150 and advertised by nodes C and I.

It therefore results that a Prefix-SID remains attached to its related IGP Prefix through the inter-area process.

When node S sends traffic to 192.0.2.1/32, it pushes Node-SID(150) as active segment and forward it to A.

When packet arrives at ABR I (or C), the ABR forwards the packet according to the active segment (Node-SID(150)). Forwarding continues across area borders, using the same Node-SID(150), until the packet reaches its destination.

When an ABR propagates a prefix from one area to another it MUST set the R-Flag.

4. BGP Peering Segments

In the context of BGP Egress Peer Engineering (EPE), as described in [[draft-filsfils-spring-segment-routing-central-epe](#)], an EPE enabled Egress PE node MAY advertise segments corresponding to its attached peers. These segments are called BGP peering segments or BGP Peering SIDs. They enable the expression of source-routed inter-domain paths.

An ingress border router of an AS may compose a list of segments to steer a flow along a selected path within the AS, towards a selected egress border router C of the AS and through a specific peer. At minimum, a BGP Peering Engineering policy applied at an ingress PE involves two segments: the Node SID of the chosen egress PE and then the BGP Peering Segment for the chosen egress PE peer or peering interface.

Hereafter, we will define three types of BGP peering segments/SID's:

PeerNodeSID, PeerAdjSID and PeerSetSID.

- o PeerNode SID. A BGP PeerNode segment/SID is a local segment. At the BGP node advertising it, its semantics is:
 - * SR header operation: NEXT.
 - * Next-Hop: the connected peering node to which the segment is related.
- o PeerAdj SID: A BGP PeerAdj segment/SID is a local segment. At the BGP node advertising it, its semantics is:
 - * SR header operation: NEXT.
 - * Next-Hop: the peer connected through the interface to which the segment is related.
- o PeerSet SID. A BGP PeerSet segment/SID is a local segment. At the BGP node advertising it, its semantics is:
 - * SR header operation: NEXT.
 - * Next-Hop: loadbalance across any connected interface to any peer in the related group.

A peer set could be all the connected peers from the same AS or a subset of these. A group could also span across AS. The group definition is a policy set by the operator.

The BGP extensions necessary in order to signal these BGP peering segments will be defined in a separate document.

[5.](#) Multicast

Segment Routing is defined for unicast. The application of the source-route concept to Multicast is not in the scope of this document.

[6.](#) IANA Considerations

TBD

[7.](#) Manageability Considerations

TBD

[8.](#) Security Considerations

TBD

[9.](#) Acknowledgements

We would like to thank Dave Ward, Dan Frost, Stewart Bryant, Pierre Francois, Thomas Telkamp, Les Ginsberg, Ruediger Geib and Hannes Gredler for their contribution to the content of this document.

[10.](#) References

[10.1.](#) Normative References

- [RFC2119] Bradner, S., "Key words for use in RFCs to Indicate Requirement Levels", [BCP 14](#), [RFC 2119](#), March 1997.
- [RFC4206] Kompella, K. and Y. Rekhter, "Label Switched Paths (LSP) Hierarchy with Generalized Multi-Protocol Label Switching (GMPLS) Traffic Engineering (TE)", [RFC 4206](#), October 2005.

[10.2.](#) Informative References

- [I-D.filsfils-spring-segment-routing-ldp-interop]
Filsfils, C., Previdi, S., Bashandy, A., Decraene, B., Litkowski, S., Horneffer, M., Milojevic, I., Shakir, R., Ytti, S., Henderickx, W., Tantsura, J., and E. Crabbe, "Segment Routing interoperability with LDP", [draft-filsfils-spring-segment-routing-ldp-interop-01](#) (work in progress), April 2014.

- [I-D.filsfils-spring-segment-routing-mpls]
Filsfils, C., Previdi, S., Bashandy, A., Decraene, B., Litkowski, S., Horneffer, M., Milojevic, I., Shakir, R., Ytti, S., Henderickx, W., Tantsura, J., and E. Crabbe,

"Segment Routing with MPLS data plane", [draft-filsfils-spring-segment-routing-mpls-02](#) (work in progress), June 2014.

[I-D.filsfils-spring-segment-routing-use-cases]

Filsfils, C., Francois, P., Previdi, S., Decraene, B., Litkowski, S., Horneffer, M., Milojevic, I., Shakir, R., Ytti, S., Henderickx, W., Tantsura, J., Kini, S., and E. Crabbe, "Segment Routing Use Cases", [draft-filsfils-spring-segment-routing-use-cases-00](#) (work in progress), March 2014.

[I-D.francois-segment-routing-ti-lfa]

Francois, P., Filsfils, C., Bashandy, A., and B. Decraene, "Topology Independent Fast Reroute using Segment Routing", [draft-francois-segment-routing-ti-lfa-00](#) (work in progress), November 2013.

[I-D.geib-spring-oam-usecase]

Geib, R. and C. Filsfils, "Use case for a scalable and topology aware MPLS data plane monitoring system", [draft-geib-spring-oam-usecase-01](#) (work in progress), February 2014.

[I-D.ietf-isis-segment-routing-extensions]

Previdi, S., Filsfils, C., Bashandy, A., Gredler, H., Litkowski, S., Decraene, B., and J. Tantsura, "IS-IS Extensions for Segment Routing", [draft-ietf-isis-segment-routing-extensions-02](#) (work in progress), June 2014.

[I-D.ietf-ospf-segment-routing-extensions]

Psenak, P., Previdi, S., Filsfils, C., Gredler, H., Shakir, R., Henderickx, W., and J. Tantsura, "OSPF Extensions for Segment Routing", [draft-ietf-ospf-segment-routing-extensions-00](#) (work in progress), June 2014.

[I-D.ietf-spring-ipv6-use-cases]

Brzozowski, J., Leddy, J., Leung, I., Previdi, S., Townsley, W., Martin, C., Filsfils, C., and R. Maglione, "IPv6 SPRING Use Cases", [draft-ietf-spring-ipv6-use-cases-00](#) (work in progress), May 2014.

[I-D.ietf-spring-resiliency-use-cases]

Francois, P., Filsfils, C., Decraene, B., and R. Shakir, "Use-cases for Resiliency in SPRING", [draft-ietf-spring-resiliency-use-cases-00](#) (work in progress), May 2014.

[I-D.kumar-spring-sr-oam-requirement]

Kumar, N., Pignataro, C., Akiya, N., Geib, R., and G. Mirsky, "OAM Requirements for Segment Routing Network", [draft-kumar-spring-sr-oam-requirement-00](#) (work in progress), February 2014.

[I-D.previdi-6man-segment-routing-header]

Previdi, S., Filsfils, C., Field, B., and I. Leung, "IPv6 Segment Routing Header (SRH)", [draft-previdi-6man-segment-routing-header-01](#) (work in progress), June 2014.

[I-D.sivabalan-pce-segment-routing]

Sivabalan, S., Medved, J., Filsfils, C., Crabbe, E., and R. Raszuk, "PCEP Extensions for Segment Routing", [draft-sivabalan-pce-segment-routing-02](#) (work in progress), October 2013.

[[draft-filsfils-spring-segment-routing-central-epe](#)]

Filsfils, C. and S. Previdi, "Segment Routing Centralized Egress Peer Engineering", May 2013.

Authors' Addresses

Clarence Filsfils (editor)
Cisco Systems, Inc.
Brussels
BE

Email: cfilsfil@cisco.com

Stefano Previdi (editor)
Cisco Systems, Inc.
Via Del Serafico, 200
Rome 00142
Italy

Email: sprevidi@cisco.com

Internet-Draft

Segment Routing

July 2014

Ahmed Bashandy
Cisco Systems, Inc.
170, West Tasman Drive
San Jose, CA 95134
US

Email: bashandy@cisco.com

Bruno Decraene
Orange
FR

Email: bruno.decraene@orange.com

Stephane Litkowski
Orange
FR

Email: stephane.litkowski@orange.com

Martin Horneffer
Deutsche Telekom
Hammer Str. 216-226
Muenster 48153
DE

Email: Martin.Horneffer@telekom.de

Igor Milojevic
Telekom Srbija
Takovska 2
Belgrade
RS

Email: igormilojevic@telekom.rs

Rob Shakir
British Telecom
London
UK

Email: rob.shakir@bt.com

Filsfils, et al.

Expires January 4, 2015

[Page 17]

Internet-Draft

Segment Routing

July 2014

Saku Ytti
TDC Oy
Mechelininkatu 1a
TDC 00094
FI

Email: saku@ytti.fi

Wim Henderickx
Alcatel-Lucent
Copernicuslaan 50
Antwerp 2018
BE

Email: wim.henderickx@alcatel-lucent.com

Jeff Tantsura
Ericsson
300 Holger Way
San Jose, CA 95134
US

Email: Jeff.Tantsura@ericsson.com

Edward Crabbe
Google, Inc.
1600 Amphitheatre Parkway
Mountain View, CA 94043
US

Email: edc@google.com

Filsfils, et al.

Expires January 4, 2015

[Page 18]