

SPRING
Internet-Draft
Intended status: Informational
Expires: May 14, 2022

C. Filsfils, Ed.
F. Clad, Ed.
K. Talaulikar
Cisco Systems
November 10, 2021

SR-MPLS Data Plane with IPv6 Control Plane
draft-filsfils-spring-sr-mpls-ipv6-control-plane-05

Abstract

This document reminds the existence of the "Segment Routing (SR) MPLS data-plane with IPv6 control-plane" solution that is mature from a standardization, productization and commercial deployment viewpoint.

Status of This Memo

This Internet-Draft is submitted in full conformance with the provisions of [BCP 78](#) and [BCP 79](#).

Internet-Drafts are working documents of the Internet Engineering Task Force (IETF). Note that other groups may also distribute working documents as Internet-Drafts. The list of current Internet-Drafts is at <https://datatracker.ietf.org/drafts/current/>.

Internet-Drafts are draft documents valid for a maximum of six months and may be updated, replaced, or obsoleted by other documents at any time. It is inappropriate to use Internet-Drafts as reference material or to cite them other than as "work in progress."

This Internet-Draft will expire on May 14, 2022.

Copyright Notice

Copyright (c) 2021 IETF Trust and the persons identified as the document authors. All rights reserved.

This document is subject to [BCP 78](#) and the IETF Trust's Legal Provisions Relating to IETF Documents (<https://trustee.ietf.org/license-info>) in effect on the date of publication of this document. Please review these documents carefully, as they describe your rights and restrictions with respect to this document. Code Components extracted from this document must include Simplified BSD License text as described in Section 4.e of the Trust Legal Provisions and are provided without warranty as described in the Simplified BSD License.

Internet-Draft

SR-MPLS DP with IPv6 CP

November 2021

Table of Contents

1.	Introduction	2
2.	Context	2
3.	Reference diagram	3
4.	Packet processing	4
5.	Security Considerations	5
6.	IANA Considerations	5
7.	Acknowledgements	5
8.	Informative References	5
	Authors' Addresses	7

[1.](#) Introduction

This document reminds the existence of the "Segment Routing (SR) MPLS dataplane with IPv6 control-plane". This solution is mature from a standardization, productization and commercial deployment viewpoint. Other proposed source routing solutions with MPLS-like label lookup or mapping ids should list all their data-plane and control-plane differences with respect to this mature solution and should justify these differences with genuine benefits not available in the mature solution described in this document and others referenced here that are published by the SPRING and MPLS WGs.

[2.](#) Context

This is an existing solution.

- o Mature IETF standardization
- o Mature productization
- o Commercially deployed

The IETF standardization references are:

- o Architecture:
 - * Segment Routing [[RFC8402](#)]
- o Data-plane:
 - * Homogenous MPLS deployment: [[RFC8660](#)]

- * Hopping over IP-only parts of network: [[RFC8663](#)]
- o Control-plane:

- * IS-IS: [[RFC8667](#)]
- * OSPFv3: [[RFC8666](#)]
- * BGP: [[RFC4364](#)]
- * BGP-LS: [[RFC9085](#)]
- * SR Policy headend: [[I-D.ietf-spring-segment-routing-policy](#)]
- o Service programming: [[I-D.ietf-spring-sr-service-programming](#)]
- o OAM: [[RFC8287](#)]

3. Reference diagram

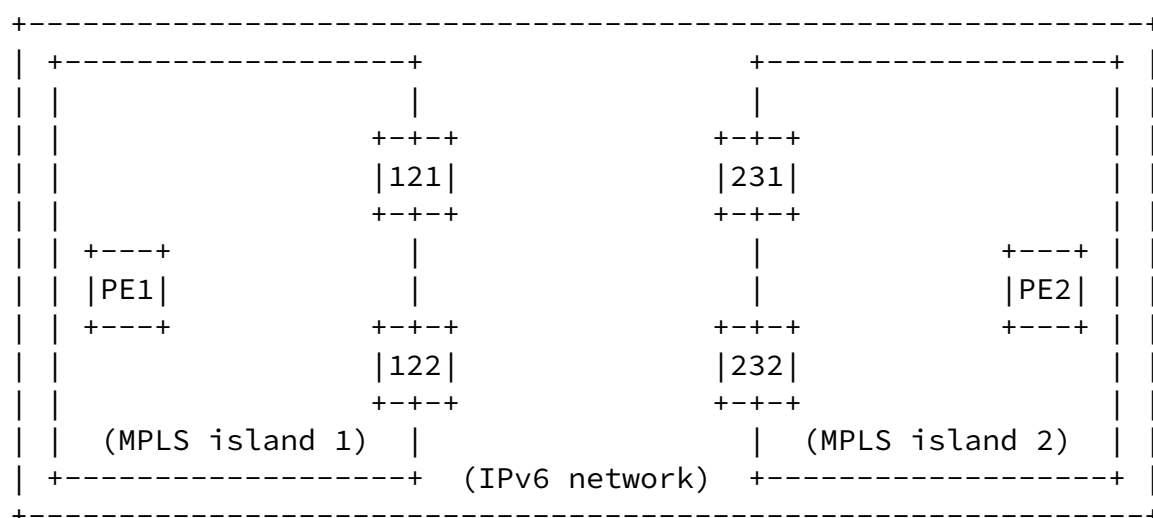


Figure 1: IPv6 network with SR-MPLS islands

- o Single IGP domain, IPv6 only
 - * PE1 is configured with a loopback IP address 2001:db8::1

| IP4(A,B) |
+-----+

Figure 2: Packet processing in IPv6 network with SR-MPLS islands

- o PE1 receives IPv4 traffic from A and headed to B
- o PE1 PUSHes the VPN label 12345 and the prefix-SID 16002 of PE2
- o Traffic is steered in MPLS island 1 according to the top label 16002
- o Traffic reaches node 121, whose next-hop towards 16002 is not MPLS-enabled
- * Node 121 has determined(*) that traffic to 16002 should be sent over an IPv6 encapsulation to node 231

- * Node 121 encapsulates the traffic with IPv6 header (Next Header 137 [[RFC4023](#)]) to 2001:db8::231
- o Node 231 removes the IPv6 encapsulation, exposes the MPLS label 16002 and forwards the traffic accordingly
- o Traffic is steered in MPLS island 2 according to the top label 16002
- o (PHP: Penultimate node POPs label 16002 and sends the traffic to PE2)
- o PE2 looks up the exposed VPN label 12345 and forwards the traffic accordingly.

(*) Node 121 determines that node 231 is the closest MPLS- and IPv6-pop-capable node on the shortest path to PE2 using a technique outside the scope of the document.

[5.](#) Security Considerations

None

6. IANA Considerations

None

7. Acknowledgements

TBD

8. Informative References

[I-D.ietf-spring-segment-routing-policy]

Filsfils, C., Talaulikar, K., Voyer, D., Bogdanov, A., and P. Mattes, "Segment Routing Policy Architecture", [draft-ietf-spring-segment-routing-policy-14](#) (work in progress), October 2021.

[I-D.ietf-spring-sr-service-programming]

Clad, F., Xu, X., Filsfils, C., Bernier, D., Li, C., Decraene, B., Ma, S., Yadlapalli, C., Henderickx, W., and S. Salsano, "Service Programming with Segment Routing", [draft-ietf-spring-sr-service-programming-05](#) (work in progress), September 2021.

Filsfils, et al.

Expires May 14, 2022

[Page 5]

Internet-Draft

SR-MPLS DP with IPv6 CP

November 2021

[RFC4023] Worster, T., Rekhter, Y., and E. Rosen, Ed., "Encapsulating MPLS in IP or Generic Routing Encapsulation (GRE)", [RFC 4023](#), DOI 10.17487/RFC4023, March 2005, <<https://www.rfc-editor.org/info/rfc4023>>.

[RFC4364] Rosen, E. and Y. Rekhter, "BGP/MPLS IP Virtual Private Networks (VPNs)", [RFC 4364](#), DOI 10.17487/RFC4364, February 2006, <<https://www.rfc-editor.org/info/rfc4364>>.

[RFC8287] Kumar, N., Ed., Pignataro, C., Ed., Swallow, G., Akiya, N., Kini, S., and M. Chen, "Label Switched Path (LSP) Ping/Traceroute for Segment Routing (SR) IGP-Prefix and IGP-Adjacency Segment Identifiers (SIDs) with MPLS Data Planes", [RFC 8287](#), DOI 10.17487/RFC8287, December 2017, <<https://www.rfc-editor.org/info/rfc8287>>.

- [RFC8402] Filsfils, C., Ed., Previdi, S., Ed., Ginsberg, L., Decraene, B., Litkowski, S., and R. Shakir, "Segment Routing Architecture", [RFC 8402](#), DOI 10.17487/RFC8402, July 2018, <<https://www.rfc-editor.org/info/rfc8402>>.
- [RFC8660] Bashandy, A., Ed., Filsfils, C., Ed., Previdi, S., Decraene, B., Litkowski, S., and R. Shakir, "Segment Routing with the MPLS Data Plane", [RFC 8660](#), DOI 10.17487/RFC8660, December 2019, <<https://www.rfc-editor.org/info/rfc8660>>.
- [RFC8663] Xu, X., Bryant, S., Farrel, A., Hassan, S., Henderickx, W., and Z. Li, "MPLS Segment Routing over IP", [RFC 8663](#), DOI 10.17487/RFC8663, December 2019, <<https://www.rfc-editor.org/info/rfc8663>>.
- [RFC8666] Psenak, P., Ed. and S. Previdi, Ed., "OSPFv3 Extensions for Segment Routing", [RFC 8666](#), DOI 10.17487/RFC8666, December 2019, <<https://www.rfc-editor.org/info/rfc8666>>.
- [RFC8667] Previdi, S., Ed., Ginsberg, L., Ed., Filsfils, C., Bashandy, A., Gredler, H., and B. Decraene, "IS-IS Extensions for Segment Routing", [RFC 8667](#), DOI 10.17487/RFC8667, December 2019, <<https://www.rfc-editor.org/info/rfc8667>>.
- [RFC9085] Previdi, S., Talaulikar, K., Ed., Filsfils, C., Gredler, H., and M. Chen, "Border Gateway Protocol – Link State (BGP-LS) Extensions for Segment Routing", [RFC 9085](#), DOI 10.17487/RFC9085, August 2021, <<https://www.rfc-editor.org/info/rfc9085>>.

Authors' Addresses

Clarence Filsfils (editor)
Cisco Systems

Email: cfilsfil@cisco.com

Francois Clad (editor)
Cisco Systems

Email: fclad@cisco.com

Ketan Talaulikar
Cisco Systems

Email: ketant.ietf@gmail.com