

IPPM Working Group  
Internet-Draft  
Intended status: Standards Track  
Expires: October 31, 2021

R. Gandhi, Ed.  
C. Filsfils  
Cisco Systems, Inc.  
D. Voyer  
Bell Canada  
M. Chen  
Huawei  
B. Janssens  
Colt  
R. Foote  
Nokia  
April 29, 2021

Simple TWAMP (STAMP) Extensions for Segment Routing Networks  
draft-gandhi-ippm-stamp-srpm-03

## Abstract

Segment Routing (SR) leverages the source routing paradigm. SR is applicable to both Multiprotocol Label Switching (SR-MPLS) and IPv6 (SRv6) data planes. This document specifies [RFC 8762](#) (Simple Two-Way Active Measurement Protocol (STAMP)) extensions for SR networks, for both SR-MPLS and SRv6 data planes by augmenting the optional extensions defined in [RFC 8972](#).

## Status of This Memo

This Internet-Draft is submitted in full conformance with the provisions of [BCP 78](#) and [BCP 79](#).

Internet-Drafts are working documents of the Internet Engineering Task Force (IETF). Note that other groups may also distribute working documents as Internet-Drafts. The list of current Internet-Drafts is at <https://datatracker.ietf.org/drafts/current/>.

Internet-Drafts are draft documents valid for a maximum of six months and may be updated, replaced, or obsoleted by other documents at any time. It is inappropriate to use Internet-Drafts as reference material or to cite them other than as "work in progress."

This Internet-Draft will expire on October 31, 2021.

## Copyright Notice

Copyright (c) 2021 IETF Trust and the persons identified as the document authors. All rights reserved.

## Internet-Draft Simple TWAMP Extensions for Segment Routing April 2021

This document is subject to [BCP 78](https://trustee.ietf.org/license-info) and the IETF Trust's Legal Provisions Relating to IETF Documents (<https://trustee.ietf.org/license-info>) in effect on the date of publication of this document. Please review these documents carefully, as they describe your rights and restrictions with respect to this document. Code Components extracted from this document must include Simplified BSD License text as described in Section 4.e of the Trust Legal Provisions and are provided without warranty as described in the Simplified BSD License.

## Table of Contents

<a href="#">1.</a>	Introduction . . . . .	<a href="#">2</a>
<a href="#">2.</a>	Conventions Used in This Document . . . . .	<a href="#">3</a>
<a href="#">2.1.</a>	Requirements Language . . . . .	<a href="#">3</a>
<a href="#">2.2.</a>	Abbreviations . . . . .	<a href="#">3</a>
<a href="#">2.3.</a>	Reference Topology . . . . .	<a href="#">3</a>
<a href="#">3.</a>	Destination Node Address TLV . . . . .	<a href="#">4</a>
<a href="#">4.</a>	Return Path TLV . . . . .	<a href="#">5</a>
<a href="#">4.1.</a>	Return Path Sub-TLVs . . . . .	<a href="#">6</a>
<a href="#">4.1.1.</a>	Return Path Control Code Sub-TLV . . . . .	<a href="#">6</a>
<a href="#">4.1.2.</a>	Return Address Sub-TLV . . . . .	<a href="#">7</a>
<a href="#">4.1.3.</a>	Return Segment List Sub-TLVs . . . . .	<a href="#">8</a>
<a href="#">5.</a>	Security Considerations . . . . .	<a href="#">8</a>
<a href="#">6.</a>	IANA Considerations . . . . .	<a href="#">9</a>
<a href="#">7.</a>	References . . . . .	<a href="#">10</a>
<a href="#">7.1.</a>	Normative References . . . . .	<a href="#">10</a>
<a href="#">7.2.</a>	Informative References . . . . .	<a href="#">10</a>
	Acknowledgments . . . . .	<a href="#">11</a>
	Authors' Addresses . . . . .	<a href="#">11</a>

[1.](#) Introduction

Segment Routing (SR) leverages the source routing paradigm and greatly simplifies network operations for Software Defined Networks (SDNs). SR is applicable to both Multiprotocol Label Switching (SR-MPLS) and IPv6 (SRv6) data planes [[RFC8402](#)]. SR Policies as defined in [[I-D.ietf-spring-segment-routing-policy](#)] are used to steer traffic through a specific, user-defined paths using a stack of Segments. Built-in SR Performance Measurement (PM) is one of the essential requirements to provide Service Level Agreements (SLAs).

The Simple Two-way Active Measurement Protocol (STAMP) provides

capabilities for the measurement of various performance metrics in IP networks [[RFC8762](#)] without the use of a control channel to pre-signal session parameters. [[RFC8972](#)] defines optional extensions for STAMP.

Internet-Draft Simple TWAMP Extensions for Segment Routing April 2021

The STAMP test packets are transmitted along an IP path between a Session-Sender and a Session-Reflector to measure performance delay and packet loss along that IP path. It may be desired in SR networks that the same path (same set of links and nodes) between the Session-Sender and Session-Reflector is used for the STAMP test packets in both directions. This is achieved by using the STAMP [[RFC8762](#)] extensions for SR-MPLS and SRv6 networks specified in this document by augmenting the optional extensions defined in [[RFC8972](#)].

## [2.](#) Conventions Used in This Document

### [2.1.](#) Requirements Language

The key words "MUST", "MUST NOT", "REQUIRED", "SHALL", "SHALL NOT", "SHOULD", "SHOULD NOT", "RECOMMENDED", "MAY", and "OPTIONAL" in this document are to be interpreted as described in [[RFC2119](#)] [[RFC8174](#)] when, and only when, they appear in all capitals, as shown here.

### [2.2.](#) Abbreviations

MPLS: Multiprotocol Label Switching.

PM: Performance Measurement.

SID: Segment ID.

SL: Segment List.

SR: Segment Routing.

SR-MPLS: Segment Routing with MPLS data plane.

SRv6: Segment Routing with IPv6 data plane.


SSID: STAMP Session Identifier.

STAMP: Simple Two-way Active Measurement Protocol.

### 2.3. Reference Topology

In the reference topology shown below, the STAMP Session-Sender R1 initiates a STAMP test packet and the STAMP Session-Reflector R3 transmits a reply test packet. The reply test packet may be transmitted to the STAMP Session-Sender R1 on the same path (same set of links and nodes) or a different path in the reverse direction from the path taken towards the Session-Reflector.

The nodes R1 and R3 may be connected via a link or an SR path [[RFC8402](#)]. The link may be a physical interface, virtual link, or Link Aggregation Group (LAG) [[IEEE802.1AX](#)], or LAG member link. The SR path may be an SR Policy [[I-D.ietf-spring-segment-routing-policy](#)] on node R1 (called head-end) with destination to node R3 (called tail-end).

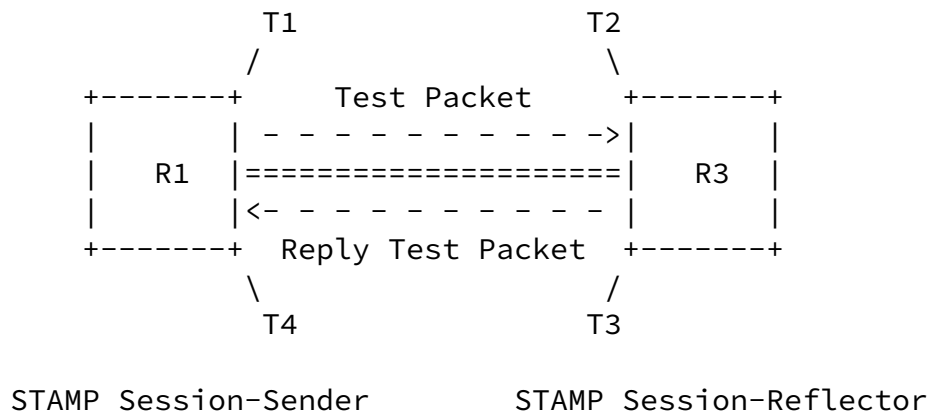

Reference Topology

### 3. Destination Node Address TLV

The STAMP Session-Sender may need to transmit test packets to the STAMP Session-Reflector with a different destination address not matching an address on the Session-Reflector e.g. when the STAMP test packet is encapsulated by a tunneling protocol or an MPLS Segment List with IPv4 address from 127/8 range. In an error condition, the STAMP test packet may not reach the intended STAMP Session-Reflector,



For links, the STAMP Session-Reflector may need to transmit the reply test packet on the same incoming link in the reverse direction. The STAMP Session-Sender can request this in the test packet to the STAMP Session-Reflector using a Return Path TLV.

[RFC8972] defines STAMP test packets that can include one or more optional TLVs. In this document, the TLV Type (value TBA2) is defined for the Return Path TLV that carries the return path for the STAMP Session-Sender test packet. The format of the Return Path TLV is shown in Figure 2:

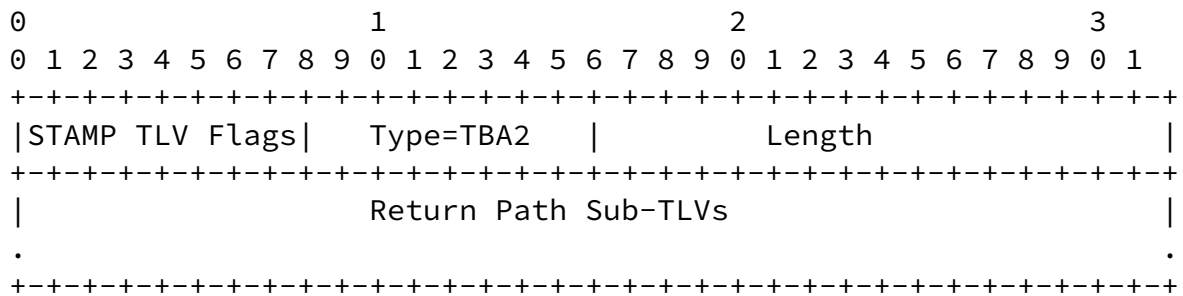


Figure 2: Return Path TLV

The STAMP TLV Flags are set using the procedures described in [\[RFC8972\]](#).

The Return Path TLV is optional. The STAMP Session-Sender MUST only insert one Return Path TLV in the STAMP test packet. The STAMP Session-Reflector that supports this TLV, MUST only process the first Return Path TLV in the test packet and ignore other Return Path TLVs if present, and it MUST NOT add Return Path TLV in the reply test packet.

#### [4.1.](#) Return Path Sub-TLVs

The Return Path TLV contains one or more Sub-TLVs to carry the information for the requested return path. A Return Path Sub-TLV can carry Return Path Control Code, Return Path IP Address or Return Path Segment List.

The STAMP Sub-TLV Flags are set using the procedures described in



telemetry using the information from the received test packet. All other Return Path Sub-TLVs are ignored in this case.

When Control Code flag is set to 0x1 in the STAMP Session-Sender test packet, the Session-Reflector transmits the reply test packet over the same incoming link where the test packet is received in the reverse direction towards the Session-Sender.

#### 4.1.2. Return Address Sub-TLV

The STAMP reply test packet may be transmitted to a different node than the Session-Sender (e.g. to a controller for telemetry use-cases). For this, the Session-Sender can specify in the test packet the receiving destination node address for the Session-Reflector reply test packet.

The format of the Return Address Sub-TLV is shown in Figure 4. The Address Family field indicates the type of the address, and it SHALL be set to one of the assigned values in the "IANA Address Family Numbers" registry. The Type of the Return Address Sub-TLV is defined as following:

- o Type (value 2): Return Address. Destination node address of the STAMP Session-Reflector reply test packet different than the Source Address in the Session-Sender test packet.



Figure 4: Return Address Sub-TLV in Return Path TLV

#### 4.1.3. Return Segment List Sub-TLVs



The format of the Segment List Sub-TLVs in the Return Path TLV is shown in Figure 5. The segment entries MUST be in network order. The Segment List Sub-TLV can be one of the following Types:

- o Type (value 3): SR-MPLS Label Stack of the Return Path
- o Type (value 4): SRv6 Segment List of the Return Path

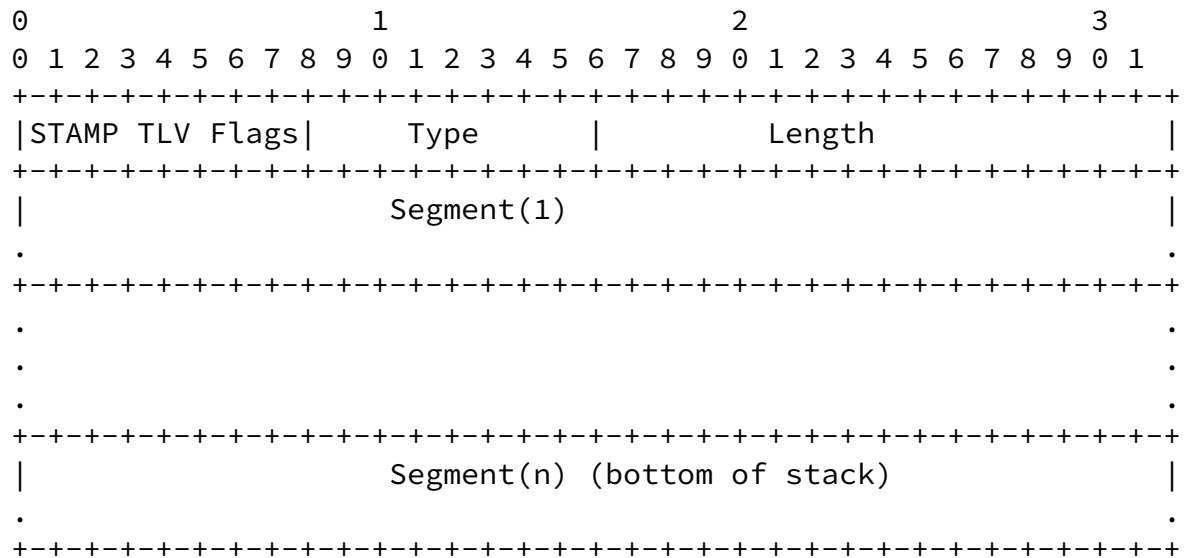


Figure 5: Segment List Sub-TLV in Return Path TLV

An SR-MPLS Label Stack Sub-TLV may carry only Binding SID [[I-D.ietf-pce-binding-label-sid](#)] of the Return SR-MPLS Policy.

An SRv6 Segment List Sub-TLV may carry only Binding SID [[I-D.ietf-pce-binding-label-sid](#)] of the Return SRv6 Policy.

The STAMP Session-Sender MUST only insert one Segment List Return Path Sub-TLV in the test packet. The STAMP Session-Reflector MUST only process the first Segment List Return Path Sub-TLV in the test packet and ignore other Segment List Return Path Sub-TLVs if present.

## 5. Security Considerations

The performance measurement is intended for deployment in well-managed private and service provider networks. As such, it assumes that a node involved in a measurement operation has previously verified the integrity of the path and the identity of the STAMP Session-Reflector.

If desired, attacks can be mitigated by performing basic validation and sanity checks, at the STAMP Session-Sender, of the timestamp fields in received reply test packets. The minimal state associated with these protocols also limits the extent of measurement disruption that can be caused by a corrupt or invalid test packet to a single test cycle.

The security considerations specified in [\[RFC8762\]](#) and [\[RFC8972\]](#) also apply to the extensions defined in this document.

## 6. IANA Considerations

IANA will create a "STAMP TLV Type" registry for [\[RFC8972\]](#). IANA is requested to allocate a value for the following Destination Address TLV Type from the IETF Review TLV range of this registry. This TLV is to be carried in the STAMP test packets.

- o Type TBA1: Destination Node Address TLV

IANA is also requested to allocate a value for the following Return Path TLV Type from the IETF Review TLV range of the same registry. This TLV is to be carried in the STAMP test packets.

- o Type TBA2: Return Path TLV

IANA is requested to create a sub-registry for "Return Path Sub-TLV Type". All code points in the range 1 through 175 in this registry shall be allocated according to the "IETF Review" procedure as specified in [\[RFC8126\]](#). Code points in the range 176 through 239 in this registry shall be allocated according to the "First Come First Served" procedure as specified in [\[RFC8126\]](#). Remaining code points are allocated according to Table 1:

Value	Description	Reference
0	Reserved	This document
1 - 175	Unassigned	This document
176 - 239	Unassigned	This document
240 - 251	Experimental	This document
252 - 254	Private Use	This document
255	Reserved	This document

Table 1: Return Path Sub-TLV Type Registry

IANA is requested to allocate the values for the following Sub-TLV Types from this registry.

Internet-Draft Simple TWAMP Extensions for Segment Routing April 2021

- o Type (value 1): Return Path Control Code
- o Type (value 2): Return Address
- o Type (value 3): SR-MPLS Label Stack of the Return Path
- o Type (value 4): SRv6 Segment List of the Return Path

## 7. References

### 7.1. Normative References

- [RFC2119] Bradner, S., "Key words for use in RFCs to Indicate Requirement Levels", [BCP 14](#), [RFC 2119](#), DOI 10.17487/RFC2119, March 1997, <<https://www.rfc-editor.org/info/rfc2119>>.
- [RFC8174] Leiba, B., "Ambiguity of Uppercase vs Lowercase in [RFC 2119](#) Key Words", [BCP 14](#), [RFC 8174](#), DOI 10.17487/RFC8174, May 2017, <<https://www.rfc-editor.org/info/rfc8174>>.
- [RFC8762] Mirsky, G., Jun, G., Nydell, H., and R. Foote, "Simple Two-Way Active Measurement Protocol", [RFC 8762](#), DOI 10.17487/RFC8762, March 2020, <<https://www.rfc-editor.org/info/rfc8762>>.
- [RFC8972] Mirsky, G., Min, X., Nydell, H., Foote, R., Masputra, A., and E. Ruffini, "Simple Two-Way Active Measurement Protocol Optional Extensions", [RFC 8972](#), DOI 10.17487/RFC8972, January 2021, <<https://www.rfc-editor.org/info/rfc8972>>.

### 7.2. Informative References

- [RFC8402] Filsfils, C., Ed., Previdi, S., Ed., Ginsberg, L., Decraene, B., Litkowski, S., and R. Shakir, "Segment Routing Architecture", [RFC 8402](#), DOI 10.17487/RFC8402, July 2018, <<https://www.rfc-editor.org/info/rfc8402>>.

[RFC8126] Cotton, M., Leiba, B., and T. Narten, "Guidelines for Writing an IANA Considerations Section in RFCs", [BCP 26](#), [RFC 8126](#), DOI 10.17487/RFC8126, June 2017, <<https://www.rfc-editor.org/info/rfc8126>>.

Gandhi, et al.

Expires October 31, 2021

[Page 10]

---

Internet-Draft Simple TWAMP Extensions for Segment Routing April 2021

[I-D.ietf-spring-segment-routing-policy]  
Filsfils, C., Talaulikar, K., Voyer, D., Bogdanov, A., and P. Mattes, "Segment Routing Policy Architecture", [draft-ietf-spring-segment-routing-policy-09](#) (work in progress), November 2020.

[I-D.ietf-pce-binding-label-sid]  
Sivabalan, S., Filsfils, C., Tantsura, J., Previdi, S., and C. Li, "Carrying Binding Label/Segment Identifier in PCE-based Networks.", [draft-ietf-pce-binding-label-sid-08](#) (work in progress), April 2021.

[IEEE802.1AX]  
IEEE Std. 802.1AX, "IEEE Standard for Local and metropolitan area networks - Link Aggregation", November 2008.

## Acknowledgments

The authors would like to thank Thierry Couture for the discussions on the use-cases for Performance Measurement in Segment Routing. The authors would also like to thank Greg Mirsky, Mike Koldychev, Gyan Mishra, Tianran Zhou, and Cheng Li for providing comments and suggestions.

## Authors' Addresses

Rakesh Gandhi (editor)  
Cisco Systems, Inc.  
Canada

Email: [rgandhi@cisco.com](mailto:rgandhi@cisco.com)

Clarence Filsfils  
Cisco Systems, Inc.

Email: cfilsfil@cisco.com

Daniel Voyer  
Bell Canada

Email: daniel.voyer@bell.ca

Gandhi, et al.

Expires October 31, 2021

[Page 11]

---

Internet-Draft Simple TWAMP Extensions for Segment Routing

April 2021

Mach(Guoyi) Chen  
Huawei

Email: mach.chen@huawei.com

Bart Janssens  
Colt

Email: Bart.Janssens@colt.net

Richard Foote  
Nokia

Email: footer.foote@nokia.com

