

Network Working Group
Internet-Draft
Expires: November 19, 2004

F. Gont
UTN FRH
May 19, 2004

TCP Adaptive User TimeOut (AUTO) Option
draft-gont-tcpm-tcp-auto-option-00.txt

Status of this memo

By submitting this Internet-Draft, I certify that any applicable patent or other IPR claims of which I am aware have been disclosed, and any of which I become aware will be disclosed, in accordance with [RFC 3668](#). This document may not be modified, and derivative works of it may not be created, except to publish it as an RFC and to translate it into languages other than English.

Internet-Drafts are working documents of the Internet Engineering Task Force (IETF), its areas, and its working groups. Note that other groups may also distribute working documents as Internet-Drafts.

Internet-Drafts are draft documents valid for a maximum of six months and may be updated, replaced, or obsoleted by other documents at any time. It is inappropriate to use Internet-Drafts as reference material or to cite them other than as "work in progress."

The list of current Internet-Drafts can be accessed at <http://www.ietf.org/lid-abstracts.html>.

The list of Internet-Draft Shadow Directories can be accessed at <http://www.ietf.org/shadow.html>.

This Internet-Draft will expire on November 19, 2004.

Copyright Notice

Copyright (C) The Internet Society (2004). All Rights Reserved.

Abstract

The original TCP specification ([RFC 793](#)) defines a "USER TIMEOUT" parameter that sets the policy as to when a user connection should be aborted. However, TCP provides no means of letting users suggest an abort policy to a remote peer dynamically. Even though a fixed policy may work well in many cases, there are a number of scenarios where a fixed USER TIMEOUT value may be inappropriate, and some means of setting the abort policy dynamically may be necessary for TCP to be

used effectively in such scenarios. This document defines a new TCP option, which lets a TCP peer suggest a USER TIMEOUT value to a remote TCP during the connection-establishment phase, and modify it

during the life of a connection, thus adapting TCP's connection-abort policy as necessary.

[1](#). Introduction

The original TCP specification [[1](#)] defines a USER TIMEOUT parameter, which sets the policy as to when a connection should be aborted. This parameter is usually set on a per-system basis, and there is no way for a TCP to suggest a value of USER TIMEOUT to be used for a connection by a remote peer.


Even though having such a fixed policy may work well in many cases, there are scenarios in which the default USER TIMEOUT may be inappropriate. For example, a mobile host connected to a network by means of a wireless link may experience transient periods of disconnection that may be longer than the USER TIMEOUT selected by the remote peer. Another possible scenario is the development of high levels of congestion during the life of a connection. In such cases, valid connections may be aborted due to an incorrect abort policy.

This document defines a new TCP option that lets TCP implementations suggest a USER TIMEOUT value during the connection-establishment phase, and modify it during the life of a connection, thus adapting TCP's connection-abort policy as necessary.

[2](#). Conventions

The key words "MUST", "MUST NOT", "REQUIRED", "SHALL", "SHALL NOT", "SHOULD", "SHOULD NOT", "RECOMMENDED", "MAY", and "OPTIONAL" in this document are to be interpreted as described in [RFC 2119](#) [[2](#)].

3. Option Format

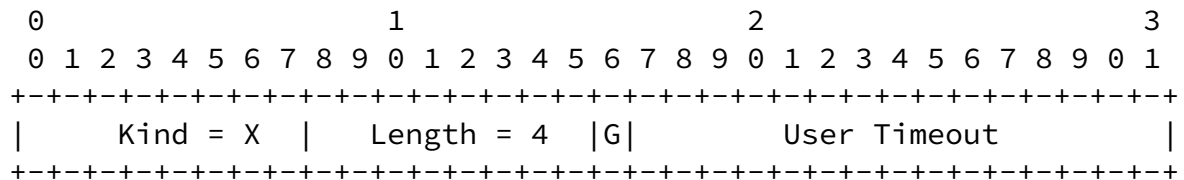

Note that one tick mark represents one bit position

Figure 1: Adaptive User Timeout Option Format

Each field is to be interpreted as follows:

Kind: 8 bits

This is the "Kind" field as specified in [1]. The "X" in Figure 1 is an option number to be assigned by IANA upon publication of this document (see [Section 7](#))

Length: 8 bits

This is the "Length" field as specified in [1]. Its value is 4 (the option length).

G: 1 bit

This is the "Granularity" bit. It indicates the granularity of the "User Timeout" field. When set, the time interval in the "User

Timeout" field MUST be interpreted as being specified in minutes. Otherwise, the time interval in the "User Timeout" field MUST be interpreted as being specified in seconds.

User Timeout: 15 bits

This field, together with the Granularity bit, specifies the USER TIMEOUT suggested by the remote peer for this connection. It MUST be interpreted as a 15-bit unsigned integer. The units of this field are specified by the "G" bit.

[3](#). Operation

TCP implementations supporting the Adaptive User TimeOut (AUTO) Option MUST set this option during the connection-establishment phase (in segments with the SYN control bit set) to indicate the suggested USER TIMEOUT value to be used for the connection.

A TCP MAY also use this option during the life of a connection, to suggest an a new value for the USER TIMEOUT parameter, thus adapting it to the current network conditions. For example, this option could be set by a TCP peer that is notified of congestion by means of ECN [\[5\]](#).

The setting of this option means "I suggest we use a USER TIMEOUT of X". The value of "X" may be larger or smaller than the default USER TIMEOUT (see [Section 4](#)).

Hosts SHOULD impose upper and lower limits on the USER TIMEOUT. A discussion of these limits can be found in [Section 5](#).

Each TCP will adopt a USER TIMEOUT as defined by equation (1):

$$\text{USER_TIMEOUT} = \min(\text{ULimit}, \max(\text{localAUTO}, \text{remoteAUTO}, \text{LLimit})) \quad (1)$$

USER_TIMEOUT:

USER TIMEOUT value to be adopted by the local TCP for this connection.

ULimit:

The upper limit imposed by this host for the USER TIMEOUT.

Llimit:

The lower limit imposed by this host for the USER TIMEOUT.

localAUTO:

The "USER TIMEOUT" value suggested by the local TCP by means of the AUTO Option.

remoteAUTO:

The "USER TIMEOUT" value suggested by the remote TCP peer by means of the AUTO Option.

The adopted USER TIMEOUT SHOULD be used only for connections that are in one of the synchronized states (ESTABLISHED, FIN-WAIT-1, FIN-WAIT-2, CLOSE-WAIT, CLOSING, LAST-ACK or TIME-WAIT).

Note that the USER TIMEOUT is not negotiated in any way. Each peer just "suggests" what USER TIMEOUT should be adopted for the connection. As can be inferred from the equation above, each peer may end up adopting a different timeout value.

[4.](#) Range of valid values

The User Timeout Option allows a TCP peer to suggest USER TIMEOUT values ranging, in principle, from 0 seconds to about 22.76 days. However, implementations SHOULD impose limits on the USER TIMEOUT values actually adopted. A discussion of these limits can be found in [Section 5](#).

[5.](#) System limits on the USER TIMEOUT

Implementations SHOULD impose an upper limit (Ulimit) and a lower limit (Llimit) on the value of the USER TIMEOUT. These limits could, for example, be set on a per-host or per-user basis.

Furthermore, these limits need not be fixed. For example, they MAY

be a function of the system resources that are available when the USER TIMEOUT is to be selected for a connection.

The Host Requirements RFC [3] does not impose any limits for the USER TIMEOUT. However, a time interval of at least 100 seconds is RECOMMENDED. Thus, the lower limit (LLimit) should be set to at least 100 seconds. As for the upper limit (ULimit), note that setting it to low values may reduce the functionality of the AUTO Option.

6. Interoperability issues

6.1 Firewalls

Stateful firewalls are known to reset connections after some fixed period of inactivity is detected. In case there is such a firewall between the TCP peers, then, regardless of the use of the AUTO Option, connections may be lost due to the firewall policy.

6.2 TCP Keep-alive mechanism

In case a TCP peer enables the TCP Keep-alive mechanism for a connection that is using the AUTO Option, then the Keep-alive timer MUST be set to a value larger than that of the adopted USER TIMEOUT (specified by Equation 1).

7. IANA Considerations

This section is to be interpreted according to [4].

This document does not define any new namespaces. It uses an 8-bit TCP option number maintained by IANA at <http://www.iana.org/assignments/tcp-parameters>.

8. Security Implications

Use of the AUTO Option implies that the adopted USER TIMEOUT be larger than the default USER TIMEOUT. This could cause a host to maintain state for a connection for a longer period of time than if the default USER TIMEOUT were used. An attacker could try to exhaust resources on the target host by establishing lots of connections and aborting them without signalling this to the attacked host's TCP. However, it must be noted that the same type of attack could be performed even if the default "USER TIMEOUT" is being used, since TCP requires no message exchange in order to keep a connection open. In any case, the system limits discussed in [Section 5](#) would serve as a counter-measure against attackers trying to exploit the AUTO option for this type of attack.

9. Author's address

Fernando Gont
Evaristo Carriego 2644
1706, Haedo
Provincia de Buenos Aires
ARGENTINA

Phone: +54 011 4650 8472
E-Mail: fernando@gont.com.ar

10. Acknowledgements

The author wishes to thank Michael Kerrisk for contributing many valuable comments.

11. References

11.1 Normative References

- [1] Postel, J., "Transmission Control Protocol", STD 7, [RFC 793](#), September 1981.
- [2] Bradner, S., "Key words for use in RFCs to Indicate Requirement Levels", [BCP 14](#), [RFC 2119](#), March 1997.
- [3] Braden, R., "Requirements for Internet Hosts - Communication Layers", STD 3, [RFC 1122](#), October 1989.

- [4] Narten, T., Alvestrand, H., "Guidelines for Writing an IANA Considerations Section in RFCs", [BCP 26](#), [RFC 2434](#), October 1998.

Gont

Expires November 19, 2004

[Page 6]

Internet-Draft

TCP Adaptive User TimeOut Option

May 2004

[11.2](#) Informative References

- [5] Ramakrishnan, K., Floyd, S., Black, D., "The Addition of Explicit Network Notification (ECN) to IP", [RFC 3168](#), September 2001.

Intellectual Property Statement

The IETF takes no position regarding the validity or scope of any Intellectual Property Rights or other rights that might be claimed to pertain to the implementation or use of the technology described in this document or the extent to which any license under such rights might or might not be available; nor does it represent that it has made any independent effort to identify any such rights. Information on the procedures with respect to rights in RFC documents can be found in [BCP 78](#) and [BCP 79](#).

Copies of IPR disclosures made to the IETF Secretariat and any assurances of licenses to be made available, or the result of an attempt made to obtain a general license or permission for the use of such proprietary rights by implementers or users of this specification can be obtained from the IETF on-line IPR repository at <http://www.ietf.org/ipr>.

The IETF invites any interested party to bring to its attention any copyrights, patents or patent applications, or other proprietary rights that may cover technology that may be required to implement this standard. Please address the information to the IETF at ietf-ipr@ietf.org.

Disclaimer of Validity

This document and the information contained herein are provided on an "AS IS" basis and THE CONTRIBUTOR, THE ORGANIZATION HE/SHE REPRESENTS OR IS SPONSORED BY (IF ANY), THE INTERNET SOCIETY AND THE INTERNET ENGINEERING TASK FORCE DISCLAIM ALL WARRANTIES, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO ANY WARRANTY THAT THE USE OF THE INFORMATION HEREIN WILL NOT INFRINGE ANY RIGHTS OR ANY IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE.

Gont

Expires November 19, 2004

[Page 7]

Internet-Draft

TCP Adaptive User TimeOut Option

May 2004

Copyright Statement

Copyright (C) The Internet Society (2004). This document is subject to the rights, licenses and restrictions contained in [BCP 78](#), and except as set forth therein, the authors retain all their rights.

