

Network Working Group
Internet-Draft
Intended status: Standards Track
Expires: September 24, 2018

S. Hares
Huawei
J. Jeong
J. Kim
Sungkyunkwan University
R. Moskowitz
HTT Consulting
Q. Lin
Huawei
March 23, 2018

I2NSF Capability YANG Data Model
draft-hares-i2nsf-capability-data-model-07

Abstract

This document defines a YANG data model for capabilities that enables an I2NSF user to control various network security functions in network security devices.

Status of This Memo

This Internet-Draft is submitted in full conformance with the provisions of [BCP 78](#) and [BCP 79](#).

Internet-Drafts are working documents of the Internet Engineering Task Force (IETF). Note that other groups may also distribute working documents as Internet-Drafts. The list of current Internet-Drafts is at <https://datatracker.ietf.org/drafts/current/>.

Internet-Drafts are draft documents valid for a maximum of six months and may be updated, replaced, or obsoleted by other documents at any time. It is inappropriate to use Internet-Drafts as reference material or to cite them other than as "work in progress."

This Internet-Draft will expire on September 24, 2018.

Copyright Notice

Copyright (c) 2018 IETF Trust and the persons identified as the document authors. All rights reserved.

This document is subject to [BCP 78](#) and the IETF Trust's Legal Provisions Relating to IETF Documents (<https://trustee.ietf.org/license-info>) in effect on the date of publication of this document. Please review these documents carefully, as they describe your rights and restrictions with respect

to this document. Code Components extracted from this document must include Simplified BSD License text as described in Section 4.e of the Trust Legal Provisions and are provided without warranty as described in the Simplified BSD License.

Table of Contents

1.	Introduction	3
2.	Requirements Language	4
3.	Terminology	4
3.1.	Tree Diagrams	4
4.	Overview	4
5.	The Structure and Objective of NSF Capabilities	6
5.1.	Generic Network Security Function Identification	6
5.2.	Event Capabilities	6
5.3.	Condition Capabilities	7
5.4.	Action Capabilities	7
5.5.	Resolution Strategy Capabilities	7
5.6.	Default Action Capabilities	7
5.7.	RPC for Acquiring Appropriate Network Security Function .	8
6.	Data Model Structure	8
6.1.	Network Security Function Identification	8
6.2.	Capabilities of Generic Network Security Function	9
6.2.1.	Event Capabilities	9
6.2.2.	Condition Capabilities	11
6.2.3.	Action Capabilities	14
6.2.4.	Resolution Strategy Capabilities	16
6.2.5.	Default Action Capabilities	17
6.2.6.	RPC for Acquiring Appropriate Network Security Function	17
7.	YANG Modules	18
7.1.	I2NSF Capability YANG Data Module	18
8.	IANA Considerations	53
9.	Security Considerations	54
10.	Acknowledgments	54
11.	Contributors	54
12.	References	54
12.1.	Normative References	54
12.2.	Informative References	55
Appendix A.	Example: Extended VoIP-VoLTE Security Function Capabilities Module	56
Appendix B.	Example: Configuration XML of Capability Module	57
B.1.	Example: Configuration XML of Generic Network Security Function Capabilities	57
B.2.	Example: Configuration XML of Extended VoIP/VoLTE Security Function Capabilities Module	59
Appendix C.	Changes from draft-hares-i2nsf-capability-data- model-06	60

Authors' Addresses [60](#)

1. Introduction

As the industry becomes more sophisticated and network devices (i.e., IoT, Intelligent Vehicle, and VoIP/VoLTE Phone), service providers has a lot of problems [[RFC8192](#)]. To resolve this problem, [[i2nsf-nsf-cap-im](#)] standardize capabilities of network security functions.

This document provides a YANG data model that defines the capabilities to express capabilities of security devices. The security devices can register own capabilities to Network Operator Mgmt System with this YANG data model through registration interface. After the capabilities of the devices are registered, this YANG data model can be used by the IN2SF user or Service Function Forwarder (SFF) [[i2nsf-sfc](#)] to acquire appropriate NSFs that can be controlled by the Network Operator Mgmt System. This document defines a YANG [[RFC6020](#)] data model based on the [[i2nsf-nsf-cap-im](#)]. Terms used in document are defined in [[i2nsf-terminology](#)].

The "Event-Condition-Action" (ECA) policy model is used as the basis for the design of I2NSF Policy Rules.

The "ietf-i2nsf-capability" YANG module defined in this document provides the following features:

- o Configuration of identification for generic network security function policy
- o Configuration of event capabilities for generic network security function policy
- o Configuration of condition capabilities for generic network security function policy
- o Configuration of action capabilities for generic network security function policy
- o Configuration of strategy capabilities for generic network security function policy
- o Configuration of default action capabilities for generic network security function policy
- o RPC for acquiring appropriate network security function according to type of NSF and/or target devices.

2. Requirements Language

The key words "MUST", "MUST NOT", "REQUIRED", "SHALL", "SHALL NOT", "SHOULD", "SHOULD NOT", "RECOMMENDED", "MAY", and "OPTIONAL" in this document are to be interpreted as described in [\[RFC2119\]](#).

3. Terminology

This document uses the terminology described in [\[i2nsf-nsf-cap-im\]](#) [\[i2rs-rib-data-model\]](#) [\[supa-policy-info-model\]](#). Especially, the following terms are from [\[supa-policy-info-model\]](#):

- o Data Model: A data model is a representation of concepts of interest to an environment in a form that is dependent on data repository, data definition language, query language, implementation language, and protocol.
- o Information Model: An information model is a representation of concepts of interest to an environment in a form that is independent of data repository, data definition language, query language, implementation language, and protocol.

3.1. Tree Diagrams

A simplified graphical representation of the data model is used in this document. The meaning of the symbols in these diagrams [\[i2rs-rib-data-model\]](#) is as follows:

- o Brackets "[" and "]" enclose list keys.
- o Abbreviations before data node names: "rw" means configuration (read-write) and "ro" state data (read-only).
- o Symbols after data node names: "?" means an optional node and "*" denotes a "list" and "leaf-list".
- o Parentheses enclose choice and case nodes, and case nodes are also marked with a colon (":").
- o Ellipsis ("...") stands for contents of subtrees that are not shown.

4. Overview

This section explains overview how the YANG data model can be used by I2NSF User, Developer's Mgmt System, and SFF. Figure 1 shows capabilities of NSFs in I2NSF Framework. As shown in this figure, Developer's Mgmt System can register NSFs with capabilities that the

device can support. To register NSFs in this way, the Developer's Mgmt System utilizes this standardized capabilities YANG data model through registration interface. Through this registration of capabilities, the a lot of problems [RFC8192] can be resolved. The following shows use cases.

Note [[i2nsf-nsf-yang](#)] is used to configure rules of NSFs in I2NSF Framework.

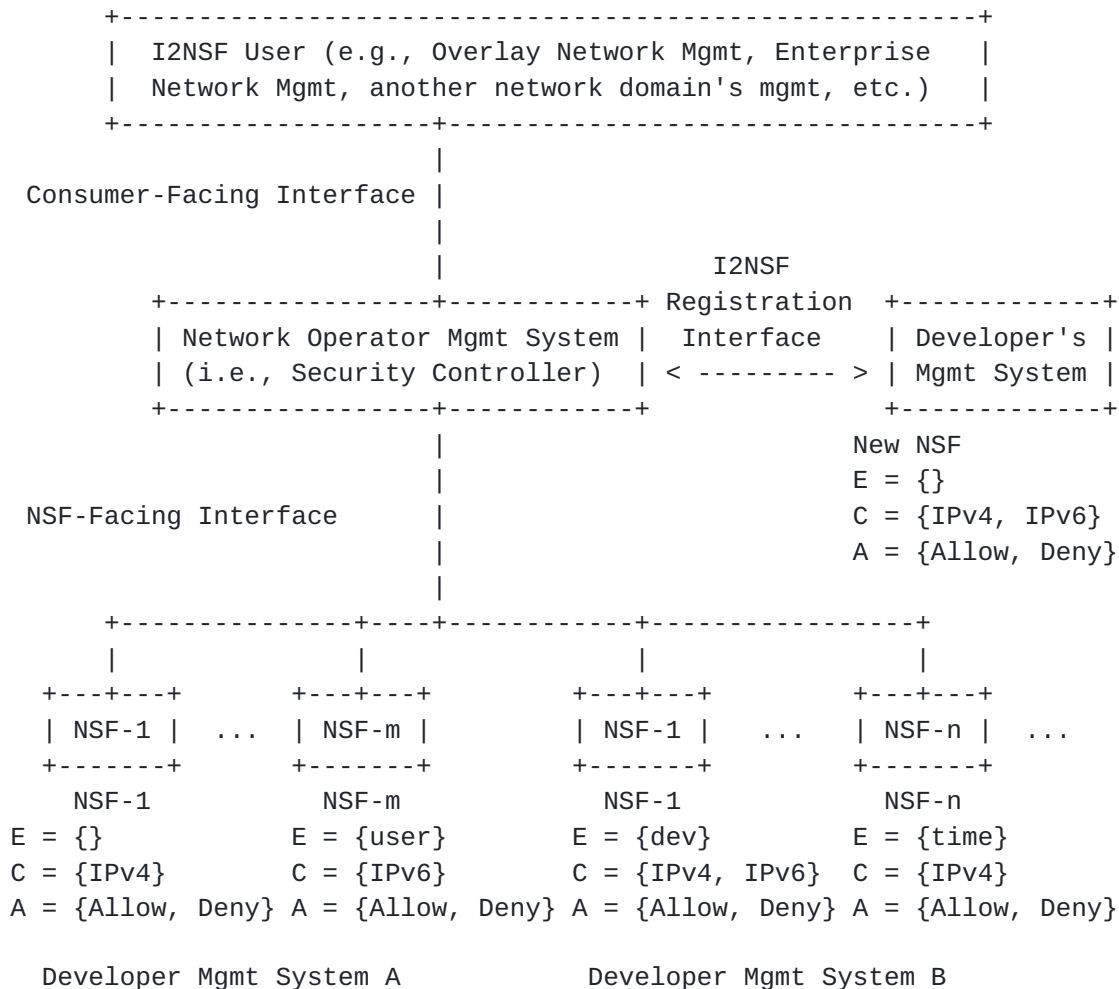


Figure 1: Capabilities of NSFs in I2NSF Framework

- o If I2NSF User wants to apply rules about blocking malicious users, it is a tremendous burden to apply all of these rules to NSFs one by one. This problem can be resolved by standardizing the capabilities of NSFs. If I2NSF User wants to block malicious users with IPv6, I2NSF User sends the rules about blocking the users to Network Operator Mgmt System. When the Network Operator Mgmt System receives the rules, it sends that rules to appropriate NSFs (i.e., NSF-m in Developer Mgmt System A and NSF-1 in

Developer Mgmt System B) which can support the capabilities (i.e., IPv6). Therefore, I2NSF User need not consider NSFs where to apply the rules.

- o If NSFs find the malicious packets, it is a tremendous burden for I2NSF User to apply the rule about blocking the malicious packets to NSFs one by one. This problem can be resolved by standardizing the capabilities of NSFs. If NSFs find the malicious packets with IPv4, they can ask the Network Operator Mgmt System to alter specific rules and/or configurations. When the Network Operator Mgmt System receives the rules for malicious packets, it inspects whether the rules are reasonable and sends the rules to appropriate NSFs (i.e., NSF-1 in Developer Mgmt System A and NSF-1 and NSF-n in Developer Mgmt System B) which can support the capabilities (i.e., IPv4). Therefore, the new rules can be applied to appropriate NSFs without control of I2NSF User.
- o If NSFs of Service Function Chaining (SFC) [[i2nsf-sfc](#)] fail, it is a tremendous burden for I2NSF User to reconfigure the policy of SFC immediately. This problem can be resolved by periodically acquiring information of appropriate NSFs of SFC. If SFF needs information of Web Application Firewall for SFC, it can ask the Network Operator Mgmt System to acquire the location information of appropriate Web Application Firewall. When the Network Operator Mgmt System receives requested information from SFF, it sends location information of Web Application Firewall to the SFF. Therefore, the policy about the NSFs of SFC can be periodically updated without control of I2NSF User.

5. The Structure and Objective of NSF Capabilities

5.1. Generic Network Security Function Identification

This shows a identification for generic network security functions. These objects are defined as location information and target device information.

5.2. Event Capabilities

This shows a event capabilities for generic network security functions policy. This is used to specify capabilities about any important occurrence in time of a change in the system being managed, and/or in the environment of the system being managed. When used in the context of I2NSF Policy Rules, it is used to determine whether the Condition clause of the I2NSF Policy Rule can be evaluated or not. These object of event capabilities is defined as user security event capabilities, device security event capabilities, system security event capabilities, and time security event capabilities.

These object of event capabilities can be extended according to specific vendor event features.

5.3. Condition Capabilities

This shows a condition capabilities for generic network security functions policy. This is used to specify capabilities about a set of attributes, features, and/or values that are to be compared with a set of known attributes, features, and/or values in order to determine whether or not the set of Actions in that (imperative) I2NSF Policy Rule can be executed or not. These object of condition capabilities is defined as packet security condition capabilities, packet payload security condition capabilities, target security condition capabilities, user security condition capabilities, context condition capabilities, and generic context condition capabilities. These object of condition capabilities can be extended according to specific vendor condition features.

5.4. Action Capabilities

This shows a action capabilities for generic network security functions policy. This is used to specify capabilities to control and monitor aspects of flow-based NSFs when the event and condition clauses are satisfied. NSFs provide security functions by executing various Actions. These object of action capabilities is defined as ingress action capabilities, egress action capabilities, and apply profile action capabilities. These object of action capabilities can be extended according to specific vendor action features.

5.5. Resolution Strategy Capabilities

This shows a resolution strategy capabilities for generic network security functions policy. This can be used to specify capabilities how to resolve conflicts that occur between the actions of the same or different policy rules that are matched and contained in this particular NSF. These objects are defined as first-matching-rule capability and last-matching-rule capability. These objects can be extended according to specific vendor resolution strategy features.

5.6. Default Action Capabilities

This shows a default action policy for generic network security functions. This can be used to specify capabilities about a predefined action when no other alternative action was matched by the currently executing I2NSF Policy Rule.

5.7. RPC for Acquiring Appropriate Network Security Function

This shows a RPC for acquiring an appropriate network security function according to type of NSF and/or target devices. If the SFF [[i2nsf-sfc](#)] does not have the location information of network security functions that it should send in own cache table, this can be used to acquire the information. These objects are defined as input data (i.e., NSF type and target devices) and output data (i.e., location information of NSF).

6. Data Model Structure

This section shows an overview of a structure tree of capabilities for generic network security functions, as defined in the [[i2nsf-nsf-cap-im](#)].

6.1. Network Security Function Identification

The data model for network security function identification has the following structure:

```

module: ietf-i2nsf-capability
  +--rw nsf* [nsf-name]
    +--rw nsf-name                string
    +--rw nsf-type?               nsf-type
    +--rw nsf-address
      | +--rw (nsf-address-type)?
      |   +--:(ipv4-address)
      |     | +--rw ipv4-address    inet:ipv4-address
      |     +--:(ipv6-address)
      |       +--rw ipv6-address    inet:ipv6-address
    +--rw target-device
      | +--rw pc?                  boolean
      | +--rw mobile-phone?       boolean
      | +--rw voip-volte-phone?   boolean
      | +--rw tablet?             boolean
      | +--rw iot?                 boolean
      | +--rw vehicle?            boolean
    +--rw generic-nsf-capabilities
      | +--rw net-sec-capabilities
      |   uses net-sec-caps
    +--rw complete-nsf-capabilities
      +--rw con-sec-control-capabilities
        | uses i2nsf-con-sec-control-caps
      +--rw attack-mitigation-capabilities
        uses i2nsf-attack-mitigation-control-caps

```

Figure 2: Data Model Structure for NSF-Identification

This draft also utilizes the concepts originated in Basile, Liroy, Pitscheider, and Zhao[2015] concerning conflict resolution, use of external data, and target device. The authors are grateful to Cataldo for pointing out this excellent work.

The nsf-type object can be used for configuration about type of a NSF. The types of NSF consists of Network Firewall, Web Application Firewall, Anti-Virus, IDS, IPS, and DDoS Mitigator. The nsf-address object can be used for configuration about location of a NSF. The target-device object can be used for configuration about target devices. We will add additional type of a NSF for more generic network security functions.

6.2. Capabilities of Generic Network Security Function

The data model for Generic NSF capabilities has the following structure:

```

+--rw generic-nsf-capabilities
  +--rw net-sec-capabilities
    uses i2nsf-net-sec-caps

```

Figure 3: Data Model Structure for Capabilities of Network Security Function

6.2.1. Event Capabilities

The data model for event capabilities has the following structure:

```

+--rw i2nsf-net-sec-caps
  +--rw net-sec-capabilities* [nsc-capabilities-name]
    +--rw nsc-capabilities-name      string
    +--rw rule-description?          boolean
    +--rw rule-rev?                  boolean
    +--rw rule-priority?              boolean
    +--rw time
      | +--rw time-zone
      | | +--rw time-zone-offset    boolean
      | +--rw time-interval
      |   +--rw absolute-time-interval
      |   | +--rw start-time?      boolean
      |   | +--rw end-time?        boolean
      |   +--rw periodic-time-interval
      |     +--rw day?              boolean
      |     +--rw month?            boolean
    +--rw event
      | +--rw (event-type)?

```



```

|   +--:(usr-event)
|   |   +--rw usr-manual?                string
|   |   +--rw usr-sec-event-content?      boolean
|   |   +--rw usr-sec-event-format
|   |   |   +--rw unknown?    boolean
|   |   |   +--rw guid?       boolean
|   |   |   +--rw uuid?       boolean
|   |   |   +--rw uri?        boolean
|   |   |   +--rw fqdn?       boolean
|   |   |   +--rw fqpn?       boolean
|   |   +--rw usr-sec-event-type
|   |   |   +--rw unknown?    boolean
|   |   |   +--rw user-created?    boolean
|   |   |   +--rw user-grp-created?    boolean
|   |   |   +--rw user-deleted?    boolean
|   |   |   +--rw user-grp-deleted?    boolean
|   |   |   +--rw user-logon?    boolean
|   |   |   +--rw user-logout?    boolean
|   |   |   +--rw user-access-request?    boolean
|   |   |   +--rw user-access-granted?    boolean
|   |   |   +--rw user-access-violation?    boolean
|   +--:(dev-event)
|   |   +--rw dev-manual?                string
|   |   +--rw dev-sec-event-content      boolean
|   |   +--rw dev-sec-event-format
|   |   |   +--rw unknown?    boolean
|   |   |   +--rw guid?       boolean
|   |   |   +--rw uuid?       boolean
|   |   |   +--rw uri?        boolean
|   |   |   +--rw fqdn?       boolean
|   |   |   +--rw fqpn?       boolean
|   |   +--rw dev-sec-event-type
|   |   |   +--rw unknown?    boolean
|   |   |   +--rw comm-alarm?    boolean
|   |   |   +--rw quality-of-service-alarm?    boolean
|   |   |   +--rw process-err-alarm?    boolean
|   |   |   +--rw equipment-err-alarm?    boolean
|   |   |   +--rw environmental-err-alarm?    boolean
|   |   +--rw dev-sec-event-type-severity
|   |   |   +--rw unknown?    boolean
|   |   |   +--rw cleared?    boolean
|   |   |   +--rw indeterminate?    boolean
|   |   |   +--rw critical?    boolean
|   |   |   +--rw major?    boolean
|   |   |   +--rw minor?    boolean
|   |   |   +--rw warning?    boolean
|   +--:(sys-event)
|   |   +--rw sys-manual?                string

```



```

|         | +--rw sys-sec-event-content?          boolean
|         | +--rw sys-sec-event-format
|         | | +--rw unknown?          boolean
|         | | +--rw guid?            boolean
|         | | +--rw uuid?            boolean
|         | | +--rw uri?             boolean
|         | | +--rw fqdn?            boolean
|         | | +--rw fqpn?            boolean
|         | +--rw sys-sec-event-type
|         |   +--rw unknown?          boolean
|         |   +--rw audit-log-written-to?  boolean
|         |   +--rw audit-log-cleared?  boolean
|         |   +--rw policy-created?      boolean
|         |   +--rw policy-edited?      boolean
|         |   +--rw policy-deleted?     boolean
|         |   +--rw policy-executed?    boolean
|         +--:(time-event)
|           +--rw time-manual?          string
|           +--rw time-sec-event-begin?  boolean
|           +--rw time-sec-event-end?    boolean
|           +--rw time-sec-event-time-zone?  boolean
+--rw condition
|   ...
+--rw action
|   ...
+--rw resolution-strategy
|   ...
+--rw default-action
    ...

```

Figure 4: Data Model Structure for Event Capabilities of Network Security Function

These objects are defined as capabilities of user security event, device security event, system security event, and time security event. These objects can be extended according to specific vendor event features. We will add additional event objects for more generic network security functions.

6.2.2. Condition Capabilities

The data model for condition capabilities has the following structure:

```

+--rw i2nsf-net-sec-caps
  +--rw net-sec-capabilities* [nsc-capabilities-name]
    +--rw nsc-capabilities-name    string

```



```

+--rw rule-description?          boolean
+--rw rule-rev?                  boolean
+--rw time
|   +--rw time-zone
|   |   +--rw time-zone-offset    boolean
|   +--rw time-interval
|       +--rw absolute-time-interval
|       |   +--rw start-time?      boolean
|       |   +--rw end-time?        boolean
|       +--rw periodic-time-interval
|           +--rw day?             boolean
|           +--rw month?          boolean
+--rw event
|   ...
+--rw condition
|   +--rw (condition-type)?
|   |   +--:(packet-security-condition)
|   |   |   +--rw packet-manual?          string
|   |   |   +--rw packet-security-mac-condition
|   |   |   |   +--rw pkt-sec-cond-mac-dest?      boolean
|   |   |   |   +--rw pkt-sec-cond-mac-src?        boolean
|   |   |   |   +--rw pkt-sec-cond-mac-8021q?      boolean
|   |   |   |   +--rw pkt-sec-cond-mac-ether-type? boolean
|   |   |   |   +--rw pkt-sec-cond-mac-tci?        string
|   |   |   +--rw packet-security-ipv4-condition
|   |   |   |   +--rw pkt-sec-cond-ipv4-header-length?    boolean
|   |   |   |   +--rw pkt-sec-cond-ipv4-tos?              boolean
|   |   |   |   +--rw pkt-sec-cond-ipv4-total-length?    boolean
|   |   |   |   +--rw pkt-sec-cond-ipv4-id?              boolean
|   |   |   |   +--rw pkt-sec-cond-ipv4-fragment?        boolean
|   |   |   |   +--rw pkt-sec-cond-ipv4-fragment-offset? boolean
|   |   |   |   +--rw pkt-sec-cond-ipv4-ttl?             boolean
|   |   |   |   +--rw pkt-sec-cond-ipv4-protocol?        boolean
|   |   |   |   +--rw pkt-sec-cond-ipv4-src?              boolean
|   |   |   |   +--rw pkt-sec-cond-ipv4-dest?            boolean
|   |   |   |   +--rw pkt-sec-cond-ipv4-ipopts?          boolean
|   |   |   |   +--rw pkt-sec-cond-ipv4-sameip?          boolean
|   |   |   |   +--rw pkt-sec-cond-ipv4-geoip?           boolean
|   |   |   +--rw packet-security-ipv6-condition
|   |   |   |   +--rw pkt-sec-cond-ipv6-dscp?            boolean
|   |   |   |   +--rw pkt-sec-cond-ipv6-ecn?             boolean
|   |   |   |   +--rw pkt-sec-cond-ipv6-traffic-class?   boolean
|   |   |   |   +--rw pkt-sec-cond-ipv6-flow-label?      boolean
|   |   |   |   +--rw pkt-sec-cond-ipv6-payload-length?  boolean
|   |   |   |   +--rw pkt-sec-cond-ipv6-next-header?     boolean
|   |   |   |   +--rw pkt-sec-cond-ipv6-hop-limit?       boolean
|   |   |   |   +--rw pkt-sec-cond-ipv6-src?             boolean
|   |   |   |   +--rw pkt-sec-cond-ipv6-dest?           boolean

```



```

|   | +--rw packet-security-tcp-condition
|   | | +--rw pkt-sec-cond-tcp-src-port?      boolean
|   | | +--rw pkt-sec-cond-tcp-dest-port?     boolean
|   | | +--rw pkt-sec-cond-tcp-seq-num?       boolean
|   | | +--rw pkt-sec-cond-tcp-ack-num?       boolean
|   | | +--rw pkt-sec-cond-tcp-window-size?   boolean
|   | | +--rw pkt-sec-cond-tcp-flags?         boolean
|   | +--rw packet-security-udp-condition
|   | | +--rw pkt-sec-cond-udp-src-port?      boolean
|   | | +--rw pkt-sec-cond-udp-dest-port?     boolean
|   | | +--rw pkt-sec-cond-udp-length?       boolean
|   | +--rw packet-security-icmp-condition
|   | | +--rw pkt-sec-cond-icmp-type?         boolean
|   | | +--rw pkt-sec-cond-icmp-code?         boolean
|   | | +--rw pkt-sec-cond-icmp-seg-num?      boolean
| +--:(packet-payload-condition)
|   | +--rw packet-payload-manual?            string
|   | +--rw pkt-payload-content?              boolean
| +--:(target-condition)
|   | +--rw target-manual?                    string
|   | +--rw device-sec-context-cond?          boolean
| +--:(users-condition)
|   | +--rw users-manual?                     string
|   | +--rw user
|   | | +--rw (user-name)?
|   | | | +--:(tenant)
|   | | | | +--rw tenant?                    boolean
|   | | | +--:(vn-id)
|   | | | | +--rw vn-id?                     boolean
|   | +--rw group
|   | | +--rw (group-name)?
|   | | | +--:(tenant)
|   | | | | +--rw tenant?                    boolean
|   | | | +--:(vn-id)
|   | | | | +--rw vn-id?                     boolean
| +--:(context-condition)
|   | +--rw context-manual?                   string
| +--:(gen-context-condition)
|   | +--rw gen-context-manual?               string
|   | +--rw geographic-location
|   | | +--rw src-geographic-location?        boolean
|   | | +--rw dest-geographic-location?       boolean
+--rw action
| ...
+--rw resolution-strategy
| ...
+--rw default-action
...

```


Figure 5: Data Model Structure for Condition Capabilities of Network Security Function

These objects are defined as capabilities of packet security condition, packet payload security condition, target security condition, user security condition, context condition, and generic context condition. These objects can be extended according to specific vendor condition features. We will add additional condition objects for more generic network security functions.

6.2.3. Action Capabilities

The data model for action capabilities has the following structure:


```

+--rw i2nsf-net-sec-caps
  +--rw net-sec-capabilities* [nsc-capabilities-name]
    +--rw nsc-capabilities-name      string
    +--rw rule-description?           boolean
    +--rw rule-rev?                   boolean
    +--rw rule-priority?              boolean
    +--rw time
      | +--rw time-zone
      | | +--rw time-zone-offset    boolean
      | +--rw time-interval
      |   +--rw absolute-time-interval
      |   | +--rw start-time?       boolean
      |   | +--rw end-time?         boolean
      |   +--rw periodic-time-interval
      |     +--rw day?               boolean
      |     +--rw month?             boolean
    +--rw event
      | ...
    +--rw condition
      | ...
    +--rw action
      | +--rw (action-type)?
      |   +--:(ingress-action)
      |   | +--rw ingress-manual?    string
      |   | +--rw ingress-action-type
      |   |   +--rw pass?             boolean
      |   |   +--rw drop?             boolean
      |   |   +--rw reject?           boolean
      |   |   +--rw alert?            boolean
      |   |   +--rw mirror?           boolean
      |   +--:(egress-action)
      |   | +--rw egress-manual?      string
      |   | +--rw egress-action-type
      |   |   +--rw invoke-signaling?  boolean
      |   |   +--rw tunnel-encapsulation?  boolean
      |   |   +--rw forwarding?        boolean
      |   |   +--rw redirection?       boolean
    +--rw resolution-strategy
      | ...
    +--rw default-action
      ...

```

Figure 6: Data Model Structure for Action Capabilities of Network Security Function

These objects are defined capabilities as ingress action, egress action, and apply profile action. These objects can be extended

according to specific vendor action feature. We will add additional action objects for more generic network security functions.

6.2.4. Resolution Strategy Capabilities

The data model for resolution strategy capabilities has the following structure:

```

+--rw i2nsf-net-sec-caps
  +--rw net-sec-capabilities* [nsc-capabilities-name]
    +--rw nsc-capabilities-name    string
    +--rw rule-description?         boolean
    +--rw rule-rev?                 boolean
    +--rw rule-priority?            boolean
    +--rw time
      | +--rw time-zone
      | | +--rw time-zone-offset    boolean
      | +--rw time-interval
      |   +--rw absolute-time-interval
      |   | +--rw start-time?       boolean
      |   | +--rw end-time?         boolean
      |   +--rw periodic-time-interval
      |     +--rw day?               boolean
      |     +--rw month?             boolean
    +--rw event
      | ...
    +--rw condition
      | ...
    +--rw action
      | ...
    +--rw resolution-strategy
      | +--rw first-matching-rule?   boolean
      | +--rw last-matching-rule?    boolean
    +--rw default-action
      ...

```

Figure 7: Data Model Structure for Resolution Strategy Capabilities of Network Security Function

These objects are defined capabilities as first-matching-rule and last-matching-rule. These objects can be extended according to specific vendor resolution strategy features. We will add additional resolution strategy objects for more generic network security functions.

6.2.5. Default Action Capabilities

The data model for default action capabilities has the following structure:

```
+--rw i2nsf-net-sec-caps
  +--rw net-sec-capabilities* [nsc-capabilities-name]
    +--rw nsc-capabilities-name      string
    +--rw rule-description?          boolean
    +--rw rule-rev?                  boolean
    +--rw rule-priority?              boolean
    +--rw time
      | +--rw time-zone
      | | +--rw time-zone-offset    boolean
      | +--rw time-interval
      |   +--rw absolute-time-interval
      |   | +--rw start-time?      boolean
      |   | +--rw end-time?        boolean
      |   +--rw periodic-time-interval
      |     +--rw day?             boolean
      |     +--rw month?           boolean
    +--rw event
      | ...
    +--rw condition
      | ...
    +--rw action
      | ...
    +--rw resolution-strategy
      | ...
    +--rw default-action
      +--rw default-action-type
        +--rw ingress-action-type
          +--rw pass?              boolean
          +--rw drop?              boolean
          +--rw reject?            boolean
          +--rw alert?             boolean
          +--rw mirror?            boolean
```

Figure 8: Data Model Structure for Default Action Capabilities of Network Security Function

6.2.6. RPC for Acquiring Appropriate Network Security Function

The data model for RPC for Acquiring Appropriate Network Security Function has the following structure:


```

rpcs:
  +---x call-appropriate-nsf
    +---w input
      | +---w nsf-type          nsf-type
      | +---w target-device
      |   +---w pc?              boolean
      |   +---w mobile-phone?    boolean
      |   +---w voip-volte-phone? boolean
      |   +---w tablet?          boolean
      |   +---w iot?             boolean
      |   +---w vehicle?         boolean
    +--ro output
      +--ro nsf-address
        +--ro (nsf-address-type)?
          +--:(ipv4-address)
            | +--ro ipv4-address    inet:ipv4-address
          +--:(ipv6-address)
            | +--ro ipv6-address    inet:ipv6-address

```

Figure 9: RPC for Acquiring Appropriate Network Security Function

This shows a RPC for acquiring an appropriate network security function according to type of NSF and/or target devices. If the SFF [[i2nsf-sfc](#)] does not have the location information of network security functions that it should send in own cache table, this can be used to acquire the information. These objects are defined as input data (i.e., NSF type and target devices) and output data (i.e., location information of NSF).

7. YANG Modules

7.1. I2NSF Capability YANG Data Module

This section introduces a YANG module for the information model of network security functions, as defined in the [[i2nsf-nsf-cap-im](#)].

<CODE BEGINS> file "ietf-i2nsf-capability@2018-03-23.yang"

```

module ietf-i2nsf-capability {
  namespace
    "urn:ietf:params:xml:ns:yang:ietf-i2nsf-capability";
  prefix
    i2nsf-capability;

  import ietf-inet-types{
    prefix inet;
  }

```


organization

"IETF I2NSF (Interface to Network Security Functions)
Working Group";

contact

"WG Web: <<http://tools.ietf.org/wg/i2nsf>>
WG List: <<mailto:i2nsf@ietf.org>>

WG Chair: Adrian Farrel
<<mailto:Adrain@olddog.co.uk>>

WG Chair: Linda Dunbar
<<mailto:Linda.dunbar@huawei.com>>

Editor: Susan Hares
<<mailto:shares@ndzh.com>>

Editor: Jaehoon Paul Jeong
<<mailto:pauljeong@skku.edu>>

Editor: Jinyong Tim Kim
<<mailto:timkim@skku.edu>>;

description

"This module describes a capability model
for I2NSF devices.";

revision "2018-03-23"{
 description "The fifth revision";
 reference
 "[draft-ietf-i2nsf-capability-00](#)";
}

grouping i2nsf-nsf-location {

description

"This provides a location for capabilities.";

container nsf-address {

description

"This is location information for capabilities.";

choice nsf-address-type {

description

"nsf address type: ipv4 and ipv4";

case ipv4-address {

description

"ipv4 case";

leaf ipv4-address {


```
        type inet:ipv4-address;
        mandatory true;
        description
            "nsf address type is ipv4";
    }
}
case ipv6-address {
    description
        "ipv6 case";
    leaf ipv6-address {
        type inet:ipv6-address;
        mandatory true;
        description
            "nsf address type is ipv6";
    }
}
}
}
}

typedef nsf-type {
    type enumeration {
        enum network-firewall {
            description
                "If type of a NSF is Network Firewall.";
        }

        enum web-app-firewall {
            description
                "If type of a NSF is Web Application
                Firewall.";
        }

        enum anti-virus {
            description
                "If type of a NSF is Anti-Virus";
        }

        enum ids {
            description
                "If type of a NSF is IDS.";
        }

        enum ips {
            description
                "If type of a NSF is IPS.";
        }
    }
}
```



```
    enum ddos-mitigator {
      description
        "If type of a NSF is DDoS Mitigator.";
    }
  }
  description
    "This is used for type of NSF.";
}

grouping i2nsf-it-resources {
  description
    "This provides a link between capabilities
    and IT resources. This has a list of IT resources
    by name.";
  container target-device {
    description
      "it-resources";

    leaf pc {
      type boolean;
      description
        "If type of a device is PC.";
    }

    leaf mobile-phone {
      type boolean;
      description
        "If type of a device is mobile-phone.";
    }

    leaf voip-volte-phone {
      type boolean;
      description
        "If type of a device is voip-volte-phone.";
    }

    leaf tablet {
      type boolean;
      description
        "If type of a device is tablet.";
    }

    leaf iot {
      type boolean;
      description
        "If type of a device is Internet of Things.";
    }
  }
}
```



```
    leaf vehicle {
      type boolean;
      description
        "If type of a device is vehicle.";
    }
  }
}

grouping capabilities-information {
  description
    "This includes information of capabilities.";

  leaf nsf-type {
    type nsf-type;
    description
      "This is type of NSF.";
  }
  uses i2nsf-nsf-location;
  uses i2nsf-it-resources;
}

grouping i2nsf-net-sec-caps {
  description
    "i2nsf-net-sec-caps";
  list net-sec-capabilities {
    key "nsc-capabilities-name";
    description
      "net-sec-capabilities";
    leaf nsc-capabilities-name {
      type string;
      mandatory true;
      description
        "nsc-capabilities-name";
    }
  }

  leaf rule-description {
    type boolean;
    description
      "This is rule-description.";
  }
  leaf rule-rev {
    type boolean;
    description
      "This is rule-revision";
  }
  leaf rule-priority {
    type boolean;
  }
}
```



```
    description
      "This is rule-priority";
  }

  container time {
    description
      "This is capabilities for time";
    container time-zone {
      description
        "This can be used to apply rules
        according to time zone";

      leaf time-zone-offset {
        type boolean;
        description
          "This is offset for UTC time zone";
      }
    }
  }

  container time-inteval {
    description
      "This can be used to apply rules
      according to time interval";
    container absolute-time-inteval {
      description
        "This can be used to apply rules according to
        absolute time interval";
      leaf start-time {
        type boolean;
        description
          "This is start time for absolute time interval";
      }
      leaf end-time {
        type boolean;
        description
          "This is end time for absolute time interval";
      }
    }
  }

  container periodic-time-inteval {
    description
      "This can be used to apply rules according to
      periodic time interval";
    leaf day {
      type boolean;
      description
        "This is day for periodic time interval";
    }
  }
```



```
    leaf month {
      type boolean;
      description
        "This is month for periodic time interval";
    }
  }
}

container event {
  description
    " This is abstract. An event is defined as any important
    occurrence in time of a change in the system being
    managed, and/or in the environment of the system being
    managed. When used in the context of policy rules for
    a flow-based NSF, it is used to determine whether the
    Condition clause of the Policy Rule can be evaluated
    or not. Examples of an I2NSF event include time and
    user actions (e.g., logon, logoff, and actions that
    violate any ACL.).";

  choice event-type {
    description
      "Vendors can use YANG data model to configure rules
      by concreting this event type";
    case usr-event {
      leaf usr-manual {
        type string;
        description
          "This is manual for user event.
          Vendors can write instructions for user event
          that vendor made";
      }

      leaf usr-sec-event-content {
        type boolean;
        description
          "This is a mandatory string that contains the content
          of the UserSecurityEvent. The format of the content
          is specified in the usrSecEventFormat class
          attribute, and the type of event is defined in the
          usrSecEventType class attribute. An example of the
          usrSecEventContent attribute is a string hrAdmin,
          with the usrSecEventFormat set to 1 (GUID) and the
          usrSecEventType attribute set to 5 (new logon).";
      }
    }
  }
}
```



```
container usr-sec-event-format {
  description
    "This is a mandatory uint 8 enumerated integer, which
    is used to specify the data type of the
    usrSecEventContent attribute. The content is
    specified in the usrSecEventContent class attribute,
    and the type of event is defined in the
    usrSecEventType class attribute. An example of the
    usrSecEventContent attribute is string hrAdmin,
    with the usrSecEventFormat attribute set to 1 (GUID)
    and the usrSecEventType attribute set to 5
    (new logon).";
  leaf unknown {
    type boolean;
    description
      "If SecEventFormat is unknown";
  }
  leaf guid {
    type boolean;
    description
      "If SecEventFormat is GUID
      (Generic Unique Identifier)";
  }
  leaf uuid {
    type boolean;
    description
      "If SecEventFormat is UUID
      (Universal Unique Identifier)";
  }
  leaf uri {
    type boolean;
    description
      "If SecEventFormat is URI
      (Uniform Resource Identifier)";
  }
  leaf fqdn {
    type boolean;
    description
      "If SecEventFormat is FQDN
      (Fully Qualified Domain Name)";
  }
  leaf fqpn {
    type boolean;
    description
      "If SecEventFormat is FQPN
      (Fully Qualified Path Name)";
  }
}
```



```
container usr-sec-event-type {
  leaf unknown {
    type boolean;
    description
      "If usrSecEventType is unknown";
  }
  leaf user-created {
    type boolean;
    description
      "If usrSecEventType is new user
      created";
  }
  leaf user-grp-created {
    type boolean;
    description
      "If usrSecEventType is new user
      group created";
  }
  leaf user-deleted {
    type boolean;
    description
      "If usrSecEventType is user
      deleted";
  }
  leaf user-grp-deleted {
    type boolean;
    description
      "If usrSecEventType is user
      group deleted";
  }
  leaf user-logon {
    type boolean;
    description
      "If usrSecEventType is user
      logon";
  }
  leaf user-logoff {
    type boolean;
    description
      "If usrSecEventType is user
      logoff";
  }
  leaf user-access-request {
    type boolean;
    description
      "If usrSecEventType is user
      access request";
  }
}
```



```
    leaf user-access-granted {
        type boolean;
        description
            "If usrSecEventType is user
            granted";
    }
    leaf user-access-violation {
        type boolean;
        description
            "If usrSecEventType is user
            violation";
    }
    description
        "This is a mandatory uint 8 enumerated integer, which
        is used to specify the type of event that involves
        this user. The content and format are specified in
        the usrSecEventContent and usrSecEventFormat class
        attributes, respectively. An example of the
        usrSecEventContent attribute is string hrAdmin,
        with the usrSecEventFormat attribute set to 1 (GUID)
        and the usrSecEventType attribute set to 5
        (new logon).";
}

}
case dev-event {
    leaf dev-manual {
        type string;
        description
            "This is manual for device event.
            Vendors can write instructions for device event
            that vendor made";
    }

    leaf dev-sec-event-content {
        type boolean;
        mandatory true;
        description
            "This is a mandatory string that contains the content
            of the DeviceSecurityEvent. The format of the
            content is specified in the devSecEventFormat class
            attribute, and the type of event is defined in the
            devSecEventType class attribute. An example of the
            devSecEventContent attribute is alarm, with the
            devSecEventFormat attribute set to 1 (GUID), the
            devSecEventType attribute set to 5 (new logon).";
    }
}
```



```
container dev-sec-event-format {
  description
    "This is a mandatory uint 8 enumerated integer,
    which is used to specify the data type of the
    devSecEventContent attribute.";

  leaf unknown {
    type boolean;
    description
      "If SecEventFormat is unknown";
  }
  leaf guid {
    type boolean;
    description
      "If SecEventFormat is GUID
      (Generic Unique Identifier)";
  }
  leaf uuid {
    type boolean;
    description
      "If SecEventFormat is UUID
      (Universal Unique Identifier)";
  }
  leaf uri {
    type boolean;
    description
      "If SecEventFormat is URI
      (Uniform Resource Identifier)";
  }
  leaf fqdn {
    type boolean;
    description
      "If SecEventFormat is FQDN
      (Fully Qualified Domain Name)";
  }
  leaf fqpn {
    type boolean;
    description
      "If SecEventFormat is FQPN
      (Fully Qualified Path Name)";
  }
}

container dev-sec-event-type {
  description
    "This is a mandatory uint 8 enumerated integer,
    which is used to specify the type of event
    that was generated by this device.";
```



```
    leaf unknown {
      type boolean;
      description
        "If devSecEventType is unknown";
    }
    leaf comm-alarm {
      type boolean;
      description
        "If devSecEventType is communications
        alarm";
    }
    leaf quality-of-service-alarm {
      type boolean;
      description
        "If devSecEventType is quality of service
        alarm";
    }
    leaf process-err-alarm {
      type boolean;
      description
        "If devSecEventType is processing error
        alarm";
    }
    leaf equipment-err-alarm {
      type boolean;
      description
        "If devSecEventType is equipment error
        alarm";
    }
    leaf environmental-err-alarm {
      type boolean;
      description
        "If devSecEventType is environmental error
        alarm";
    }
  }

  container dev-sec-event-type-severity {
    description
      "This is a mandatory uint 8 enumerated integer,
      which is used to specify the perceived
      severity of the event generated by this
      Device.";

    leaf unknown {
      type boolean;
      description
```



```
        "If devSecEventType is unknown";
    }
    leaf cleared {
        type boolean;
        description
            "If devSecEventTypeSeverity is cleared";
    }
    leaf indeterminate {
        type boolean;
        description
            "If devSecEventTypeSeverity is
            indeterminate";
    }
    leaf critical {
        type boolean;
        description
            "If devSecEventTypeSeverity is critical";
    }
    leaf major{
        type boolean;
        description
            "If devSecEventTypeSeverity is major";
    }
    leaf minor {
        type boolean;
        description
            "If devSecEventTypeSeverity is minor";
    }
    leaf warning {
        type boolean;
        description
            "If devSecEventTypeSeverity is warning";
    }
}

case sys-event {
    leaf sys-manual {
        type string;
        description
            "This is manual for system event.
            Vendors can write instructions for system event
            that vendor made";
    }
}

leaf sys-sec-event-content {
    type boolean;
    description
        "This is a mandatory string that contains a content
```


of the SystemSecurityEvent. The format of a content is specified in a sysSecEventFormat class attribute, and the type of event is defined in the sysSecEventType class attribute. An example of the sysSecEventContent attribute is string sysadmin3, with the sysSecEventFormat attribute set to 1(GUID), and the sysSecEventType attribute set to 2 (audit log cleared).";

```
}

```

```
container sys-sec-event-format {
  description
    "This is a mandatory uint 8 enumerated integer, which
    is used to specify the data type of the
    sysSecEventContent attribute.";

  leaf unknown {
    type boolean;
    description
      "If SecEventFormat is unknown";
  }
  leaf guid {
    type boolean;
    description
      "If SecEventFormat is GUID
      (Generic Unique Identifier)";
  }
  leaf uuid {
    type boolean;
    description
      "If SecEventFormat is UUID
      (Universal Unique Identifier)";
  }
  leaf uri {
    type boolean;
    description
      "If SecEventFormat is URI
      (Uniform Resource Identifier)";
  }
  leaf fqdn {
    type boolean;
    description
      "If SecEventFormat is FQDN
      (Fully Qualified Domain Name)";
  }
  leaf fqpn {
    type boolean;
    description

```



```
        "If SecEventFormat is FQPN
        (Fully Qualified Path Name)";
    }
}

container sys-sec-event-type {
  description
    "This is a mandatory uint 8 enumerated integer, which
    is used to specify the type of event that involves
    this device.";

  leaf unknown {
    type boolean;
    description
      "If sysSecEventType is unknown";
  }
  leaf audit-log-written-to {
    type boolean;
    description
      "If sysSecEventTypeSeverity
      is that audit log is written to";
  }
  leaf audit-log-cleared {
    type boolean;
    description
      "If sysSecEventTypeSeverity
      is that audit log is cleared";
  }
  leaf policy-created {
    type boolean;
    description
      "If sysSecEventTypeSeverity
      is that policy is created";
  }
  leaf policy-edited{
    type boolean;
    description
      "If sysSecEventTypeSeverity
      is that policy is edited";
  }
  leaf policy-deleted{
    type boolean;
    description
      "If sysSecEventTypeSeverity
      is that policy is deleted";
  }
  leaf policy-executed{
    type boolean;
```



```
        description
        "If sysSecEventTypeSeverity
        is that policy is executed";
    }
}
}
case time-event {
    leaf time-manual {
        type string;
        description
        "This is manual for time event.
        Vendors can write instructions for time event
        that vendor made";
    }
    leaf time-sec-event-begin {
        type boolean;
        description
        "This is a mandatory DateTime attribute, and
        represents the beginning of a time period.
        It has a value that has a date and/or a time
        component (as in the Java or Python libraries).";
    }

    leaf time-sec-event-end {
        type boolean;
        description
        "This is a mandatory DateTime attribute, and
        represents the end of a time period. It has
        a value that has a date and/or a time component
        (as in the Java or Python libraries). If this is
        a single event occurrence, and not a time period
        when the event can occur, then the
        timeSecEventPeriodEnd attribute may be ignored.";
    }

    leaf time-sec-event-time-zone {
        type boolean;
        description
        "This is a mandatory string attribute, and defines a
        time zone that this event occurred in using the
        format specified in ISO8601.";
    }
}
}
}

container condition {
    description
```


" This is abstract. A condition is defined as a set of attributes, features, and/or values that are to be compared with a set of known attributes, features, and/or values in order to determine whether or not the set of Actions in that (imperative) I2NSF Policy Rule can be executed or not. Examples of I2NSF Conditions include matching attributes of a packet or flow, and comparing the internal state of an NSF to a desired state.";

```
choice condition-type {
  description
    "Vendors can use YANG data model to configure rules
    by concreting this condition type";

  case packet-security-condition {
    leaf packet-manual {
      type string;
      description
        "This is manual for packet condition.
        Vendors can write instructions for packet condition
        that vendor made";
    }

    container packet-security-mac-condition {
      description
        "The purpose of this Class is to represent packet MAC
        packet header information that can be used as part of
        a test to determine if the set of Policy Actions in
        this ECA Policy Rule should be execute or not.";

      leaf pkt-sec-cond-mac-dest {
        type boolean;
        description
          "The MAC destination address (6 octets long).";
      }

      leaf pkt-sec-cond-mac-src {
        type boolean;
        description
          "The MAC source address (6 octets long).";
      }

      leaf pkt-sec-cond-mac-8021q {
        type boolean;
        description
          "This is an optional string attribute, and defines
          The 802.1Q tag value (2 octets long).";
      }
    }
  }
}
```



```
leaf pkt-sec-cond-mac-ether-type {
  type boolean;
  description
    "The EtherType field (2 octets long). Values up to
    and including 1500 indicate the size of the payload
    in octets; values of 1536 and above define which
    protocol is encapsulated in the payload of the
    frame.";
}

leaf pkt-sec-cond-mac-tci {
  type string;
  description
    "This is an optional string attribute, and defines
    the Tag Control Information. This consists of a 3
    bit user priority field, a drop eligible indicator
    (1 bit), and a VLAN identifier (12 bits).";
}
}

container packet-security-ipv4-condition {
  description
    "The purpose of this Class is to represent packet IPv4
    packet header information that can be used as part of
    a test to determine if the set of Policy Actions in
    this ECA Policy Rule should be executed or not.";

  leaf pkt-sec-cond-ipv4-header-length {
    type boolean;
    description
      "The IPv4 packet header consists of 14 fields,
      of which 13 are required.";
  }

  leaf pkt-sec-cond-ipv4-tos {
    type boolean;
    description
      "The ToS field could specify a datagram's priority
      and request a route for low-delay, high-throughput,
      or highly-reliable service..";
  }

  leaf pkt-sec-cond-ipv4-total-length {
    type boolean;
    description
      "This 16-bit field defines the entire packet size,
      including header and data, in bytes.";
  }
}
```



```
leaf pkt-sec-cond-ipv4-id {
  type boolean;
  description
    "This field is an identification field and is
    primarily used for uniquely identifying
    the group of fragments of a single IP datagram.";
}

leaf pkt-sec-cond-ipv4-fragment {
  type boolean;
  description
    "IP fragmentation is an Internet Protocol (IP)
    process that breaks datagrams into smaller pieces
    (fragments), so that packets may be formed that
    can pass through a link with a smaller maximum
    transmission unit (MTU) than the original
    datagram size.";
}

leaf pkt-sec-cond-ipv4-fragment-offset {
  type boolean;
  description
    "Fragment offset field along with Don't Fragment
    and More Fragment flags in the IP protocol
    header are used for fragmentation and reassembly
    of IP datagrams.";
}

leaf pkt-sec-cond-ipv4-ttl {
  type boolean;
  description
    "The ttl keyword is used to check for a specific
    IP time-to-live value in the header of
    a packet.";
}

leaf pkt-sec-cond-ipv4-protocol {
  type boolean;
  description
    "Internet Protocol version 4(IPv4) is the fourth
    version of the Internet Protocol (IP).";
}

leaf pkt-sec-cond-ipv4-src {
  type boolean;
  description
    "Defines the IPv4 Source Address.";
}
```



```
leaf pkt-sec-cond-ipv4-dest {
  type boolean;
  description
    "Defines the IPv4 Destination Address.";
}

leaf pkt-sec-cond-ipv4-ipopts {
  type boolean;
  description
    "With the ipopts keyword you can check if
    a specific ip option is set. Ipopts has
    to be used at the beginning of a rule.";
}

leaf pkt-sec-cond-ipv4-sameip {
  type boolean;
  description
    "Every packet has a source IP-address and
    a destination IP-address. It can be that
    the source IP is the same as
    the destination IP.";
}

leaf pkt-sec-cond-ipv4-geoip {
  type boolean;
  description
    "The geoip keyword enables you to match on
    the source, destination or source and destination
    IP addresses of network traffic and to see to
    which country it belongs. To do this, Suricata
    uses GeoIP API with MaxMind database format.";
}
}

container packet-security-ipv6-condition {
  description
    "The purpose of this Class is to represent packet
    IPv6 packet header information that can be used as
    part of a test to determine if the set of Policy
    Actions in this ECA Policy Rule should be executed
    or not.";

  leaf pkt-sec-cond-ipv6-dscp {
    type boolean;
    description
      "Differentiated Services Code Point (DSCP)
      of ipv6.";
  }
}
```



```
leaf pkt-sec-cond-ipv6-ecn {
    type boolean;
    description
        "ECN allows end-to-end notification of network
        congestion without dropping packets.";
}

leaf pkt-sec-cond-ipv6-traffic-class {
    type boolean;
    description
        "The bits of this field hold two values. The 6
        most-significant bits are used for
        differentiated services, which is used to
        classify packets.";
}

leaf pkt-sec-cond-ipv6-flow-label {
    type boolean;
    description
        "The flow label when set to a non-zero value
        serves as a hint to routers and switches
        with multiple outbound paths that these
        packets should stay on the same path so that
        they will not be reordered.";
}

leaf pkt-sec-cond-ipv6-payload-length {
    type boolean;
    description
        "The size of the payload in octets,
        including any extension headers.";
}

leaf pkt-sec-cond-ipv6-next-header {
    type boolean;
    description
        "Specifies the type of the next header.
        This field usually specifies the transport
        layer protocol used by a packet's payload.";
}

leaf pkt-sec-cond-ipv6-hop-limit {
    type boolean;
    description
        "Replaces the time to live field of IPv4.";
}

leaf pkt-sec-cond-ipv6-src {
```



```
    type boolean;
    description
      "The IPv6 address of the sending node.";
  }

  leaf pkt-sec-cond-ipv6-dest {
    type boolean;
    description
      "The IPv6 address of the destination node(s).";
  }
}

container packet-security-tcp-condition {
  description
    "The purpose of this Class is to represent packet
    TCP packet header information that can be used as
    part of a test to determine if the set of Policy
    Actions in this ECA Policy Rule should be executed
    or not.";

  leaf pkt-sec-cond-tcp-src-port {
    type boolean;
    description
      "This is a mandatory string attribute, and
      defines the Source Port number (16 bits).";
  }

  leaf pkt-sec-cond-tcp-dest-port {
    type boolean;
    description
      "This is a mandatory string attribute, and
      defines the Destination Port number (16 bits).";
  }

  leaf pkt-sec-cond-tcp-seq-num {
    type boolean;
    description
      "If the SYN flag is set (1), then this is the
      initial sequence number.";
  }

  leaf pkt-sec-cond-tcp-ack-num {
    type boolean;
    description
      "If the ACK flag is set then the value of this
      field is the next sequence number that the sender
      is expecting.";
  }
}
```



```
leaf pkt-sec-cond-tcp-window-size {
  type boolean;
  description
    "The size of the receive window, which specifies
    the number of windows size units (by default,bytes)
    (beyond the segment identified by the sequence
    number in the acknowledgment field) that the sender
    of this segment is currently willing to recive.";
}

leaf pkt-sec-cond-tcp-flags {
  type boolean;
  description
    "This is a mandatory string attribute, and defines
    the nine Control bit flags (9 bits).";
}
}

container packet-security-udp-condition {
  description
    "The purpose of this Class is to represent packet UDP
    packet header information that can be used as part
    of a test to determine if the set of Policy Actions
    in this ECA Policy Rule should be executed or not.";

  leaf-list pkt-sec-cond-udp-src-port {
    type boolean;
    description
      "This is a mandatory string attribute, and
      defines the UDP Source Port number (16 bits).";
  }

  leaf-list pkt-sec-cond-udp-dest-port {
    type boolean;
    description
      "This is a mandatory string attribute, and
      defines the UDP Destination Port number (16 bits).";
  }

  leaf pkt-sec-cond-udp-length {
    type boolean;
    description
      "This is a mandatory string attribute, and defines
      the length in bytes of the UDP header and data
      (16 bits).";
  }
}
```



```
container packet-security-icmp-condition {
  description
    "The internet control message protocol condition.";

  leaf pkt-sec-cond-icmp-type {
    type boolean;
    description
      "ICMP type, see Control messages.";
  }

  leaf pkt-sec-cond-icmp-code {
    type boolean;
    description
      "ICMP subtype, see Control messages.";
  }

  leaf pkt-sec-cond-icmp-seg-num {
    type boolean;
    description
      "The icmp Sequence Number.";
  }
}

case packet-payload-condition {
  leaf packet-payload-manual {
    type string;
    description
      "This is manual for payload condition.
      Vendors can write instructions for payload condition
      that vendor made";
  }
  leaf pkt-payload-content {
    type boolean;
    description
      "The content keyword is very important in
      signatures. Between the quotation marks you
      can write on what you would like the
      signature to match.";
  }
}

case target-condition {
  leaf target-manual {
    type string;
    description
      "This is manual for target condition.
      Vendors can write instructions for target condition
      that vendor made";
  }
}
```



```
    }

    leaf device-sec-context-cond {
        type boolean;
        description
            "The device attribute that can identify a device,
            including the device type (i.e., router, switch,
            pc, ios, or android) and the device's owner as
            well.";
    }
}

case users-condition {
    leaf users-manual {
        type string;
        description
            "This is manual for user condition.
            Vendors can write instructions for user condition
            that vendor made";
    }
}

container user{
    description
        "The user (or user group) information with which
        network flow is associated: The user has many
        attributes such as name, id, password, type,
        authentication mode and so on. Name/id is often
        used in the security policy to identify the user.
        Besides, NSF is aware of the IP address of the
        user provided by a unified user management system
        via network. Based on name-address association,
        NSF is able to enforce the security functions
        over the given user (or user group)";

    choice user-name {
        description
            "The name of the user.
            This must be unique.";

        case tenant {
            description
                "Tenant information.";

            leaf tenant {
                type boolean;
                description
                    "User's tenant information.";
            }
        }
    }
}
```



```
    case vn-id {
      description
        "VN-ID information.";

      leaf vn-id {
        type boolean;
        description
          "User's VN-ID information.";
      }
    }
  }
}

container group {
  description
    "The user (or user group) information with which
    network flow is associated: The user has many
    attributes such as name, id, password, type,
    authentication mode and so on. Name/id is often
    used in the security policy to identify the user.
    Besides, NSF is aware of the IP address of the
    user provided by a unified user management system
    via network. Based on name-address association,
    NSF is able to enforce the security functions
    over the given user (or user group)";

  choice group-name {
    description
      "The name of the user.
      This must be unique.";

    case tenant {
      description
        "Tenant information.";

      leaf tenant {
        type boolean;
        description
          "User's tenant information.";
      }
    }
  }

  case vn-id {
    description
      "VN-ID information.";

    leaf vn-id {
      type boolean;
      description
```



```
        "User's VN-ID information.";
    }
}
}
}

}
case context-condition {
    leaf context-manual {
        type string;
        description
            "This is manual for context condition.
            Vendors can write instructions for context condition
            that vendor made";
    }
}
case gen-context-condition {
    leaf gen-context-manual {
        type string;
        description
            "This is manual for generic context condition.
            Vendors can write instructions for generic context
            condition that vendor made";
    }
}

container geographic-location {
    description
        "The location where network traffic is associated
        with. The region can be the geographic location
        such as country, province, and city,
        as well as the logical network location such as
        IP address, network section, and network domain.";

    leaf src-geographic-location {
        type boolean;
        description
            "This is mapped to ip address. We can acquire
            source region through ip address stored the
            database.";
    }
    leaf dest-geographic-location {
        type boolean;
        description
            "This is mapped to ip address. We can acquire
            destination region through ip address stored
            the database.";
    }
}
}
```



```
    }
  }
}
container action {
  description
    "An action is used to control and monitor aspects of
    flow-based NSFs when the event and condition clauses
    are satisfied. NSFs provide security functions by
    executing various Actions. Examples of I2NSF Actions
    include providing intrusion detection and/or protection,
    web and flow filtering, and deep packet inspection
    for packets and flows.";

  choice action-type {
    description
      "Vendors can use YANG data model to configure rules
      by concreting this action type";
    case ingress-action {
      leaf ingress-manual {
        type string;
        description
          "This is manual for ingress action.
          Vendors can write instructions for ingress action
          that vendor made";
      }
      container ingress-action-type {
        description
          "Ingress action type: permit, deny, and mirror.";
        leaf pass {
          type boolean;
          description
            "If ingress action is pass";
        }
        leaf drop {
          type boolean;
          description
            "If ingress action is drop";
        }
        leaf reject {
          type boolean;
          description
            "If ingress action is reject";
        }
        leaf alert {
          type boolean;
          description
            "If ingress action is alert";
        }
      }
    }
  }
}
```



```
    }
    leaf mirror {
      type boolean;
      description
        "If ingress action is mirror";
    }
  }
}
case egress-action {
  leaf egress-manual {
    type string;
    description
      "This is manual for egress action.
      Vendors can write instructions for egress action
      that vendor made";
  }
  container egress-action-type {
    description
      "Egress-action-type: invoke-signaling,
      tunnel-encapsulation, and forwarding.";
    leaf invoke-signaling {
      type boolean;
      description
        "If egress action is invoke signaling";
    }
    leaf tunnel-encapsulation {
      type boolean;
      description
        "If egress action is tunnel encapsulation";
    }
    leaf forwarding {
      type boolean;
      description
        "If egress action is forwarding";
    }
    leaf redirection {
      type boolean;
      description
        "If egress action is redirection";
    }
  }
}
}
}
}
container resolution-strategy {
  description
    "The resolution strategies can be used to
    specify how to resolve conflicts that occur between
```


the actions of the same or different policy rules that are matched and contained in this particular NSF";

```
leaf first-matching-rule {
  type boolean;
  description
    "If the resolution strategy is first matching rule";
}

leaf last-matching-rule {
  type boolean;
  description
    "If the resolution strategy is last matching rule";
}
}

container default-action {
  description
    "This default action can be used to specify a predefined
    action when no other alternative action was matched
    by the currently executing I2NSF Policy Rule. An analogy
    is the use of a default statement in a C switch statement.";

  container default-action-type {
    description
      "Ingress action type: permit, deny, and mirror.";

    container ingress-action-type {
      description
        "Ingress action type: permit, deny, and mirror.";
      leaf pass {
        type boolean;
        description
          "If ingress action is pass";
      }
      leaf drop {
        type boolean;
        description
          "If ingress action is drop";
      }
      leaf reject {
        type boolean;
        description
          "If ingress action is reject";
      }
      leaf alert {
        type boolean;
        description
          "If ingress action is alert";
      }
    }
  }
}
```



```
    }
    leaf mirror {
      type boolean;
      description
        "If ingress action is mirror";
    }
  }
}
}
}

grouping i2nsf-con-sec-control-caps {
  description
    "i2nsf-con-sec-control-caps";

  container con-sec-control-capabilities {
    description
      "content-security-control-capabilities";

    leaf anti-virus {
      type boolean;
      description
        "antivirus";
    }
    leaf ips {
      type boolean;
      description
        "ips";
    }

    leaf ids {
      type boolean;
      description
        "ids";
    }

    leaf url-filter {
      type boolean;
      description
        "url-filter";
    }
    leaf data-filter {
      type boolean;
      description
        "data-filter";
    }
  }
}
```



```
    leaf mail-filter {
      type boolean;
      description
        "mail-filter";
    }
    leaf sql-filter {
      type boolean;
      description
        "sql-filter";
    }
    leaf file-blocking {
      type boolean;
      description
        "file-blocking";
    }
    leaf file-isolate {
      type boolean;
      description
        "file-isolate";
    }
    leaf pkt-capture {
      type boolean;
      description
        "pkt-capture";
    }
    leaf application-behavior {
      type boolean;
      description
        "application-behavior";
    }
    leaf voip-volte {
      type boolean;
      description
        "voip-volte";
    }
  }
}

grouping i2nsf-attack-mitigation-control-caps {
  description
    "i2nsf-attack-mitigation-control-caps";

  container attack-mitigation-capabilities {
    description
      "attack-mitigation-capabilities";
    choice attack-mitigation-control-type {
```



```
description
  "attack-mitigation-control-type";
case ddos-attack {
  description
    "ddos-attack";
  choice ddos-attack-type {
    description
      "ddos-attack-type";
    case network-layer-ddos-attack {
      description
        "network-layer-ddos-attack";
      container network-layer-ddos-attack-types {
        description
          "network-layer-ddos-attack-type";
        leaf syn-flood-attack {
          type boolean;
          description
            "syn-flood-attack";
        }
        leaf udp-flood-attack {
          type boolean;
          description
            "udp-flood-attack";
        }
        leaf icmp-flood-attack {
          type boolean;
          description
            "icmp-flood-attack";
        }
        leaf ip-fragment-flood-attack {
          type boolean;
          description
            "ip-fragment-flood-attack";
        }
        leaf ipv6-related-attack {
          type boolean;
          description
            "ip-fragment-flood-attack";
        }
      }
    }
  }
}
case app-layer-ddos-attack {
  description
    "app-layer-ddos-attack";
  container app-layer-ddos-attack-types {
    description
      "app-layer-ddos-attack-types";
    leaf http-flood-attack {
```



```

        type boolean;
        description
            "http-flood-attack";
    }
    leaf https-flood-attack {
        type boolean;
        description
            "https-flood-attack";
    }
    leaf dns-flood-attack {
        type boolean;
        description
            "dns-flood-attack";
    }
    leaf dns-amp-flood-attack {
        type boolean;
        description
            "dns-amp-flood-attack";
    }
    leaf ssl-flood-attack {
        type boolean;
        description
            "ssl-flood-attack";
    }
}
}
}
}
}

case single-packet-attack {
    description
        "single-packet-attack";
    choice single-packet-attack-type {
        description
            "single-packet-attack-type";
        case scan-and-sniff-attack {
            description
                "scan-and-sniff-attack";
            leaf ip-sweep-attack {
                type boolean;
                description
                    "ip-sweep-attack";
            }
            leaf port-scanning-attack {
                type boolean;
                description
                    "port-scanning-attack";
            }
        }
    }
}

```



```
    }
    case malformed-packet-attack {
      description
        "malformed-packet-attack";
      leaf ping-of-death-attack {
        type boolean;
        description
          "ping-of-death-attack";
      }
      leaf teardrop-attack {
        type boolean;
        description
          "teardrop-attack";
      }
    }
    case special-packet-attack {
      description
        "special-packet-attack";
      leaf oversized-icmp-attack {
        type boolean;
        description
          "oversized-icmp-attack";
      }
      leaf tracert-attack {
        type boolean;
        description
          "tracert-attack";
      }
    }
  }
}
}
```

```
list nsf {
  key "nsf-name";
  description
    "nsf-name";
  leaf nsf-name {
    type string;
    mandatory true;
    description
      "nsf-name";
  }
  uses capabilities-information;
```



```
    container generic-nsf-capabilities {
      description
        "generic-nsf-capabilities";
      uses i2nsf-net-sec-caps;
    }
  }

  rpc call-appropriate-nsf {
    description
      "We can acquire appropriate NSF that we want
      If we give type of NSF that we want to use,
      we acquire the location information of NSF";

    input {
      leaf nsf-type {
        type nsf-type;
        mandatory true;
        description
          "This is used to acquire NSF
          This is mandatory";
      }
      uses i2nsf-it-resources;
    }
    output {
      uses i2nsf-nsf-location;
    }
  }
}
```

<CODE ENDS>

Figure 10: YANG Data Module of I2NSF Capability

8. IANA Considerations

No IANA considerations exist for this document at this time. URL will be added.

9. Security Considerations

This document introduces no additional security threats and SHOULD follow the security requirements as stated in [[RFC8329](#)].

10. Acknowledgments

This work was supported by Institute for Information & communications Technology Promotion (IITP) grant funded by the Korea government (MSIP) (No.R-20160222-002755, Cloud based Security Intelligence Technology Development for the Customized Security Service Provisioning).

11. Contributors

I2NSF is a group effort. I2NSF has had a number of contributing authors. The following are considered co-authors:

- o Hyoungshick Kim (Sungkyunkwan University)
- o Daeyoung Hyun (Sungkyunkwan University)
- o Dongjin Hong (Sungkyunkwan University)
- o Liang Xia (Huawei)
- o Jung-Soo Park (ETRI)
- o Tae-Jin Ahn (Korea Telecom)
- o Se-Hui Lee (Korea Telecom)

12. References

12.1. Normative References

- [RFC2119] Bradner, S., "Key words for use in RFCs to Indicate Requirement Levels", [BCP 14](#), [RFC 2119](#), March 1997.
- [RFC6020] Bjorklund, M., "YANG - A Data Modeling Language for the Network Configuration Protocol (NETCONF)", [RFC 6020](#), October 2010.
- [RFC8192] Hares, S., Lopez, D., Zarny, M., Jacquenet, C., Kumar, R., and J. Jeong, "Interface to Network Security Functions (I2NSF): Problem Statement and Use Cases", [RFC 8192](#), July 2017.

- [RFC8329] Lopez, D., Lopez, E., Dunbar, L., Strassner, J., and R. Kumar, "Framework for Interface to Network Security Functions", [RFC 8329](#), February 2018.

12.2. Informative References

- [i2nsf-nsf-cap-im]
Xia, L., Strassner, J., Basile, C., and D. Lopez,
"Information Model of NSFs Capabilities", [draft-ietf-i2nsf-capability-00](#) (work in progress), September 2017.
- [i2nsf-nsf-yang]
Kim, J., Jeong, J., Park, J., Hares, S., and Q. Lin,
"I2NSF Network Security Function-Facing Interface YANG Data Model", [draft-kim-i2nsf-nsf-facing-interface-data-model-05](#) (work in progress), March 2018.
- [i2nsf-sfc]
Hyun, S., Jeong, J., Park, J., and S. Hares, "Service Function Chaining-Enabled I2NSF Architecture", [draft-hyun-i2nsf-nsf-triggered-steering-05](#) (work in progress), March 2018.
- [i2nsf-terminology]
Hares, S., Strassner, J., Lopez, D., Xia, L., and H. Birkholz, "Interface to Network Security Functions (I2NSF) Terminology", [draft-ietf-i2nsf-terminology-05](#) (work in progress), January 2018.
- [i2rs-rib-data-model]
Wang, L., Chen, M., Dass, A., Ananthakrishnan, H., Kini, S., and N. Bahadur, "A YANG Data Model for Routing Information Base (RIB)", [draft-ietf-i2rs-rib-data-model-10](#) (work in progress), February 2018.
- [supa-policy-info-model]
Strassner, J., Halpern, J., and S. Meer, "Generic Policy Information Model for Simplified Use of Policy Abstractions (SUPA)", [draft-ietf-supa-generic-policy-info-model-03](#) (work in progress), May 2017.

[Appendix A](#). Example: Extended VoIP-VoLTE Security Function Capabilities Module

This section gives a simple example of how VoIP-VoLTE Security Function Capabilities module could be extended.

```
module
ex-voip-volte-cap {
  namespace "http://example.com/voip-volte-cap";
  prefix "voip-volte-cap";

  import ietf-i2nsf-capability {
    prefix capa;
  }

  augment "/capa:nsf/capa:generic-nsf-capabilities/"
    + "capa:net-sec-control-capabilities/"
    + "capa:condition/capa:condition-type" {
    case voice-condition {
      leaf sip-header-method {
        type boolean;
        description
          "SIP header method.";
      }

      leaf sip-header-uri {
        type boolean;
        description
          "SIP header URI.";
      }

      leaf sip-header-from {
        type boolean;
        description
          "SIP header From.";
      }

      leaf sip-header-to {
        type boolean;
        description
          "SIP header To.";
      }

      leaf sip-header-expire-time {
        type boolean;
        description
          "SIP header expire time.";
```



```
    }  
  
    leaf sip-header-user-agent {  
        type boolean;  
        description  
            "SIP header user agent.";  
    }  
}  
}
```

Figure 11: Example: Extended VoIP-VoLTE Security Function
Capabilities Module

Appendix B. Example: Configuration XML of Capability Module

This section gives a xml examples for a configuration of Capability module according to a requirement.

B.1. Example: Configuration XML of Generic Network Security Function Capabilities

This section gives a xml example for generic network security function capability configuration according to a requirement.

Requirement: Register packet filter according to requirements.

1. The location of the NSF is 221.159.112.150.
2. The NSF can obtain the best effect if the packet was generated by PC or IoT.
3. The NSF can apply policies according to time.
4. The NSF should be able to block the source packets or destination packets with IPv4 address.
5. The NSF should be able to pass, reject, or alert packets.
6. Here is XML example for the generic network security function capability configuration:


```
<?xml version="1.0" encoding="UTF-8"?>
<rpc message-id="1" xmlns="urn:ietf:params:xml:ns:netconf:base:1.0">
<edit-config>
  <target>
    <running />
  </target>
  <config>
    <nsf xmlns="urn:ietf:params:xml:ns:yang:" +
      "ietf-i2nsf-capability">
      <nsf-name>Huawei-Firewall</nsf-name>
      <nsf-address>
        <ipv4-address>221.159.112.150</ipv4-address>
      </nsf-address>
      <target-device>
        <pc>true</pc>
      </target-device>
      <target-device>
        <iot>true</iot>
      </target-device>
      <generic-nsf-capabilities>
        <net-sec-control-capabilities>
          <nsc-capabilities-name>ipv4-packet-filter<nsc-capabilities-name>
          <time-zone>
            <start-time>true</start-time>
            <end-time>true</end-time>
          </time-zone>
          <condition>
            <packet-security-ipv4-condition>
              <pkt-sec-cond-ipv4-src>true</pkt-sec-cond-ipv4-src>
              <pkt-sec-cond-ipv4-dest>true</pkt-sec-cond-ipv4-dest>
            </packet-security-ipv4-condition>
          </condition>
          <action>
            <ingress-action-type>
              <pass>true</pass>
              <reject>true</reject>
              <alert>true</alert>
            </ingress-action-type>
          </action>
        </net-sec-control-capabilities>
      </generic-nsf-capabilities>
    </nsf>
  </config>
</edit-config>
</rpc>
```

Figure 12: Example: Configuration XML for Generic Network Security
Function Capability

B.2. Example: Configuration XML of Extended VoIP/VoLTE Security Function Capabilities Module

This section gives a xml example for extended VoIP-VoLTE security function capabilities (See Figure 11) configuration according to a requirement.

Requirement: Register VoIP/VoLTe security function according to requirements.

1. The location of the NSF is 221.159.112.151.
2. The NSF can obtain the best effect if the packet was generated by VoIP-VoLTE phone.
3. The NSF should be able to block the malicious sip packets with user agent.
4. The NSF should be able to pass, reject, or alert packets.

Here is XML example for the VoIP-VoLTE security function capabilities configuration:


```
<?xml version="1.0" encoding="UTF-8"?>
<rpc message-id="1" xmlns="urn:ietf:params:xml:ns:netconf:base:1.0">
<edit-config>
  <target>
    <running />
  </target>
<config>
  <nsf xmlns="urn:ietf:params:xml:ns:yang:" +
    "ietf-i2nsf-capability">
    <nsf-name>Cisco-VoIP-VoLTE</nsf-name>
    <nsf-address>
      <ipv4-address>221.159.112.151</ipv4-address>
    </nsf-address>
    <generic-nsf-capabilities>
      <net-sec-control-capabilities>
        <nsc-capabilities-name>sip-packet-filter<nsc-capabilities-name>
          <condition>
            <sip-header-user-agent>true</sip-header-user-agent>
          </condition>
          <action>
            <ingress-action-type>
              <pass>true</pass>
              <reject>true</reject>
              <alert>true</alert>
            </ingress-action-type>
          </action>
        </net-sec-control-capabilities>
      </generic-nsf-capabilities>
    </nsf>
  </config>
</edit-config>
</rpc>
```

Figure 13: Example: Configuration XML for Extended VoIP/VoLTE
Security Function Capabilities

Appendix C. Changes from [draft-hares-i2nsf-capability-data-model-06](#)

The following changes are made from [draft-hares-i2nsf-capability-data-model-06](#):

1. We added the the capability for time zone and time interval.

Authors' Addresses

Susan Hares
Huawei
7453 Hickory Hill
Saline, MI 48176
USA

Phone: +1-734-604-0332
EMail: shares@ndzh.com

Jaehoon Paul Jeong
Department of Software
Sungkyunkwan University
2066 Seobu-Ro, Jangan-Gu
Suwon, Gyeonggi-Do 16419
Republic of Korea

Phone: +82 31 299 4957
Fax: +82 31 290 7996
EMail: pauljeong@skku.edu
URI: <http://iotlab.skku.edu/people-jaehoon-jeong.php>

Jinyong Tim Kim
Department of Computer Engineering
Sungkyunkwan University
2066 Seobu-Ro, Jangan-Gu
Suwon, Gyeonggi-Do 16419
Republic of Korea

Phone: +82 10 8273 0930
EMail: timkim@skku.edu

Robert Moskowitz
HTT Consulting
Oak Park, MI
USA

Phone: +1-248-968-9809
EMail: rgm@htt-consult.com

Qiushi Lin

Huawei

Huawei Industrial Base

Shenzhen, Guangdong 518129

China

EMail: linqiushi@huawei.com