

Network Working Group
Internet-Draft
Intended status: Standards Track
Expires: 7 September 2022

Z. Hu
Huawei Technologies
H. Chen
Futurewei
J. Yao
Huawei Technologies
C. Bowers
Juniper Networks
Y. Zhu
China Telecom
Y. Liu
China Mobile
6 March 2022

LSR for SR Proxy Forwarding
draft-hc-lsr-sr-proxy-fw-00

Abstract

This document describes extensions to OSPF and IS-IS to support SR proxy forwarding mechanism for fast protecting the failure of a node with segments on a SR-TE path. The segments of the node include adjacency, node or binding segments.

Requirements Language

The key words "MUST", "MUST NOT", "REQUIRED", "SHALL", "SHALL NOT", "SHOULD", "SHOULD NOT", "RECOMMENDED", "MAY", and "OPTIONAL" in this document are to be interpreted as described in [RFC 2119](#) [[RFC2119](#)].

Status of This Memo

This Internet-Draft is submitted in full conformance with the provisions of [BCP 78](#) and [BCP 79](#).

Internet-Drafts are working documents of the Internet Engineering Task Force (IETF). Note that other groups may also distribute working documents as Internet-Drafts. The list of current Internet-Drafts is at <https://datatracker.ietf.org/drafts/current/>.

Internet-Drafts are draft documents valid for a maximum of six months and may be updated, replaced, or obsoleted by other documents at any time. It is inappropriate to use Internet-Drafts as reference material or to cite them other than as "work in progress."

This Internet-Draft will expire on 7 September 2022.

Internet-Draft

SR Proxy

March 2022

Copyright Notice

Copyright (c) 2022 IETF Trust and the persons identified as the document authors. All rights reserved.

This document is subject to [BCP 78](#) and the IETF Trust's Legal Provisions Relating to IETF Documents (<https://trustee.ietf.org/license-info>) in effect on the date of publication of this document. Please review these documents carefully, as they describe your rights and restrictions with respect to this document. Code Components extracted from this document must include Revised BSD License text as described in Section 4.e of the [Trust Legal Provisions](#) and are provided without warranty as described in the Revised BSD License.

Table of Contents

1.	Introduction	2
2.	Extensions to IGP for Proxy Forwarding	3
2.1.	Extensions to OSPF	3
2.1.1.	Advertising Proxy Forwarding	3
2.1.2.	Advertising Binding Segment	5
2.2.	Extensions to IS-IS	8
2.2.1.	Advertising Proxy Forwarding	8
2.2.2.	Advertising Binding Segment	9
3.	Security Considerations	10
4.	IANA Considerations	10
4.1.	OSPFv2	10
4.2.	OSPFv3	11
4.3.	IS-IS	12
5.	Acknowledgements	12
6.	References	12
6.1.	Normative References	12
6.2.	Informative References	13
	Authors' Addresses	14

[1.](#) Introduction

[I-D.hu-spring-segment-routing-proxy-forwarding] describes a SR proxy forwarding for protection. Each neighbor of a possible failed node advertises its SR proxy forwarding capability when it has the capability. This capability indicates that the neighbor (the Proxy Forwarder) will forward traffic on behalf of the failed node. A router receiving the capability from the neighbors of a failed node

will send traffic using the node-SID of the failed node to the nearest Proxy Forwarder after the IGP converges on the failure.

Once the affected traffic reaches a Proxy Forwarder, it sends the traffic on the post-failure shortest path to the node immediately following the failed node in the segment list.

For a binding segment of a possible failed node, the node advertises the information about the binding segment, including the binding SID and the list of SIDs associated with the binding SID, to its direct neighbors only. Note that the information is not advertised in the network domain.

After the node fails and the IGP converges on the failure, the traffic with the binding SID of the failed node will reach its neighbor having SR Proxy Forwarding capability. Once receiving the traffic, the neighbor swaps the binding SID with the list of SIDs associated with the binding SID and sends the traffic along the post-failure shortest path to the first node in the segment list.

[2.](#) Extensions to IGP for Proxy Forwarding

This section defines extensions to IGP for advertising the SR proxy forwarding capability of a node in a network domain and the information about each binding segment (including its binding SID and the list of SIDs associated) of a node to its direct neighbors.

[2.1.](#) Extensions to OSPF

[2.1.1.](#) Advertising Proxy Forwarding

When a node P has the capability to do a SR proxy forwarding for its neighboring nodes for protecting the failures of these nodes, P advertises its capability for these nodes. The mirror SID [\[RFC8402\]](#) [\[RFC8667\]](#) for a node N (Neighbor of P) advertised by P indicates the capability of P for N.

Alternatively, P advertises its capability in its router information opaque LSA with Router Functional Capabilities TLV [\[RFC7770\]](#). One

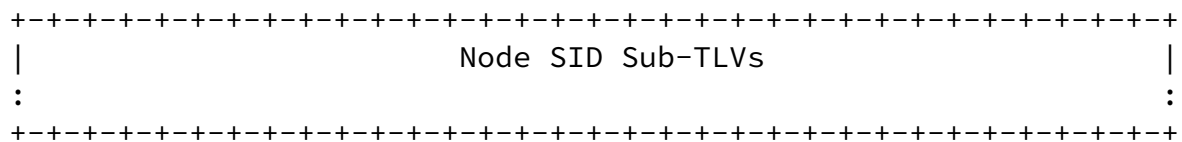


Figure 1: OSPF Proxy Node SIDs TLV

The Type (TBD1) is to be assigned by IANA. The TLV contains a number of Node SID Sub-TLVs. The Length is the total size of the Node SID Sub-TLVs included in the TLV. A Node SID Sub-TLV is the Prefix SID Sub-TLV defined in [\[RFC8665\]](#).

A proxy forwarding node P originates an Extended Prefix Opaque LSA containing this new TLV. The TLV includes the Node SID Sub-TLVs for the node SIDs of some of P's neighboring nodes. For each of some of P's neighboring nodes, the Node SID Sub-TLV for its prefix/node SID is included the TLV. This prefix/node SID is called a proxy prefix/node SID.

When an neighboring node fails, P maintains the LSA with the TLV containing the Prefix/Node SID Sub-TLV for the neighboring node for a given period of time. After the given period of time, the Prefix/Node SID Sub-TLV for the neighboring node is removed from the TLV in the LSA and then after a given time the corresponding proxy forwarding entries for protecting the failure of the neighboring node is removed.

[2.1.2.](#) Advertising Binding Segment

For a binding segment (or binding for short) on a node A, which consists of a binding SID and a list of segments, node A advertises an LSA containing the binding (i.e., the binding SID and the list of the segments). The LSA is advertised only to each of the node A's neighboring nodes. For OSPFv2, the LSA is a opaque LSA of LS type 9 (i.e., a link local scope LSA).

A binding segment is represented by binding segment TLV of the format as shown in Figure 2.

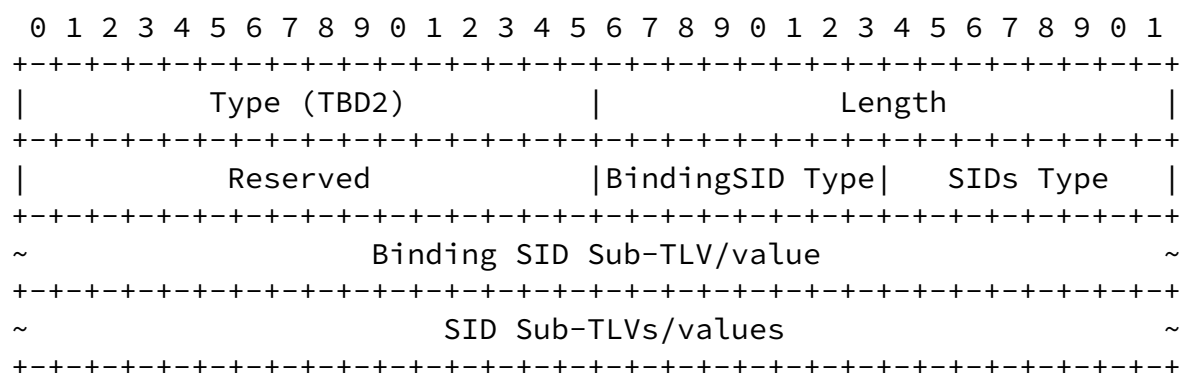


Figure 2: OSPF Binding Segment TLV

It comprises a binding SID and a list of segments (SIDs). The fields of this TLV are defined as follows:

Type: 2 octets, its value (TBD2) is to be assigned by IANA.

Length: 2 octets, its value is (4 + length of Sub-TLVs/values).

Binding SID Type (BT): 1 octet indicates whether the binding SID is represented by a Sub-TLV or a value included in the TLV. For the binding SID represented by a value, it indicates the type of binding SID. The following BT values are defined:

- o BT = 0: The binding SID is represented by a Sub-TLV (i.e., Binding SID Sub-TLV) in the TLV. A binding SID Sub-TLV is a SID/Label Sub-TLV defined in [RFC8665]. BT != 0 indicates that the binding SID is represented by a value.


- o BT = 1: The binding SID value is a label, which is represented by the 20 rightmost bits. The length of the value is 3 octets.

- o BT = 2: The binding SID value is a 32-bit SID. The length of the value is 4 octets.

SIDs Type (ST): 1 octet indicates whether the list of segments (SIDs) are represented by Sub-TLVs or values included in the TLV. For the SIDs represented by values, it indicates the type of SIDs. The following ST values are defined:

- o ST = 0: The SIDs are represented by Sub-TLVs (i.e., SID Sub-TLVs) in the TLV. A SID Sub-TLV is an Adj-SID Sub-TLV, a Prefix-SID Sub-TLV or a SID/Label Sub-TLV defined in [RFC8665]. ST != 0 indicates that the SIDs are represented by values.
- o ST = 1: Each of the SID values is a label, which is represented by the 20 rightmost bits. The length of the value is 3 octets.
- o ST = 2: Each of the SID values is a 32-bit SID. The length of the value is 4 octets.

The opaque LSA of LS Type 9 containing the binding segment (i.e., the binding SID and the list of the segments) has the format as shown in Figure 3. It may have Opaque Type of x (the exact type is to be assigned by IANA) for Binding Segment Opaque LSA.

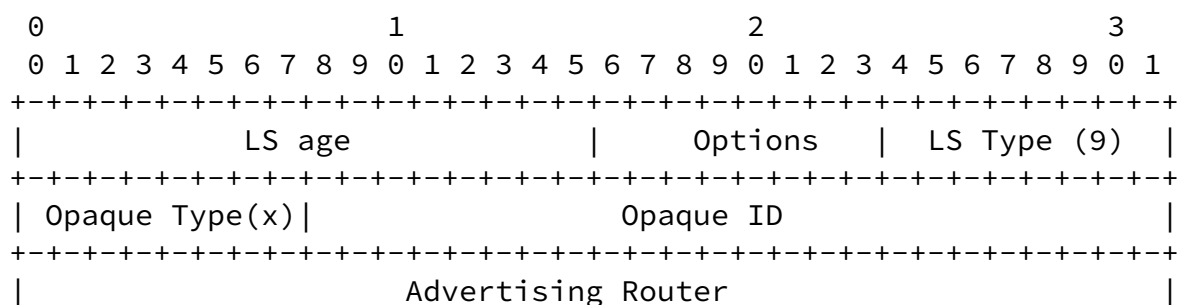

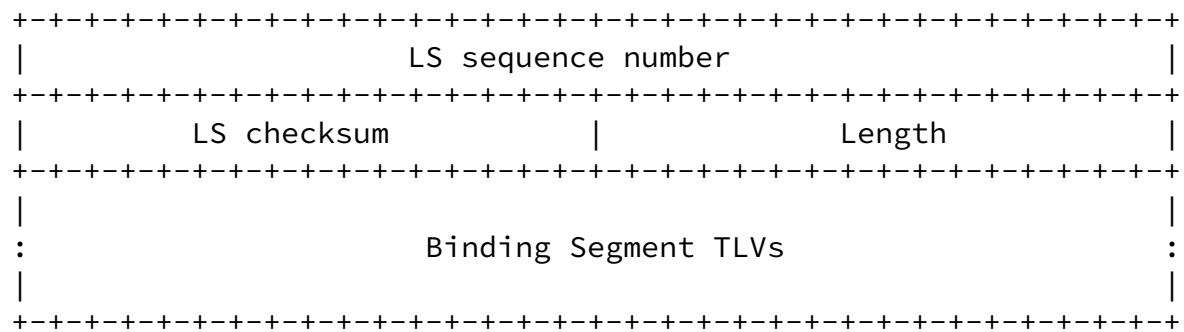


Figure 3: OSPFv2 Binding Segment Opaque LSA

For every binding on a node A, the LSA originated by A contains a binding segment TLV for it.

For node A running OSPFv3, it originates a link-local scoping LSA of a new LSA function code (TBD3) containing binding segment TLVs for the bindings on it. The format of the LSA is illustrated in Figure 4.

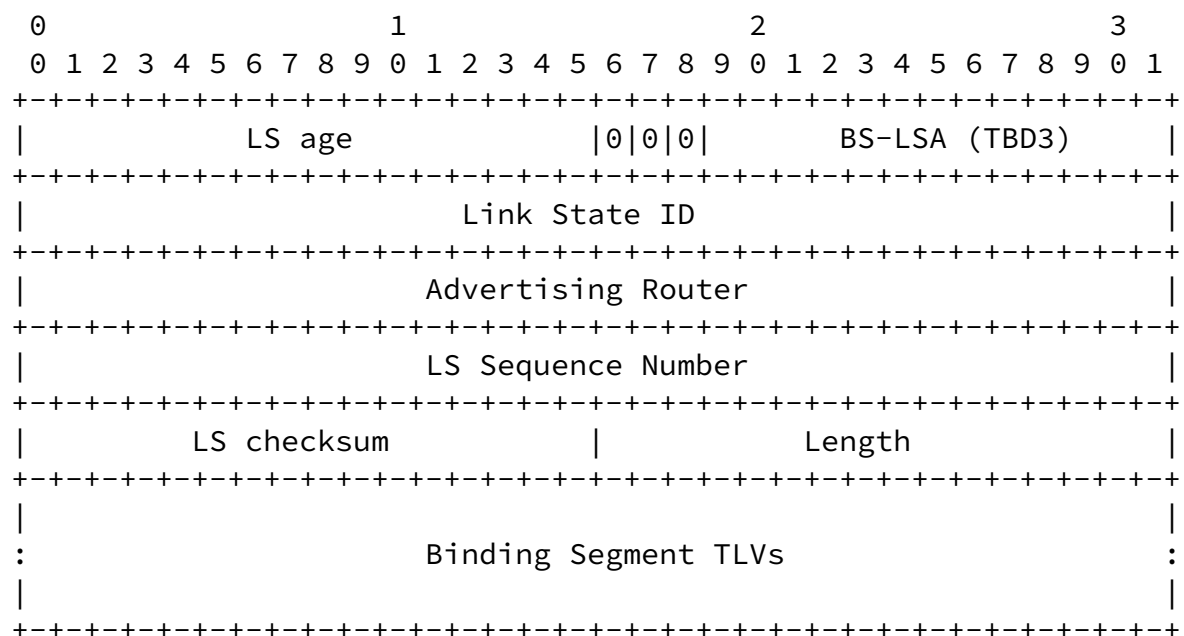


Figure 4: OSPFv3 Binding Segment Opaque LSA

The U-bit is set to 0, and the scope is set to 00 for link-local

scoping.

[2.2.](#) Extensions to IS-IS

[2.2.1.](#) Advertising Proxy Forwarding

When a node P has the capability to do a SR proxy forwarding for its neighboring nodes, P advertises its capability in its LSP with a Router Capability TLV of Type 242 including a SR capabilities sub-TLV of sub-Type 2.

One bit (called PF bit) in the Flags field of the SR capabilities sub-TLV is defined to indicate node P's capability. When this bit is set to one by node P, it indicates that node P is capable of doing a SR proxy forwarding for its neighboring nodes.

If node P can not do a SR proxy forwarding for all its neighboring nodes, but for some of them, then it advertises the node SID of each of the nodes as a proxy node SID, indicating that it is able to do proxy forwarding for the node SID.

The IS-IS SID/Label Binding TLV (suggested value 149) is defined in [\[RFC8667\]](#). A Proxy Forwarder uses the SID/Label Binding TLV to advertise the node SID of its neighboring node. The Flags field of the SID/Label Binding TLV is extended to include a P flag as shown in Figure 5. The prefix/node SID in prefix/node SID Sub-TLV included in SID/Label Binding TLV is identified as a proxy forwarding prefix/node SID.

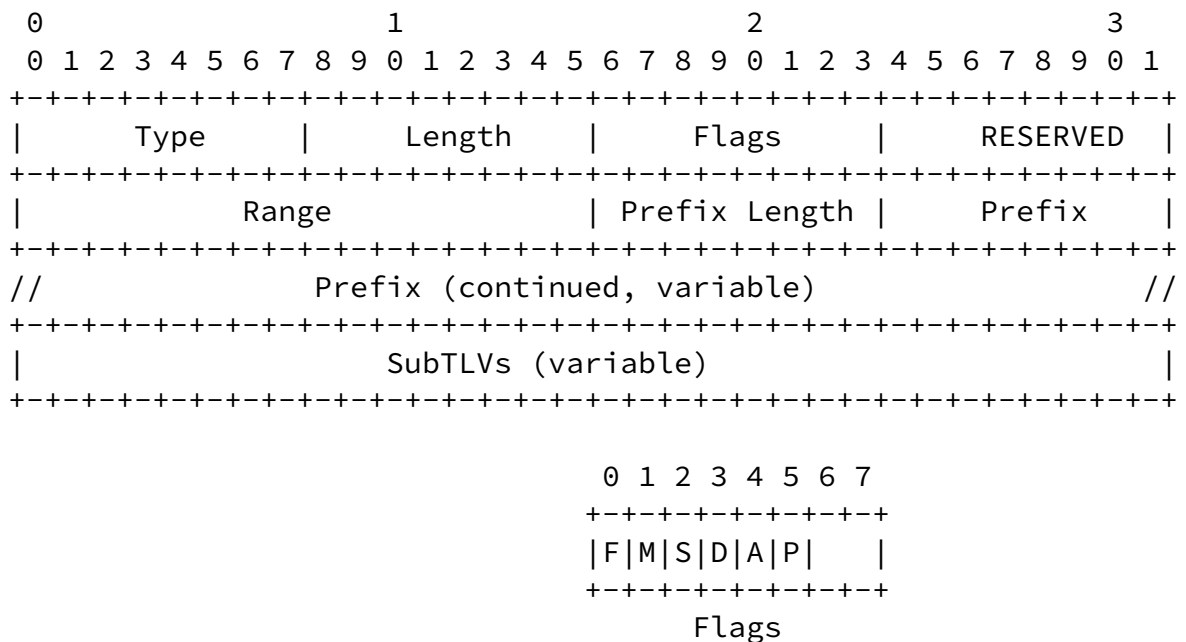


Figure 5: SID/Label Binding TLV

Where:

P-Flag: Proxy forwarding flag. If set, this prefix/node SID is advertised by the proxy node. This TLV is used to announce that the node has the ability to proxy forward the prefix/node SID.

When the P-flag is set in the SID/Label Binding TLV, the following usage rules apply.

The Range, Prefix Length and Prefix field are not used. They should be set to zero on transmission and ignored on receipt.

SID/Label Binding TLV contains a number of prefix/node SID Sub-TLVs. The TLV advertised by a proxy forwarding node P contains prefix/node SID Sub-TLVs for the node SIDs of P's neighbor nodes. Each of the Sub-TLVs is a prefix/node SID Sub-TLV defined in [RFC8667]. From the SID in a prefix/node SID Sub-TLV advertised by the Proxy Forwarding node, its prefix can be obtained through matching corresponding prefix/node SID advertised by the neighbor/protected node using TLV-135 (or 235, 236, or 237) together with the prefix/node SID Sub-TLV.

2.2.2. Advertising Binding Segment

For supporting binding SID proxy forwarding, a new IS-IS TLV, called Binding Segment TLV, is defined. It contains a binding SID and a list of segments (SIDs). This TLV is advertised in Circuit Scoped Link State PDUs (CS-LSP) [RFC7356]. Its format is shown in Figure 6.

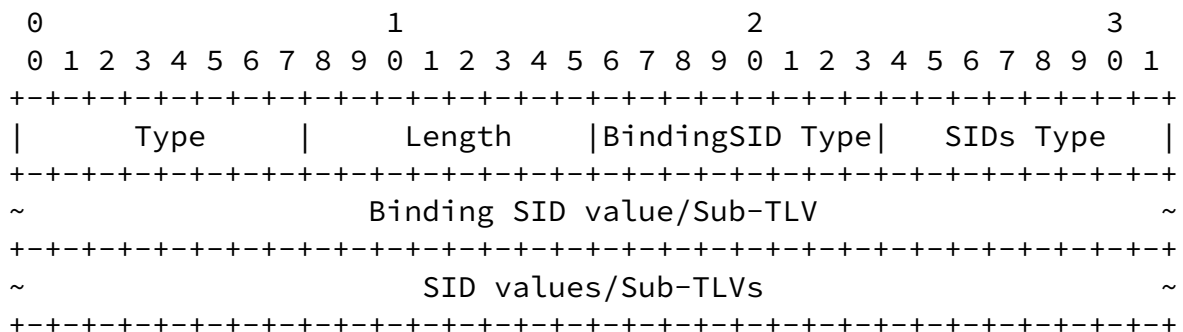


Figure 6: IS-IS Binding Segment TLV

The fields of this TLV are defined as follows:

Type: 1 octet Suggested value 152 (to be assigned by IANA)

Length: 1 octet (2 + length of Sub-TLVs/values).

The other fields are the same as those in Figure 2.

3. Security Considerations

The extensions to OSPF and IS-IS described in this document result in two types of behaviors in data plane when a node in a network fails. One is that for a node, which is a upstream (except for the direct upstream) node of the failed node along a SR-TE path, it continues to send the traffic to the failed node along the SR-TE path for an extended period of time. The other is that for a node, which is the direct upstream node of the failed node, it fast re-routes the traffic around the failed node to the direct downstream node of the failed node along the SR-TE path. These behaviors are internal to a network and should not cause extra security issues.

4. IANA Considerations

4.1. OSPFv2

Under Subregistry Name "OSPF Router Functional Capability Bits" within the "Open Shortest Path First v2 (OSPFv2) Parameters" [[RFC7770](#)], IANA is requested to assign one bit for Proxy Forwarding Capability as follows:

Bit number	Capability Name	Reference
31	Proxy Forwarding	This document

Under Registry Name "OSPFv2 Extended Prefix Opaque LSA TLVs" [[RFC7684](#)], IANA is requested to assign one new TLV value for OSPF Proxy Node SIDs as follows:

TLV Value	TLV Name	Reference
-----------	----------	-----------

2	Proxy Node SIDs TLV	This document
---	---------------------	---------------

Under Registry Name "Opaque Link-State Advertisements (LSA) Option Types" [[RFC5250](#)], IANA is requested to assign new Opaque Type registry values for Binding Segment LSA as follows:

Hu, et al.

Expires 7 September 2022

[Page 10]

Internet-Draft

SR Proxy

March 2022

Registry Value	Opaque Type	Reference
10	Binding Segment	This document

IANA is requested to create and maintain new registries:

- o OSPFv2 Binding Segment Opaque LSA TLVs

Initial values for the registry are given below. The future assignments are to be made through IETF Review [[RFC5226](#)].

Value	TLV Name	Definition
0	Reserved	
1	Binding Segment TLV	This Document
2-32767	Unassigned	
32768-65535	Reserved	

[4.2.](#) OSPFv3

Under Registry Name "OSPFv3 LSA Function Codes", IANA is requested to assign new registry values for Binding Segment LSA as follows:

Value	LSA Function Code Name	Reference
16	Binding Segment LSA	This document

- o OSPFv3 Binding Segment LSA TLVs

Value	TLV Name	Definition
0	Reserved	
1	Binding Segment TLV	This Document
2-32767	Unassigned	
32768-65535	Reserved	

Under Registration "Segment Routing Capability" in the "sub-TLVs for TLV 242" registry [[RFC8667](#)], IANA is requested to assign one bit flag for Proxy Forwarding Capability as follows:

Bit number	Capability Name	Reference
2	Proxy Forwarding (PF)	This document

Bit number	Flag Name	Reference
5	P-Flag	This document

Under Registry Name: IS-IS TLV Codepoints, IANA is requested to assign one new TLV value for IS-IS Binding Segment as follows:

Value	TLV Name	Reference
152	Binding Segment TLV	This Document

5. Acknowledgements

The authors would like to thank Peter Psenak, Acee Lindem, Les Ginsberg, Bruno Decraene and Jeff Tantsura for their comments to this work.

6. References

6.1. Normative References

- [RFC2119] Bradner, S., "Key words for use in RFCs to Indicate Requirement Levels", [BCP 14](#), [RFC 2119](#), DOI 10.17487/RFC2119, March 1997, <<https://www.rfc-editor.org/info/rfc2119>>.

Hu, et al.

Expires 7 September 2022

[Page 12]

Internet-Draft

SR Proxy

March 2022

- [RFC5226] Narten, T. and H. Alvestrand, "Guidelines for Writing an IANA Considerations Section in RFCs", [RFC 5226](#), DOI 10.17487/RFC5226, May 2008, <<https://www.rfc-editor.org/info/rfc5226>>.
- [RFC5250] Berger, L., Bryskin, I., Zinin, A., and R. Coltun, "The OSPF Opaque LSA Option", [RFC 5250](#), DOI 10.17487/RFC5250, July 2008, <<https://www.rfc-editor.org/info/rfc5250>>.
- [RFC7356] Ginsberg, L., Previdi, S., and Y. Yang, "IS-IS Flooding Scope Link State PDUs (LSPs)", [RFC 7356](#), DOI 10.17487/RFC7356, September 2014, <<https://www.rfc-editor.org/info/rfc7356>>.
- [RFC7684] Psenak, P., Gredler, H., Shakir, R., Henderickx, W., Tantsura, J., and A. Lindem, "OSPFv2 Prefix/Link Attribute Advertisement", [RFC 7684](#), DOI 10.17487/RFC7684, November 2015, <<https://www.rfc-editor.org/info/rfc7684>>.

- [RFC7770] Lindem, A., Ed., Shen, N., Vasseur, JP., Aggarwal, R., and S. Shaffer, "Extensions to OSPF for Advertising Optional Router Capabilities", [RFC 7770](#), DOI 10.17487/RFC7770, February 2016, <<https://www.rfc-editor.org/info/rfc7770>>.
- [RFC8665] Psenak, P., Ed., Previdi, S., Ed., Filsfils, C., Gredler, H., Shakir, R., Henderickx, W., and J. Tantsura, "OSPF Extensions for Segment Routing", [RFC 8665](#), DOI 10.17487/RFC8665, December 2019, <<https://www.rfc-editor.org/info/rfc8665>>.
- [RFC8667] Previdi, S., Ed., Ginsberg, L., Ed., Filsfils, C., Bashandy, A., Gredler, H., and B. Decraene, "IS-IS Extensions for Segment Routing", [RFC 8667](#), DOI 10.17487/RFC8667, December 2019, <<https://www.rfc-editor.org/info/rfc8667>>.

6.2. Informative References

- [I-D.hu-spring-segment-routing-proxy-forwarding]
Hu, Z., Chen, H., Yao, J., Bowers, C., Yongqing, and Yisong, "SR-TE Path Midpoint Restoration", Work in Progress, Internet-Draft, [draft-hu-spring-segment-routing-proxy-forwarding-18](#), 28 February 2022, <<https://www.ietf.org/archive/id/draft-hu-spring-segment-routing-proxy-forwarding-18.txt>>.

Hu, et al.	Expires 7 September 2022	[Page 13]
------------	--------------------------	-----------

Internet-Draft	SR Proxy	March 2022
----------------	----------	------------

- [I-D.ietf-spring-segment-routing-policy]
Filsfils, C., Talaulikar, K., Voyer, D., Bogdanov, A., and P. Mattes, "Segment Routing Policy Architecture", Work in Progress, Internet-Draft, [draft-ietf-spring-segment-routing-policy-18](#), 17 February 2022, <<https://www.ietf.org/archive/id/draft-ietf-spring-segment-routing-policy-18.txt>>.
- [RFC8402] Filsfils, C., Ed., Previdi, S., Ed., Ginsberg, L., Decraene, B., Litkowski, S., and R. Shakir, "Segment Routing Architecture", [RFC 8402](#), DOI 10.17487/RFC8402,

July 2018, <<https://www.rfc-editor.org/info/rfc8402>>.

Authors' Addresses

Zhibo Hu
Huawei Technologies
Huawei Bld., No.156 Beiqing Rd.
Beijing
100095
China
Email: huzhibo@huawei.com

Huaimo Chen
Futurewei
Boston, MA,
United States of America
Email: Huaimo.chen@futurewei.com

Junda Yao
Huawei Technologies
Huawei Bld., No.156 Beiqing Rd.
Beijing
100095
China
Email: yaojunda@huawei.com

Chris Bowers
Juniper Networks
1194 N. Mathilda Ave.
Sunnyvale, CA, 94089
United States of America
Email: cbowers@juniper.net

Hu, et al.

Expires 7 September 2022

[Page 14]

Internet-Draft

SR Proxy

March 2022

Yongqing
China Telecom
109, West Zhongshan Road, Tianhe District
Guangzhou

510000
China
Email: zhuyq8@chinatelecom.cn

Yisong
China Mobile
510000
China
Email: liuyisong@chinamobile.com