

6lo  
Internet-Draft  
Intended status: Standards Track  
Expires: September 5, 2018

Lijo Thomas  
C-DAC  
P. Akshay  
Smarten Spaces  
Satish Anamalamudi  
Huaiyin Institute of Technology  
S.V.R.Anand  
Malati Hegde  
Indian Institute of Science  
C. Perkins  
Futurewei  
March 4, 2018

Packet Delivery Deadline time in 6LoWPAN Routing Header  
draft-ietf-6lo-deadline-time-01

## Abstract

This document specifies a new type for the 6LoWPAN routing header containing the delivery deadline time for data packets. The deadline time enables forwarding and scheduling decisions for time critical IoT M2M applications that need deterministic delay guarantees over constrained networks and operate within time-synchronized networks.

## Status of This Memo

This Internet-Draft is submitted in full conformance with the provisions of [BCP 78](#) and [BCP 79](#).

Internet-Drafts are working documents of the Internet Engineering Task Force (IETF). Note that other groups may also distribute working documents as Internet-Drafts. The list of current Internet-Drafts is at <https://datatracker.ietf.org/drafts/current/>.

Internet-Drafts are draft documents valid for a maximum of six months and may be updated, replaced, or obsoleted by other documents at any time. It is inappropriate to use Internet-Drafts as reference material or to cite them other than as "work in progress."

This Internet-Draft will expire on September 5, 2018.

## Copyright Notice

Copyright (c) 2018 IETF Trust and the persons identified as the document authors. All rights reserved.

Internet-Draft

6lo Delivery Deadline Time

March 2018

This document is subject to [BCP 78](https://trustee.ietf.org/license-info) and the IETF Trust's Legal Provisions Relating to IETF Documents (<https://trustee.ietf.org/license-info>) in effect on the date of publication of this document. Please review these documents carefully, as they describe your rights and restrictions with respect to this document. Code Components extracted from this document must include Simplified BSD License text as described in Section 4.e of the Trust Legal Provisions and are provided without warranty as described in the Simplified BSD License.

## Table of Contents

<a href="#">1.</a>	Introduction . . . . .	<a href="#">2</a>
<a href="#">2.</a>	Terminology . . . . .	<a href="#">3</a>
<a href="#">3.</a>	6LoRHE Generic Format . . . . .	<a href="#">3</a>
<a href="#">4.</a>	Deadline-6LoRHE . . . . .	<a href="#">4</a>
<a href="#">5.</a>	Deadline-6LoRHE Format . . . . .	<a href="#">5</a>
<a href="#">6.</a>	Deadline-6LoRHE in Three Network Scenarios . . . . .	<a href="#">6</a>
6.1.	Scenario 1: Endpoints in the same DODAG (N1) in non-storing mode. . . . .	<a href="#">7</a>
6.2.	Scenario 2: Endpoints in Networks with Dissimilar L2 Technologies. . . . .	<a href="#">8</a>
6.3.	Scenario 3: Packet transmission across different DODAGs (N1 to N2). . . . .	<a href="#">9</a>
<a href="#">7.</a>	IANA Considerations . . . . .	<a href="#">10</a>
<a href="#">8.</a>	Security Considerations . . . . .	<a href="#">10</a>
<a href="#">9.</a>	Acknowledgements . . . . .	<a href="#">10</a>
<a href="#">10.</a>	References . . . . .	<a href="#">10</a>
<a href="#">10.1.</a>	Normative References . . . . .	<a href="#">10</a>
<a href="#">10.2.</a>	Informative References . . . . .	<a href="#">11</a>
<a href="#">Appendix A.</a>	Changes Since <a href="#">draft-ietf-6lo-deadline-time-00</a> . . . . .	<a href="#">12</a>
	Authors' Addresses . . . . .	<a href="#">13</a>

## [1.](#) Introduction

Low Power and Lossy Networks (LLNs) are likely to be deployed for real time industrial applications requiring end-to-end delay guarantees [[I-D.ietf-detnet-use-cases](#)]. A Deterministic Network ("detnet") typically requires some data packets to reach their receivers within strict time bounds. Intermediate nodes use the deadline information to make appropriate packet forwarding and scheduling decisions to meet the time bounds.

The draft [[I-D.ietf-roll-routing-dispatch](#)] specifies the 6LoWPAN Routing Header (6LoRH), compression schemes for RPL routing (source routing) operation [[RFC6554](#)], header compression of RPL Packet Information [[RFC6553](#)], and IP-in-IP encapsulation. This document specifies a new Deadline-6LoRHE type for the 6LoWPAN Dispatch Page 1,

Internet-Draft 6lo Delivery Deadline Time March 2018

so that the deadline time of data packets can be included within the 6LoWPAN routing header. This document also specifies handling of the deadline time when packets traverse through time-synchronized networks operating in different timezones or distinct reference clocks. Time synchronization techniques need not be mandated by this specification. There are a number of standards available for this purpose, including IEEE 1588 [[ieee-1588](#)], IEEE 802.1AS [[dot1AS-2011](#)], IEEE 802.15.4-2015 TSCH [[dot15-tsch](#)], and more.

## 2. Terminology

The key words "MUST", "MUST NOT", "REQUIRED", "SHALL", "SHALL NOT", "SHOULD", "SHOULD NOT", "RECOMMENDED", "NOT RECOMMENDED", "MAY", and "OPTIONAL" in this document are to be interpreted as described in [[RFC2119](#)].

This document uses terminology consistent with the terminology used in [[RFC6550](#)] and [[I-D.ietf-6tisch-terminology](#)]. Also, in this document, the terms "expiration time", "delivery deadline time", and "deadline" are used interchangeably with the same meaning.

## 3. 6LoRHE Generic Format

Note: this section is not normative. It is included for convenience, and may be deleted in a later revision of this document. The generic header format of the 6LoRHE is specified in [[I-D.ietf-roll-routing-dispatch](#)]. Figure 1 illustrates the 6LoRHE generic format.

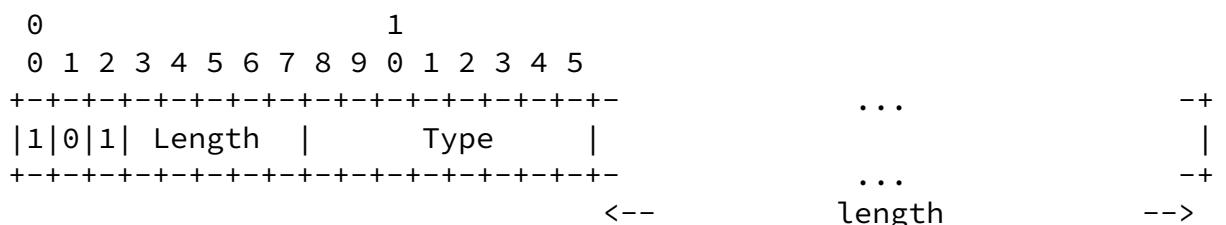


Figure 1: 6LoRHE format

- o Length: Length of the 6LoRHE expressed in bytes, excluding the first 2 bytes. This enables a node to skip a 6LoRHE if the Type is not recognized/supported.
- o Type: Type of the 6LoRHE.
- o length: variable

#### [4.](#) Deadline-6LoRHE

The Deadline-6LoRHE (see Figure 2) is an elective 6LoRH (i.e., a 6LoRHE) that provides the Deadline time (DT) for an IPv6 datagram in a compressed form. Along with the deadline, the header can include the packet Origination Time (OT), to enable a close estimate of the total delay incurred by a packet. The OT field is initialized by the sender using the current time at the outgoing network interface through which the packet is forwarded.

The deadline field contains the value of the delivery deadline time for the packet. The packet SHOULD be delivered to the Receiver before this time.

$$\text{packet\_deadline\_time} = \text{packet\_origination\_time} + \text{max\_delay}$$

All nodes within the network SHOULD process the Deadline-6LoRHE in order to support delay-sensitive deterministic applications. The packet deadline time (DT) and origination time (OT) are represented in time units determined by a scaling parameter in the routing header. One of the time units is the Network ASN (Absolute Slot Number) which can be used in case of a time slotted synchronized network, for instance a 6TiSCH network, where global time is maintained in the units of slot lengths of a certain resolution.

The delay experienced by packets in the network is a useful metric for network diagnostics and performance monitoring. Whenever the packets crosses into a network using a different reference clock, the Origination Time field is updated to represent the same Origination

Time as expressed using the reference clock of the outgoing interface into the new network. This is the same as the current time when the packet is transmitted into the new network, minus the delay already experienced by the packet, say 't'. In effect, to the newly entered network, the packet will appear to have originated 't' time units earlier with respect to the reference clock of the new network.

$$\text{Origination Time in new network} = \text{current\_time\_in\_new\_network} - \text{delay\_already\_experienced\_in\_previous\_network(s)}$$

There are multiple ways that a packet can be delayed, including propagation delay and queuing delays. Sometimes there are processing delays as well. For the purpose of determining whether or not the deadline has already passed, these various delays are not distinguished.

## 5. Deadline-6LoRHE Format

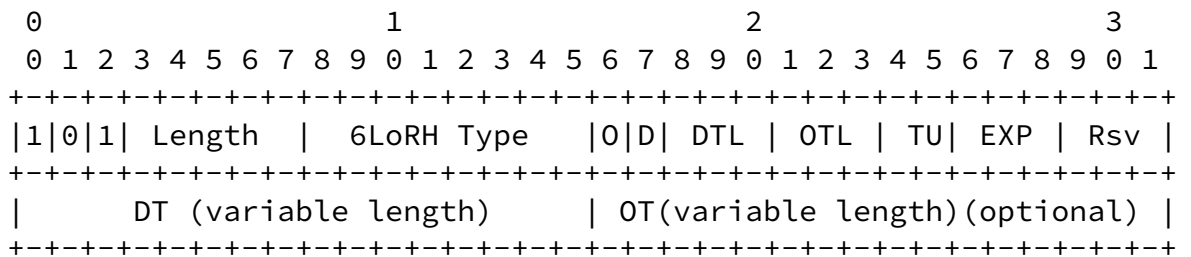


Figure 2: Deadline-6LoRHE format

Length (5 bits): Length represents the total length of the Deadline-6LoRHE type measured in octets.

6LoRH Type: TBD

O flag (1bit): Indicates the presence of Origination Time field. '1' means the OT field is present, and '0' means it is absent.

D flag (1 bit): The 'D' flag, set by the Sender, indicates the action to be taken when a 6LR detects that the deadline time has elapsed.

If 'D' bit is 1, then the 6LR MUST drop the packet if the deadline time is elapsed. If 'D' bit is 0, then the 6LR MAY ignore the deadline time and forward the packet.

DTL (3 bits): Length of DT field.

OTL (3 bits) : Length of OT field.

For example, DTL = 000 means the deadline time in the 6LoRHE is 1 octet (8 bits) long. Similarly, OTL = 111 means the origination time is 8 octets (64 bits) long.

TU (2 bits) : Indicates the time units for DT and OT fields

00 : Time represented in microseconds  
01 : Time represented in seconds  
10 : Network ASN  
11 : Reserved

EXP (3 bits) : Multiplication factor expressed as exponent of 10.

The value of the DT field is multiplied by 10 to this power, to get the actual deadline time in the units represented by TU. The default value of EXP is 000, so that the DT field is unaffected.

Rsv (3 bits) : Reserved

DT Value (8..64-bit) : Deadline Time value

OT Value (8..64-bit) : Origination Time value

Whenever a sender initiates the IP datagram, it includes the Deadline-6LoRHE along with other 6LoRH information.

Example: Consider a 6TiSCH network with time-slot length of 10ms. Let the current ASN when the packet is originated be 54400, and the maximum allowable delay (max\_delay) for the packet delivery is 1 second from the packet origination, then:

$$\begin{aligned} \text{deadline\_time} &= \text{packet\_origination\_time} + \text{max\_delay} \\ &= 55400 + 100 \text{ (in Network ASNs)} \end{aligned}$$


= 55500(Network ASNs)

Deadline-6LoRHE encoding with '0' flag set to 1 :

DTL = 001, OTL = 001, TU = '10', EXP = 2, DT = 0x22B, OT = 0x22A

## 6. Deadline-6LoRHE in Three Network Scenarios

In this section, Deadline-6LoRHE operation is described for 3 network scenarios. Figure 3 depicts a constrained time-synchronized LLN that has two subnets N1 and N2, connected through LBRs [\[I-D.ietf-6lo-backbone-router\]](#) with different reference clock times T1 and T2.

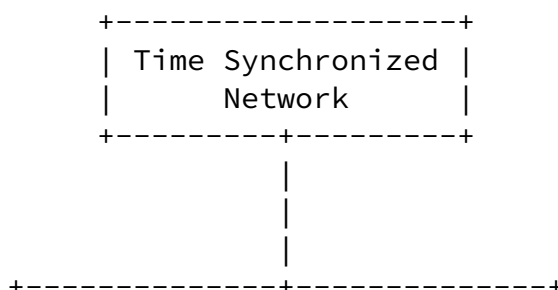

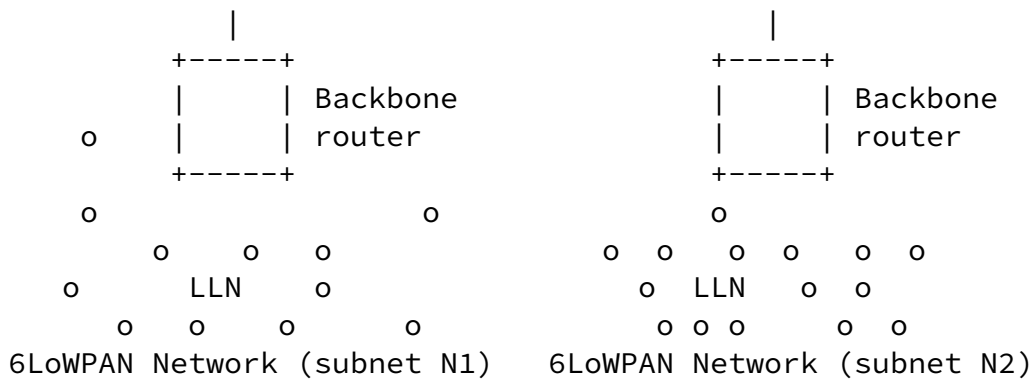


Figure 3: Intra-network Timezone Scenario

6.1. Scenario 1: Endpoints in the same DODAG (N1) in non-storing mode.

In scenario 1, shown in Figure 4, the Sender 'S' has an IP datagram to be routed to a Receiver 'R' within the same DODAG. For the route segment from Sender to 6LBR, the Sender includes a Deadline-6LoRHE by encoding the deadline time contained in the inband-OAM header extension. Then 6LR begins hop-by-hop operation to forward the packet towards the 6LBR. Once 6LBR receives the IP datagram, it generates a IPv6-in-IPv6 encapsulated packet when sending the packet downwards to the Receiver [I-D.ietf-roll-useofrplinfo]. The 6LBR copies the Deadline-6LoRHE from the Sender originated IP header to the outer IP header. The Deadline-6LoRHE contained in the inner IP header is elided.

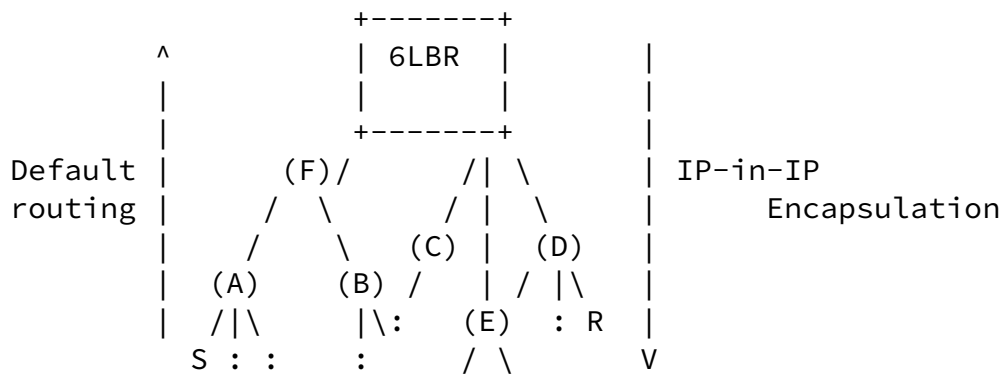


Figure 4: End points within same DODAG(subnet N1)

At the tunnel endpoint of IPv6-in-IPv6 encapsulation, the Deadline-



6LoRHE is copied back from the outer header to inner header, and the inner IP packet is delivered to 'R'.

## 6.2. Scenario 2: Endpoints in Networks with Dissimilar L2 Technologies.

In scenario 2, shown in Figure 5, the Sender 'S' (belonging to DODAG 1) has IP datagram to be routed to a Receiver 'R' over a time-synchronized IPv6 network. For the route segment from 'S' to 6LBR, 'S' includes a Deadline-6LoRHE. Subsequently, 6LR will perform hop-by-hop operation to forward the packet towards the 6LBR. Once the IP datagram reaches 6LBR of DODAG1, it encodes the deadline time (and, if available, the origination time) into the In-band OAM header extension, [[I-D.ietf-ippm-ioam-data](#)] and passes the datagram to the IPv6 layer for further routing.

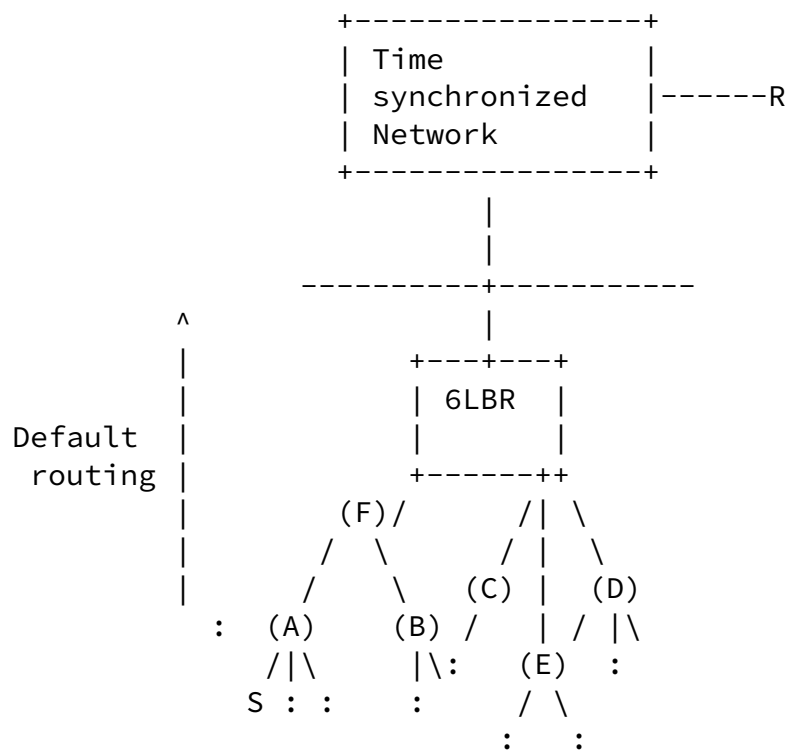


Figure 5: Packet transmission in Dissimilar L2 Technologies or Internet

The IP datagram is routed to another time synchronized deterministic network following its own distinct reference clock, so the deadline time in In-band OAM has to be updated according to the measurement of the current time in the new network.

**6.3.** Scenario 3: Packet transmission across different DODAGs (N1 to N2).

Consider the scenario depicted in Figure 6, in which the Sender 'S' (belonging to DODAG 1) has an IP datagram to be sent to Receiver 'R' belonging to another DODAG (DODAG 2). The operation of this scenario can be decomposed into combination of case 1 and case 2 scenarios. For the route segment from 'S' to 6LBR, 'S' includes the Deadline-6LoRHE. Subsequently, each 6LR will perform hop-by-hop operation to forward the packet towards the 6LBR. Once the IP datagram reaches 6LBR1 of DODAG1, it applies the same rule as described in Case 2 while routing the packet to LBR2 over a (likely) time synchronized wired backhaul. The wired side of LBR2 can be mapped to receiver of Case 2. Once the packet reaches LBR2, it updates the Deadline-6LoRHE by adding the current time of DODAG2. Further, it generates an IPv6-in-IPv6 encapsulated packet when sending the packet downstream to the Receiver [[I-D.ietf-roll-useofrplinfo](#)].

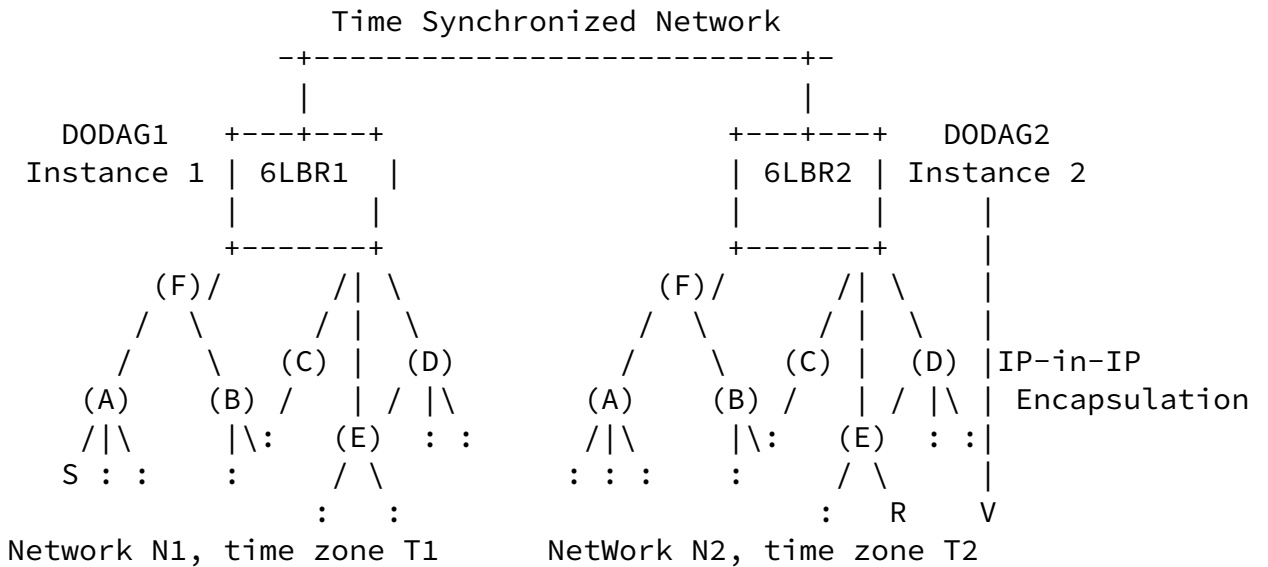


Figure 6: Packet transmission in different DODAGs(N1 to N2)

Consider an example of a 6TiSCH network in which S in DODAG1 generates the packet at ASN 20000 to R in DODAG2. Let the maximum allowable delay be 1 second. The time-slot length in DODAG1 and DODAG2 is assumed to be 10ms. Once the deadline time is encoded in Deadline-6LoRHE, the packet is forwarded to LBR of DODAG1. Suppose the packet reaches LBR of DODAG1 at ASN 20050.

$$\text{current\_time} = \text{ASN at LBR} * \text{slot\_length\_value}$$

$$\text{remaining\_time} = \text{deadline\_time} - \text{current\_time}$$

$$\begin{aligned}
&= ((\text{packet\_origination\_time} + \text{max\_delay}) - \text{current time}) \\
&= (20000 + 100) - 20050
\end{aligned}$$

$$\begin{aligned}
&= 50 \text{ (in Network ASNs)} \\
&= 50 * 10^3 \text{ milliseconds.}
\end{aligned}$$

The remaining time is encoded in In-Band OAM (see Case 2) and forwarded to LBR2 over a different L2-interface, typically wired. Once the packet reaches LBR2, the deadline time in Deadline-6LoRHE is adjusted by adding or subtracting the difference between the reference clocks of the two networks, before forwarding the packet to its connected 6TiSCH network.

## 7. IANA Considerations

This document defines a new 6LoWPAN Timestamp Header Type, and assigns a value (TBD) from the 6LoWPAN Dispatch Page1 number space.

6LoRH Type	Value
Deadline-6LoRHE	TBD

Figure 7: Deadline-6LoRHE type

## 8. Security Considerations

The security considerations of [\[RFC4944\]](#), [\[RFC6282\]](#) and [\[RFC6553\]](#) apply. Using a compressed format as opposed to the full in-line format is logically equivalent and does not create an opening for a new threat when compared to [\[RFC6550\]](#), [\[RFC6553\]](#) and [\[RFC6554\]](#).

## 9. Acknowledgements

The authors thank Pascal Thubert for suggesting the idea and encouraging the work. Thanks to Shwetha Bhandari's suggestions which were instrumental in extending the timing information to heterogeneous networks. The authors acknowledge the 6TiSCH WG members for their inputs on the mailing list. Special thanks to Jerry Daniel, Seema Kumar, Avinash Mohan, Shalu Rajendran and Anita Varghese for their support and valuable feedback.

## [10.](#) References

### [10.1.](#) Normative References

[I-D.ietf-6tisch-terminology]

Palattella, M., Thubert, P., Watteyne, T., and Q. Wang, "Terms Used in IPv6 over the TSCH mode of IEEE 802.15.4e", [draft-ietf-6tisch-terminology-10](#) (work in progress), March 2018.

Lijo Thomas, et al.

Expires September 5, 2018

[Page 10]

---

Internet-Draft

6to Delivery Deadline Time

March 2018

[I-D.ietf-roll-routing-dispatch]

Thubert, P., Bormann, C., Toutain, L., and R. Cragie, "6LoWPAN Routing Header", [draft-ietf-roll-routing-dispatch-05](#) (work in progress), October 2016.

[RFC2119] Bradner, S., "Key words for use in RFCs to Indicate Requirement Levels", [BCP 14](#), [RFC 2119](#), DOI 10.17487/RFC2119, March 1997, <<https://www.rfc-editor.org/info/rfc2119>>.

[RFC4944] Montenegro, G., Kushalnagar, N., Hui, J., and D. Culler, "Transmission of IPv6 Packets over IEEE 802.15.4 Networks", [RFC 4944](#), DOI 10.17487/RFC4944, September 2007, <<https://www.rfc-editor.org/info/rfc4944>>.

[RFC6282] Hui, J., Ed. and P. Thubert, "Compression Format for IPv6 Datagrams over IEEE 802.15.4-Based Networks", [RFC 6282](#), DOI 10.17487/RFC6282, September 2011, <<https://www.rfc-editor.org/info/rfc6282>>.

[RFC6550] Winter, T., Ed., Thubert, P., Ed., Brandt, A., Hui, J., Kelsey, R., Levis, P., Pister, K., Struik, R., Vasseur, JP., and R. Alexander, "RPL: IPv6 Routing Protocol for Low-Power and Lossy Networks", [RFC 6550](#), DOI 10.17487/RFC6550, March 2012, <<https://www.rfc-editor.org/info/rfc6550>>.

[RFC6553] Hui, J. and JP. Vasseur, "The Routing Protocol for Low-Power and Lossy Networks (RPL) Option for Carrying RPL Information in Data-Plane Datagrams", [RFC 6553](#), DOI 10.17487/RFC6553, March 2012, <<https://www.rfc-editor.org/info/rfc6553>>.

[RFC6554] Hui, J., Vasseur, JP., Culler, D., and V. Manral, "An IPv6 Routing Header for Source Routes with the Routing Protocol for Low-Power and Lossy Networks (RPL)", [RFC 6554](#), DOI 10.17487/RFC6554, March 2012, <<https://www.rfc-editor.org/info/rfc6554>>.

## 10.2. Informative References

[dot15-tsch]

P802.11, "IEEE Standard for Low-Rate Wireless Networks, Part 15.4, IEEE Std 802.15.4-2015", April 2016.

Lijo Thomas, et al. Expires September 5, 2018 [Page 11]

---

Internet-Draft 6lo Delivery Deadline Time March 2018

[dot1AS-2011]

IEEE 802.1AS Working Group, "IEEE Standard for Local and Metropolitan Area Networks - Timing and Synchronization for Time-Sensitive Applications in Bridged Local Area Networks", March 2011.

[I-D.ietf-6lo-backbone-router]

Thubert, P., "IPv6 Backbone Router", [draft-ietf-6lo-backbone-router-06](#) (work in progress), February 2018.

[I-D.ietf-detnet-use-cases]

Grossman, E., "Deterministic Networking Use Cases", [draft-ietf-detnet-use-cases-14](#) (work in progress), February 2018.

[I-D.ietf-ippm-ioam-data]

Brockners, F., Bhandari, S., Pignataro, C., Gredler, H., Leddy, J., Youell, S., Mizrahi, T., Mozes, D., Lapukhov, P., Chang, R., and d. daniel.bernier@bell.ca, "Data Fields for In-situ OAM", [draft-ietf-ippm-ioam-data-01](#) (work in progress), October 2017.

[I-D.ietf-roll-useofrplinfo]

Robles, I., Richardson, M., and P. Thubert, "When to use [RFC 6553](#), 6554 and IPv6-in-IPv6", [draft-ietf-roll-](#)

[useofrplinfo-22](#) (work in progress), March 2018.

[ieee-1588]

Precise Time and Time Interval Working Group, "IEEE Std 1588-2008 Standard for a Precision Clock Synchronization Protocol for Networked Measurement and Control Systems", July 2008.

#### [Appendix A](#). Changes Since [draft-ietf-6lo-deadline-time-00](#)

This section lists the changes between [draft-ietf-6lo-deadline-time](#) revisions ...-00.txt and ...-01.txt.

- o Changed "SHOULD drop" to "MUST drop" a packet if the deadline is passed (see [Section 5](#)).
- o Added explanatory text about how packet delays might arise. (see [Section 4](#)).
- o Mentioned availability of time-synchronization protocols (see [Section 1](#)).
- o Updated bibliographic citations.

Lijo Thomas, et al.

Expires September 5, 2018

[Page 12]

---

Internet-Draft

6lo Delivery Deadline Time

March 2018

- o Alphabetized contributor names.
- o Added this section.

#### Authors' Addresses

Lijo Thomas  
C-DAC  
Trivandrum 695033  
India

Email: [lijo@cdac.in](mailto:lijo@cdac.in)

P.M. Akshay  
Smarten Spaces  
Bangalore 560103  
India

Email: akshay.pm@smartenspaces.com

Satish Anamalamudi  
Huaiyin Institute of Technology  
No.89 North Beijing Road, Qinghe District  
Huaiian  
China

Email: satishnaidu80@gmail.com

S.V.R Anand  
Indian Institute of Science  
Bangalore 560012  
India

Email: anand@ece.iisc.ernet.in

Malati Hegde  
Indian Institute of Science  
Bangalore 560012  
India

Email: malati@ece.iisc.ernet.in

Lijo Thomas, et al. Expires September 5, 2018 [Page 13]

---

Internet-Draft 6to Delivery Deadline Time March 2018

Charles E. Perkins  
Futurewei  
2330 Central Expressway  
Santa Clara 95050  
Unites States

Email: charliep@computer.org

