

Internet Engineering Task Force
Internet-Draft
Intended status: Standards Track
Expires: March 9, 2015

J. Schoenwaelder
A. Sehgal
Jacobs University
T. Tsou
Huawei Technologies (USA)
C. Zhou
Huawei Technologies
September 5, 2014

Definition of Managed Objects for IPv6 over Low-Power Wireless Personal
Area Networks (6LoWPANs)

[draft-ietf-6lo-lowpan-mib-04](http://datatracker.ietf.org/drafts/current/draft-ietf-6lo-lowpan-mib-04)

Abstract

This document defines a portion of the Management Information Base (MIB) for use with network management protocols in the Internet community. In particular, it defines objects for managing IPv6 over Low-Power Wireless Personal Area Networks (6LoWPANs).

Status of This Memo

This Internet-Draft is submitted in full conformance with the provisions of [BCP 78](#) and [BCP 79](#).

Internet-Drafts are working documents of the Internet Engineering Task Force (IETF). Note that other groups may also distribute working documents as Internet-Drafts. The list of current Internet-Drafts is at <http://datatracker.ietf.org/drafts/current/>.

Internet-Drafts are draft documents valid for a maximum of six months and may be updated, replaced, or obsoleted by other documents at any time. It is inappropriate to use Internet-Drafts as reference material or to cite them other than as "work in progress."

This Internet-Draft will expire on March 9, 2015.

Copyright Notice

Copyright (c) 2014 IETF Trust and the persons identified as the document authors. All rights reserved.

This document is subject to [BCP 78](#) and the IETF Trust's Legal Provisions Relating to IETF Documents (<http://trustee.ietf.org/license-info>) in effect on the date of publication of this document. Please review these documents carefully, as they describe your rights and restrictions with respect

Internet-Draft

LOWPAN-MIB

September 2014

to this document. Code Components extracted from this document must include Simplified BSD License text as described in Section 4.e of the Trust Legal Provisions and are provided without warranty as described in the Simplified BSD License.

Table of Contents

1.	Introduction	2
2.	The Internet-Standard Management Framework	2
3.	Conventions	3
4.	Overview	3
5.	Relationship to Other MIB Modules	7
6.	Definitions	7
7.	Security Considerations	24
8.	IANA Considerations	25
9.	Acknowledgements	25
10.	References	25
10.1.	Normative References	25
10.2.	Informative References	26

[1.](#) Introduction

This document defines a portion of the Management Information Base (MIB) for use with network management protocols. In particular it defines objects for managing IPv6 over Low-Power Wireless Personal Area Networks (6LoWPANs) [[RFC4944](#)].

While a MIB module provides a direct binding for accessing data via the Simple Network Management Protocol (SNMP) [[RFC3410](#)], supporting SNMP may not always be affordable on constrained devices. Other protocols to access data modeled in MIB modules are possible and proposals have been made recently to provide bindings to the Constrained Application Protocol (CoAP) [[RFC7252](#)].

[2.](#) The Internet-Standard Management Framework

For a detailed overview of the documents that describe the current Internet-Standard Management Framework, please refer to [section 7 of RFC 3410](#) [[RFC3410](#)].

Managed objects are accessed via a virtual information store, termed the Management Information Base or MIB. MIB objects are generally accessed through the Simple Network Management Protocol (SNMP).

Objects in the MIB are defined using the mechanisms defined in the Structure of Management Information (SMI). This document specifies a MIB module that is compliant to the SMIV2, which is described in STD 58, [RFC 2578](#) [[RFC2578](#)], STD 58, [RFC 2579](#) [[RFC2579](#)] and STD 58, [RFC 2580](#) [[RFC2580](#)].

Internet-Draft

LOWPAN-MIB

September 2014

3. Conventions

The key words "MUST", "MUST NOT", "REQUIRED", "SHALL", "SHALL NOT", "SHOULD", "SHOULD NOT", "RECOMMENDED", "NOT RECOMMENDED", "MAY", and "OPTIONAL" in this document are to be interpreted as described in [RFC 2119](#) [[RFC2119](#)].

4. Overview

The left part of Figure 1 provides an overview of the IETF protocols designed for constrained devices. The right part lists the MIB modules providing monitoring and troubleshooting support ([RFC4113](#), [RFC4292](#), [RFC4293](#), [RFC2863](#)). The LOWPAN-MIB defined in this document fills a hole by providing monitoring and troubleshooting support for the 6LoWPAN layer.

Protocol Layer	MIB Modules
CoAP [RFC7252]	UDP-MIB [RFC4113]
UDP [RFC0768]	IP-MIB [RFC4293]
IPv6 [RFC2460]	IP-FORWARD-MIB [RFC4292]
ICMPv6 [RFC4443]	LOWPAN-MIB [RFCXXXX]
6LoWPAN [RFC4944]	IF-MIB [RFC2863]
IEEE 802.15.4, ...	

/* RFC Ed.: replace XXXX above with RFC number
and remove this note */

Figure 1: Protocol Layers and MIB Modules

The LOWPAN-MIB module is primarily a collection of counters that reflect how 6LoWPAN datagrams are processed by the 6LoWPAN layer. The objects are defined twice, once to report the global statistics as seen by the 6LoWPAN layer and once to report per interface 6LoWPAN layer statistics. The per interface statistics are optional to implement. The object identifier registration tree has the following structure:

```
/* RFC Ed.: replace XXXX below with IANA assigned OID number
   and remove this note */
```

```
----- lowpanMIB(1.3.6.1.2.1.XXXX)
+----- lowpanNotifications(0)
+----- lowpanObjects(1)
|   +----- lowpanStats(1)
|   |   +---r- lowpanReasmTimeout(1)           Unsigned32
|   |   +---r- lowpanInReceives(2)           Counter32
|   |   +---r- lowpanInHdrErrors(3)          Counter32
|   |   +---r- lowpanInMeshReceives(4)       Counter32
|   |   +---r- lowpanInMeshForwds(5)        Counter32
|   |   +---r- lowpanInMeshDelivers(6)       Counter32
|   |   +---r- lowpanInReasmReqds(7)        Counter32
|   |   +---r- lowpanInReasmFails(8)        Counter32
|   |   +---r- lowpanInReasmOKs(9)          Counter32
|   |   +---r- lowpanInCompReqds(10)         Counter32
|   |   +---r- lowpanInCompFails(11)        Counter32
|   |   +---r- lowpanInCompOKs(12)          Counter32
|   |   +---r- lowpanInDiscards(13)         Counter32
|   |   +---r- lowpanInDelivers(14)         Counter32
|   |   +---r- lowpanOutRequests(15)        Counter32
|   |   +---r- lowpanOutCompReqds(16)       Counter32
|   |   +---r- lowpanOutCompFails(17)       Counter32
|   |   +---r- lowpanOutCompOKs(18)        Counter32
|   |   +---r- lowpanOutFragReqds(19)       Counter32
|   |   +---r- lowpanOutFragFails(20)       Counter32
|   |   +---r- lowpanOutFragOKs(21)        Counter32
|   |   +---r- lowpanOutFragCreates(22)     Counter32
|   |   +---r- lowpanOutMeshHopLimitExceeds(23) Counter32
|   |   +---r- lowpanOutMeshNoRoutes(24)   Counter32
|   |   +---r- lowpanOutMeshRequests(25)   Counter32
```

```

| | +---r- lowpanOutMeshForwds(26)           Counter32
| | +---r- lowpanOutMeshTransmits(27)       Counter32
| | +---r- lowpanOutDiscards(28)           Counter32
| | +---r- lowpanOutTransmits(29)          Counter32
+---- lowpanIfStatsTable(2)
| +---- lowpanIfStatsEntry(1) [ifIndex]
| | +---r- lowpanIfReasmTimeout(1)          Unsigned32
| | +---r- lowpanIfInReceives(2)           Counter32
| | +---r- lowpanIfInHdrErrors(3)           Counter32
| | +---r- lowpanIfInMeshReceives(4)       Counter32
| | +---r- lowpanIfInMeshForwds(5)         Counter32
| | +---r- lowpanIfInMeshDelivers(6)       Counter32
| | +---r- lowpanIfInReasmReqds(7)         Counter32
| | +---r- lowpanIfInReasmFails(8)         Counter32
| | +---r- lowpanIfInReasmOKs(9)           Counter32
| | +---r- lowpanIfInCompReqds(10)         Counter32
| | +---r- lowpanIfInCompFails(11)         Counter32
| | +---r- lowpanIfInCompOKs(12)          Counter32
| | +---r- lowpanIfInDiscards(13)          Counter32

```

```

| | +---r- lowpanIfInDelivers(14)           Counter32
| | +---r- lowpanIfOutRequests(15)          Counter32
| | +---r- lowpanIfOutCompReqds(16)         Counter32
| | +---r- lowpanIfOutCompFails(17)         Counter32
| | +---r- lowpanIfOutCompOKs(18)           Counter32
| | +---r- lowpanIfOutFragReqds(19)         Counter32
| | +---r- lowpanIfOutFragFails(20)         Counter32
| | +---r- lowpanIfOutFragOKs(21)           Counter32
| | +---r- lowpanIfOutFragCreates(22)       Counter32
| | +---r- lowpanIfOutMeshHopLimitExceeds(23) Counter32
| | +---r- lowpanIfOutMeshNoRoutes(24)      Counter32
| | +---r- lowpanIfOutMeshRequests(25)      Counter32
| | +---r- lowpanIfOutMeshForwds(26)       Counter32
| | +---r- lowpanIfOutMeshTransmits(27)     Counter32
| | +---r- lowpanIfOutDiscards(28)         Counter32
| | +---r- lowpanIfOutTransmits(29)         Counter32
+---- lowpanConformance(2)
| +---- lowpanGroups(1)
| | +---- lowpanStatsGroup(1)
| | +---- lowpanStatsMeshGroup(2)
| | +---- lowpanIfStatsGroup(3)
| | +---- lowpanIfStatsMeshGroup(4)

```

```


+---- lowpanCompliances(2)
+---- lowpanCompliance(1)

```

The counters defined in the LOWPAN-MIB module provide information about the 6LoWPAN datagrams received and transmitted and how they are processed in the 6LoWPAN layer. For link-layers that use the 6LoWPAN dispatch byte as defined in [RFC4944] (e.g., IEEE 802.15.4), a 6LoWPAN datagram is a datagram with a dispatch byte matching the bit patterns 01xxxxxx, 10xxxxxx, or 11xxxxxx. Datagrams with a dispatch byte matching the bit pattern 00xxxxxx (NALP - not a LoWPAN frame) are not considered to be 6LoWPAN datagram by this specification. Other radio technologies may use different mechanisms to identify 6LoWPAN datagrams (e.g., the BLUETOOTH Low Energy Logical Link Control and Adaptation Protocol uses Channel Identifiers [I-D.ietf-6lo-btle]).

The Case Diagram [CASE] in Figure 2 illustrates the conceptual relationships between the counters. Implementations may choose to implement the processing of 6LoWPAN datagrams in a different order.

The generic InDiscards and OutDiscards counters can be incremented anytime when 6LoWPAN datagrams are discarded due to reasons not covered by the other more specific counters. For example, an implementation discarding 6LoWPAN datagrams while all buffers are used for ongoing packet reassemblies will increment the relevant InDiscards counters for each discarded 6LoWPAN datagram.

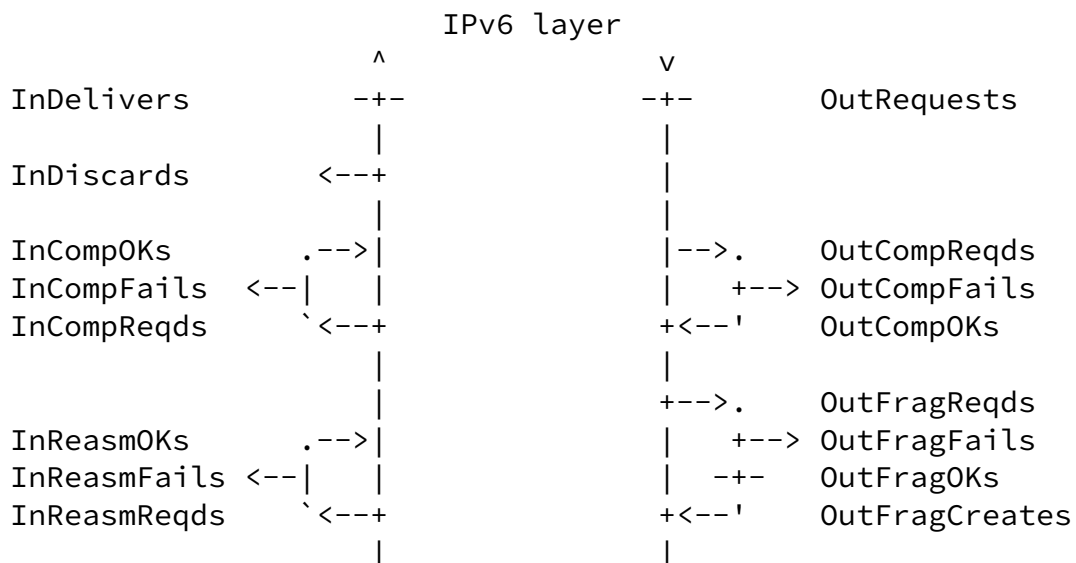

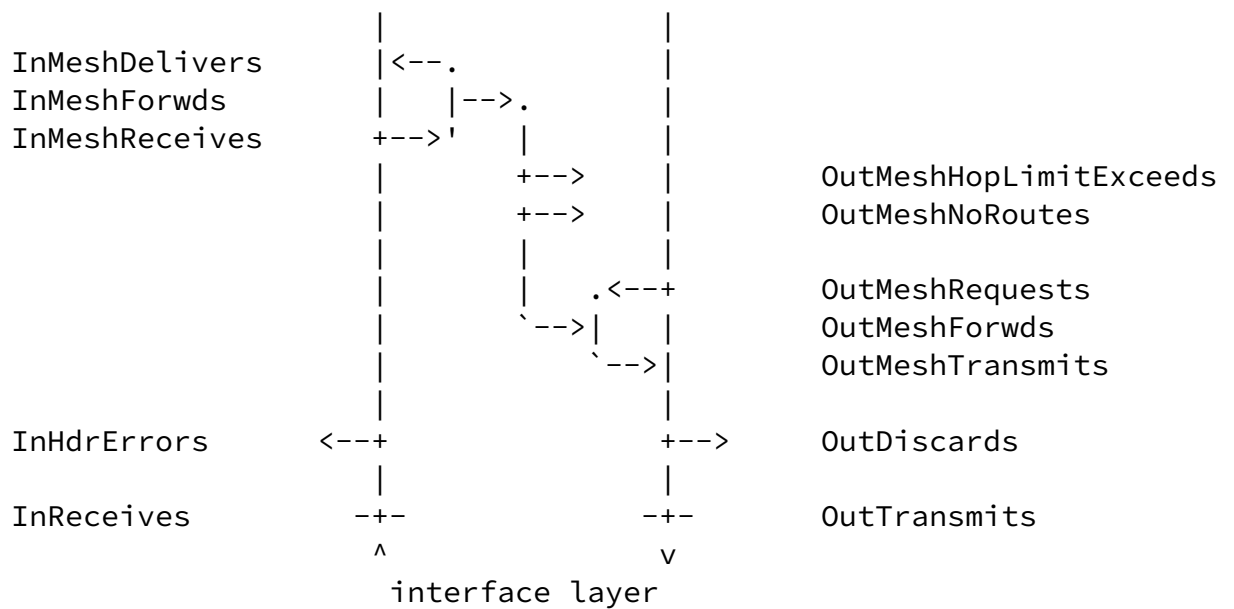


Figure 2: Conceptual Relationship between LOWPAN-MIB Counters

The fragmentation related counters have been modeled after the fragmentation related counters of the IP-MIB [RFC4293]. The discard counters have been placed at the end of the input and output chains but they can be bumped any time if a datagram is discarded for a reason not covered by the other counters.

The compression related counters provide insights into compression requests and in particular also compression related failures. Note that the diagram is conceptual in the sense that compression happens after reassembly for incoming 6LoWPAN datagrams and compression happens before fragmentation for outgoing 6LoWPAN datagrams. Implementations may choose to implement things slightly differently. For example, implementations may decompress FRAG1 fragments as soon as they are received, not waiting for reassembly to complete.

The mesh header processing related counters do not have an explicit discard counter. Implementations that do not support mesh forwarding MUST count the number of received 6LoWPAN datagrams with a MESH header (`lowpanInMeshReceives`) but they MUST NOT increment the `lowpanInMeshReceives` and `lowpanInMeshDelivers` counters if these 6LoWPAN datagrams are dropped.

5. Relationship to Other MIB Modules

The MIB module imports definitions from SNMPv2-SMI [[RFC2578](#)], SNMPv2-CONF [[RFC2580](#)], and IF-MIB [[RFC2863](#)].

6. Definitions

```
LOWPAN-MIB DEFINITIONS ::= BEGIN
```

```
IMPORTS
```

```
    MODULE-IDENTITY, OBJECT-TYPE, Unsigned32, Counter32, mib-2
        FROM SNMPv2-SMI                                -- RFC 2578
    OBJECT-GROUP, MODULE-COMPLIANCE
        FROM SNMPv2-CONF                                -- RFC 2580
    ifIndex FROM IF-MIB;                                -- RFC 2863
```

```
lowpanMIB     MODULE-IDENTITY
```

```
    LAST-UPDATED      "201409050000Z"
```

```
    ORGANIZATION
```

```
        "IETF IPv6 over Networks of Resource-constrained Nodes
         Working Group"
```

```
    CONTACT-INFO
```

```
        "WG Email: 6lo@ietf.org
```

```
        WG Web:   http://tools.ietf.org/wg/6lo/
```

```
        Juergen Schoenwaelder
```

```
        Jacobs University Bremen
```

```
        Email: j.schoenwaelder@jacobs-university.de
```

```
        Anuj Sehgal
```

```
        Jacobs University Bremen
```

```
        Email: s.anuj@jacobs-university.de
```

```
        Tina Tsou
```

```
        Huawei Technologies
```

```
        Email: tina.tsou.zouting@huawei.com
```

```
        Cathy Zhou
```

```
        Huawei Technologies
```

```
        Email: cathyzhou@huawei.com"
```


"The MIB module for monitoring nodes implementing the IPv6 over Low-Power Wireless Personal Area Networks (6LoWPAN) protocol.

Copyright (c) 2014 IETF Trust and the persons identified as authors of the code. All rights reserved.

Redistribution and use in source and binary forms, with or without modification, is permitted pursuant to, and subject to the license terms contained in, the Simplified BSD License set forth in [Section 4.c](#) of the IETF Trust's Legal Provisions Relating to IETF Documents (<http://trustee.ietf.org/license-info>).

```
REVISION "201409050000Z"
DESCRIPTION
    "Initial version, published as RFC XXXX."
-- RFC Ed.: replace XXXX with RFC number and remove this note

 ::= { mib-2 YYYY }
-- RFC Ed.: replace YYYYY with IANA assigned number

-- object definitions

lowpanNotifications      OBJECT IDENTIFIER ::= { lowpanMIB 0 }
lowpanObjects            OBJECT IDENTIFIER ::= { lowpanMIB 1 }
lowpanConformance       OBJECT IDENTIFIER ::= { lowpanMIB 2 }

lowpanStats              OBJECT IDENTIFIER ::= { lowpanObjects 1 }

lowpanReasmTimeout OBJECT-TYPE
    SYNTAX      Unsigned32
    UNITS       "seconds"
    MAX-ACCESS  read-only
    STATUS      current
    DESCRIPTION
        "The maximum number of seconds that received fragments are
         held while they are awaiting reassembly at this entity."
    ::= { lowpanStats 1 }

lowpanInReceives OBJECT-TYPE
    SYNTAX      Counter32
    MAX-ACCESS  read-only
    STATUS      current
    DESCRIPTION
        "The total number of 6LoWPAN datagrams received, including
         those received in error."
```

```
::= { lowpanStats 2 }
```

```
lowpanInHdrErrors OBJECT-TYPE
```

```
SYNTAX Counter32
```

```
MAX-ACCESS read-only
```

```
STATUS current
```

```
DESCRIPTION
```

```
"The number of received 6LoWPAN datagrams discarded due to  
errors in their headers, including unknown dispatch values."
```

```
::= { lowpanStats 3 }
```

```
lowpanInMeshReceives OBJECT-TYPE
```

```
SYNTAX Counter32
```

```
MAX-ACCESS read-only
```

```
STATUS current
```

```
DESCRIPTION
```

```
"The number of received 6LoWPAN datagrams with a MESH  
header."
```

```
::= { lowpanStats 4 }
```

```
lowpanInMeshForwds OBJECT-TYPE
```

```
SYNTAX Counter32
```

```
MAX-ACCESS read-only
```

```
STATUS current
```

```
DESCRIPTION
```

```
"The number of received 6LoWPAN datagrams requiring MESH  
forwarding."
```

```
::= { lowpanStats 5 }
```

```
lowpanInMeshDelivers OBJECT-TYPE
```

```
SYNTAX Counter32
```

```
MAX-ACCESS read-only
```

```
STATUS current
```

```
DESCRIPTION
```

```
"The number of received 6LoWPAN datagrams with a MESH header  
delivered to the local system."
```

```
::= { lowpanStats 6 }
```

```
lowpanInReasmReqds OBJECT-TYPE
```

```
SYNTAX Counter32
```

```
MAX-ACCESS read-only
```

```
STATUS current
```

```
DESCRIPTION
```

```
"The number of received 6LoWPAN fragments that needed to  
be reassembled. This includes both FRAG1 and FRAGN 6LoWPAN  
datagrams."
```

```
::= { lowpanStats 7 }
```

Internet-Draft

LOWPAN-MIB

September 2014

lowpanInReasmFails OBJECT-TYPE

SYNTAX Counter32

MAX-ACCESS read-only

STATUS current

DESCRIPTION

"The number of failures detected by the re-assembly algorithm (e.g., timeouts). Note that this is not necessarily a count of discarded 6LoWPAN fragments since implementations can lose track of the number of fragments by combining them as received."

```
::= { lowpanStats 8 }
```

lowpanInReasmOKs OBJECT-TYPE

SYNTAX Counter32

MAX-ACCESS read-only

STATUS current

DESCRIPTION

"The number of IPv6 packets successfully reassembled."

```
::= { lowpanStats 9 }
```

lowpanInCompReqs OBJECT-TYPE

SYNTAX Counter32

MAX-ACCESS read-only

STATUS current

DESCRIPTION

"The number of 6LoWPAN datagrams requiring header decompression."

```
::= { lowpanStats 10 }
```

lowpanInCompFails OBJECT-TYPE

SYNTAX Counter32

MAX-ACCESS read-only

STATUS current

DESCRIPTION

"The number of 6LoWPAN datagrams where header decompression failed (e.g., because the necessary context information was not available)."

```
::= { lowpanStats 11 }
```

lowpanInCompOKs OBJECT-TYPE

SYNTAX Counter32

MAX-ACCESS read-only

STATUS current

DESCRIPTION

"The number of 6LoWPAN datagrams where header decompression was successful."

::= { lowpanStats 12 }

lowpanInDiscards OBJECT-TYPE

SYNTAX Counter32

MAX-ACCESS read-only

STATUS current

DESCRIPTION

"The number of received 6LoWPAN datagrams for which no problems were encountered to prevent their continued processing, but were discarded (e.g., for lack of buffer space). Note that this counter does not include any datagrams discarded due to a reassembly failure or a compression failure."

::= { lowpanStats 13 }

lowpanInDelivers OBJECT-TYPE

SYNTAX Counter32

MAX-ACCESS read-only

STATUS current

DESCRIPTION

"The total number of IPv6 packets successfully delivered to the IPv6 layer."

::= { lowpanStats 14 }

lowpanOutRequests OBJECT-TYPE

SYNTAX Counter32

MAX-ACCESS read-only

STATUS current

DESCRIPTION

"The total number of IPv6 packets supplied by the IPv6 layer."

::= { lowpanStats 15 }

lowpanOutCompReqds OBJECT-TYPE

SYNTAX Counter32
MAX-ACCESS read-only
STATUS current
DESCRIPTION
 "The total number of IPv6 packets for which header
 compression was attempted."
 ::= { lowpanStats 16 }

lowpanOutCompFails OBJECT-TYPE

SYNTAX Counter32
MAX-ACCESS read-only
STATUS current
DESCRIPTION
 "The total number of IPv6 packets for which header
 compression failed."
 ::= { lowpanStats 17 }

lowpanOutCompOKs OBJECT-TYPE

SYNTAX Counter32
MAX-ACCESS read-only
STATUS current
DESCRIPTION
 "The total number of IPv6 packets for which header
 compression was successful."
 ::= { lowpanStats 18 }

lowpanOutFragReqds OBJECT-TYPE

SYNTAX Counter32
MAX-ACCESS read-only
STATUS current
DESCRIPTION
 "The number of IPv6 packets that required fragmentation
 in order to be transmitted."
 ::= { lowpanStats 19 }

lowpanOutFragFails OBJECT-TYPE

SYNTAX Counter32
MAX-ACCESS read-only
STATUS current
DESCRIPTION
 "The number of IPv6 packets that have been discarded because
 fragmentation failed."

```
::= { lowpanStats 20 }
```

```
lowpanOutFragOKs OBJECT-TYPE
```

```
SYNTAX Counter32
```

```
MAX-ACCESS read-only
```

```
STATUS current
```

```
DESCRIPTION
```

```
"The number of IPv6 packets that have been successfully  
fragmented."
```

```
::= { lowpanStats 21 }
```

```
lowpanOutFragCreates OBJECT-TYPE
```

```
SYNTAX Counter32
```

```
MAX-ACCESS read-only
```

```
STATUS current
```

```
DESCRIPTION
```

```
"The number of 6LoWPAN fragments that have been  
generated as a result of fragmentation. This includes  
both FRAG1 and FRAGN 6LoWPAN datagrams."
```

```
::= { lowpanStats 22 }
```

```
lowpanOutMeshHopLimitExceeds OBJECT-TYPE
```

```
SYNTAX Counter32
```

```
MAX-ACCESS read-only
```

```
STATUS current
```

```
DESCRIPTION
```

```
"The number of 6LoWPAN datagrams with a MESH header that  
were dropped because the hop limit has been exceeded."
```

```
::= { lowpanStats 23 }
```

```
lowpanOutMeshNoRoutes OBJECT-TYPE
```

```
SYNTAX Counter32
```

```
MAX-ACCESS read-only
```

```
STATUS current
```

```
DESCRIPTION
```

```
"The number of 6LoWPAN datagrams with a MESH header that  
were dropped because there was no forwarding information  
available."
```

```
::= { lowpanStats 24 }
```

```
lowpanOutMeshRequests OBJECT-TYPE
```

SYNTAX Counter32
MAX-ACCESS read-only
STATUS current
DESCRIPTION
"The number of 6LoWPAN datagrams requiring MESH header encapsulation."
 ::= { lowpanStats 25 }

lowpanOutMeshForwds OBJECT-TYPE

SYNTAX Counter32
MAX-ACCESS read-only
STATUS current
DESCRIPTION
"The number of 6LoWPAN datagrams with a MESH header for which suitable forwarding information was available."
 ::= { lowpanStats 26 }

lowpanOutMeshTransmits OBJECT-TYPE

SYNTAX Counter32
MAX-ACCESS read-only
STATUS current
DESCRIPTION
"The number of 6LoWPAN datagrams with a MESH header created."
 ::= { lowpanStats 27 }

lowpanOutDiscards OBJECT-TYPE

SYNTAX Counter32
MAX-ACCESS read-only
STATUS current

DESCRIPTION
"The number of IPv6 packets for which no problem was encountered to prevent their transmission to their destination, but were discarded (e.g., for lack of buffer space)."
 ::= { lowpanStats 28 }

lowpanOutTransmits OBJECT-TYPE

SYNTAX Counter32
MAX-ACCESS read-only
STATUS current

DESCRIPTION

"The total number of 6LoWPAN datagram that this entity supplied to the lower layers for transmission."

::= { lowpanStats 29 }

lowpanIfStatsTable OBJECT-TYPE

SYNTAX SEQUENCE OF LowpanIfStatsEntry

MAX-ACCESS not-accessible

STATUS current

DESCRIPTION

"A table providing per interface statistics."

::= { lowpanObjects 2 }

lowpanIfStatsEntry OBJECT-TYPE

SYNTAX LowpanIfStatsEntry

MAX-ACCESS not-accessible

STATUS current

DESCRIPTION

"An entry providing statistics for a specific interface."

INDEX { ifIndex }

::= { lowpanIfStatsTable 1 }

LowpanIfStatsEntry ::= SEQUENCE {

lowpanIfReasmTimeout	Unsigned32,
lowpanIfInReceives	Counter32,
lowpanIfInHdrErrors	Counter32,
lowpanIfInMeshReceives	Counter32,
lowpanIfInMeshForwds	Counter32,
lowpanIfInMeshDelivers	Counter32,
lowpanIfInReasmReqds	Counter32,
lowpanIfInReasmFails	Counter32,
lowpanIfInReasmOKs	Counter32,
lowpanIfInCompReqds	Counter32,
lowpanIfInCompFails	Counter32,
lowpanIfInCompOKs	Counter32,
lowpanIfInDiscards	Counter32,
lowpanIfInDelivers	Counter32,

lowpanIfOutRequests	Counter32,
lowpanIfOutCompReqds	Counter32,
lowpanIfOutCompFails	Counter32,
lowpanIfOutCompOKs	Counter32,


```

lowpanIfOutFragReqds          Counter32,
lowpanIfOutFragFails         Counter32,
lowpanIfOutFragOKs           Counter32,
lowpanIfOutFragCreates        Counter32,
lowpanIfOutMeshHopLimitExceeds Counter32,
lowpanIfOutMeshNoRoutes       Counter32,
lowpanIfOutMeshRequests       Counter32,
lowpanIfOutMeshForwds         Counter32,
lowpanIfOutMeshTransmits      Counter32,
lowpanIfOutDiscards           Counter32,
lowpanIfOutTransmits          Counter32
}

lowpanIfReasmTimeout OBJECT-TYPE
SYNTAX      Unsigned32
UNITS       "seconds"
MAX-ACCESS  read-only
STATUS      current
DESCRIPTION
    "The maximum number of seconds that received fragments are
    held while they are awaiting reassembly at this interface."
 ::= { lowpanIfStatsEntry 1 }

lowpanIfInReceives OBJECT-TYPE
SYNTAX      Counter32
MAX-ACCESS  read-only
STATUS      current
DESCRIPTION
    "The total number of 6LoWPAN datagrams received on this
    interface, including those received in error."
 ::= { lowpanIfStatsEntry 2 }

lowpanIfInHdrErrors OBJECT-TYPE
SYNTAX      Counter32
MAX-ACCESS  read-only
STATUS      current
DESCRIPTION
    "The number of 6LoWPAN datagrams received on this
    interface that were discarded due to errors in
    their headers, including unknown dispatch values."
 ::= { lowpanIfStatsEntry 3 }

lowpanIfInMeshReceives OBJECT-TYPE
SYNTAX      Counter32

```

```
MAX-ACCESS    read-only
STATUS        current
DESCRIPTION
    "The number of 6LoWPAN datagrams received on this
    interface with a MESH header."
 ::= { lowpanIfStatsEntry 4 }

lowpanIfInMeshForwds OBJECT-TYPE
SYNTAX        Counter32
MAX-ACCESS    read-only
STATUS        current
DESCRIPTION
    "The number of 6LoWPAN datagrams received on this
    interface requiring MESH forwarding."
 ::= { lowpanIfStatsEntry 5 }

lowpanIfInMeshDelivers OBJECT-TYPE
SYNTAX        Counter32
MAX-ACCESS    read-only
STATUS        current
DESCRIPTION
    "The number of 6LoWPAN datagrams received on this
    interface with a MESH header delivered to the local
    system."
 ::= { lowpanIfStatsEntry 6 }

lowpanIfInReasmReqds OBJECT-TYPE
SYNTAX        Counter32
MAX-ACCESS    read-only
STATUS        current
DESCRIPTION
    "The number of 6LoWPAN fragments received on this
    interface that needed to be reassembled. This
    includes both FRAG1 and FRAGN 6LoWPAN datagrams."
 ::= { lowpanIfStatsEntry 7 }

lowpanIfInReasmFails OBJECT-TYPE
SYNTAX        Counter32
MAX-ACCESS    read-only
STATUS        current
DESCRIPTION
    "The number of failures detected by the re-assembly
    algorithm (e.g., timeouts) for datagrams received
    on this interface. Note that this is not necessarily
    a count of discarded 6LoWPAN fragments since
    implementations can lose track of the number
    of fragments by combining them as received."
```

::= { lowpanIfStatsEntry 8 }

Internet-Draft

LOWPAN-MIB

September 2014

lowpanIfInReasmOKs OBJECT-TYPE

SYNTAX Counter32

MAX-ACCESS read-only

STATUS current

DESCRIPTION

"The number of IPv6 packets successfully reassembled from fragments received on this interface."

::= { lowpanIfStatsEntry 9 }

lowpanIfInCompReqds OBJECT-TYPE

SYNTAX Counter32

MAX-ACCESS read-only

STATUS current

DESCRIPTION

"The number of 6LoWPAN datagrams received on this interface requiring header decompression."

::= { lowpanIfStatsEntry 10 }

lowpanIfInCompFails OBJECT-TYPE

SYNTAX Counter32

MAX-ACCESS read-only

STATUS current

DESCRIPTION

"The number of 6LoWPAN datagrams received on this interface where header decompression failed (e.g., because the necessary context information was not available)."

::= { lowpanIfStatsEntry 11 }

lowpanIfInCompOKs OBJECT-TYPE

SYNTAX Counter32

MAX-ACCESS read-only

STATUS current

DESCRIPTION

"The number of 6LoWPAN datagrams received on this interface where header decompression was successful."

::= { lowpanIfStatsEntry 12 }

lowpanIfInDiscards OBJECT-TYPE

SYNTAX Counter32

MAX-ACCESS read-only
STATUS current
DESCRIPTION

"The number of 6LoWPAN datagrams received on this interface for which no problems were encountered to prevent their continued processing, but were discarded (e.g., for lack of buffer space). Note that this counter does not include any datagrams discarded due

to a reassembly failure or a compression failure."
 ::= { lowpanIfStatsEntry 13 }

lowpanIfInDelivers OBJECT-TYPE

SYNTAX Counter32
MAX-ACCESS read-only
STATUS current
DESCRIPTION

"The total number of IPv6 packets received on this interface that were successfully delivered to the IPv6 layer."

::= { lowpanIfStatsEntry 14 }

lowpanIfOutRequests OBJECT-TYPE

SYNTAX Counter32
MAX-ACCESS read-only
STATUS current
DESCRIPTION

"The total number of IPv6 packets supplied by the IPv6 layer to be sent over this interface."

::= { lowpanIfStatsEntry 15 }

lowpanIfOutCompReqds OBJECT-TYPE

SYNTAX Counter32
MAX-ACCESS read-only
STATUS current
DESCRIPTION

"The total number of IPv6 packets to be sent over this interface for which header compression was attempted."

::= { lowpanIfStatsEntry 16 }

lowpanIfOutCompFails OBJECT-TYPE

SYNTAX Counter32
MAX-ACCESS read-only
STATUS current
DESCRIPTION
"The total number of IPv6 packets to be sent over
this interface for which header compression failed."
::= { lowpanIfStatsEntry 17 }

lowpanIfOutCompOKs OBJECT-TYPE

SYNTAX Counter32
MAX-ACCESS read-only
STATUS current
DESCRIPTION
"The total number of IPv6 packets to be sent over
this interface for which header compression was

successful."
::= { lowpanIfStatsEntry 18 }

lowpanIfOutFragReqds OBJECT-TYPE

SYNTAX Counter32
MAX-ACCESS read-only
STATUS current
DESCRIPTION
"The number of IPv6 packets to be sent over this
interface that required fragmentation in order
to be transmitted."
::= { lowpanIfStatsEntry 19 }

lowpanIfOutFragFails OBJECT-TYPE

SYNTAX Counter32
MAX-ACCESS read-only
STATUS current
DESCRIPTION
"The number of IPv6 packets to be sent over this
interface that have been discarded because
fragmentation failed."
::= { lowpanIfStatsEntry 20 }

lowpanIfOutFragOKs OBJECT-TYPE

SYNTAX Counter32
MAX-ACCESS read-only

STATUS current
DESCRIPTION
"The number of IPv6 packets to be sent over this
interface that have been successfully fragmented."
::= { lowpanIfStatsEntry 21 }

lowpanIfOutFragCreates OBJECT-TYPE

SYNTAX Counter32
MAX-ACCESS read-only
STATUS current
DESCRIPTION
"The number of 6LoWPAN fragments that have been
generated on this interface as a result of
fragmentation. This includes both FRAG1 and FRAGN
6LoWPAN datagrams."
::= { lowpanIfStatsEntry 22 }

lowpanIfOutMeshHopLimitExceeds OBJECT-TYPE

SYNTAX Counter32
MAX-ACCESS read-only
STATUS current
DESCRIPTION

"The number of 6LoWPAN datagrams to be sent on this
interface with a MESH header that were dropped
because the hop limit has been exceeded."
::= { lowpanIfStatsEntry 23 }

lowpanIfOutMeshNoRoutes OBJECT-TYPE

SYNTAX Counter32
MAX-ACCESS read-only
STATUS current
DESCRIPTION
"The number of 6LoWPAN datagrams to be sent on this
interface with a MESH header that were dropped
because there was no forwarding information available."
::= { lowpanIfStatsEntry 24 }

lowpanIfOutMeshRequests OBJECT-TYPE

SYNTAX Counter32
MAX-ACCESS read-only
STATUS current

DESCRIPTION

"The number of 6LoWPAN datagrams to be sent on this interface requiring MESH header encapsulation."

::= { lowpanIfStatsEntry 25 }

lowpanIfOutMeshForwds OBJECT-TYPE

SYNTAX Counter32

MAX-ACCESS read-only

STATUS current

DESCRIPTION

"The number of 6LoWPAN datagrams to be sent on this interface with a MESH header for which suitable forwarding information was available."

::= { lowpanIfStatsEntry 26 }

lowpanIfOutMeshTransmits OBJECT-TYPE

SYNTAX Counter32

MAX-ACCESS read-only

STATUS current

DESCRIPTION

"The number of 6LoWPAN datagrams to be sent on this interface with a MESH header created."

::= { lowpanIfStatsEntry 27 }

lowpanIfOutDiscards OBJECT-TYPE

SYNTAX Counter32

MAX-ACCESS read-only

STATUS current

DESCRIPTION

"The number of IPv6 packets to be sent over this interface for which no problem was encountered to prevent their transmission to their destination, but were discarded (e.g., for lack of buffer space)."

::= { lowpanIfStatsEntry 28 }

lowpanIfOutTransmits OBJECT-TYPE

SYNTAX Counter32

MAX-ACCESS read-only

STATUS current

DESCRIPTION

"The total number of 6LoWPAN datagrams to be sent on

```

        this interface that this entity supplied to the lower
        layers for transmission."
 ::= { lowpanIfStatsEntry 29 }

-- conformance definitions

lowpanGroups      OBJECT IDENTIFIER ::= { lowpanConformance 1 }
lowpanCompliances OBJECT IDENTIFIER ::= { lowpanConformance 2 }

lowpanCompliance MODULE-COMPLIANCE
  STATUS      current
  DESCRIPTION
    "Compliance statement for systems that implement 6LoWPAN."
  MODULE      -- this module
  MANDATORY-GROUPS {
    lowpanStatsGroup
  }
  GROUP       lowpanStatsMeshGroup
  DESCRIPTION
    "This group is mandatory for implementations that process
    or forward 6LoWPAN datagrams with mesh headers."
  GROUP       lowpanIfStatsGroup
  DESCRIPTION
    "This group is mandatory for implementations that expose
    per interface statistics."
  GROUP       lowpanIfStatsMeshGroup
  DESCRIPTION
    "This group is mandatory for implementations that expose
    per interface statistics and that process or forward
    6LoWPAN datagrams with mesh headers."
 ::= { lowpanCompliances 1 }

lowpanStatsGroup OBJECT-GROUP
  OBJECTS {
    lowpanReasmTimeout,
    lowpanInReceives,

```

```

    lowpanInHdrErrors,
    lowpanInMeshReceives,
    lowpanInReasmReqds,
    lowpanInReasmFails,
    lowpanInReasmOKs,

```



```

        lowpanInCompReqds,
        lowpanInCompFails,
        lowpanInCompOKs,
        lowpanInDiscards,
        lowpanInDelivers,
        lowpanOutRequests,
        lowpanOutCompReqds,
        lowpanOutCompFails,
        lowpanOutCompOKs,
        lowpanOutFragReqds,
        lowpanOutFragFails,
        lowpanOutFragOKs,
        lowpanOutFragCreates,
        lowpanOutDiscards,
        lowpanOutTransmits
    }
    STATUS          current
    DESCRIPTION
        "A collection of objects providing information and
        statistics about the processing of 6LoWPAN datagrams,
        excluding counters covering the processing of datagrams
        with a mesh headers."
    ::= { lowpanGroups 1 }

lowpanStatsMeshGroup OBJECT-GROUP
    OBJECTS {
        lowpanInMeshForwds,
        lowpanInMeshDelivers,
        lowpanOutMeshHopLimitExceeds,
        lowpanOutMeshNoRoutes,
        lowpanOutMeshRequests,
        lowpanOutMeshForwds,
        lowpanOutMeshTransmits
    }
    STATUS          current
    DESCRIPTION
        "A collection of objects providing information and
        statistics about the processing of 6LoWPAN datagrams
        with a 6LoWPAN mesh header."
    ::= { lowpanGroups 2 }

lowpanIfStatsGroup OBJECT-GROUP
    OBJECTS {

```

```

    lowpanIfReasmTimeout,
    lowpanIfInReceives,
    lowpanIfInHdrErrors,
    lowpanIfInMeshReceives,
    lowpanIfInReasmReqds,
    lowpanIfInReasmFails,
    lowpanIfInReasmOKs,
    lowpanIfInCompReqds,
    lowpanIfInCompFails,
    lowpanIfInCompOKs,
    lowpanIfInDiscards,
    lowpanIfInDelivers,
    lowpanIfOutRequests,
    lowpanIfOutCompReqds,
    lowpanIfOutCompFails,
    lowpanIfOutCompOKs,
    lowpanIfOutFragReqds,
    lowpanIfOutFragFails,
    lowpanIfOutFragOKs,
    lowpanIfOutFragCreates,
    lowpanIfOutDiscards,
    lowpanIfOutTransmits
}
STATUS      current
DESCRIPTION
    "A collection of objects providing per interface
    information and statistics about the processing
    of 6LoWPAN datagrams, excluding counters covering
    the processing of datagrams with a mesh headers."
::= { lowpanGroups 3 }

```

lowpanIfStatsMeshGroup OBJECT-GROUP

```

OBJECTS {
    lowpanIfInMeshForwds,
    lowpanIfInMeshDelivers,
    lowpanIfOutMeshHopLimitExceeds,
    lowpanIfOutMeshNoRoutes,
    lowpanIfOutMeshRequests,
    lowpanIfOutMeshForwds,
    lowpanIfOutMeshTransmits
}
STATUS      current
DESCRIPTION
    "A collection of objects providing per interface
    information and statistics about the processing
    of 6LoWPAN datagrams with a 6LoWPAN mesh header."
::= { lowpanGroups 4 }

```

Internet-Draft

LOWPAN-MIB

September 2014

END

7. Security Considerations

There are no management objects defined in this MIB module that have a MAX-ACCESS clause of read-write and/or read-create. So, if this MIB module is implemented correctly, then there is no risk that an intruder can alter or create any management objects of this MIB module via direct SNMP SET operations.

Some of the readable objects in this MIB module (i.e., objects with a MAX-ACCESS other than not-accessible) may be considered sensitive or vulnerable in some network environments. It is thus important to control even GET and/or NOTIFY access to these objects and possibly to even encrypt the values of these objects when sending them over the network via SNMP.

The read-only counters provide insights into the amount of 6LoWPAN traffic a node is receiving or transmitting. This might provide information whether a device is regularly exchanging information with other devices or whether a device is mostly not participating in any communication (e.g., the device might be "easier" to take away unnoticed). The reassembly counters could be used to direct denial of service attacks on the reassembly mechanism.

SNMP versions prior to SNMPv3 did not include adequate security. Even if the network itself is secure (for example by using IPsec), even then, there is no control as to who on the secure network is allowed to access and GET/SET (read/change/create/delete) the objects in this MIB module.

It is RECOMMENDED that implementers consider the security features as provided by the SNMPv3 framework (see [\[RFC3410\], section 8](#)), including full support for the SNMPv3 cryptographic mechanisms (for authentication and privacy).

Further, deployment of SNMP versions prior to SNMPv3 is NOT RECOMMENDED. Instead, it is RECOMMENDED to deploy SNMPv3 and to enable cryptographic security. It is then a customer/operator responsibility to ensure that the SNMP entity giving access to an instance of this MIB module is properly configured to give access to the objects only to those principals (users) that have legitimate

rights to indeed GET or SET (change/create/delete) them.

8. IANA Considerations

IANA and RFC Ed.: IANA is requested to assign a value for "YYYY" under the 'mib-2' subtree and to record the assignment in the SMI Numbers registry. When the assignment has been made, the RFC Editor is asked to replace "YYYY" (here and in the MIB module) with the assigned value and to remove this note.

The MIB module in this document uses the following IANA-assigned OBJECT IDENTIFIER values recorded in the SMI Numbers registry:

Descriptor	OBJECT IDENTIFIER value
-----	-----
lowpanMIB	{ mib-2 YYYY }

9. Acknowledgements

This specification borrows heavily from the IP-MIB defined in [\[RFC4293\]](#).

Juergen Schoenwaelder and Anuj Sehgal were partly funded by Flamingo, a Network of Excellence project (ICT-318488) supported by the European Commission under its Seventh Framework Programme.

10. References

10.1. Normative References

- [RFC2119] Bradner, S., "Key words for use in RFCs to Indicate Requirement Levels", [BCP 14](#), [RFC 2119](#), March 1997.
- [RFC2578] McCloghrie, K., Ed., Perkins, D., Ed., and J. Schoenwaelder, Ed., "Structure of Management Information Version 2 (SMIv2)", STD 58, [RFC 2578](#), April 1999.

- [RFC2579] McCloghrie, K., Ed., Perkins, D., Ed., and J. Schoenwaelder, Ed., "Textual Conventions for SMIV2", STD 58, [RFC 2579](#), April 1999.
- [RFC2580] McCloghrie, K., Perkins, D., and J. Schoenwaelder, "Conformance Statements for SMIV2", STD 58, [RFC 2580](#), April 1999.
- [RFC4944] Montenegro, G., Kushalnagar, N., Hui, J., and D. Culler, "Transmission of IPv6 Packets over IEEE 802.15.4 Networks", [RFC 4944](#), September 2007.

- [RFC2863] McCloghrie, K. and F. Kastenholz, "The Interfaces Group MIB", [RFC 2863](#), June 2000.

[10.2](#). Informative References

- [RFC0768] Postel, J., "User Datagram Protocol", STD 6, [RFC 768](#), August 1980.
- [RFC2460] Deering, S. and R. Hinden, "Internet Protocol, Version 6 (IPv6) Specification", [RFC 2460](#), December 1998.
- [RFC3410] Case, J., Mundy, R., Partain, D., and B. Stewart, "Introduction and Applicability Statements for Internet-Standard Management Framework", [RFC 3410](#), December 2002.
- [RFC4113] Fenner, B. and J. Flick, "Management Information Base for the User Datagram Protocol (UDP)", [RFC 4113](#), June 2005.
- [RFC4292] Haberman, B., "IP Forwarding Table MIB", [RFC 4292](#), April 2006.
- [RFC4293] Routhier, S., "Management Information Base for the Internet Protocol (IP)", [RFC 4293](#), April 2006.
- [RFC4443] Conta, A., Deering, S., and M. Gupta, "Internet Control Message Protocol (ICMPv6) for the Internet Protocol Version 6 (IPv6) Specification", [RFC 4443](#), March 2006.

[RFC7252] Shelby, Z., Hartke, K., and C. Bormann, "The Constrained Application Protocol (CoAP)", [RFC 7252](#), June 2014.

[I-D.ietf-6lo-btle]

Nieminen, J., Savolainen, T., Isomaki, M., Patil, B., Shelby, Z., and C. Gomez, "Transmission of IPv6 Packets over BLUETOOTH(R) Low Energy", [draft-ietf-6lo-btle-03](#) (work in progress), September 2014.

[CASE] Case, J. and C. Partridge, "Case Diagrams: A First Step to Diagrammed Management Information Bases", Computer Communications Review 19(1), January 1989.

Authors' Addresses

Schoenwaelder, et al.

Expires March 9, 2015

[Page 26]

Internet-Draft

LOWPAN-MIB

September 2014

Juergen Schoenwaelder
Jacobs University
Campus Ring 1
Bremen 28759
Germany

E-Mail: j.schoenwaelder@jacobs-university.de

Anuj Sehgal
Jacobs University
Campus Ring 1
Bremen 28759
Germany

E-Mail: s.anuj@jacobs-university.de

Tina Tsou
Huawei Technologies (USA)
2330 Central Expressway

Santa Clara CA 95050
USA

EMail: tina.tsou.zouting@huawei.com

Cathy Zhou
Huawei Technologies
Bantian, Longgang District
Shenzhen 518129
P.R. China

EMail: cathyzhou@huawei.com