

6Lo Working Group  
Internet-Draft  
Intended status: Standards Track  
Expires: January 18, 2019

Y. Choi, Ed.  
Y-G. Hong  
ETRI  
J-S. Youn  
Donggeui Univ  
D-K. Kim  
KNU  
J-H. Choi  
Samsung Electronics Co.,  
July 17, 2018

**Transmission of IPv6 Packets over Near Field Communication  
draft-ietf-6lo-nfc-10**

Abstract

Near field communication (NFC) is a set of standards for smartphones and portable devices to establish radio communication with each other by touching them together or bringing them into proximity, usually no more than 10 cm. NFC standards cover communications protocols and data exchange formats, and are based on existing radio-frequency identification (RFID) standards including ISO/IEC 14443 and FeliCa. The standards include ISO/IEC 18092 and those defined by the NFC Forum. The NFC technology has been widely implemented and available in mobile phones, laptop computers, and many other devices. This document describes how IPv6 is transmitted over NFC using 6LowPAN techniques.

Status of This Memo

This Internet-Draft is submitted in full conformance with the provisions of [BCP 78](#) and [BCP 79](#).

Internet-Drafts are working documents of the Internet Engineering Task Force (IETF). Note that other groups may also distribute working documents as Internet-Drafts. The list of current Internet-Drafts is at <https://datatracker.ietf.org/drafts/current/>.

Internet-Drafts are draft documents valid for a maximum of six months and may be updated, replaced, or obsoleted by other documents at any time. It is inappropriate to use Internet-Drafts as reference material or to cite them other than as "work in progress."

This Internet-Draft will expire on January 18, 2019.

Copyright Notice

Copyright (c) 2018 IETF Trust and the persons identified as the document authors. All rights reserved.

This document is subject to [BCP 78](https://trustee.ietf.org/license-info) and the IETF Trust's Legal Provisions Relating to IETF Documents (<https://trustee.ietf.org/license-info>) in effect on the date of publication of this document. Please review these documents carefully, as they describe your rights and restrictions with respect to this document. Code Components extracted from this document must include Simplified BSD License text as described in Section 4.e of the Trust Legal Provisions and are provided without warranty as described in the Simplified BSD License.

Table of Contents

- [1. Introduction . . . . .](#) [3](#)
- [2. Conventions and Terminology . . . . .](#) [3](#)
- [3. Overview of Near Field Communication Technology . . . . .](#) [4](#)
  - [3.1. Peer-to-peer Mode of NFC . . . . .](#) [4](#)
  - [3.2. Protocol Stacks of NFC . . . . .](#) [4](#)
  - [3.3. NFC-enabled Device Addressing . . . . .](#) [6](#)
  - [3.4. MTU of NFC Link Layer . . . . .](#) [6](#)
- [4. Specification of IPv6 over NFC . . . . .](#) [7](#)
  - [4.1. Protocol Stacks . . . . .](#) [7](#)
  - [4.2. Link Model . . . . .](#) [8](#)
  - [4.3. Stateless Address Autoconfiguration . . . . .](#) [9](#)
  - [4.4. IPv6 Link Local Address . . . . .](#) [9](#)
  - [4.5. Neighbor Discovery . . . . .](#) [10](#)
  - [4.6. Dispatch Header . . . . .](#) [11](#)
  - [4.7. Header Compression . . . . .](#) [11](#)
  - [4.8. Fragmentation and Reassembly . . . . .](#) [12](#)
  - [4.9. Unicast and Multicast Address Mapping . . . . .](#) [12](#)
- [5. Internet Connectivity Scenarios . . . . .](#) [13](#)
  - [5.1. NFC-enabled Device Connected to the Internet . . . . .](#) [13](#)
  - [5.2. Isolated NFC-enabled Device Network . . . . .](#) [14](#)
- [6. IANA Considerations . . . . .](#) [14](#)
- [7. Security Considerations . . . . .](#) [14](#)
- [8. Acknowledgements . . . . .](#) [15](#)
- [9. References . . . . .](#) [15](#)
  - [9.1. Normative References . . . . .](#) [15](#)
  - [9.2. Informative References . . . . .](#) [17](#)
- [Authors' Addresses . . . . .](#) [17](#)



## **1. Introduction**

NFC is a set of short-range wireless technologies, typically requiring a distance of 10 cm or less. NFC operates at 13.56 MHz on ISO/IEC 18000-3 air interface and at rates ranging from 106 kbit/s to 424 kbit/s. NFC always involves an initiator and a target; the initiator actively generates an RF field that can power a passive target. This enables NFC targets to take very simple form factors such as tags, stickers, key fobs, or cards that do not require batteries. NFC peer-to-peer communication is possible, provided both devices are powered. NFC builds upon RFID systems by allowing two-way communication between endpoints, where earlier systems such as contactless smart cards were one-way only. It has been used in devices such as mobile phones, running Android operating system, named with a feature called "Android Beam". In addition, it is expected for the other mobile phones, running the other operating systems (e.g., iOS, etc.) to be equipped with NFC technology in the near future.

Considering the potential for exponential growth in the number of heterogeneous air interface technologies, NFC would be widely used as one of the other air interface technologies, such as Bluetooth Low Energy (BT-LE), Wi-Fi, and so on. Each of the heterogeneous air interface technologies has its own characteristics, which cannot be covered by the other technologies, so various kinds of air interface technologies would co-exist together. Therefore, it is required for them to communicate with each other. NFC also has the strongest ability (e.g., secure communication distance of 10 cm) to prevent a third party from attacking privacy.

When the number of devices and things having different air interface technologies communicate with each other, IPv6 is an ideal internet protocols owing to its large address space. Also, NFC would be one of the endpoints using IPv6. Therefore, this document describes how IPv6 is transmitted over NFC using 6LoWPAN techniques.

[RFC4944] specifies the transmission of IPv6 over IEEE 802.15.4. The NFC link also has similar characteristics to that of IEEE 802.15.4. Many of the mechanisms defined in [[RFC4944](#)] can be applied to the transmission of IPv6 on NFC links. This document specifies the details of IPv6 transmission over NFC links.

## **2. Conventions and Terminology**

The key words "MUST", "MUST NOT", "REQUIRED", "SHALL", "SHALL NOT", "SHOULD", "SHOULD NOT", "RECOMMENDED", "NOT RECOMMENDED", "MAY", and "OPTIONAL" in this document are to be interpreted as described in BCP



14 [[RFC2119](#)] [[RFC8174](#)] when, and only when, they appear in all capitals, as shown here.

### **3. Overview of Near Field Communication Technology**

NFC technology enables simple and safe two-way interactions between electronic devices, allowing consumers to perform contactless transactions, access digital content, and connect electronic devices with a single touch. NFC complements many popular consumer level wireless technologies, by utilizing the key elements in existing standards for contactless card technology (ISO/IEC 14443 A&B and JIS-X 6319-4). NFC can be compatible with existing contactless card infrastructure and it enables a consumer to utilize one device across different systems.

Extending the capability of contactless card technology, NFC also enables devices to share information at a distance that is less than 10 cm with a maximum communication speed of 424 kbps. Users can share business cards, make transactions, access information from a smart poster or provide credentials for access control systems with a simple touch.

NFC's bidirectional communication ability is ideal for establishing connections with other technologies by the simplicity of touch. In addition to the easy connection and quick transactions, simple data sharing is also available.

#### **3.1. Peer-to-peer Mode of NFC**

NFC-enabled devices are unique in that they can support three modes of operation: card emulation, peer-to-peer, and reader/writer. Peer-to-peer mode enables two NFC-enabled devices to communicate with each other to exchange information and share files, so that users of NFC-enabled devices can quickly share contact information and other files with a touch. Therefore, an NFC-enabled device can securely send IPv6 packets to any corresponding node on the Internet when an NFC-enabled gateway is linked to the Internet.

#### **3.2. Protocol Stacks of NFC**

IP can use the services provided by the Logical Link Control Protocol (LLCP) in the NFC stack to provide reliable, two-way transport of information between the peer devices. Figure 1 depicts the NFC P2P protocol stack with IPv6 bindings to LLCP.

For data communication in IPv6 over NFC, an IPv6 packet MUST be passed down to LLCP of NFC and transported to an Information Field in Protocol Data Unit (I PDU) of LLCP of the NFC-enabled peer device.









### **3.3. NFC-enabled Device Addressing**

According to NFC Logical Link Control Protocol v1.3 [[LLCP-1.3](#)], NFC-enabled devices have two types of 6-bit addresses (i.e., SSAP and DSAP) to identify service access points. The several service access points can be installed on a NFC device. However, the SSAP and DSAP can be used as identifiers for NFC link connections with the IPv6 over NFC adaptation layer. Therefore, the SSAP can be used to generate an IPv6 interface identifier. Address values between 00h and 0Fh of SSAP and DSAP are reserved for identifying the well-known service access points, which are defined in the NFC Forum Assigned Numbers Register. Address values between 10h and 1Fh SHALL be assigned by the local LLC to services registered by local service environment. In addition, address values between 20h and 3Fh SHALL be assigned by the local LLC as a result of an upper layer service request. Therefore, the address values between 20h and 3Fh can be used for generating IPv6 interface identifiers.

### **3.4. MTU of NFC Link Layer**

As mentioned in [Section 3.2](#), an IPv6 packet MUST be passed down to LLC of NFC and transported to an Unnumbered Information Protocol Data Unit (UI PDU) and an Information Field in Protocol Data Unit (I PDU) of LLC of the NFC-enabled peer device.

The information field of an I PDU contains a single service data unit. The maximum number of octets in the information field is determined by the Maximum Information Unit (MIU) for the data link connection. The default value of the MIU for I PDUs is 128 octets. The local and remote LLCs each establish and maintain distinct MIU values for each data link connection endpoint. Also, an LLC MAY announce a larger MIU for a data link connection by transmitting an MIUX extension parameter within the information field. If no MIUX parameter is transmitted, the default MIU value of 128 MUST be used. Otherwise, the MTU size in NFC LLC SHOULD be calculated from the MIU value as follows:

$$\text{MIU} = 128 + \text{MIUX}.$$

According to [[LLCP-1.3](#)], Figure 2 shows an example of the MIUX parameter TLV. Each of TLV Type and TLV Length field is 1 byte, and TLV Value field is 2 bytes.



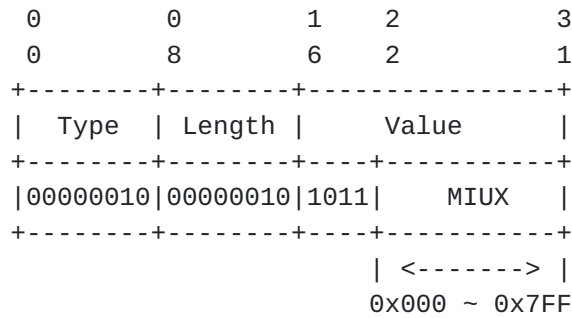


Figure 2: Example of MIUX Parameter TLV

When the MIUX parameter is encoded as a TLV option, the TLV Type field MUST be 0x02 and the TLV Length field MUST be 0x02. The MIUX parameter MUST be encoded into the least significant 11 bits of the TLV Value field. The unused bits in the TLV Value field MUST be set to zero by the sender and ignored by the receiver. A maximum value of the TLV Value field can be 0x7FF, and a maximum size of the MTU in NFC LLCP is 2176 bytes including the 128 byte default of MIU.

#### 4. Specification of IPv6 over NFC

NFC technology also has considerations and requirements owing to low power consumption and allowed protocol overhead. 6LoWPAN standards [RFC4944], [RFC6775], and [RFC6282] provide useful functionality for reducing overhead which can be applied to NFC. This functionality consists of link-local IPv6 addresses and stateless IPv6 address auto-configuration (see Section 4.3), Neighbor Discovery (see Section 4.5) and header compression (see Section 4.7).

##### 4.1. Protocol Stacks

Figure 3 illustrates IPv6 over NFC. Upper layer protocols can be transport layer protocols (TCP and UDP), application layer protocols, and others capable running on top of IPv6.



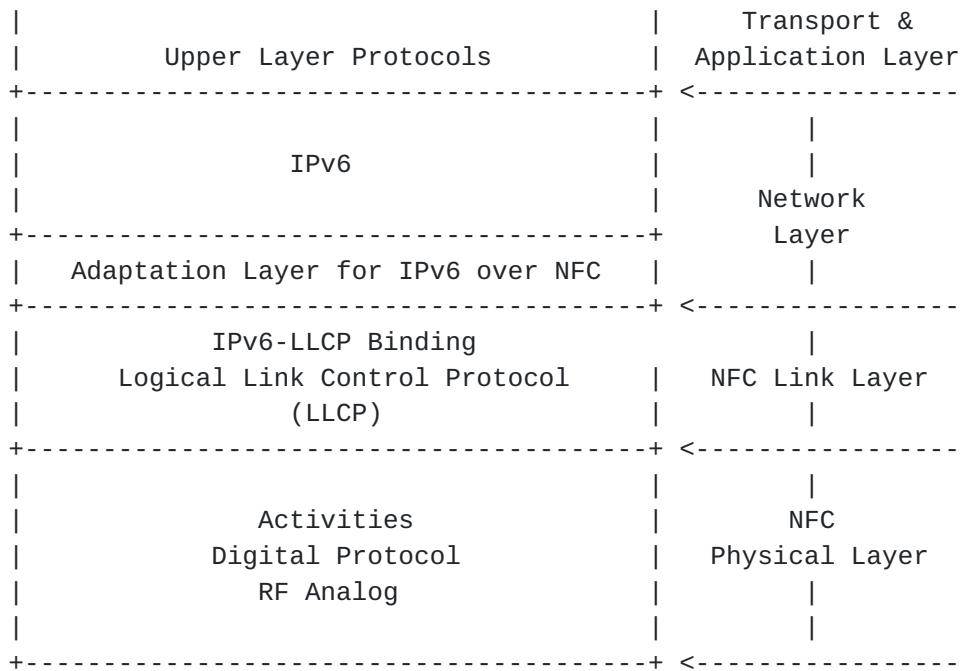


Figure 3: Protocol Stacks for IPv6 over NFC

The adaptation layer for IPv6 over NFC SHALL support neighbor discovery, stateless address auto-configuration, header compression, and fragmentation & reassembly.

**4.2. Link Model**

In the case of BT-LE, the Logical Link Control and Adaptation Protocol (L2CAP) supports fragmentation and reassembly (FAR) functionality; therefore, the adaptation layer for IPv6 over BT-LE does not have to conduct the FAR procedure. The NFC LLCP, in contrast, does not support the FAR functionality, so IPv6 over NFC needs to consider the FAR functionality, defined in [RFC4944]. However, the MTU on an NFC link can be configured in a connection procedure and extended enough to fit the MTU of IPv6 packet (see Section 4.8).

This document does NOT RECOMMEND using FAR over NFC link due to simplicity of the protocol and implementation. In addition, the implementation for this specification SHOULD use MIUX extension to communicate the MTU of the link to the peer as defined in Section 3.4.

The NFC link between two communicating devices is considered to be a point-to-point link only. Unlike in BT-LE, an NFC link does not support a star topology or mesh network topology but only direct connections between two devices. Furthermore, the NFC link layer



does not support packet forwarding in link layer. Due to this characteristics, 6LOWPAN functionalities, such as addressing and auto-configuration, and header compression, need to be specialized into IPv6 over NFC.

**4.3. Stateless Address Autoconfiguration**

An NFC-enabled device (i.e., 6LN) performs stateless address autoconfiguration as per [RFC4862]. A 64-bit Interface identifier (IID) for an NFC interface is formed by utilizing the 6-bit NFC LLCP address (see Section 3.3). In the viewpoint of address configuration, such an IID SHOULD guarantee a stable IPv6 address because each data link connection is uniquely identified by the pair of DSAP and SSAP included in the header of each LLC PDU in NFC.

Following the guidance of [RFC7136], interface identifiers of all unicast addresses for NFC-enabled devices are 64 bits long and constructed by using the generation algorithm of random (but stable) identifier (RID) [RFC7217] (see Figure 4).

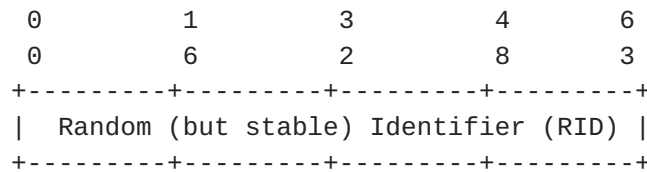


Figure 4: IID from NFC-enabled device

The RID is an output which MAY be created by the algorithm, F() with input parameters. One of the parameters is Net\_IFace, and NFC Link Layer address (i.e., SSAP) MAY be a source of the NetIFace parameter. The 6-bit address of SSAP of NFC is easy and short to be targeted by attacks of third party (e.g., address scanning). The F() can provide secured and stable IIDs for NFC-enabled devices.

In addition, the "Universal/Local" bit (i.e., the 'u' bit) of an NFC-enabled device address MUST be set to 0 [RFC4291].

**4.4. IPv6 Link Local Address**

Only if the NFC-enabled device address is known to be a public address, the "Universal/Local" bit be set to 1. The IPv6 link-local address for an NFC-enabled device is formed by appending the IID, to the prefix FE80::/64, as depicted in Figure 5.





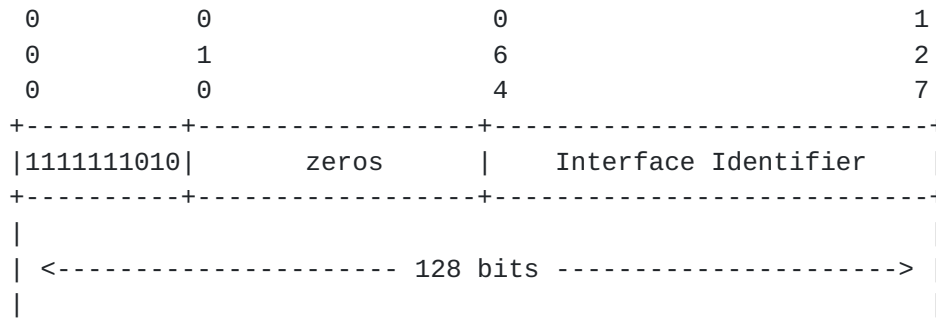


Figure 5: IPv6 link-local address in NFC

The tool for a 6LBR to obtain an IPv6 prefix for numbering the NFC network is can be accomplished via DHCPv6 Prefix Delegation ([RFC3633]).

#### 4.5. Neighbor Discovery

Neighbor Discovery Optimization for 6LoWPANs ([RFC6775]) describes the neighbor discovery approach in several 6LoWPAN topologies, such as mesh topology. NFC does not support a complicated mesh topology but only a simple multi-hop network topology or directly connected peer-to-peer network. Therefore, the following aspects of RFC 6775 are applicable to NFC:

- o When an NFC-enabled device (6LN) is directly connected to a 6LBR, an NFC 6LN MUST register its address with the 6LBR by sending a Neighbor Solicitation (NS) message with the Address Registration Option (ARO) and process the Neighbor Advertisement (NA) accordingly. In addition, if DHCPv6 is used to assign an address, Duplicate Address Detection (DAD) MAY not be required.
- o When two or more NFC 6LNs meet, there MAY be two cases. One is that they meet with multi-hop connections, and the other is that they meet within a single hop range (e.g., isolated network). In a case of multi-hops, all of 6LNs, which have two or more connections with different neighbors, MAY be a router for 6LR/6LBR. In a case that they meet within a single hop and they have the same properties, any of them can be a router. When the NFC nodes are not of uniform category (e.g., different MTU, level of remaining energy, connectivity, etc.), a performance-outstanding device can become a router. Also, they MUST deliver their MTU information to neighbors with NFC LLCP protocols during connection initialization. The router MAY also communicate other capabilities which is out of scope of this document.



- o For sending Router Solicitations and processing Router Advertisements, the NFC 6LNs MUST follow Sections 5.3 and 5.4 of [RFC6775].

#### 4.6. Dispatch Header

All IPv6-over-NFC encapsulated datagrams are prefixed by an encapsulation header stack consisting of a Dispatch value followed by zero or more header fields. The only sequence currently defined for IPv6-over-NFC is the LOWPAN\_IPHC header followed by payload, as depicted in Figure 6.




Figure 6: A IPv6-over-NFC Encapsulated 6LOWPAN\_IPHC Compressed IPv6 Datagram

The dispatch value may be treated as an unstructured namespace. Only a single pattern is used to represent current IPv6-over-NFC functionality.

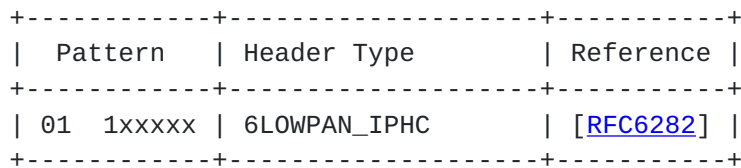


Figure 7: Dispatch Values

Other IANA-assigned 6LowPAN Dispatch values do not apply to this specification.

#### 4.7. Header Compression

Header compression as defined in [RFC6282], which specifies the compression format for IPv6 datagrams on top of IEEE 802.15.4, is REQUIRED in this document as the basis for IPv6 header compression on top of NFC. All headers MUST be compressed according to RFC 6282 encoding formats.

Therefore, IPv6 header compression in [RFC6282] MUST be implemented. Further, implementations MAY also support Generic Header Compression (GHC) of [RFC7400].



If a 16-bit address is required as a short address, it MUST be formed by padding the 6-bit NFC link-layer (node) address to the left with zeros as shown in Figure 8.

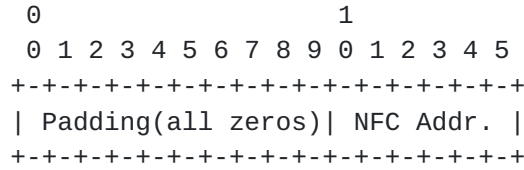


Figure 8: NFC short address format

**4.8. Fragmentation and Reassembly**

IPv6-over-NFC fragmentation and reassembly (FAR) for the payloads is NOT RECOMMENDED in this document as discussed in Section 3.4. The NFC link connection for IPv6 over NFC MUST be configured with an equivalent MIU size to fit the MTU of IPv6 Packet. If NFC devices support extension of the MTU, the MIUX value is 0x480 in order to fit the MTU (1280 bytes) of a IPv6 packet.

**4.9. Unicast and Multicast Address Mapping**

The address resolution procedure for mapping IPv6 non-multicast addresses into NFC link-layer addresses follows the general description in Section 7.2 of [RFC4861], unless otherwise specified.

The Source/Target link-layer Address option has the following form when the addresses are 6-bit NFC link-layer (node) addresses.

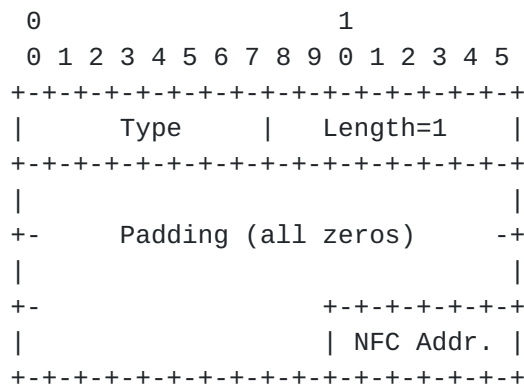


Figure 9: Unicast address mapping

Option fields:

Type:



1: for Source Link-layer address.

2: for Target Link-layer address.

Length:

This is the length of this option (including the type and length fields) in units of 8 octets. The value of this field is 1 for 6-bit NFC node addresses.

NFC address:

The 6-bit address in canonical bit order. This is the unicast address the interface currently responds to.

The NFC Link Layer does not support multicast. Therefore, packets are always transmitted by unicast between two NFC-enabled devices. Even in the case where a 6LBR is attached to multiple 6LNs, the 6LBR cannot do a multicast to all the connected 6LNs. If the 6LBR needs to send a multicast packet to all its 6LNs, it has to replicate the packet and unicast it on each link.

## 5. Internet Connectivity Scenarios

As two typical scenarios, the NFC network can be isolated and connected to the Internet.

### 5.1. NFC-enabled Device Connected to the Internet

One of the key applications of using IPv6 over NFC is securely transmitting IPv6 packets because the RF distance between 6LN and 6LBR is typically within 10 cm. If any third party wants to hack into the RF between them, it must come to nearly touch them. Applications can choose which kinds of air interfaces (e.g., BT-LE, Wi-Fi, NFC, etc.) to send data depending on the characteristics of the data.

Figure 10 illustrates an example of an NFC-enabled device network connected to the Internet. The distance between 6LN and 6LBR is typically 10 cm or less. If there is any laptop computers close to a user, it will become the a 6LBR. Additionally, when the user mounts an NFC-enabled air interface adapter (e.g., portable NFC dongle) on the close laptop PC, the user's NFC-enabled device (6LN) can communicate with the laptop PC (6LBR) within 10 cm distance.







Figure 10: NFC-enabled device network connected to the Internet

**5.2. Isolated NFC-enabled Device Network**

In some scenarios, the NFC-enabled device network may transiently be a simple isolated network as shown in the Figure 11.

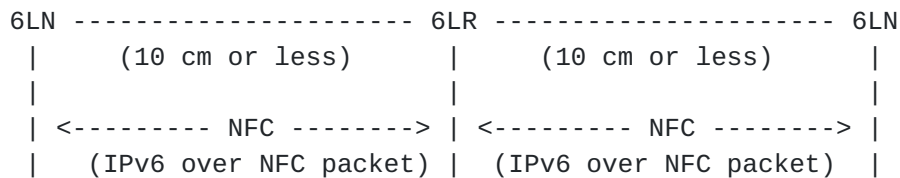


Figure 11: Isolated NFC-enabled device network

In mobile phone markets, applications are designed and made by user developers. They may image interesting applications, where three or more mobile phones touch or attach each other to accomplish outstanding performance.

**6. IANA Considerations**

There are no IANA considerations related to this document.

**7. Security Considerations**

When interface identifiers (IIDs) are generated, devices and users are required to consider mitigating various threats, such as correlation of activities over time, location tracking, device-specific vulnerability exploitation, and address scanning.

IPv6-over-NFC is, in practice, not used for long-lived links for big size data transfer or multimedia streaming, but used for extremely short-lived links (i.e., single touch-based approaches) for ID verification and mobile payment. This will mitigate the threat of correlation of activities over time.

IPv6-over-NFC uses an IPv6 interface identifier formed from a "Short Address" and a set of well-known constant bits (such as padding with '0's) for the modified EUI-64 format. However, the short address of NFC link layer (LLC) is not generated as a physically permanent value



but logically generated for each connection. Thus, every single touch connection can use a different short address of NFC link with an extremely short-lived link. This can mitigate address scanning as well as location tracking and device-specific vulnerability exploitation.

Thus, this document does not RECOMMEND sending NFC packets over the Internet or any unsecured network.

If there is a compelling reason to send/receive the IPv6-over-NFC packets over the unsecured network, the deployment SHOULD make sure that the packets are sent over secured channels. The particular Security mechanisms are out of scope of this document.

## **8. Acknowledgements**

We are grateful to the members of the IETF 6lo working group.

Michael Richardson, Suresh Krishnan, Pascal Thubert, Carsten Bormann, Alexandru Petrescu, James Woodyatt, Dave Thaler, Samita Chakrabarti, and Gabriel Montenegro have provided valuable feedback for this draft.

## **9. References**

### **9.1. Normative References**

- [LLCP-1.3] "NFC Logical Link Control Protocol version 1.3", NFC Forum Technical Specification , March 2016.
- [RFC2119] Bradner, S., "Key words for use in RFCs to Indicate Requirement Levels", [BCP 14](#), [RFC 2119](#), DOI 10.17487/RFC2119, March 1997, <<https://www.rfc-editor.org/info/rfc2119>>.
- [RFC3633] Troan, O. and R. Droms, "IPv6 Prefix Options for Dynamic Host Configuration Protocol (DHCP) version 6", [RFC 3633](#), DOI 10.17487/RFC3633, December 2003, <<https://www.rfc-editor.org/info/rfc3633>>.
- [RFC4291] Hinden, R. and S. Deering, "IP Version 6 Addressing Architecture", [RFC 4291](#), DOI 10.17487/RFC4291, February 2006, <<https://www.rfc-editor.org/info/rfc4291>>.



- [RFC4861] Narten, T., Nordmark, E., Simpson, W., and H. Soliman, "Neighbor Discovery for IP version 6 (IPv6)", [RFC 4861](#), DOI 10.17487/RFC4861, September 2007, <<https://www.rfc-editor.org/info/rfc4861>>.
- [RFC4862] Thomson, S., Narten, T., and T. Jinmei, "IPv6 Stateless Address Autoconfiguration", [RFC 4862](#), DOI 10.17487/RFC4862, September 2007, <<https://www.rfc-editor.org/info/rfc4862>>.
- [RFC4944] Montenegro, G., Kushalnagar, N., Hui, J., and D. Culler, "Transmission of IPv6 Packets over IEEE 802.15.4 Networks", [RFC 4944](#), DOI 10.17487/RFC4944, September 2007, <<https://www.rfc-editor.org/info/rfc4944>>.
- [RFC6282] Hui, J., Ed. and P. Thubert, "Compression Format for IPv6 Datagrams over IEEE 802.15.4-Based Networks", [RFC 6282](#), DOI 10.17487/RFC6282, September 2011, <<https://www.rfc-editor.org/info/rfc6282>>.
- [RFC6775] Shelby, Z., Ed., Chakrabarti, S., Nordmark, E., and C. Bormann, "Neighbor Discovery Optimization for IPv6 over Low-Power Wireless Personal Area Networks (6LoWPANs)", [RFC 6775](#), DOI 10.17487/RFC6775, November 2012, <<https://www.rfc-editor.org/info/rfc6775>>.
- [RFC7136] Carpenter, B. and S. Jiang, "Significance of IPv6 Interface Identifiers", [RFC 7136](#), DOI 10.17487/RFC7136, February 2014, <<https://www.rfc-editor.org/info/rfc7136>>.
- [RFC7217] Gont, F., "A Method for Generating Semantically Opaque Interface Identifiers with IPv6 Stateless Address Autoconfiguration (SLAAC)", [RFC 7217](#), DOI 10.17487/RFC7217, April 2014, <<https://www.rfc-editor.org/info/rfc7217>>.
- [RFC7400] Bormann, C., "6LoWPAN-GHC: Generic Header Compression for IPv6 over Low-Power Wireless Personal Area Networks (6LoWPANs)", [RFC 7400](#), DOI 10.17487/RFC7400, November 2014, <<https://www.rfc-editor.org/info/rfc7400>>.
- [RFC8174] Leiba, B., "Ambiguity of Uppercase vs Lowercase in [RFC 2119](#) Key Words", [BCP 14](#), [RFC 8174](#), DOI 10.17487/RFC8174, May 2017, <<https://www.rfc-editor.org/info/rfc8174>>.



## **9.2. Informative References**

[ECMA-340]

"Near Field Communication - Interface and Protocol (NFCIP-1) 3rd Ed.", ECMA-340 , June 2013.

### Authors' Addresses

Younghwan Choi (editor)  
Electronics and Telecommunications Research Institute  
218 Gajeongno, Yuseung-gu  
Daejeon 34129  
Korea

Phone: +82 42 860 1429  
Email: yhc@etri.re.kr

Yong-Geun Hong  
Electronics and Telecommunications Research Institute  
161 Gajeong-Dong Yuseung-gu  
Daejeon 305-700  
Korea

Phone: +82 42 860 6557  
Email: yghong@etri.re.kr

Joo-Sang Youn  
DONG-EUI University  
176 Eomgwangno Busan\_jin\_gu  
Busan 614-714  
Korea

Phone: +82 51 890 1993  
Email: joosang.youn@gmail.com

Dongkyun Kim  
Kyungpook National University  
80 Daehak-ro, Buk-gu  
Daegu 702-701  
Korea

Phone: +82 53 950 7571  
Email: dongkyun@knu.ac.kr





JinHyok Choi  
Samsung Electronics Co.,  
129 Samsung-ro, Youngdong-gu  
Suwon 447-712  
Korea

Phone: +82 2 2254 0114

Email: jinchoe@samsung.com