

6man Working Group  
Internet-Draft  
Intended status: Standards Track  
Expires: October 11, 2013

F. Costa  
J-M. Combes, Ed.  
X. Pougard  
France Telecom Orange  
H. Li  
Huawei Technologies  
April 9, 2013

**Duplicate Address Detection Proxy**  
**draft-ietf-6man-dad-proxy-07**

**Abstract**

The document describes a proxy based mechanism allowing the use of Duplicate Address Detection (DAD) by IPv6 nodes in a point-to-multipoint architecture with "split-horizon" forwarding scheme, primarily deployed for Digital Subscriber Line (DSL) and Fiber access architectures. Based on the DAD signalling, the first hop router stores in a Binding Table all known IPv6 addresses used on a point-to-multipoint domain (e.g. VLAN). When a node performs DAD for an address already used by another node, the first hop router replies instead of this last one.

**Status of this Memo**

This Internet-Draft is submitted in full conformance with the provisions of [BCP 78](#) and [BCP 79](#).

Internet-Drafts are working documents of the Internet Engineering Task Force (IETF). Note that other groups may also distribute working documents as Internet-Drafts. The list of current Internet-Drafts is at <http://datatracker.ietf.org/drafts/current/>.

Internet-Drafts are draft documents valid for a maximum of six months and may be updated, replaced, or obsoleted by other documents at any time. It is inappropriate to use Internet-Drafts as reference material or to cite them other than as "work in progress."

This Internet-Draft will expire on October 11, 2013.

**Copyright Notice**

Copyright (c) 2013 IETF Trust and the persons identified as the document authors. All rights reserved.

This document is subject to [BCP 78](#) and the IETF Trust's Legal Provisions Relating to IETF Documents

(<http://trustee.ietf.org/license-info>) in effect on the date of publication of this document. Please review these documents carefully, as they describe your rights and restrictions with respect to this document. Code Components extracted from this document must include Simplified BSD License text as described in Section 4.e of the Trust Legal Provisions and are provided without warranty as described in the Simplified BSD License.

## Table of Contents

<a href="#">1.</a>	<a href="#">Introduction . . . . .</a>	<a href="#">3</a>
<a href="#">1.1.</a>	<a href="#">Requirements Language . . . . .</a>	<a href="#">3</a>
<a href="#">2.</a>	<a href="#">Background . . . . .</a>	<a href="#">3</a>
<a href="#">3.</a>	<a href="#">Why existing IETF solutions are not sufficient? . . . . .</a>	<a href="#">4</a>
<a href="#">3.1.</a>	<a href="#">Duplicate Address Detection . . . . .</a>	<a href="#">5</a>
<a href="#">3.2.</a>	<a href="#">Neighbor Discovery Proxy . . . . .</a>	<a href="#">5</a>
<a href="#">3.3.</a>	<a href="#">6LoWPAN Neighbor Discovery . . . . .</a>	<a href="#">5</a>
<a href="#">3.4.</a>	<a href="#">IPv6 Mobility Manager . . . . .</a>	<a href="#">6</a>
<a href="#">4.</a>	<a href="#">Duplicate Address Detection Proxy (DAD-Proxy) specifications . . . . .</a>	<a href="#">6</a>
<a href="#">4.1.</a>	<a href="#">DAD-Proxy Data structure . . . . .</a>	<a href="#">6</a>
<a href="#">4.2.</a>	<a href="#">DAD-Proxy mechanism . . . . .</a>	<a href="#">7</a>
<a href="#">4.2.1.</a>	<a href="#">No entry exists for the tentative address . . . . .</a>	<a href="#">7</a>
<a href="#">4.2.2.</a>	<a href="#">An entry already exists for the tentative address . . . . .</a>	<a href="#">7</a>
<a href="#">4.2.3.</a>	<a href="#">Confirmation of reachability to check the validity of the conflict . . . . .</a>	<a href="#">9</a>
<a href="#">5.</a>	<a href="#">Manageability Considerations . . . . .</a>	<a href="#">11</a>
<a href="#">6.</a>	<a href="#">IANA Considerations . . . . .</a>	<a href="#">11</a>
<a href="#">7.</a>	<a href="#">Security Considerations . . . . .</a>	<a href="#">11</a>
<a href="#">7.1.</a>	<a href="#">Interoperability with SEND . . . . .</a>	<a href="#">11</a>
<a href="#">7.2.</a>	<a href="#">IP source address spoofing protection . . . . .</a>	<a href="#">11</a>
<a href="#">8.</a>	<a href="#">Acknowledgments . . . . .</a>	<a href="#">12</a>
<a href="#">9.</a>	<a href="#">References . . . . .</a>	<a href="#">12</a>
<a href="#">9.1.</a>	<a href="#">Normative References . . . . .</a>	<a href="#">12</a>
<a href="#">9.2.</a>	<a href="#">Informative References . . . . .</a>	<a href="#">12</a>
<a href="#">Appendix A.</a>	<a href="#">DAD Proxy state machine . . . . .</a>	<a href="#">13</a>
	<a href="#">Authors' Addresses . . . . .</a>	<a href="#">15</a>



## **1. Introduction**

This document specifies a function called Duplicate Address Detection (DAD) proxy allowing the use of DAD by the nodes on the same point-to-multipoint domain with "split-horizon" forwarding scheme, primarily deployed for Digital Subscriber Line (DSL) and Fiber access architectures. It only impacts the first hop router and it doesn't need modifications on the other IPv6 nodes. This mechanism is fully effective if all the nodes of a point-to-multipoint domain (except the DAD proxy itself) perform DAD.

This document explains also why DAD mechanism [[RFC4862](#)] without a proxy cannot be used in a point-to-multipoint architecture with "split-horizon" forwarding scheme (IPv6 over PPP [[RFC5072](#)] is not affected). One of the main reasons is that, because of this forwarding scheme, IPv6 nodes on the same point-to-multipoint domain cannot have direct communication: any communication between them must go through the first hop router of the same domain.

It is assumed in this document that Link-layer addresses on a point-to-multipoint domain are unique from the first hop router's point of view (e.g. in an untrusted Ethernet architecture this assumption can be guaranteed thanks to mechanisms such as "MAC Address Translation" performed by an aggregation device between IPv6 nodes and the first hop router).

### **1.1. Requirements Language**

The key words "MUST", "MUST NOT", "REQUIRED", "SHALL", "SHALL NOT", "SHOULD", "SHOULD NOT", "RECOMMENDED", "MAY", and "OPTIONAL" in this document are to be interpreted as described in [RFC 2119](#) [[RFC2119](#)].

## **2. Background**

Terminology in this document follows that in Neighbor Discovery for IP version 6 (IPv6) [[RFC4861](#)] and IPv6 Stateless Address Autoconfiguration [[RFC4862](#)]. In addition, this section defines additional terms related to Digital Subscriber Line (DSL) and Fiber access architectures, which are an important case where the solution described in this document can be used:

Customer Premises Equipment (CPE)

The first IPv6 node in a customer's network.



**Access Node (AN)**

The first aggregation point in the public access network. It is considered as a L2 bridge in this document.

**Broadband Network Gateway (BNG)**

The first hop router from the CPE's point of view.

**VLAN N:1 architecture**

A point-to-multipoint architecture where many CPEs are connected to the same VLAN. The CPEs may be connected on the same or different Access Nodes.

**split-horizon model**

A forwarding scheme where CPEs cannot have direct layer 2 communications between them (i.e. IP flows must be forwarded through the BNG via routing).

The following figure shows where are the different entities defined above.

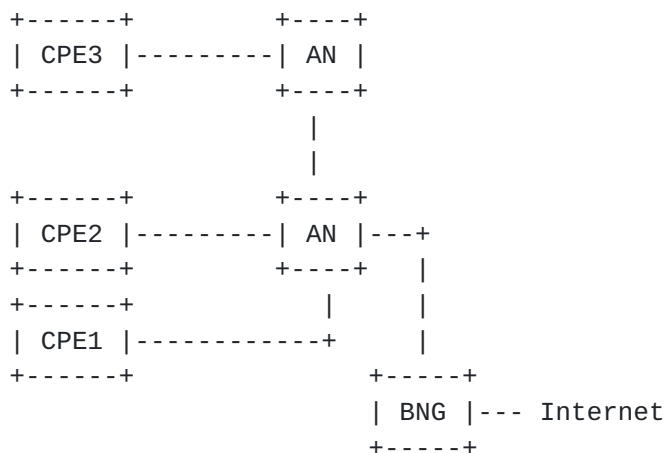


Figure 1: DSL and Fiber access Architecture

### **3. Why existing IETF solutions are not sufficient?**

In a DSL or Fiber access architecture depicted in Figure 1, CPE1,2,3 and the BNG are IPv6 nodes, while AN is a L2 bridge providing connectivity between the BNG and each CPE. The AN enforces a split-horizon model so that CPEs can only send and receive frames (e.g. Ethernet frames) to and from the BNG but not to each other. That said, the BNG is on a same link with all CPE, but one CPE is not on a same link with any other CPE.



### **3.1. Duplicate Address Detection**

Duplicate Address Detection (DAD) [[RFC4862](#)] is performed when an IPv6 node verifies the uniqueness of a tentative IPv6 address. This node sends a Neighbor Solicitation (NS) message with the IP destination set to the solicited-node multicast address of the tentative address. This NS message is multicasted to other nodes on the same link. When the tentative address is already used on the link by another node, this last one replies with a Neighbor Advertisement (NA) message to inform the first node. So when performing DAD, a node expects the NS messages to be received by any node currently using the tentative address.

However, in a point-to-multipoint network with split-horizon forwarding scheme implemented in the AN, the CPEs are prevented from talking to each other directly. All packets sent out from a CPE are forwarded by the AN only to the BNG but not to any other CPE. NS messages sent by a certain CPE will be received only by the BNG and will not reach other CPEs. So, other CPEs have no idea that a certain IPv6 address is used by another CPE. That means, in a network with split-horizon, DAD, as defined in [[RFC4862](#)], can't work properly without an additional help.

### **3.2. Neighbor Discovery Proxy**

Neighbor Discovery (ND) Proxy [[RFC4389](#)] is designed for forwarding ND messages between different IP links where the subnet prefix is the same. A ND Proxy function on a bridge ensures that packets between nodes on different segments can be received by this function and have the correct link-layer address type on each segment. When the ND proxy receives a multicast ND message, it forwards it to all other interfaces on a same link.

In DSL or Fiber networks, when the AN, acting as a ND Proxy, receives a ND message from a CPE, it will forward it to the BNG but none of other CPEs, as only the BNG is on the same link with the CPE. Hence, implementing ND Proxy on the AN would not help a CPE acknowledge link-local addresses used by other CPEs.

As the BNG must not forward link-local scoped messages sent from a CPE to other CPEs, ND Proxy cannot be implemented in the BNG.

### **3.3. 6LoWPAN Neighbor Discovery**

[RFC6775] defines an optional modification of DAD for a 6LoWPAN. When a 6LoWPAN node wants to configure an IPv6 address, it registers that address with one or more of its default routers using the Address Registration option (ARO). If this address is already owned





by another node, the router informs the 6LoWPAN node this address cannot be configured.

This mechanism requires modifications in all hosts in order to support the Address Registration option.

### **3.4. IPv6 Mobility Manager**

According to [[RFC6275](#)], a home agent acts as a proxy for mobile nodes when they are away from the home network: the home agent defends an mobile node's home address by replying to NS messages with NA messages.

There is a problem for this mechanism if it is applied in a DSL or Fiber public access network. Operators of such networks require a NA message is only received by the sender of the corresponding NS message, for security and scalability reasons. However, the home agent per [[RFC6275](#)] multicasts NA messages on the home link and all nodes on this link will receive these NA messages. This shortcoming prevents this mechanism being deployed in DSL or Fiber access networks directly.

## **4. Duplicate Address Detection Proxy (DAD-Proxy) specifications**

At first, it is important to note that as this mechanism is strongly based on DAD [[RFC4862](#)], it is not completely reliable and the goal of this document is not to fix DAD.

### **4.1. DAD-Proxy Data structure**

A BNG needs to store in a Binding Table information related to the IPv6 addresses generated by any CPE. This Binding Table can be distinct from the Neighbor Cache. This must be done per point to multipoint domain (e.g. per Ethernet VLAN). Each entry in this Binding Table MUST contain the following fields:

- o IPv6 Address
- o Link-layer Address

For security or performances reasons, it must be possible to limit the number of IPv6 Addresses per Link-layer Address (possibly, but not necessarily, to 1).

On the reception of an unsolicited NA (e.g., when a CPE wishes to inform its neighbors of a new link-layer address) for an IPv6 address already recorded in the Binding Table, each entry associated to this



IPv6 address MUST be updated consequently: the current Link-layer Address is replaced by the one included in the unsolicited NA message.

For security or performances reasons, the Binding Table MUST be large enough for the deployment in which it is used: if the Binding Table is distinct from the Neighbor Cache, it MUST have at least the same size as this last one. Implementations MUST either state the fixed size of Binding Table that they support or make the size configurable. In the latter case, implementations MUST state the largest Binding Table size that they support. Additionally, implementations SHOULD allow an operator to enquire the current occupancy level of the Binding Table to determine if it is about to become full. Implementations encountering a full Binding Table will likely handle it in a way similar to NS message loss.

It is recommended to apply technical solutions to minimize the risk that the Binding Table becomes full. These solutions are out of the scope of this document.

#### **4.2. DAD-Proxy mechanism**

When a CPE performs DAD, as specified in [\[RFC4862\]](#), it sends a Neighbor Solicitation (NS) message, with the unspecified address as the source address, in order to check if a tentative address is already in use on the link. The BNG receives this message and MUST perform actions specified in the following sections based on the information in the Binding Table.

##### **4.2.1. No entry exists for the tentative address**

When there is no entry for the tentative address, the BNG MUST create one with the following information:

- o IPv6 Address Field set to the tentative address in the NS message.
- o Link-layer Address Field set to the Link-layer source address in the Link-layer Header of the NS message.

The BNG MUST NOT reply to the CPE or forward the NS message.

##### **4.2.2. An entry already exists for the tentative address**

When there is an entry for the tentative address, the BNG MUST check the following conditions:

- o The address in the Target Address Field in the NS message is equal to the address in the IPv6 Address Field in the entry.



- o The source address of the IPv6 Header in the NS message is equal to the unspecified address.

When these conditions are met and the source address of the Link-Layer Header in the NS message is equal to the address in the Link-Layer Address Field in the entry, that means the CPE is still performing DAD for this address. The BNG MUST NOT reply to the CPE or forward the NS message.

When these conditions are met and the source address of the Link-Layer Header in the NS message is not equal to the address in the Link-Layer Address Field in the entry, that means possibly another CPE performs DAD for an already owned address. The BNG then has to verify whether there is a real conflict by checking if the CPE whose IPv6 address is in the entry is still connected. In the following, we will call IPv6-CPE1 the IPv6 address of the existing entry in the Binding Table, Link-layer-CPE1 the Link-layer address of that entry and Link-layer-CPE2 the Link-layer address of the CPE which is performing DAD, which is different from Link-layer-CPE1.

The BNG MUST check if the potential address conflict is real. In particular:

- o If IPv6-CPE1 is in the Neighbor Cache and it is associated with Link-layer-CPE1, the reachability of IPv6-CPE1 MUST be confirmed as explained in [Section 4.2.3](#).
- o If IPv6-CPE1 is in the Neighbor Cache, but in this cache it is associated with another Link-layer address than Link-layer-CPE1, that means that there is possibly a conflict with another CPE, but that CPE did not perform DAD. This situation is out of the scope of this document, since one assumption made above is that all the nodes of a point-to-multipoint domain (except the DAD proxy itself) perform DAD.
- o If IPv6-CPE1 is not in the Neighbor Cache, then the BNG MUST create a new entry based on the information of the entry in the Binding Table. This step is necessary in order to trigger the reachability check as explained in [Section 4.2.3](#). The entry in the Neighbor Cache MUST be created based on the algorithm defined in [section 7.3.3 of \[RFC4861\]](#), in particular by considering the case as if a packet other than a solicited Neighbor Advertisement was received from IPv6-CPE1. That means that the new entry of the Neighbor Cache MUST contain the following information:

- \* IPv6 address: IPv6-CPE1



- \* Link-layer address: Link-layer-CPE1
- \* State: STALE

Then the reachability of IPv6-CPE1 MUST be confirmed as soon as possible following the procedure explained in [section 4.2.3](#).

#### **[4.2.3](#). Confirmation of reachability to check the validity of the conflict**

Given that the IPv6-CPE1 is in an entry of the Neighbor Cache, the reachability of IPv6-CPE1 is checked by using the NUD (Neighbor Unreachability Detection) mechanism described in [section 7.3.1 of \[RFC4861\]](#). This mechanism MUST be triggered as if a packet has to be sent to IPv6-CPE1. Note that in some cases this mechanism does not do anything, for instance if the state of the entry is REACHABLE and a positive confirmation was received recently that the forward path to the IPv6-CPE1 was functioning properly (see [RFC 4861](#) for more details).

Next, the behavior of the BNG depends on the result of the NUD process, as explained in the following sections.

##### **[4.2.3.1](#). The result of the NUD process is negative**

If the result of the NUD process is negative (i.e. if this process removes IPv6-CPE1 from the Neighbor Cache), that means that the potential conflict is not real.

The conflicting entry in the Binding Table (Link-layer-CPE1) is deleted and it is replaced by a new entry with the same IPv6 address, but the Link-layer address of the CPE which is performing DAD (Link-layer-CPE2), as explained in [Section 4.2.1](#).

##### **[4.2.3.2](#). The result of the NUD process is positive**

If the result of the NUD process is positive (i.e. if after this process the state of IPv6-CPE1 is REACHABLE), that means that the potential conflict is real.

As shown in Figure 2, the BNG MUST reply to CPE that is performing DAD (CPE2 in Figure 1) with a NA message which has the following format:

Layer 2 Header Fields:





**Source Address**

The Link-layer address of the interface on which the BNG received the NS message.

**Destination Address**

The source address in the Layer 2 Header of the NS message received by the BNG (i.e. Link-layer-CPE2)

**IPv6 Header Fields:****Source Address**

An address assigned to the interface from which the advertisement is sent.

**Destination Address**


The all-nodes multicast address.

**ICMPv6 Fields:****Target Address**

The tentative address already used (i.e. IPv6-CPE1).

**Target Link-layer address**

The Link-layer address of the interface on which the BNG received the NS message.

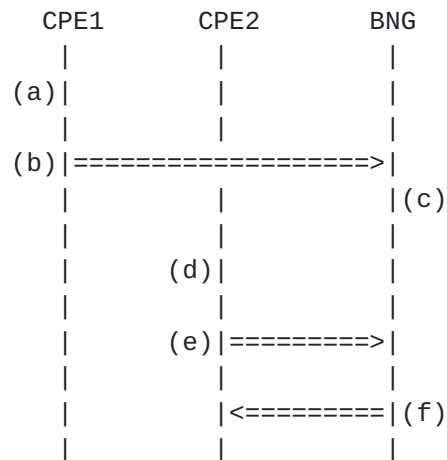

- (a) CPE1 generated a tentative address
- (b) CPE1 performs DAD for this one
- (c) BNG updates its Binding Table
- (d) CPE2 generates a same tentative address
- (e) CPE2 performs DAD for this one
- (f) BNG informs CPE2 that DAD fails



Figure 2

The BNG and the CPE MUST support the Unicast Transmission on Link-layer of IPv6 Multicast Messages [[RFC6085](#)], to be able, respectively, to generate and to process such a packet format.

## **5. Manageability Considerations**

The BNG SHOULD support a mechanism to log and emit alarms whenever a duplication of IPv6 addresses is detected by the DAD-Proxy function. Moreover, the BNG SHOULD implement a function to allow an operator to access logs and to see the current entries in the Binding Table. The management of access rights to get this information is out of the scope of this document.

## **6. IANA Considerations**

No new options or messages are defined in this document.

## **7. Security Considerations**

### **7.1. Interoperability with SEND**

The mechanism described in this document will not interoperate with SEcure Neighbor Discovery (SEND) [[RFC3971](#)]. This is due to the BNG not owning the private key associated with the Cryptographically Generated Address (CGA) [[RFC3972](#)] needed to correctly sign the proxied ND messages [[RFC5909](#)].

Secure Proxy ND Support for SEND [[RFC6496](#)] has been specified to address this limitation, and SHOULD be implemented and used on the BNG and the CPEs.

### **7.2. IP source address spoofing protection**

To ensure protection against IP source address spoofing in data packets, this proposal can be used in combinaison with Source Address Validation Improvement (SAVI) mechanisms [[RFC6620](#)] [[I-D.ietf-savi-send](#)] [[I-D.ietf-savi-mix](#)].

If so, the SAVI device is the BNG and the Binding Anchor for a CPE is its MAC address, which is assumed to be unique in this document (cf. [Section 1](#)).



## **8. Acknowledgments**

The authors would like to thank Alan Kavanagh, Wojciech Dec, Suresh Krishnan and Tassos Chatzithomaoglou for their comments. The authors would like also to thank the IETF 6man WG members and the BBF community for their support.

## **9. References**

### **9.1. Normative References**

- [RFC2119] Bradner, S., "Key words for use in RFCs to Indicate Requirement Levels", [BCP 14](#), [RFC 2119](#), March 1997.
- [RFC4861] Narten, T., Nordmark, E., Simpson, W., and H. Soliman, "Neighbor Discovery for IP version 6 (IPv6)", [RFC 4861](#), September 2007.
- [RFC4862] Thomson, S., Narten, T., and T. Jinmei, "IPv6 Stateless Address Autoconfiguration", [RFC 4862](#), September 2007.
- [RFC6085] Gundavelli, S., Townsley, M., Troan, O., and W. Dec, "Address Mapping of IPv6 Multicast Packets on Ethernet", [RFC 6085](#), January 2011.

### **9.2. Informative References**

- [I-D.ietf-savi-mix]  
Bi, J., Yao, G., Halpern, J., and E. Levy-Abegnoli, "SAVI for Mixed Address Assignment Methods Scenario", [draft-ietf-savi-mix-03](#) (work in progress), November 2012.
- [I-D.ietf-savi-send]  
Bagnulo, M. and A. Garcia-Martinez, "SEND-based Source-Address Validation Implementation", [draft-ietf-savi-send-09](#) (work in progress), April 2013.
- [RFC3971] Arkko, J., Kempf, J., Zill, B., and P. Nikander, "SEcure Neighbor Discovery (SEND)", [RFC 3971](#), March 2005.
- [RFC3972] Aura, T., "Cryptographically Generated Addresses (CGA)", [RFC 3972](#), March 2005.
- [RFC4389] Thaler, D., Talwar, M., and C. Patel, "Neighbor Discovery Proxies (ND Proxy)", [RFC 4389](#), April 2006.
- [RFC5072] S.Varada, Haskins, D., and E. Allen, "IP Version 6 over



PPP", [RFC 5072](#), September 2007.

- [RFC5909] Combes, J-M., Krishnan, S., and G. Daley, "Securing Neighbor Discovery Proxy: Problem Statement", [RFC 5909](#), July 2010.
- [RFC6275] Perkins, C., Johnson, D., and J. Arkko, "Mobility Support in IPv6", [RFC 6275](#), July 2011.
- [RFC6496] Krishnan, S., Laganier, J., Bonola, M., and A. Garcia-Martinez, "Secure Proxy ND Support for SEcure Neighbor Discovery (SEND)", [RFC 6496](#), February 2012.
- [RFC6620] Nordmark, E., Bagnulo, M., and E. Levy-Abegnoli, "FCFS SAVI: First-Come, First-Served Source Address Validation Improvement for Locally Assigned IPv6 Addresses", [RFC 6620](#), May 2012.
- [RFC6775] Shelby, Z., Chakrabarti, S., Nordmark, E., and C. Bormann, "Neighbor Discovery Optimization for IPv6 over Low-Power Wireless Personal Area Networks (6LoWPANs)", [RFC 6775](#), November 2012.

#### **[Appendix A](#). DAD Proxy state machine**

This appendix, informative, contains a summary (cf. Table 1) of the actions done by the BNG when it receives a DAD based NS (DAD-NS) message. The tentative address in this message is IPv6-CPE1 and the associated Link-layer address is Link-layer-CPE2. The actions are precisely specified in [Section 4.2](#).





Event	Check	Action	New event
DAD-NS message reception.	o No entry for IPv6-CPE1 in the Binding Table.	Create an entry for IPv6-CPE1 bound to Link-layer-CPE2 in the Binding Table.	-
Existing entry	o Entry for IPv6-CPE1 in the Binding Table.	-	Existing entry
	o Link-layer-CPE2 bound to IPv6-CPE1 in the Binding Table.	-	-
	o Another Link-layer address, Link-layer-CPE1, bound to IPv6-CPE1 in the Binding Table.	-	Conflict?
	o IPv6-CPE1 associated to Link-layer-CPE1 in the Neighbor Cache.	-	Reachable?
Conflict?	o IPv6-CPE1 associated to another Link-layer address than Link-layer-CPE1 in the Neighbor Cache.	Out of scope.	-
	o IPv6-CPE1 is not in the Neighbor Cache.	Create an entry for IPv6-CPE1 associated to Link-layer-CPE1 in the Neighbor Cache.	Reachable?
	o NUD process is negative.	IPv6-CPE2 is bound to Link-layer-CPE2, instead to Link-layer-CPE1, in the Binding Table.	-
	o NUD process is positive.	A NA message is sent.	-



Table 1

## Authors' Addresses

Fabio Costa  
France Telecom Orange  
61 rue des Archives  
75141 Paris Cedex 03  
France

Email: fabio.costa@orange.com

Jean-Michel Combes (editor)  
France Telecom Orange  
38 rue du General Leclerc  
92794 Issy-les-Moulineaux Cedex 9  
France

Email: jeanmichel.combes@orange.com

Xavier Pournard  
France Telecom Orange  
2 avenue Pierre Marzin  
22300 Lannion  
France

Email: xavier.pournard@orange.com

Hongyu Li  
Huawei Technologies  
Huawei Industrial Base  
Shenzhen  
China

Email: lihy@huawei.com

