

Workgroup: ADD

Internet-Draft: draft-ietf-add-dnr-07

Published: 13 April 2022

Intended Status: Standards Track

Expires: 15 October 2022

Authors: M. Boucadair, Ed.	T. Reddy, Ed.	D. Wing
Orange	Akamai	Citrix
N. Cook	T. Jensen	
Open-Xchange	Microsoft	

## **DHCP and Router Advertisement Options for the Discovery of Network-designated Resolvers (DNR)**

### **Abstract**

The document specifies new DHCP and IPv6 Router Advertisement options to discover encrypted DNS servers (e.g., DNS-over-HTTPS, DNS-over-TLS, DNS-over-QUIC). Particularly, it allows to learn an authentication domain name together with a list of IP addresses and a set of service parameters to reach such encrypted DNS servers.

### **Status of This Memo**

This Internet-Draft is submitted in full conformance with the provisions of BCP 78 and BCP 79.

Internet-Drafts are working documents of the Internet Engineering Task Force (IETF). Note that other groups may also distribute working documents as Internet-Drafts. The list of current Internet-Drafts is at <https://datatracker.ietf.org/drafts/current/>.

Internet-Drafts are draft documents valid for a maximum of six months and may be updated, replaced, or obsoleted by other documents at any time. It is inappropriate to use Internet-Drafts as reference material or to cite them other than as "work in progress."

This Internet-Draft will expire on 15 October 2022.

### **Copyright Notice**

Copyright (c) 2022 IETF Trust and the persons identified as the document authors. All rights reserved.

This document is subject to BCP 78 and the IETF Trust's Legal Provisions Relating to IETF Documents (<https://trustee.ietf.org/license-info>) in effect on the date of publication of this document. Please review these documents carefully, as they describe your rights and restrictions with respect to this document. Code Components extracted from this document must include Revised BSD License text as described in

Section 4.e of the Trust Legal Provisions and are provided without warranty as described in the Revised BSD License.

## Table of Contents

- [1. Introduction](#)
- [2. Terminology](#)
- [3. Overview](#)
  - [3.1. Configuration Data for Encrypted DNS](#)
  - [3.2. Handling Configuration Data Conflicts](#)
  - [3.3. Connection Establishment](#)
  - [3.4. Multihoming Considerations](#)
- [4. DHCPv6 Encrypted DNS Option](#)
  - [4.1. Option Format](#)
  - [4.2. DHCPv6 Client Behavior](#)
- [5. DHCPv4 Encrypted DNS Option](#)
  - [5.1. Option Format](#)
  - [5.2. DHCPv4 Client Behavior](#)
- [6. IPv6 RA Encrypted DNS Option](#)
  - [6.1. Option Format](#)
  - [6.2. IPv6 Host Behavior](#)
- [7. Security Considerations](#)
  - [7.1. Spoofing Attacks](#)
  - [7.2. Deletion Attacks](#)
  - [7.3. Passive Attacks](#)
  - [7.4. Wireless Security - Authentication Attacks](#)
- [8. IANA Considerations](#)
  - [8.1. DHCPv6 Option](#)
  - [8.2. DHCPv4 Option](#)
  - [8.3. Neighbor Discovery Option](#)
- [9. Acknowledgements](#)
- [10. Contributing Authors](#)
- [11. References](#)
  - [11.1. Normative References](#)
  - [11.2. Informative References](#)
- [Authors' Addresses](#)

## 1. Introduction

This document focuses on the support of encrypted DNS such as DNS-over-HTTPS (DoH) [[RFC8484](#)], DNS-over-TLS (DoT) [[RFC7858](#)], or DNS-over-QUIC (DoQ) [[I-D.ietf-dprive-dnsoquic](#)] in local networks.

In particular, the document specifies how a local encrypted DNS server can be discovered by connected hosts by means of DHCPv4 [[RFC2132](#)], DHCPv6 [[RFC8415](#)], and IPv6 Router Advertisement (RA) [[RFC4861](#)] options. These options are designed to convey the following information: the DNS Authentication Domain Name (ADN), a

list of IP addresses, and a set of service parameters. This procedure is called Discovery of Network-designated Resolvers (DNR).

The options defined in this document can be deployed in a variety of deployments (e.g., local networks with Customer Premises Equipment (CPEs) that may or may not be managed by an Internet Service Provider (ISP), local networks with or without DNS forwarders). It is out of the scope of this document to provide an inventory of such deployments.

## 2. Terminology

The key words "MUST", "MUST NOT", "REQUIRED", "SHALL", "SHALL NOT", "SHOULD", "SHOULD NOT", "RECOMMENDED", "NOT RECOMMENDED", "MAY", and "OPTIONAL" in this document are to be interpreted as described in BCP 14 [[RFC2119](#)] [[RFC8174](#)] when, and only when, they appear in all capitals, as shown here.

This document makes use of the terms defined in [[RFC8499](#)]. The following additional terms are used:

**Do53:** refers to unencrypted DNS.

**DNR:** refers to the Discovery of Network-designated Resolvers procedure.

**Encrypted DNS:** refers to a scheme where DNS exchanges are transported over an encrypted channel. Examples of encrypted DNS are DoT, DoH, or DoQ.

**Encrypted DNS options:** refers to the options defined in Sections [4](#), [5](#), and [6](#).

**DHCP:** refers to both DHCPv4 and DHCPv6.

## 3. Overview

This document describes how a DNS client can discover local encrypted DNS servers using DHCP (Sections [4](#) and [5](#)) and Neighbor Discovery protocol ([Section 6](#)): Encrypted DNS options.

These options configure an authentication domain name, a list of IPv6 addresses, and a set of service parameters of the encrypted DNS server. More information about the design of these options is provided in the following subsections.

### 3.1. Configuration Data for Encrypted DNS

In order to allow for PKIX-based authentication between a DNS client and an encrypted DNS server, the Encrypted DNS options are designed

to include an authentication domain name. This ADN is presented as a reference identifier for DNS authentication purposes. This design accommodates the current best practices for issuing certificates as per Section 1.7.2 of [[RFC6125](#)]:

| Some certification authorities issue server certificates based on  
| IP addresses, but preliminary evidence indicates that such  
| certificates are a very small percentage (less than 1%) of issued  
| certificates.

To avoid adding a dependency on another server to resolve the ADN, the Encrypted DNS options return the IP address(es) to locate the encrypted DNS server. These encrypted DNS servers may be hosted on the same or distinct IP addresses. Such a decision is deployment specific.

In order to optimize the size of discovery messages when all DNS servers terminate on the same IP address, early versions of this document considered relying upon the discovery mechanisms specified in [[RFC2132](#)][[RFC3646](#)][[RFC8106](#)] to retrieve a list of IP addresses to reach their DNS servers. Nevertheless, this approach requires a client that supports more than one encrypted DNS protocol (e.g., DoH and DoT) to probe that list of IP addresses. To avoid such a probing, the options defined in Sections [4](#), [5](#), and [6](#) associate an IP address with an encrypted DNS protocol. No probing is required in such a design.

A list of IP addresses to reach an encrypted DNS server may be returned in an Encrypted DNS option to accommodate current deployments relying upon primary and backup servers. Whether one or more IP addresses are returned in an Encrypted DNS option is deployment specific. For example, a router embedding a recursive server or a forwarder has to include one single IP address pointing to one of its LAN-facing interfaces. This IP address can be a private IPv4 address, a link-local address, a Unique Local IPv6 unicast Address (ULA), or a Global Unicast Address (GUA).

If more than one IP address are to be returned in an Encrypted DNS option, these addresses are ordered in the preference for use by the client.

Because distinct encrypted DNS protocols may be provisioned by a network (e.g., DoT, DoH, and DoQ) and that some of these protocols may make use of customized port numbers instead of default ones, the Encrypted DNS options are designed to return a set of service parameters. These parameters are encoded following the same rules for encoding SvcParams in Section 2.1 of [[I-D.ietf-dnsop-svcb-https](#)]. This encoding approach may increase the size of the options but it has the merit to rely upon an existing IANA registry and,

thus, to accommodate new encrypted DNS protocols and service parameters that may be defined in the future. At least the following service parameters are RECOMMENDED to be supported by a DNR implementation:

**alpn:** Used to indicate the set of supported protocols (Section 7.1 of [[I-D.ietf-dnsop-svcb-https](#)]).

**port:** Used to indicate the target port number for the encrypted DNS connection (Section 7.2 of [[I-D.ietf-dnsop-svcb-https](#)]).

**ech:** Used to enable Encrypted ClientHello (ECH) (Section 7.3 of [[I-D.ietf-dnsop-svcb-https](#)]).

**dohpath:** Used to supply a relative DoH URI Template (Section 5.1 of [[I-D.ietf-add-svcb-dns](#)]).

A single option is used to convey both the ADN and IP addresses because otherwise means to correlate an IP address with an ADN will be required if, for example, more than one ADN is supported by the network.

The DHCP options defined in Sections [4](#) and [5](#) follow the option ordering guidelines in Section 17 of [[RFC7227](#)]. Likewise, the RA option ([Section 6](#)) adheres to the recommendations in Section 9 of [[RFC4861](#)].

ServiceMode (Section 2.4.3 of [[I-D.ietf-dnsop-svcb-https](#)]) SHOULD be used because the Encrypted DNS options are self-contained and do not require any additional DNS queries. The reader may refer to [[RFC7969](#)] for an overview of advanced capabilities that are supported by DHCP servers to populate configuration data (e.g., issue DNS queries).

In contexts where putting additional complexity on requesting hosts is acceptable, returning an ADN only can be considered. The supplied ADN will be processed by a host following the procedure in Section 5 of [[I-D.ietf-add-ddr](#)]. Note that this mode may be subject to active attacks, which can be mitigated by DNSSEC.

Other mechanisms may be considered in other contexts (e.g., secure discovery) for the provisioning of encrypted DNS servers. It is RECOMMENDED that at least the following DNR information is made available to a requesting host:

\*A service priority whenever the discovery mechanism does not rely on implicit ordering if multiple instances of the encrypted DNS are used.

\*An authentication domain name.

\*A list of IP addresses to locate the encrypted DNS server.

\*A set of service parameters.

### **3.2. Handling Configuration Data Conflicts**

If the encrypted DNS is discovered by a host using both RA and DHCP, the rules discussed in Section 5.3.1 of [\[RFC8106\]](#) MUST be followed.

DHCP/RA options to discover encrypted DNS servers (including, DoH URI Templates) takes precedence over Discovery of Designated Resolvers (DDR) [\[I-D.ietf-add-ddr\]](#) since DDR uses Do53 to an external DNS resolver, which is susceptible to both internal and external attacks whereas DHCP/RA is typically protected using the mechanisms discussed in [Section 7.1](#).

### **3.3. Connection Establishment**

If the local DNS client supports one of the discovered Encrypted DNS protocols identified by Application Layer Protocol Negotiation (ALPN) protocol identifiers, the DNS client establishes an encrypted DNS session following the order of the discovered servers. The client follows the mechanism discussed in Section 8 of [\[RFC8310\]](#) to authenticate the DNS server certificate using the authentication domain name conveyed in the Encrypted DNS options. ALPN-related considerations can be found in Section 6.1 of [\[I-D.ietf-dnsop-svcb-https\]](#).

### **3.4. Multihoming Considerations**

Devices may be connected to multiple networks; each providing their own DNS configuration using the discovery mechanisms specified in this document. Nevertheless, it is out of the scope of this specification to discuss DNS selection of multi-interface devices. The reader may refer to [\[RFC6731\]](#) for a discussion of issues and an example of DNS server selection for multi-interfaced devices.

## **4. DHCPv6 Encrypted DNS Option**

### **4.1. Option Format**

The format of the DHCPv6 Encrypted DNS option is shown in [Figure 1](#).

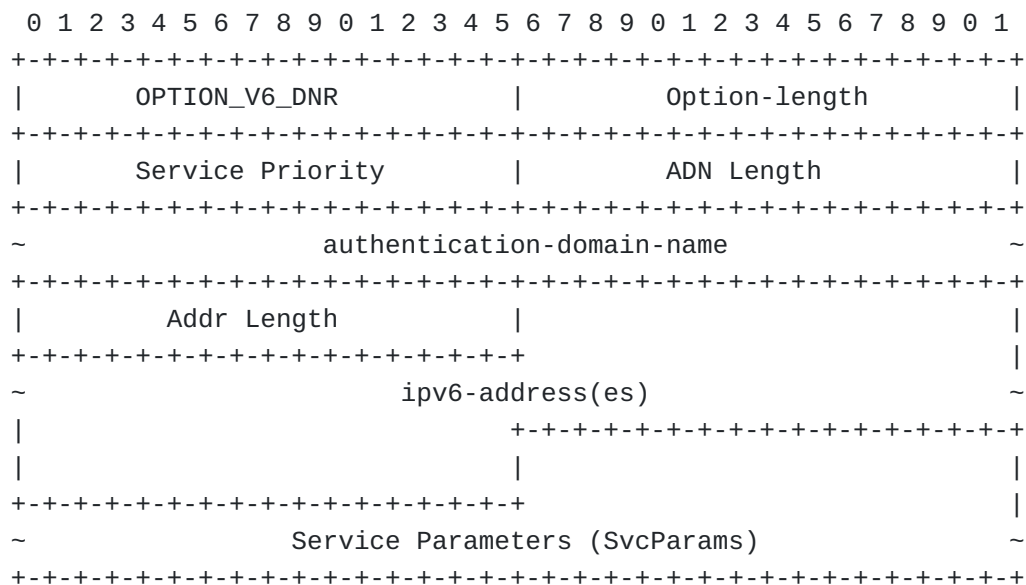


Figure 1: DHCPv6 Encrypted DNS Option

The fields of the option shown in [Figure 1](#) are as follows:

**Option-code:** OPTION\_V6\_DNR (TBA1, see [Section 8.1](#))

**Option-length:** Length of the enclosed data in octets. The option length is ('ADN Length' + 4) when only an ADN is included in the option.

**Service Priority:** The priority of this OPTION\_V6\_DNR instance compared to other instances. This field is encoded following the rules specified in Section 2.4.1 of [[I-D.ietf-dnsop-svcb-https](#)].

**ADN Length:** Length of the authentication-domain-name field in octets.

**authentication-domain-name (variable length):** A fully qualified domain name of the encrypted DNS server. This field is formatted as specified in Section 10 of [[RFC8415](#)].

An example of the authentication-domain-name encoding is shown in [Figure 2](#). This example conveys the FQDN "doh1.example.com.", and the resulting Option-length field is 18.

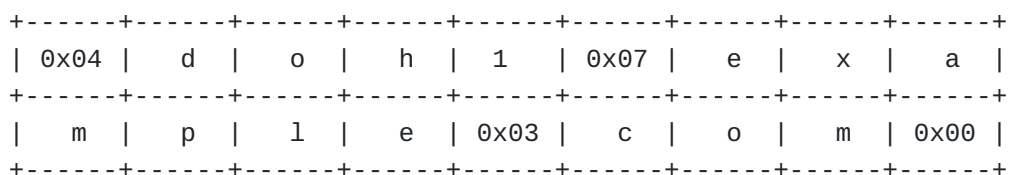


Figure 2: An Example of the DNS authentication-domain-name Encoding

**Addr Length:**

Length of enclosed IPv6 addresses in octets. It MUST be a multiple of 16 for ServiceMode.

**ipv6-address(es) (variable length):** Indicates one or more IPv6 addresses to reach the encrypted DNS server. An address can be link-local, ULA, or GUA. The format of this field is shown in [Figure 3](#).



Figure 3: Format of the IPv6 Addresses Field

**Service Parameters (SvcParams) (variable length):** Specifies a set of service parameters that are encoded following the rules in Section 2.1 of [\[I-D.ietf-dnsop-svcb-https\]](#). Service parameters may include, for example, a list of ALPN protocol identifiers or alternate port numbers. The service parameters MUST NOT include "ipv4hint" or "ipv6hint" SvcParams as they are superseded by the included IP addresses.

If no port service parameter is included, this indicates that default port numbers should be used. As a reminder, the default port number is 853 for DoT, 443 for DoH, and 853 for DoQ.

The length of this field is ('Option-length' - 6 - 'ADN Length' - 'Addr Length').

## 4.2. DHCPv6 Client Behavior

To discover an encrypted DNS server, the DHCPv6 client MUST include OPTION\_V6\_DNR in an Option Request Option (ORO), as in Sections 18.2.1, 18.2.2, 18.2.4, 18.2.5, 18.2.6, and 21.7 of [RFC8415].

The DHCPv6 client MUST be prepared to receive multiple instances of the OPTION\_V6\_DNR option; each option is to be treated as a separate encrypted DNS server. These instances SHOULD be processed following their service priority (i.e., smaller service priority indicates a higher preference).

The DHCPv6 client MUST silently discard multicast and host loopback addresses conveyed in OPTION\_V6\_DNR.



## 5. DHCPv4 Encrypted DNS Option

### 5.1. Option Format

The format of the DHCPv4 Encrypted DNS option is illustrated in [Figure 4](#).

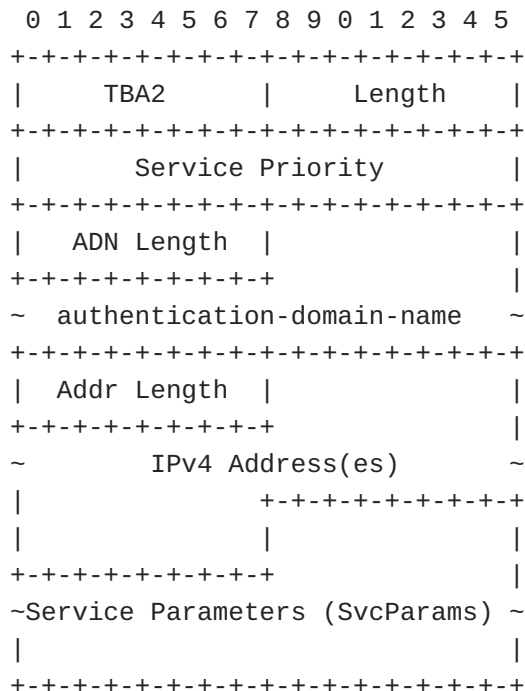


Figure 4: DHCPv4 Encrypted DNS Option

The fields of the option shown in [Figure 4](#) are as follows:

**Code:** OPTION\_V4\_DNR (TBA2, see [Section 8.2](#)).

**Length:** Indicates the length of the enclosed data in octets. The option length is ('ADN Length' + 3) when only an ADN is included in the option.

**Service Priority:** The priority of this OPTION\_V4\_DNR instance compared to other instances. This field is encoded following the rules specified in Section 2.4.1 of [[I-D.ietf-dnsop-svcb-https](#)].

**ADN Length:** Indicates the length of the authentication-domain-name in octets.

**authentication-domain-name (variable length):** Includes the authentication domain name of the encrypted DNS server. This field is formatted as specified in Section 10 of [[RFC8415](#)]. The format of this field is shown in [Figure 5](#). The values s1, s2, s3,

etc. represent the domain name labels in the domain name encoding.




Figure 5: Format of the Authentication Domain Name Field

**Addr Length:** Indicates the length of included IPv4 addresses in octets. It MUST be a multiple of 4 for ServiceMode.

**IPv4 Address(es) (variable length):** Indicates one or more IPv4 addresses to reach the encrypted DNS server. Both private and public IPv4 addresses can be included in this field. The format of this field is shown in [Figure 6](#). This format assumes that an IPv4 address is encoded as a1.a2.a3.a4.

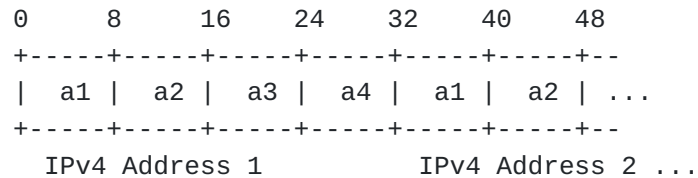


Figure 6: Format of the IPv4 Addresses Field

**Service Parameters (SvcParams) (variable length):** Specifies a set of service parameters that are encoded following the rules in Section 2.1 of [[I-D.ietf-dnsop-svcb-https](#)]. Service parameters may include, for example, a list of ALPN protocol identifiers or alternate port numbers. The service parameters MUST NOT include "ipv4hint" or "ipv6hint" SvcParams as they are superseded by the included IP addresses.

If no port service parameter is included, this indicates that default port numbers should be used.

The length of this field is ('Option-length' - 4 - 'ADN Length' - 'Addr Length').

OPTION\_V4\_DNR is a concatenation-requiring option. As such, the mechanism specified in [[RFC3396](#)] MUST be used if OPTION\_V4\_DNR exceeds the maximum DHCPv4 option size of 255 octets.

## 5.2. DHCPv4 Client Behavior

To discover an encrypted DNS server, the DHCPv4 client requests the Encrypted DNS server by including OPTION\_V4\_DNR in a Parameter Request List option [[RFC2132](#)].

The DHCPv4 client MUST be prepared to receive multiple instances of the OPTION\_V4\_DNR option; each option is to be treated as a separate encrypted DNS server. These instances SHOULD be processed following their service priority (i.e., smaller service priority indicates a higher preference).

The DHCPv4 client MUST silently discard multicast and host loopback addresses conveyed in OPTION\_V4\_DNR.

## 6. IPv6 RA Encrypted DNS Option

### 6.1. Option Format

This section defines a new Neighbor Discovery option [RFC4861]: IPv6 RA Encrypted DNS option. This option is useful in contexts similar to those discussed in Section 1.1 of [RFC8106].

The format of the IPv6 RA Encrypted DNS option is illustrated in [Figure 7](#).

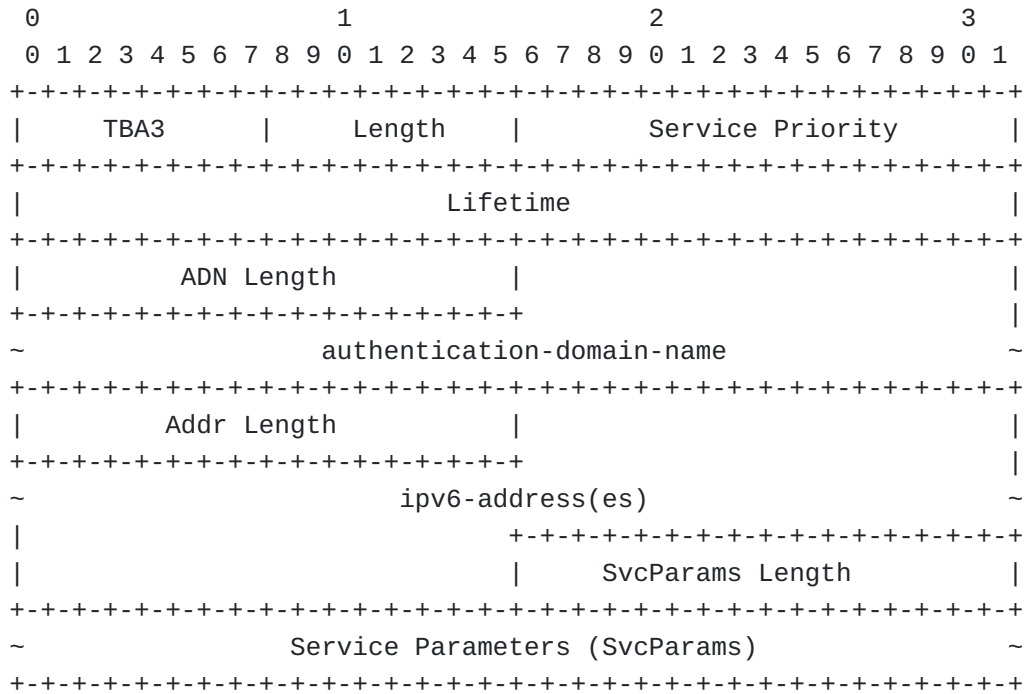


Figure 7: RA Encrypted DNS Option

The fields of the option shown in [Figure 7](#) are as follows:

**Type:** 8-bit identifier of the Encrypted DNS option as assigned by IANA (TBA3, see [Section 8.3](#)).

**Length:** 8-bit unsigned integer. The length of the option (including the Type and Length fields) is in units of 8 octets.

**Service Priority:**

The priority of this Encrypted DNS option instance compared to other instances. This field is encoded following the rules specified in Section 2.4.1 of [[I-D.ietf-dnsop-svcb-https](#)].

**Lifetime:** 32-bit unsigned integer. The maximum time in seconds (relative to the time the packet is received) over which the discovered Authentication Domain Name is valid.

The value of Lifetime SHOULD by default be at least  $3 * \text{MaxRtrAdvInterval}$ , where MaxRtrAdvInterval is the maximum RA interval as defined in [[RFC4861](#)].

A value of all one bits (0xffffffff) represents infinity.

A value of zero means that this Authentication Domain Name MUST no longer be used.

**ADN Length:** 16-bit unsigned integer. This field indicates the length of the authentication-domain-name field in octets.

**authentication-domain-name (variable length):** The domain name of the encrypted DNS server. This field is formatted as specified in Section 10 of [[RFC8415](#)].

**Addr Length:** 16-bit unsigned integer. This field indicates the length of enclosed IPv6 addresses in octets. It MUST be a multiple of 16 for ServiceMode.

**ipv6-address(es) (variable length):** One or more IPv6 addresses of the encrypted DNS server. An address can be link-local, ULA, or GUA.

All of the addresses share the same Lifetime value. Similar to [[RFC8106](#)], if it is desirable to have different Lifetime values per IP address, multiple Encrypted DNS options may be used.

The format of this field is shown in [Figure 3](#).

**SvcParams Length:** 16-bit unsigned integer. This field indicates the length of the Service Parameters field in octets.

**Service Parameters (SvcParams) (variable length):** Specifies a set of service parameters that are encoded following the rules in Section 2.1 of [[I-D.ietf-dnsop-svcb-https](#)]. Service parameters may include, for example, a list of ALPN protocol identifiers or alternate port numbers. The service parameters MUST NOT include "ipv4hint" or "ipv6hint" SvcParams as they are superseded by the included IP addresses.

If no port service parameter is included, this indicates that default port numbers should be used.

The option MUST be padded with zeros so that the full enclosed data is a multiple of 8 octets (Section 4.6 of [[RFC4861](#)]).

## **6.2. IPv6 Host Behavior**

The procedure for DNS configuration is the same as it is with any other Neighbor Discovery option [[RFC4861](#)]. In addition, the host follows the procedure described in Section 5.3.1 of [[RFC8106](#)] with the formatting requirements in [Section 6.1](#) substituted for the length validation.

The host MUST be prepared to receive multiple Encrypted DNS options in RAs. These instances SHOULD be processed following their service priority (i.e., smaller service priority indicates a higher preference).

The host MUST silently discard multicast and host loopback addresses conveyed in the Encrypted DNS options.

## **7. Security Considerations**

### **7.1. Spoofing Attacks**

DHCP/RA messages are not encrypted or protected against modification within the LAN. Unless mitigated (described below), the content of DHCP and RA messages can be spoofed or modified by active attackers, such as compromised devices within the local network. An active attacker (Section 3.3 of [[RFC3552](#)]) can spoof the DHCP/RA response to provide the attacker's Encrypted DNS server. Note that such an attacker can launch other attacks as discussed in Section 22 of [[RFC8415](#)]. The attacker can get a domain name with a domain-validated public certificate from a CA and host an Encrypted DNS server.

Attacks of spoofed or modified DHCP responses and RA messages by attackers within the local network may be mitigated by making use of the following mechanisms:

- \*DHCPv6-Shield described in [[RFC7610](#)], the router (e.g., a border router, a CPE) discards DHCP response messages received from any local endpoint.

- \*RA-Guard described in [[RFC7113](#)], the router discards RAs messages received from any local endpoint.

\*Source Address Validation Improvement (SAVI) solution for DHCP described in [[RFC7513](#)], the router filters packets with forged source IP addresses.

The above mechanisms would ensure that the endpoint receives the correct configuration information of the encrypted DNS servers selected by the DHCP server (or RA sender), but cannot provide any information about the DHCP server or the entity hosting the DHCP server (or RA sender) .

Encrypted DNS sessions with rogue servers that spoof the IP address of a DNS server will fail because the DNS client will fail to authenticate that rogue server based upon PKIX authentication [[RFC6125](#)], particularly the authentication domain name in the Encrypted DNS Option. DNS clients that ignore authentication failures and accept spoofed certificates will be subject to attacks (e.g., redirect to malicious servers, intercept sensitive data).

Encrypted DNS connections received from outside the local network MUST be discarded by the encrypted DNS forwarder in the CPE. This behavior adheres to REQ#8 in [[RFC6092](#)]; it MUST apply for both IPv4 and IPv6.

## **7.2. Deletion Attacks**

If the DHCP responses or RAs are dropped by the attacker, the client can fallback to use a preconfigured encrypted DNS server. However, the use of policies to select servers is out of the scope of this document.

Note that deletion attack is not specific to DHCP/RA.

## **7.3. Passive Attacks**

A passive attacker (Section 3.2 of [[RFC3552](#)]) can identify a host is using DHCP/RA to discover an encrypted DNS server and can infer that host is capable of using DoH/DoT/DoQ to encrypt DNS messages. However, a passive attacker cannot spoof or modify DHCP/RA messages.

## **7.4. Wireless Security - Authentication Attacks**

Wireless LAN (WLAN) as frequently deployed in local networks (e.g., home networks) is vulnerable to various attacks (e.g., [[Evil-Twin](#)], [[Krack](#)], [[Dragonblood](#)]). Because of these attacks, only cryptographically authenticated communications are trusted on WLANs. This means that an information (e.g., NTP server, DNS server, default domain) provided by such networks via DHCP, DHCPv6, or RA are untrusted because DHCP and RA messages are not authenticated.

If the pre-shared key is the same for all clients that connect to the same WLAN, the shared key will be available to all nodes, including attackers. As such, it is possible to mount an active on-path attack. Man-in-the-middle attacks are possible within local networks because such WLAN authentication lacks peer entity authentication.

This leads to the need for provisioning unique credentials for different clients. Endpoints can be provisioned with unique credentials (username and password, typically) provided by the local network administrator to mutually authenticate to the local WLAN Access Point (e.g., 802.1x Wireless User Authentication on OpenWRT [dot1x], EAP-pwd [RFC8146]). Not all endpoint devices (e.g., IoT devices) support 802.1x supplicant and need an alternate mechanism to connect to the local network. To address this limitation, unique pre-shared keys can be created for each such device and WPA-PSK is used (e.g., [PSK]).

## 8. IANA Considerations

### 8.1. DHCPv6 Option

IANA is requested to assign the following new DHCPv6 Option Code in the registry maintained in [DHCPV6].

Value	Description	Client ORO	Singleton Option	Reference
TBA1	OPTION_V6_DNR	Yes	No	[ThisDocument]

Table 1

### 8.2. DHCPv4 Option

IANA is requested to assign the following new DHCP Option Code in the registry maintained in [BOOTP].

Tag	Name	Data Length	Meaning	Reference
TBA2	OPTION_V4_DNR	N	Encrypted DNS Server	[ThisDocument]

### 8.3. Neighbor Discovery Option

IANA is requested to assign the following new IPv6 Neighbor Discovery Option type in the "IPv6 Neighbor Discovery Option Formats" sub-registry under the "Internet Control Message Protocol version 6 (ICMPv6) Parameters" registry maintained in [ND].

Type	Description	Reference
TBA3	DNS Encrypted DNS Option	[ThisDocument]

Table 2

## 9. Acknowledgements

Many thanks to Christian Jacquenet and Michael Richardson for the review.

Thanks to Stephen Farrell, Martin Thomson, Vittorio Bertola, Stephane Bortzmeyer, Ben Schwartz, Iain Sharp, and Chris Box for the comments.

Thanks to Mark Nottingham for the feedback on HTTP redirection that was discussed in previous versions of this specification.

The use of DHCP to retrieve an authentication domain name was discussed in Section 7.3.1 of [[RFC8310](#)] and [[I-D.pusateri-dhc-dns-driu](#)].

Thanks to Bernie Volz for the review of the DHCP part.

## 10. Contributing Authors

Nicolai Leymann  
Deutsche Telekom  
Germany

Email: [n.leymann@telekom.de](mailto:n.leymann@telekom.de)

Zhiwei Yan  
CNNIC  
No.4 South 4th Street, Zhongguancun  
Beijing 100190  
China

EMail: [yan@cnnic.cn](mailto:yan@cnnic.cn)

## 11. References

### 11.1. Normative References

[[I-D.ietf-dnsop-svcb-https](#)] Schwartz, B., Bishop, M., and E. Nygren, "Service binding and parameter specification via the DNS (DNS SVCB and HTTPS RRs)", Work in Progress, Internet-Draft, draft-ietf-dnsop-svcb-https-08, 12 October 2021,



<<https://www.ietf.org/archive/id/draft-ietf-dnsop-svcb-https-08.txt>>.

- [RFC2119] Bradner, S., "Key words for use in RFCs to Indicate Requirement Levels", BCP 14, RFC 2119, DOI 10.17487/RFC2119, March 1997, <<https://www.rfc-editor.org/info/rfc2119>>.
- [RFC2132] Alexander, S. and R. Droms, "DHCP Options and BOOTP Vendor Extensions", RFC 2132, DOI 10.17487/RFC2132, March 1997, <<https://www.rfc-editor.org/info/rfc2132>>.
- [RFC3396] Lemon, T. and S. Cheshire, "Encoding Long Options in the Dynamic Host Configuration Protocol (DHCPv4)", RFC 3396, DOI 10.17487/RFC3396, November 2002, <<https://www.rfc-editor.org/info/rfc3396>>.
- [RFC4861] Narten, T., Nordmark, E., Simpson, W., and H. Soliman, "Neighbor Discovery for IP version 6 (IPv6)", RFC 4861, DOI 10.17487/RFC4861, September 2007, <<https://www.rfc-editor.org/info/rfc4861>>.
- [RFC8106] Jeong, J., Park, S., Beloeil, L., and S. Madanapalli, "IPv6 Router Advertisement Options for DNS Configuration", RFC 8106, DOI 10.17487/RFC8106, March 2017, <<https://www.rfc-editor.org/info/rfc8106>>.
- [RFC8174] Leiba, B., "Ambiguity of Uppercase vs Lowercase in RFC 2119 Key Words", BCP 14, RFC 8174, DOI 10.17487/RFC8174, May 2017, <<https://www.rfc-editor.org/info/rfc8174>>.
- [RFC8415] Mrugalski, T., Siodelski, M., Volz, B., Yourtchenko, A., Richardson, M., Jiang, S., Lemon, T., and T. Winters, "Dynamic Host Configuration Protocol for IPv6 (DHCPv6)", RFC 8415, DOI 10.17487/RFC8415, November 2018, <<https://www.rfc-editor.org/info/rfc8415>>.

## 11.2. Informative References

- [BOOTP] "BOOTP Vendor Extensions and DHCP Options", <<https://www.iana.org/assignments/bootp-dhcp-parameters/bootp-dhcp-parameters.xhtml#options>>.
- [DHCPV6] "DHCPv6 Option Codes", <<https://www.iana.org/assignments/dhcpv6-parameters/dhcpv6-parameters.xhtml#dhcpv6-parameters-2>>.
- [dot1x] Cisco, "Basic 802.1x Wireless User Authentication", <<https://openwrt.org/docs/guide-user/network/wifi/wireless.security.8021x>>.
- [Dragonblood] The Unicode Consortium, "Dragonblood: Analyzing the Dragonfly Handshake of WPA3 and EAP-pwd", <<https://papers.mathyvanhoef.com/dragonblood.pdf>>.
- [Evil-Twin] The Unicode Consortium, "Evil twin (wireless networks)", <[https://en.wikipedia.org/wiki/Evil\\_twin\\_\(wireless\\_networks\)](https://en.wikipedia.org/wiki/Evil_twin_(wireless_networks))>.
- [I-D.ietf-add-ddr] Pauly, T., Kinnear, E., Wood, C. A., McManus, P., and T. Jensen, "Discovery of Designated Resolvers", Work in Progress, Internet-Draft, draft-ietf-add-ddr-06, 4 April 2022, <<https://www.ietf.org/archive/id/draft-ietf-add-ddr-06.txt>>.
- [I-D.ietf-add-svc-b-dns] Schwartz, B., "Service Binding Mapping for DNS Servers", Work in Progress, Internet-Draft, draft-ietf-add-svc-b-dns-02, 1 February 2022, <<https://www.ietf.org/archive/id/draft-ietf-add-svc-b-dns-02.txt>>.
- [I-D.ietf-dprive-dns-quick] Huitema, C., Dickinson, S., and A. Mankin, "DNS over Dedicated QUIC Connections", Work in Progress, Internet-Draft, draft-ietf-dprive-dns-quick-11, 21 March 2022, <<https://www.ietf.org/archive/id/draft-ietf-dprive-dns-quick-11.txt>>.
- [I-D.pusateri-dhc-dns-driu] Pusateri, T. and W. Toorop, "DHCPv6 Options for private DNS Discovery", Work in Progress, Internet-Draft, draft-pusateri-dhc-dns-driu-00, 2 July

2018, <<https://www.ietf.org/archive/id/draft-pusateri-dhc-dns-driu-00.txt>>.

[Krack] The Unicode Consortium, "Key Reinstallation Attacks", 2017, <<https://www.krackattacks.com/>>.

[ND] "IPv6 Neighbor Discovery Option Formats", <<http://www.iana.org/assignments/icmpv6-parameters/icmpv6-parameters.xhtml#icmpv6-parameters-5>>.

[PSK] Cisco, "Identity PSK Feature Deployment Guide", <[https://www.cisco.com/c/en/us/td/docs/wireless/controller/technotes/8-5/b\\_Identity\\_PSK\\_Feature\\_Deployment\\_Guide.html](https://www.cisco.com/c/en/us/td/docs/wireless/controller/technotes/8-5/b_Identity_PSK_Feature_Deployment_Guide.html)>.

[RFC3552] Rescorla, E. and B. Korver, "Guidelines for Writing RFC Text on Security Considerations", BCP 72, RFC 3552, DOI 10.17487/RFC3552, July 2003, <<https://www.rfc-editor.org/info/rfc3552>>.

[RFC3646] Droms, R., Ed., "DNS Configuration options for Dynamic Host Configuration Protocol for IPv6 (DHCPv6)", RFC 3646, DOI 10.17487/RFC3646, December 2003, <<https://www.rfc-editor.org/info/rfc3646>>.

[RFC6092] Woodyatt, J., Ed., "Recommended Simple Security Capabilities in Customer Premises Equipment (CPE) for Providing Residential IPv6 Internet Service", RFC 6092, DOI 10.17487/RFC6092, January 2011, <<https://www.rfc-editor.org/info/rfc6092>>.

[RFC6125] Saint-Andre, P. and J. Hodges, "Representation and Verification of Domain-Based Application Service Identity within Internet Public Key Infrastructure Using X.509 (PKIX) Certificates in the Context of Transport Layer Security (TLS)", RFC 6125, DOI 10.17487/RFC6125, March 2011, <<https://www.rfc-editor.org/info/rfc6125>>.

[RFC6731] Savolainen, T., Kato, J., and T. Lemon, "Improved Recursive DNS Server Selection for Multi-Interfaced Nodes", RFC 6731, DOI 10.17487/RFC6731, December 2012, <<https://www.rfc-editor.org/info/rfc6731>>.

[RFC7113] Gont, F., "Implementation Advice for IPv6 Router Advertisement Guard (RA-Guard)", RFC 7113, DOI 10.17487/RFC7113, February 2014, <<https://www.rfc-editor.org/info/rfc7113>>.

[RFC7227] Hankins, D., Mrugalski, T., Siodelski, M., Jiang, S., and S. Krishnan, "Guidelines for Creating New DHCPv6

Options", BCP 187, RFC 7227, DOI 10.17487/RFC7227, May 2014, <<https://www.rfc-editor.org/info/rfc7227>>.

- [RFC7513] Bi, J., Wu, J., Yao, G., and F. Baker, "Source Address Validation Improvement (SAVI) Solution for DHCP", RFC 7513, DOI 10.17487/RFC7513, May 2015, <<https://www.rfc-editor.org/info/rfc7513>>.
- [RFC7610] Gont, F., Liu, W., and G. Van de Velde, "DHCPv6-Shield: Protecting against Rogue DHCPv6 Servers", BCP 199, RFC 7610, DOI 10.17487/RFC7610, August 2015, <<https://www.rfc-editor.org/info/rfc7610>>.
- [RFC7858] Hu, Z., Zhu, L., Heidemann, J., Mankin, A., Wessels, D., and P. Hoffman, "Specification for DNS over Transport Layer Security (TLS)", RFC 7858, DOI 10.17487/RFC7858, May 2016, <<https://www.rfc-editor.org/info/rfc7858>>.
- [RFC7969] Lemon, T. and T. Mrugalski, "Customizing DHCP Configuration on the Basis of Network Topology", RFC 7969, DOI 10.17487/RFC7969, October 2016, <<https://www.rfc-editor.org/info/rfc7969>>.
- [RFC8146] Harkins, D., "Adding Support for Salted Password Databases to EAP-pwd", RFC 8146, DOI 10.17487/RFC8146, April 2017, <<https://www.rfc-editor.org/info/rfc8146>>.
- [RFC8310] Dickinson, S., Gillmor, D., and T. Reddy, "Usage Profiles for DNS over TLS and DNS over DTLS", RFC 8310, DOI 10.17487/RFC8310, March 2018, <<https://www.rfc-editor.org/info/rfc8310>>.
- [RFC8484] Hoffman, P. and P. McManus, "DNS Queries over HTTPS (DoH)", RFC 8484, DOI 10.17487/RFC8484, October 2018, <<https://www.rfc-editor.org/info/rfc8484>>.
- [RFC8499] Hoffman, P., Sullivan, A., and K. Fujiwara, "DNS Terminology", BCP 219, RFC 8499, DOI 10.17487/RFC8499, January 2019, <<https://www.rfc-editor.org/info/rfc8499>>.

#### Authors' Addresses

Mohamed Boucadair (editor)  
Orange  
35000 Rennes  
France

Email: [mohamed.boucadair@orange.com](mailto:mohamed.boucadair@orange.com)

Tirumaleswar Reddy (editor)

Akamai  
Embassy Golf Link Business Park  
Bangalore 560071  
Karnataka  
India

Email: [kondtir@gmail.com](mailto:kondtir@gmail.com)

Dan Wing  
Citrix Systems, Inc.  
United States of America

Email: [dwing-ietf@fuggles.com](mailto:dwing-ietf@fuggles.com)

Neil Cook  
Open-Xchange  
United Kingdom

Email: [neil.cook@noware.co.uk](mailto:neil.cook@noware.co.uk)

Tommy Jensen  
Microsoft  
United States of America

Email: [tojens@microsoft.com](mailto:tojens@microsoft.com)