

ANIMA WG  
Ed.  
Internet-Draft  
Systems  
Intended status: Standards Track  
Eckert  
Expires: May 4, 2017  
  
Bjarnason  
  
Networks  
  
2016

M. Behringer,  
  
Cisco  
  
T.  
  
S.  
  
Arbor  
  
October 31,

**An Autonomic Control Plane  
draft-ietf-anima-autonomic-control-plane-04**

Abstract

Autonomic functions need a control plane to communicate, which depends on some addressing and routing. This Autonomic Control Plane should ideally be self-managing, and as independent as possible of configuration. This document defines an "Autonomic Control Plane", with the primary use as a control plane for autonomic functions. It also serves as a "virtual out of band channel" for OAM communications over a network that is not configured, or mis-configured.

Status of This Memo

This Internet-Draft is submitted in full conformance with the provisions of [BCP 78](#) and [BCP 79](#).

Internet-Drafts are working documents of the Internet Engineering Task Force (IETF). Note that other groups may also distribute working documents as Internet-Drafts. The list of current Internet-Drafts is at <http://datatracker.ietf.org/drafts/current/>.

Internet-Drafts are draft documents valid for a maximum of six months and may be updated, replaced, or obsoleted by other documents at any time. It is inappropriate to use Internet-Drafts as reference material or to cite them other than as "work in progress."

This Internet-Draft will expire on May 4, 2017.

Copyright Notice

Copyright (c) 2016 IETF Trust and the persons identified as the document authors. All rights reserved.

This document is subject to [BCP 78](#) and the IETF Trust's Legal Provisions Relating to IETF Documents (<http://trustee.ietf.org/license-info>) in effect on the date of

publication of this document. Please review these documents

Behringer, et al.  
1]

Expires May 4, 2017

[Page

carefully, as they describe your rights and restrictions with respect to this document. Code Components extracted from this document must include Simplified BSD License text as described in Section 4.e of the Trust Legal Provisions and are provided without warranty as described in the Simplified BSD License.

Table of Contents

- [1.](#) Introduction . . . . .  
[3](#)
- [2.](#) Use Cases for an Autonomic Control Plane . . . . .  
[4](#)
  - [2.1.](#) An Infrastructure for Autonomic Functions . . . . .  
[4](#)
  - [2.2.](#) Secure Bootstrap over an Unconfigured Network . . . . .  
[5](#)
  - [2.3.](#) Data Plane Independent Permanent Reachability . . . . .  
[5](#)
- [3.](#) Requirements . . . . .  
[6](#)
- [4.](#) Overview . . . . .  
[7](#)
- [5.](#) Self-Creation of an Autonomic Control Plane . . . . .  
[8](#)
  - [5.1.](#) Preconditions . . . . .  
[8](#)
    - [5.1.1.](#) Domain Certificate with ANIMA information . . . . .  
[8](#)
    - [5.1.2.](#) AN Adjacency Table . . . . .  
[9](#)
  - [5.2.](#) Neighbor discovery . . . . .  
[10](#)
    - [5.2.1.](#) L2 topology considerations . . . . .  
[10](#)
    - [5.2.2.](#) CDP/LLDP/mDNS considerations . . . . .  
[11](#)
    - [5.2.3.](#) Discovery with GRASP . . . . .  
[11](#)
    - [5.2.4.](#) Discovery and BRSKY . . . . .  
[12](#)
  - [5.3.](#) Candidate ACP Neighbor Selection . . . . .  
[12](#)
  - [5.4.](#) Channel Selection . . . . .  
[13](#)
  - [5.5.](#) Security Association protocols . . . . .  
[14](#)
    - [5.5.1.](#) ACP via IPsec . . . . .  
[14](#)
    - [5.5.2.](#) ACP via GRE/IPsec . . . . .  
[15](#)
    - [5.5.3.](#) ACP via dTLS . . . . .

<u>15</u>	<a href="#">5.5.4.</a>	GRASP/TLS negotiation . . . . .
<u>15</u>	<a href="#">5.5.5.</a>	ACP Security Profiles . . . . .
<u>16</u>	<a href="#">5.6.</a>	GRASP instance details . . . . .
<u>16</u>	<a href="#">5.7.</a>	Context Separation . . . . .
<u>16</u>	<a href="#">5.8.</a>	Addressing inside the ACP . . . . .
<u>16</u>	<a href="#">5.8.1.</a>	Fundamental Concepts of Autonomic Addressing . . . . .
<u>17</u>	<a href="#">5.8.2.</a>	The ACP Addressing Base Scheme . . . . .
<u>18</u>	<a href="#">5.8.3.</a>	ACP Addressing Sub-Scheme . . . . .
<u>18</u>	<a href="#">5.8.4.</a>	Usage of the Zone Field . . . . .
<u>20</u>	<a href="#">5.8.5.</a>	Other ACP Addressing Sub-Schemes . . . . .
<u>20</u>	<a href="#">5.9.</a>	Routing in the ACP . . . . .
<u>21</u>	<a href="#">5.10.</a>	General ACP Considerations . . . . .
<u>21</u>	<a href="#">6.</a>	Workarounds for Non-Autonomic Nodes . . . . .
<u>22</u>	<a href="#">6.1.</a>	Connecting a Non-Autonomic Controller / NMS system . . . . .
<u>22</u>	<a href="#">6.2.</a>	ACP through Non-Autonomic L3 Clouds . . . . .
<u>22</u>	<a href="#">7.</a>	Self-Healing Properties . . . . .
<u>23</u>	<a href="#">8.</a>	Self-Protection Properties . . . . .
<u>24</u>	<a href="#">9.</a>	The Administrator View . . . . .
<u>24</u>		

[10](#). Security Considerations . . . . .  
[25](#)  
[11](#). IANA Considerations . . . . .  
[25](#)  
[12](#). Acknowledgements . . . . .  
[26](#)  
[13](#). Change log [RFC Editor: Please remove] . . . . .  
[26](#)  
    [13.1](#). Initial version . . . . .  
[26](#)  
    [13.2](#). [draft-behringer-anima-autonomic-control-plane-00](#) . . . . .  
[26](#)  
    [13.3](#). [draft-behringer-anima-autonomic-control-plane-01](#) . . . . .  
[26](#)  
    [13.4](#). [draft-behringer-anima-autonomic-control-plane-02](#) . . . . .  
[27](#)  
    [13.5](#). [draft-behringer-anima-autonomic-control-plane-03](#) . . . . .  
[27](#)  
    [13.6](#). [draft-ietf-anima-autonomic-control-plane-00](#) . . . . .  
[27](#)  
    [13.7](#). [draft-ietf-anima-autonomic-control-plane-01](#) . . . . .  
[27](#)  
    [13.8](#). [draft-ietf-anima-autonomic-control-plane-02](#) . . . . .  
[28](#)  
    [13.9](#). [draft-ietf-anima-autonomic-control-plane-03](#) . . . . .  
[28](#)  
    [13.10](#). [draft-ietf-anima-autonomic-control-plane-04](#) . . . . .  
[29](#)  
[14](#). References . . . . .  
[29](#)  
[Appendix A](#). Background on the choice of routing protocol . . . . .  
[31](#)  
Authors' Addresses . . . . .  
[32](#)

## [1](#). Introduction

Autonomic Networking is a concept of self-management: Autonomic functions self-configure, and negotiate parameters and settings across the network. [[RFC7575](#)] defines the fundamental ideas and design goals of Autonomic Networking. A gap analysis of Autonomic Networking is given in [[RFC7576](#)]. The reference architecture for Autonomic Networking in the IETF is currently being defined in the document [[I-D.ietf-anima-reference-model](#)]

Autonomic functions need a stable and robust infrastructure to communicate on. This infrastructure should be as robust as possible, and it should be re-usable by all autonomic functions. [[RFC7575](#)] calls it the "Autonomic Control Plane". This document defines the Autonomic Control Plane.

Today, the management and control plane of networks typically runs in the global routing table, which is dependent on correct configuration and routing. Misconfigurations or routing problems can therefore disrupt management and control channels. Traditionally, an out of band network has been used to recover from such problems, or personnel is sent on site to access devices through console ports. However, both options are operationally expensive.

In increasingly automated networks either controllers or distributed autonomic service agents in the network require a control plane which is independent of the network they manage, to avoid impacting their own operations.

This document describes options for a self-forming, self-managing and self-protecting "Autonomic Control Plane" (ACP) which is inband on the network, yet as independent as possible of configuration, addressing and routing problems (for details how this achieved, see [Section 5](#)). It therefore remains operational even in the presence of configuration errors, addressing or routing issues, or where policy could inadvertently affect control plane connectivity. The Autonomic Control Plane serves several purposes at the same time:

- o Autonomic functions communicate over the ACP. The ACP therefore supports directly Autonomic Networking functions, as described in [[I-D.ietf-anima-reference-model](#)]. For example, GRASP [[I-D.ietf-anima-grasp](#)] can run inside the ACP.
- o An operator can use it to log into remote devices, even if the data plane is misconfigured or unconfigured.
- o A controller or network management system can use it to securely bootstrap network devices in remote locations, even if the network in between is not yet configured; no data-plane dependent bootstrap configuration is required. An example of such a secure bootstrap process is described in [[I-D.ietf-anima-bootstrapping-keyinfra](#)]

This document describes some use cases for the ACP in [Section 2](#), it defines the requirements in [Section 3](#), [Section 4](#) gives an overview how an Autonomic Control Plane is constructed, and in [Section 5](#) the detailed process is explained. [Section 6](#) explains how non-autonomic nodes and networks can be integrated, and [Section 5.5](#) the first channel types for the ACP.

The document "Autonomic Network Stable Connectivity" [[I-D.ietf-anima-stable-connectivity](#)] describes how the ACP can be used to provide stable connectivity for OAM applications. It also explains on how existing management solutions can leverage the ACP in parallel with traditional management models, when to use the ACP versus the data plane, how to integrate IPv4 based management, etc.

## **2. Use Cases for an Autonomic Control Plane**

### **2.1. An Infrastructure for Autonomic Functions**

Autonomic Functions need a stable infrastructure to run on, and all autonomic functions should use the same infrastructure to minimise the complexity of the network. This way, there is only need for a single discovery mechanism, a single security mechanism, and other processes that distributed functions require.

Behringer, et al.  
4]

Expires May 4, 2017

[Page



## **2.2. Secure Bootstrap over an Unconfigured Network**

Today, bootstrapping a new device typically requires all devices between a controlling node (such as an SDN controller) and the new device to be completely and correctly addressed, configured and secured. Therefore, bootstrapping a network happens in layers around

the controller. Without console access (for example through an out of band network) it is not possible today to make devices securely reachable before having configured the entire network between.

With the ACP, secure bootstrap of new devices can happen without requiring any configuration on the network. A new device can automatically be bootstrapped in a secure fashion and be deployed with a domain certificate. This does not require any configuration on intermediate nodes, because they can communicate through the ACP.

## **2.3. Data Plane Independent Permanent Reachability**

Today, most critical control plane protocols and network management protocols are running in the data plane (global routing table) of the

network. This leads to undesirable dependencies between control and management plane on one side and the data plane on the other: Only if

the data plane is operational, will the other planes work as expected.

Data plane connectivity can be affected by errors and faults, for example certain AAA misconfigurations can lock an administrator out of a device; routing or addressing issues can make a device unreachable; shutting down interfaces over which a current management

session is running can lock an admin irreversibly out of the device. Traditionally only console access can help recover from such issues.

Data plane dependencies also affect NOC/SDN controller applications: Certain network changes are today hard to operate, because the change

itself may affect reachability of the devices. Examples are address or mask changes, routing changes, or security policies. Today such changes require precise hop-by-hop planning.

The ACP provides reachability that is largely independent of the data

plane, which allows control plane and management plane to operate more robustly:

- o For management plane protocols, the ACP provides the functionality of a "Virtual-out-of-band (VooB) channel", by providing connectivity to all devices regardless of their configuration or

global routing table.

Behringer, et al.  
5]

Expires May 4, 2017

[Page

- o For control plane protocols, the ACP allows their operation even when the data plane is temporarily faulty, or during transitional events, such as routing changes, which may affect the control plane at least temporarily. This is specifically important for autonomic service agents, which could affect data plane connectivity.

The document "Autonomic Network Stable Connectivity" [[I-D.ietf-anima-stable-connectivity](#)] explains the use cases for the ACP in significantly more detail and explains how the ACP can be used in practical network operations.

### **3. Requirements**

The Autonomic Control Plane has the following requirements:

1. The ACP SHOULD provide robust connectivity: As far as possible, it should be independent of configured addressing, configuration and routing. Requirements 2 and 3 build on this requirement, but also have value on their own.
2. The ACP MUST have a separate address space from the data plane. Reason: traceability, debug-ability, separation from data plane, security (can block easily at edge).
3. The ACP MUST use autonomically managed address space. Reason: easy bootstrap and setup ("autonomic"); robustness (admin can't mess things up so easily). This document suggests to use ULA addressing for this purpose.
4. The ACP MUST be generic. Usable by all the functions and protocols of the AN infrastructure. It MUST NOT be tied to a particular protocol.
5. The ACP MUST provide security: Messages coming through the ACP MUST be authenticated to be from a trusted node, and SHOULD (very strong SHOULD) be encrypted.

The default mode of operation of the ACP is hop-by-hop, because this interaction can be built on IPv6 link local addressing, which is autonomic, and has no dependency on configuration (requirement 1). It may be necessary to have end-to-end connectivity in some cases, for example to provide an end-to-end security association for some protocols. This is possible, but then has a dependency on routable address space.



#### **4. Overview**

The Autonomic Control Plane is constructed in the following way (for details, see [Section 5](#)):

- o An autonomic node creates a virtual routing and forwarding (VRF) instance, or a similar virtual context.
- o It determines, following a policy, a candidate peer list. This is the list of nodes to which it should establish an autonomic control plane. Default policy is: To all adjacent nodes in the same domain. Intent can override this default policy.
- o For each node in the candidate peer list, it authenticates that node and negotiates a mutually acceptable channel type.
- o It then establishes a secure tunnel of the negotiated channel type. These tunnels are placed into the previously set up VRF. This creates an overlay network with hop-by-hop tunnels.
- o Inside the ACP VRF, each node sets up a virtual interface with its ULA IPv6 address.
- o Each node runs a lightweight routing protocol, to announce reachability of the virtual addresses inside the ACP.
- o Non-autonomic NMS systems or controllers have to be manually connected into the ACP.
- o Connecting over non-autonomic Layer-3 clouds initially requires a tunnel between autonomic nodes.
- o None of the above operations (except manual ones) is reflected in the configuration of the device.

The following figure illustrates the ACP.



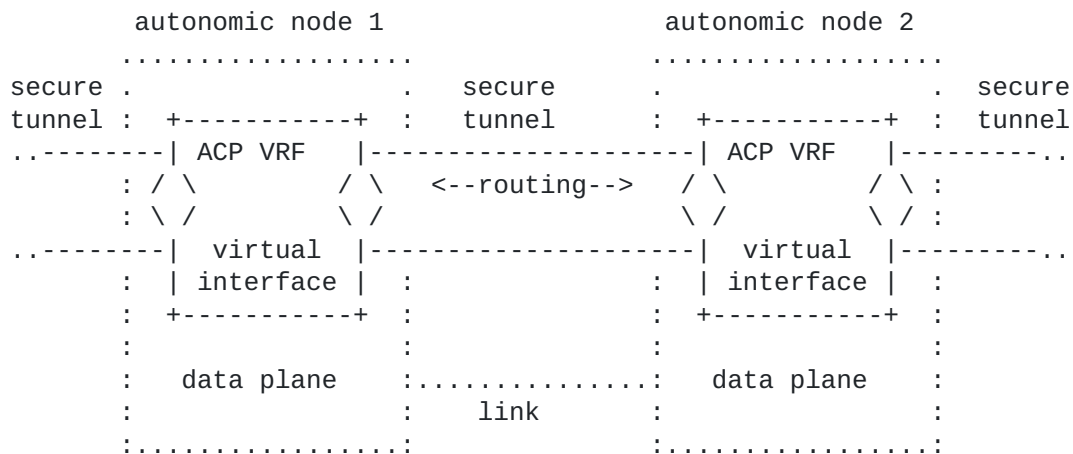


Figure 1

The resulting overlay network is normally based exclusively on hop-by-hop tunnels. This is because addressing used on links is IPv6 link local addressing, which does not require any prior set-up.

This

way the ACP can be built even if there is no configuration on the devices, or if the data plane has issues such as addressing or routing problems.

## 5. Self-Creation of an Autonomic Control Plane

This section describes the steps to set up an Autonomic Control Plane, and highlights the key properties which make it "indestructible" against many inadvertent changes to the data plane,

for

example caused by misconfigurations.

### 5.1. Preconditions

An autonomic node can be a router, switch, controller, NMS host, or any other IP device. We assume an autonomic node has a globally unique domain certificate (LDevID), as well as an adjacency table.

#### 5.1.1. Domain Certificate with ANIMA information

To establish an ACP securely, an Autonomic Node MUST have a globally unique domain certificate (LDevID), with which it can cryptographically assert its membership of the domain. The document [[I-D.ietf-anima-bootstrapping-keyinfra](#)] describes how a domain certificate can be automatically and securely derived from a vendor specific Unique Device Identifier (UDI) or IDevID certificate. (Note: the UDI used in this document is NOT the UUID specified in [[RFC4122](#)].)





The domain certificate (LDevID) of an autonomic node MUST contain ANIMA specific information, specifically the domain name, and its ACP address with the zone-ID set to zero. This information MUST be encoded in the LDevID in the subjectAltName / rfc822Name field in the following way:

```
anima.acp+<ACP address>@<domain>
```

An example:

```
anima.acp+FD99:B02D:8EC3:0:200:0:6400:1@example.com
```

The ACP address MUST be specified in its canonical form, as specified in [\[RFC5952\]](#), to allow for easy textual comparisons.

The bootstrap process defined in [\[I-D.ietf-anima-bootstrapping-keyinfra\]](#) MUST in an ANIMA network pass on ACP address and domain to a new node, such that the new node can add this to its enrolment request.

The Certificate Authority in an ANIMA network MUST honor these parameters, and create the respective subjectAltName / rfc822Name in the certificate.

ANIMA nodes can therefore find ACP address and domain using this field in the domain certificate, both for themselves, as well as for other nodes.

See [section 4.2.1.6 of \[RFC5280\]](#) for details on the subjectAltName field.

### **5.1.2. AN Adjacency Table**

To know to which nodes to establish an ACP channel, every autonomic node maintains an adjacency table. The adjacency table contains information about adjacent autonomic nodes, at a minimum: node-ID, IP address, domain, certificate. An autonomic device MUST maintain this adjacency table up to date. This table is used to determine to which neighbor an ACP connection is established.

Where the next autonomic device is not directly adjacent, the information in the adjacency table can be supplemented by configuration. For example, the node-ID and IP address could be configured.

The adjacency table MAY contain information about the validity and trust of the adjacent autonomic node's certificate. However, subsequent steps MUST always start with authenticating the peer.

Behringer, et al.  
9]

Expires May 4, 2017

[Page

The adjacency table contains information about adjacent autonomic nodes in general, independently of their domain and trust status. The next step determines to which of those autonomic nodes an ACP connection should be established.

**5.2. Neighbor discovery**

**5.2.1. L2 topology considerations**




Figure 2

Consider a large L2 LAN with ANrtr1...ANrtrN connected via some topology of L2 switches (eg: in a large enterprise campus or IoT environment using large L2 LANs). If the discovery protocol used

for

the ACP is operating at the subnet level, every AN router will see all other AN routers on the LAN as neighbors and a full mesh of ACP channels will be built. If some or all of the AN switches are autonomic with the same discovery protocol, then the full mesh would include those switches as well.

A full mesh of ACP connections like this can create fundamental challenges. The number of security associations of the secure channel protocols will not scale arbitrarily, especially when they leverage platform accelerated encryption/decryption. Likewise, any other ACP operations need to scale to the number of direct ACP neighbors. An AN router with just 4 interfaces might be deployed

into

a LAN with hundreds of neighbors connected via switches.

Introducing

such a new unpredictable scaling factor requirement makes it harder to support the ACP on arbitrary platforms and in arbitrary deployments.

Predictable scaling requirements for ACP neighbors can most easily be

achieved if in topologies like these, AN capable L2 switches can ensure that discovery messages terminate on them so that neighboring AN routers and switches will only find the physically connected AN

L2

switches as their candidate ACP neighbors. With such a discovery mechanism in place, the ACP and its security associations will only need to scale to the number of physical interfaces instead of a potentially much larger number of "LAN-connected" neighbors. And

the

ACP topology will follow directly the physical topology, something

which can then also be leveraged in management operations or by ASAs.

Behringer, et al.  
10]

Expires May 4, 2017

[Page

In the example above, consider ANswitch1 and ANswitchI are AN capable, and ANswitch2 is not AN capable. The desired ACP topology is therefore that ANrtr1 and ANrtrI only have an ACP connection to ANswitch1, and that ANswitch1, ANrtr2, ANrtrN have a full mesh of ACP connection amongst each other. ANswitch1 also has an ACP connection with ANswitchI and ANswitchI has ACP connections to anything else behind it.

### **5.2.2. CDP/LLDP/mDNS considerations**

LLDP (and Cisco's CDP) are example of L2 discovery protocols that do terminate their messages on L2 ports. Unfortunately, they will also terminate their messages if they do not support the ACP and would then inhibit ACP neighbor discovery

mDNS operates at the subnet level, and is also used on L2 switches. The authors of this document are not aware of mDNS implementation that terminate their messages on L2 ports instead of the subnet level. If mDNS was used as the ACP discovery mechanism on an ACP capable L2 switch, then this would be necessary to implement. It is likely that termination of mDNS messages could only be applied to all

mDNS messages from a port, which would then make it necessary to software forward any non-ACP related mDNS messages to maintain prior non-ACP mDNS functionality. With low performance of software forwarding in many L2 switches, this could easily make the ACP unsupportable on such L2 switches.

### **5.2.3. Discovery with GRASP**

In conclusion for the above described considerations, the ACP uses "insecure" instances of GRASP for discovery of ACP neighbors because it can easily be set up to match the requirements without affecting other uses of the protocol.

The name of the GRASP objective to announce/discover the capability of a neighbor to run the ACP is "ACP". All other parameters are defined in section [[I-D.ietf-anima-grasp](#)] where these instances of GRASP are called "DULL" (Discovery Unsolicited Link Local). As explained above, in an ACP enabled L2 switch, each of these instances would actually need to be per-L2-port. The result of the discovery is the IPv6 link-local address of the neighbor. It is stored in the AN Adjacency Table, see [Section 5.1.2](#) which then drives the further building of the ACP to that neighbor.

For example, ANswitch1 would run separate DULL GRASP instances on its ports to ANrtr1, ANswitch2 and ANswitchI, even though all those three ports may be in the data plane in the same (V)LAN. This is easily

achieved by extracting native GRASP multicast messages by their MAC

Behringer, et al.  
11]

Expires May 4, 2017

[Page

multicast destination address. None of the other type of GRASP instances (eg: as used inside the ACP) use GRASP messages that would be affected by such extraction, because all other GRASP messages have encrypted encapsulations.

#### **5.2.4. Discovery and BRSKY**

Before a node has a domain certificate, it can not participate in the ACP and therefore does also not try to discover an ACP neighbor. Instead, it uses the discovery mechanism described in [[I-D.ietf-anima-grasp](#)] to discover a bootstrap proxy. Currently, that document describes mDNS as the protocol of choice for that discovery. In the context of above topology example, ANrtr1 might therefore discover and choose any ANrtr or ANswitch on the LAN that is already part of the autonomic domain - instead of the closest one which is ANswitch1. This choice of bootstrap proxy does not impact in the later building of the ACP on ANrtr1 and is therefore not a concern for the ACP.

Once a device has its domain certificate, it will start announcing itself via GRASP as ACP capable.

When an autonomic device is a registrar, it will announce the registrar function via GRASP in the ACP as the "6JOIN" objective.

An

AN device that is a registrar or learns about one or more reachable registrars via this GRASP/ACP announcements will announce itself as

a

bootstrap proxy via mDNS. See [[I-D.richardson-anima-6join-discovery](#)] for more details.

#### **5.3. Candidate ACP Neighbor Selection**

An autonomic node must determine to which other autonomic nodes in the adjacency table it should build an ACP connection. This is based on the information in the AN Adjacency table.

The ACP is by default established exclusively between nodes in the same domain.

Intent can change this default behaviour. The precise format for this Intent needs to be defined outside this document. Example Intent policies are:

o The ACP should be built between all sub-domains for a given parent

domain. For example: For domain "example.com", nodes of "example.com", "access.example.com", "core.example.com" and "city.core.example.com" should all establish one single ACP.

Behringer, et al.  
12]

Expires May 4, 2017

[Page



- o Two domains should build one single ACP between themselves, for example "example1.com" should establish the ACP also with nodes from "example2.com". For this case, the two domains must be able to validate their trust, typically by cross-signing their certificate infrastructure.

The result of the candidate ACP neighbor selection process is a list of adjacent or configured autonomic neighbors to which an ACP channel should be established. The next step begins that channel establishment.

#### **5.4. Channel Selection**

To avoid attacks, initial discovery of candidate ACP peers can not include any non-protected negotiation. To avoid re-inventing and validating security association mechanisms, the next step after discovering the address of a candidate neighbor can only be to try first to establish a security association with that neighbor using a well-known security association method.

At this time in the lifecycle of autonomic devices, it is unclear whether it is feasible to even decide on a single MTI (mandatory to implement) security association protocol across all autonomic devices.

From the use-cases it is clear that not all type of autonomic devices can or need to connect directly to each other or are able to support or prefer all possible mechanisms. For example, code space limited IoT devices may only support dTLS (because that code exists already on them for end-to-end security use-cases), but low-end in-ceiling L2 switches may only want to support MacSec because that is also supported in HW, and only a more flexible gateway device may need to support both of these mechanisms and potentially more.

To support these requirements, and make ACP channel negotiation also easily extensible, the secure channel selection between Alice and Bob is a potentially two stage process. In the first stage, Alice and Bob directly try to establish a secure channel using the security-association and channel protocols they support. One or more of these protocols may simply be protocols not directly resulting in an ACP channel, but instead establishing a secure negotiation channel through which the final secure channel protocol is decided. If both Alice and Bob support such a negotiation step, then this secured negotiation channel is the first step, and the secure channel protocol is the second step.

If Alice supports multiple security association protocols in the first step, it is a matter of Alices local policy to determine the

Behringer, et al.  
13]

Expires May 4, 2017

[Page

order in which she will try to build the connection to Bob. To support multiple security association protocols, Alice must be able to simultaneously act as a responder in parallel for all of them -

so

that she can respond to any order in which Bob wants to prefer building the security association.

When ACP setup between Alice and Bob results in the first secure association to be established, the peer with the higher Device-ID in the certificate will stop building new security associations. The peer with the lower certificate Device-ID is now responsible to continue building its most preferred security association and to tear

down all but that most preferred one - unless the secure association is one of a negotiation protocols whose rules superceed this.

All this negotiation is in the context of an "L2 interface". Alice and Bob will build ACP connections to each other on every "L2 interface" that they both connect to.

## **5.5. Security Association protocols**

The following sections define the security association protocols that

we consider to be important and feasible to specify in this document.

In all cases, the mutual authentication is done via the autonomic domain certificate of the peer as follows - unless superceeded by intent:

- o The certificate is valid as proven by the security associations protocol exchanges.
- o The peers certificate is signed by the same CA as the devices domain certificate.
- o The peers OU (Organizational Unit) field in the certificates Subject is the same as in the devices certificate.

### **5.5.1. ACP via IPsec**

To run ACP via IPsec transport mode, no further IANA assignments/ definitions are required. All autonomic devices suppoting IPsec MUST

support IPsec security setup via IKEv2, transport mode encapsulation via the device and peer link-local IPv6 addresses and AES256 encryption. Further parameter options can be negotiated via IKEv2

or

via GRASP/TLS.

Behringer, et al.  
14]

Expires May 4, 2017

[Page

### **5.5.2. ACP via GRE/IPsec**

In network devices it is often easier to provide virtual interfaces on top of GRE encapsulation than natively on top of a simple IPsec association. On those devices it may be necessary to run the ACP secure channel on top of a GRE connection protected by the IPsec association. The requirements for the IPsec association are the same

as described above, but instead of directly carrying the ACP IPv6 packets, the payload is an ACP IPv6 packet inside GRE/IPv6.

Note that without explicit negotiation (eg: via GRASP/TLS), this method is incompatible to direct ACP via IPsec, so it must only be used as an option during GRASP/TLS negotiation.

### **5.5.3. ACP via dTLS**

To run ACP via UDP and dTLS v1.2 [[RFC6347](#)] an IANA assigned port [TBD] is used. All autonomic devices supporting ACP via dTLS must support AES256 encryption.

### **5.5.4. GRASP/TLS negotiation**

To explicitly allow negotiation of the ACP channel protocol, GRASP over a TLS connection using the GRASP\_LISTEN\_PORT and the devices and peers link-local IPv6 address is used. When Alice and Bob support GRASP negotiation, they do prefer it over any other non-explicitly negotiated security association protocol and should wait trying any non-negotiated ACP channel protocol until after it is clear that GRASP/TLS will not work to the peer.

When Alice and Bob successfully establish the GRASP/TLS session, they

will initially negotiate the channel mechanism to use. Bob and Alice

each have a list of channel mechanisms they support, sorted by preference. They negotiate the best mechanism supported by both of them. In the absence of Intent, the mechanism chosen is the best one for the device with the lower Device-ID.

After agreeing on a channel mechanism, Alice and Bob start the selected Channel protocol. The GRASP/TLS connection can be kept alive or timed out as long as the selected channel protocol has a secure association between Alice and Bob. When it terminates, it needs to be re-negotiated via GRASP/TLS.

Negotiation of a channel type may require IANA assignments of code points. See IANA Considerations ([Section 11](#)) for the formal definition of those code points.

TBD: The exact negotiation steps in GRASP to achieve this outcome.



#### **5.5.5. ACP Security Profiles**

A baseline autonomic device MUST support IPsec and SHOULD support GRASP/TLS and dTLS. A constrained autonomic device MUST support dTLS.

Autonomic devices need to specify in documentation the set of secure ACP mechanisms they support.

#### **5.6. GRASP instance details**

Received GRASP packets are assigned to an instance of GRASP by the context they are received on:

- o GRASP packets received on an ACP (virtual) interfaces are assigned to the ACP instance of GRASP
- o GRASP/UDP packets received on L2 interfaces/ports where the device is willing to run ACP are assigned to a DULL instance of GRASP for that interface/port.
- o GRASP packets received inside a TLS connection established for GRASP/TLS ACP negotiation are assigned to a separate instance of GRASP for that negotiation.

#### **5.7. Context Separation**

The ACP is in a separate context from the normal data plane of the device. This context includes the ACP channels IPv6 forwarding and routing as well as any required higher layer ACP functions.

In classical network device platforms, a dedicated so called "Virtual routing and forwarding instance" (VRF) is one logical implementation option for the ACP. If possible by the platform SW architecture, separation options that minimize shared components are preferred. The context for the ACP needs to be established automatically during bootstrap of a device. As much as possible it should be protected from being modified unintentionally by data plane configuration.

Context separation improves security, because the ACP is not reachable from the global routing table. Also, configuration errors from the data plane setup do not affect the ACP.

#### **5.8. Addressing inside the ACP**

The channels explained above typically only establish communication between two adjacent nodes. In order for communication to happen across multiple hops, the autonomic control plane requires internal





network wide valid addresses and routing. Each autonomic node must create a virtual interface with a network wide unique address inside the ACP context mentioned in [Section 5.7](#). This address may be used also in other virtual contexts.

With the algorithm introduced here, all autonomic devices in the same domain have the same /48 prefix. Conversely, global IDs from different domains are unlikely to clash, such that two networks can be merged, as long as the policy allows that merge. See also [Section 7](#) for a discussion on merging domains.

Links inside the ACP only use link-local IPv6 addressing, such that each node only requires one routable virtual address.

#### **5.8.1. Fundamental Concepts of Autonomic Addressing**

- o Usage: Autonomic addresses are exclusively used for self-management functions inside a trusted domain. They are not used for user traffic. Communications with entities outside the trusted domain use another address space, for example normally managed routable address space.
- o Separation: Autonomic address space is used separately from user address space and other address realms. This supports the robustness requirement.
- o Loopback-only: Only loopback interfaces of autonomic nodes carry a routable address; all other interfaces exclusively use IPv6 link local for autonomic functions. The usage of IPv6 link local addressing is discussed in [[RFC7404](#)].
- o Use-ULA: For loopback interfaces of autonomic nodes, we use Unique Local Addresses (ULA), as specified in [[RFC4193](#)]. An alternative scheme was discussed, using assigned ULA addressing. The consensus was to use standard ULA, because it was deemed to be sufficient.
- o No external connectivity: They do not provide access to the Internet. If a node requires further reaching connectivity, it should use another, traditionally managed address scheme in parallel.

The ACP is based exclusively on IPv6 addressing, for a variety of reasons:

- o Simplicity, reliability and scale: If other network layer protocols were supported, each would have to have its own set of security associations, routing table and process, etc.



- o Autonomic functions do not require IPv4: Autonomic functions and autonomic service agents are new concepts. They can be exclusively built on IPv6 from day one. There is no need for backward compatibility.
- o OAM protocols do not require IPv4: The ACP may carry OAM protocols. All relevant protocols (SNMP, TFTP, SSH, SCP, Radius, Diameter, ...) are available in IPv6.

**5.8.2. The ACP Addressing Base Scheme**

The Base ULA addressing scheme for autonomic nodes has the following format:

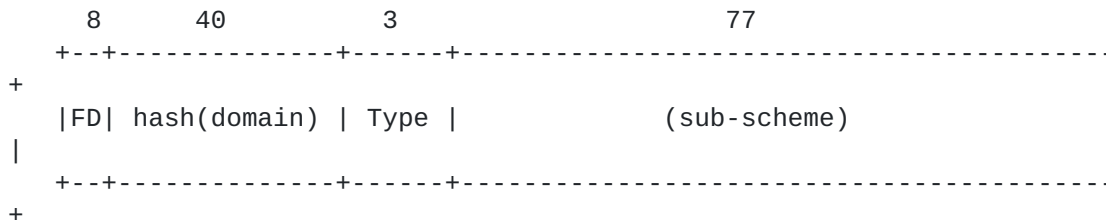


Figure 3: ACP Addressing Base Scheme

The first 48 bits follow the ULA scheme, as defined in [RFC4193], to which a type field is added:

- o "FD" identifies a locally defined ULA address.
- o The ULA "global ID" is set here to be a hash of the domain name, which results in a pseudo-random 40 bit value. It is calculated as the first 40 bits of the MD5 hash of the domain name, in the example "example.com".
- o Type: This field allows different address sub-schemes in the future. The goal is to start with a single sub-schemes, but to allow for extensions later if and when required. This addresses the "upgradability" requirement. Assignment of types for this field should be maintained by IANA.

**5.8.3. ACP Addressing Sub-Scheme**

The sub-scheme defined here is defined by the Type value 0 (zero) in the base scheme.

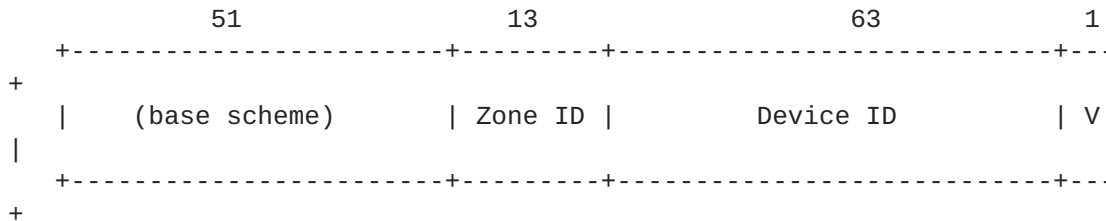


Figure 4: ACP Addressing Sub-Scheme

Behringer, et al.  
18]

Expires May 4, 2017

[Page

The fields are defined as follows: [Editor's note: The lengths of the fields is for discussion.]

- o Zone ID: If set to all zero bits: The device ID bits are used as an identifier (as opposed to a locator). This results in a non-hierarchical, flat addressing scheme. Any other value indicates a zone. See section [Section 5.8.4](#) on how this field is used in detail.
- o Device ID: A unique value for each device.
- o V: Virtualization bit: 0: autonomic node base system; 1: a virtual context on an autonomic node.

The device ID is derived as follows: In an Autonomic Network, a registrar is enrolling new devices. As part of the enrolment process the registrar assigns a number to the device, which is unique for this registrar, but not necessarily unique in the domain. The 64 bit device ID is then composed as:

- o 48 bit: Registrar ID, a number unique inside the domain that identifies the registrar which assigned the name to the device. A MAC address of the registrar can be used for this purpose.
- o 15 bit: Device number, a number which is unique for a given registrar, to identify the device. This can be a sequentially assigned number.

The "device ID" itself is unique in a domain (i.e., the Zone-ID is not required for uniqueness). Therefore, a device can be addressed either as part of a flat hierarchy (zone ID = 0), or with an aggregation scheme (any other zone ID). A address with zone-ID = 0 is an identifier, with another zone-ID as a locator. See [Section 5.8.4](#) for a description of the zone bits.

This addressing sub-scheme allows the direct addressing of specific virtual containers / VMs on an autonomic node. An increasing number of hardware platforms have a distributed architecture, with a base OS for the node itself, and the support for hardware blades with potentially different OSs. The VMs on the blades could be considered as separate autonomic nodes, in which case it would make sense to be able to address them directly. Autonomic Service Agents (ASAs) could be instantiated in either the base OS, or one of the VMs on a blade.

This addressing scheme allows for the easy separation of the hardware context.

Behringer, et al.  
19]

Expires May 4, 2017

[Page

The location of the V bit(s) at the end of the address allows to announce a single prefix for each autonomic node, while having separate virtual contexts addressable directly.

#### **5.8.4. Usage of the Zone Field**

The "zone ID" allows for the introduction of structure in the addressing scheme.

Zone = zero is the default addressing scheme in an autonomic domain. Every autonomic node MUST respond to its ACP address with zone=0. Used on its own this leads to a non-hierarchical address scheme, which is suitable for networks up to a certain size. In this case, the addresses primarily act as identifiers for the nodes, and aggregation is not possible.

If aggregation is required, the 13 bit value allows for up to 8191 zones. The allocation of zone numbers may either happen automatically through a to-be-defined algorithm; or it could be configured and maintained manually. [We could divide the zone space into manual and automatic space - to be discussed.]

If a device learns through an autonomic method or through configuration that it is part of a zone, it MUST also respond to its ACP address with that zone number. In this case the ACP loopback is configured with two ACP addresses: One for zone 0 and one for the assigned zone. This method allows for a smooth transition between a flat addressing scheme and an hierarchical one.

(Theoretically, the 13 bits for the zone ID would allow also for two levels of zones, introducing a sub-hierarchy. We do not think this is required at this point, but a new type could be used in the future to support such a scheme.)

Note: Another way to introduce hierarchy is to use sub-domains in the naming scheme. The node names "node17.subdomainA.example.com" and "node4.subdomainB.example.com" would automatically lead to different ULA prefixes, which can be used to introduce a routing hierarchy in the network, assuming that the subdomains are aligned with routing areas.

#### **5.8.5. Other ACP Addressing Sub-Schemes**

Other ACP addressing sub-schemes can be defined if and when required.

IANA will assign a new "type" for each new addressing sub-scheme.





### **5.9. Routing in the ACP**

Once ULA address are set up all autonomic entities should run a routing protocol within the autonomic control plane context. This routing protocol distributes the ULA created in the previous section for reachability. The use of the autonomic control plane specific context eliminates the probable clash with the global routing table and also secures the ACP from interference from the configuration mismatch or incorrect routing updates.

The establishment of the routing plane and its parameters are automatic and strictly within the confines of the autonomic control plane. Therefore, no manual configuration is required.

All routing updates are automatically secured in transit as the channels of the autonomic control plane are by default secured.

The routing protocol inside the ACP should be light weight and highly scalable to ensure that the ACP does not become a limiting factor in network scalability. We suggest the use of RPL [[RFC6550](#)] as one such protocol which is light weight and scales well for the control plane traffic. See [Appendix A](#) for more details on the choice of RPL.

### **5.10. General ACP Considerations**

In order to be independent of configured link addresses, channels SHOULD use IPv6 link local addresses between adjacent neighbors wherever possible. This way, the ACP tunnels are independent of correct network wide routing.

Since channels are by default established between adjacent neighbors, the resulting overlay network does hop by hop encryption. Each node decrypts incoming traffic from the ACP, and encrypts outgoing traffic to its neighbors in the ACP. Routing is discussed in [Section 5.9](#).

If two nodes are connected via several links, the ACP SHOULD be established on every link, but it is possible to establish the ACP only on a sub-set of links. Having an ACP channel on every link has a number of advantages, for example it allows for a faster failover in case of link failure, and it reflects the physical topology more closely. Using a subset of links (for example, a single link), reduces resource consumption on the devices, because state needs to be kept per ACP channel.



## **6. Workarounds for Non-Autonomic Nodes**

### **6.1. Connecting a Non-Autonomic Controller / NMS system**

The Autonomic Control Plane can be used by management systems, such as controllers or network management system (NMS) hosts (henceforth called simply "NMS hosts"), to connect to devices through it. For this, an NMS host must have access to the ACP. By default, the ACP is a self-protecting overlay network, which only allows access to trusted systems. Therefore, a traditional, non-autonomic NMS system does not have access to the ACP by default, just like any other external device.

If the NMS host is not autonomic, i.e., it does not support autonomic

negotiation of the ACP, then it can be brought into the ACP by explicit configuration. On an adjacent autonomic node with ACP, the interface with the NMS host can be configured to be part of the ACP. In this case, the NMS host is with this interface entirely and exclusively inside the ACP. It would likely require a second interface for connections between the NMS host and administrators,

or

Internet based services. This mode of connecting an NMS host has security consequences: All systems and processes connected to this implicitly trusted interface have access to all autonomic nodes on the entire ACP, without further authentication. Thus, this connection must be physically controlled.

The non-autonomic NMS host must be routed in the ACP. This involves two parts: 1) the NMS host must point default to the AN device for the ULA prefix used inside the ACP, and 2) the prefix used between AN

node and NMS host must be announced into the ACP, and distributed there.

The document "Autonomic Network Stable Connectivity" [[I-D.ietf-anima-stable-connectivity](#)] explains in more detail how the ACP can be integrated in a mixed NOC environment.

### **6.2. ACP through Non-Autonomic L3 Clouds**

Not all devices in a network may be autonomic. If non-autonomic Layer-2 devices are between autonomic nodes, the communications described in this document should work, since it is IP based. However, non-autonomic Layer-3 devices do not forward link local autonomic messages, and thus break the Autonomic Control Plane.

One workaround is to manually configure IP tunnels between autonomic nodes across a non-autonomic Layer-3 cloud. The tunnels are represented on each autonomic node as virtual interfaces, and all autonomic transactions work across such tunnels.



Such manually configured tunnels are less "indestructible" than an automatically created ACP based on link local addressing, since they depend on correct data plane operations, such as routing and addressing.

## 7. Self-Healing Properties

The ACP is self-healing:

- o New neighbors will automatically join the ACP after successful validation and will become reachable using their unique ULA address across the ACP.
- o When any changes happen in the topology, the routing protocol used in the ACP will automatically adapt to the changes and will continue to provide reachability to all devices.
- o If an existing device gets revoked, it will automatically be denied access to the ACP as its domain certificate will be validated against a Certificate Revocation List during authentication. Since the revocation check is only done at the establishment of a new security association, existing ones are not automatically torn down. If an immediate disconnect is required, existing sessions to a freshly revoked device can be re-set.

The ACP can also sustain network partitions and mergers.

Practically

all ACP operations are link local, where a network partition has no impact. Devices authenticate each other using the domain certificates to establish the ACP locally. Addressing inside the

ACP

remains unchanged, and the routing protocol inside both parts of the ACP will lead to two working (although partitioned) ACPs.

There are few central dependencies: A certificate revocation list (CRL) may not be available during a network partition; a suitable policy to not immediately disconnect neighbors when no CRL is available can address this issue. Also, a registrar or Certificate Authority might not be available during a partition. This may delay renewal of certificates that are to expire in the future, and it may prevent the enrolment of new devices during the partition.

After a network partition, a re-merge will just establish the previous status, certificates can be renewed, the CRL is available, and new devices can be enrolled everywhere. Since all devices use the same trust anchor, a re-merge will be smooth.

Merging two networks with different trust anchors requires the trust anchors to mutually trust each other (for example, by cross-signing).

Behringer, et al.  
23]

Expires May 4, 2017

[Page

As long as the domain names are different, the addressing will not overlap (see [Section 5.8](#)).

## **8. Self-Protection Properties**

As explained in [Section 5](#), the ACP is based on secure channels built between devices that have mutually authenticated each other with their domain certificates. The channels themselves are protected using standard encryption technologies like DTLS or IPsec which provide additional authentication during channel establishment, data integrity and data confidentiality protection of data inside the ACP and in addition, provide replay protection.

An attacker will therefore not be able to join the ACP unless having a valid domain certificate, also packet injection and sniffing traffic will not be possible due to the security provided by the encryption protocol.

The remaining attack vector would be to attack the underlying AN protocols themselves, either via directed attacks or by denial-of-service attacks. However, as the ACP is built using link-local IPv6 address, remote attacks are impossible. The ULA addresses are only reachable inside the ACP context, therefore unreachable from the data plane. Also, the ACP protocols should be implemented to be attack resistant and not consume unnecessary resources even while under attack.

## **9. The Administrator View**

An ACP is self-forming, self-managing and self-protecting, therefore has minimal dependencies on the administrator of the network. Specifically, since it is independent of configuration, there is no scope for configuration errors on the ACP itself. The administrator may have the option to enable or disable the entire approach, but detailed configuration is not possible. This means that the ACP must not be reflected in the running configuration of devices, except a possible on/off switch.

While configuration is not possible, an administrator must have full visibility of the ACP and all its parameters, to be able to do trouble-shooting. Therefore, an ACP must support all show and debug options, as for any other network function. Specifically, a network management system or controller must be able to discover the ACP, and monitor its health. This visibility of ACP operations must clearly be separated from visibility of data plane so automated systems will never have to deal with ACP aspect unless they explicitly desire to do so.





Since an ACP is self-protecting, a device not supporting the ACP, or without a valid domain certificate cannot connect to it. This means that by default a traditional controller or network management system cannot connect to an ACP. See [Section 6.1](#) for more details on how to connect an NMS host into the ACP.

**10. Security Considerations**

An ACP is self-protecting and there is no need to apply configuration to make it secure. Its security therefore does not depend on configuration.

However, the security of the ACP depends on a number of other factors:

- o The usage of domain certificates depends on a valid supporting PKI infrastructure. If the chain of trust of this PKI infrastructure is compromised, the security of the ACP is also compromised. This is typically under the control of the network administrator.
- o Security can be compromised by implementation errors (bugs), as in all products.

Fundamentally, security depends on correct operation, implementation and architecture. Autonomic approaches such as the ACP largely eliminate the dependency on correct operation; implementation and architectural mistakes are still possible, as in all networking technologies.

**11. IANA Considerations**

[Section 5.5.3](#) describes ACP over dTLS, which requires a well-known UDP port. We request IANA to assign this UDP port for 'ACP over dTLS'.

[Section 5.5.4](#) describes an option for the channel negotiation, the 'ACP channel type'. We request IANA to create a registry for 'ACP channel type'.

The ACP channel type is a 8-bit unsigned integer. This document only assigns the first value.

Number	Channel Type	RFC
0	GRE tunnel protected with	this document

| IPsec transport mode |  
1-255 | reserved for future channel types |

Behringer, et al.  
25]

Expires May 4, 2017

[Page

[Section 5.8.2](#) describes a 'type' field in the base addressing scheme.

We request IANA to create a registry for the 'ACP addressing scheme type'. The initial value and definition will be determined in a later version of this document.

## **12. Acknowledgements**

This work originated from an Autonomic Networking project at Cisco Systems, which started in early 2010. Many people contributed to this project and the idea of the Autonomic Control Plane, amongst which (in alphabetical order): Ignas Bagdonas, Parag Bhide, Balaji BL, Alex Clemm, Yves Hertoghs, Bruno Klauser, Max Pritikin, Ravi Kumar Vadapalli.

Further input and suggestions were received from: Rene Struik, Brian Carpenter, Benoit Claise.

## **13. Change log [RFC Editor: Please remove]**

### **13.1. Initial version**

First version of this document: [draft-behringer-autonomic-control-plane](#)

### **13.2. [draft-behringer-anima-autonomic-control-plane-00](#)**

Initial version of the anima document; only minor edits.

### **13.3. [draft-behringer-anima-autonomic-control-plane-01](#)**

- o Clarified that the ACP should be based on, and support only IPv6.
- o Clarified in intro that ACP is for both, between devices, as well as for access from a central entity, such as an NMS.
- o Added a section on how to connect an NMS system.
- o Clarified the hop-by-hop crypto nature of the ACP.
- o Added several references to GDNP as a candidate protocol.
- o Added a discussion on network split and merge. Although, this should probably go into the certificate management story longer term.



#### [13.4. draft-behringer-anima-autonomic-control-plane-02](#)

Addresses (numerous) comments from Brian Carpenter. See mailing list

for details. The most important changes are:

- o Introduced a new section "overview", to ease the understanding of the approach.
- o Merged the previous "problem statement" and "use case" sections into a mostly re-written "use cases" section, since they were overlapping.
- o Clarified the relationship with [draft-ietf-anima-stable-connectivity](#)

#### [13.5. draft-behringer-anima-autonomic-control-plane-03](#)

- o Took out requirement for IPv6 --> that's in the reference doc.
- o Added requirement section.
- o Changed focus: more focus on autonomic functions, not only virtual out of band. This goes a bit throughout the document, starting with a changed abstract and intro.

#### [13.6. draft-ietf-anima-autonomic-control-plane-00](#)

No changes; re-submitted as WG document.

#### [13.7. draft-ietf-anima-autonomic-control-plane-01](#)

- o Added some paragraphs in addressing section on "why IPv6 only", to reflect the discussion on the list.
- o Moved the data-plane ACP out of the main document, into an appendix. The focus is now the virtually separated ACP, since it has significant advantages, and isn't much harder to do.
- o Changed the self-creation algorithm: Part of the initial steps go into the reference document. This document now assumes an adjacency table, and domain certificate. How those get onto the device is outside scope for this document.
- o Created a new [section 6](#) "workarounds for non-autonomic nodes", and put the previous controller section (5.9) into this new section. Now, [section 5](#) is "autonomic only", and [section 6](#) explains what to do with non-autonomic stuff. Much cleaner now.

Behringer, et al.  
27]

Expires May 4, 2017

[Page

- o Added an appendix explaining the choice of RPL as a routing protocol.
- o Formalised the creation process a bit more. Now, we create a "candidate peer list" from the adjacency table, and form the ACP with those candidates. Also it explains now better that policy (Intent) can influence the peer selection. ([section 4](#) and 5)
- o Introduce a section for the capability negotiation protocol ([section 7](#)). This needs to be worked out in more detail. This will likely be based on GRASP.
- o Introduce a new parameter: ACP tunnel type. And defines it in the IANA considerations section. Suggest GRE protected with IPSec transport mode as the default tunnel type.
- o Updated links, lots of small edits.

#### **13.8. [draft-ietf-anima-autonomic-control-plane-02](#)**

- o Added explicitly text for the ACP channel negotiation.
- o Merged [draft-behringer-anima-autonomic-addressing-02](#) into this document, as suggested by WG chairs.

#### **13.9. [draft-ietf-anima-autonomic-control-plane-03](#)**

- o Changed Neighbor discovery protocol from GRASP to mDNS.  
Bootstrap  
protocol team decided to go with mDNS to discover bootstrap  
proxy,  
and ACP should be consistent with this. Reasons to go with mDNS  
in bootstrap were a) Bootstrap should be reuseable also outside  
of  
full anima solutions and introduce as few as possible new  
elements. mDNS was considered well-known and very-likely even  
pre-  
existing in low-end devices (IoT). b) Using GRASP both for the  
insecure neighbor discovery and secure ACP operations raises  
the  
risk of introducing security issues through implementation  
issues/  
non-isolation between those two instances of GRASP.
- o Shortened the section on GRASP instances, because with mDNS being  
used for discovery, there is no insecure GRASP session any  
longer,  
simplifying the GRASP considerations.
- o Added certificate requirements for ANIMA in [section 5.1.1](#),  
specifically how the ANIMA information is encoded in

subjectAltName.

- o Deleted the appendix on "ACP without separation", as originally planned, and the paragraph in the main text referring to it.

Behringer, et al.  
28]

Expires May 4, 2017

[Page



- o Deleted one sub-addressing scheme, focusing on a single scheme now.
- o Included information on how ANIMA information must be encoded in the domain certificate in [Section 5.1](#).
- o Editorial changes, updated draft references, etc.

#### **13.10. [draft-ietf-anima-autonomic-control-plane-04](#)**

Changed discovery of ACP neighbor back from mDNS to GRASP after revisiting the L2 problem. Described problem in discovery section itself to justify. Added text to explain how ACP discovery relates to BRSKY (bootstrap) discovery and pointed to Michael Richardsons draft detailing it. Removed appendix section that contained the original explanations why GRASP would be useful (current text is meant to be better).

#### **14. References**

[I-D.ietf-anima-bootstrapping-keyinfra]

Pritikin, M., Richardson, M., Behringer, M., Bjarnason, S., and K. Watsen, "Bootstrapping Remote Secure Key Infrastructures (BRSKI)", [draft-ietf-anima-bootstrapping-keyinfra-04](#) (work in progress), October 2016.

[I-D.ietf-anima-grasp]

Bormann, C., Carpenter, B., and B. Liu, "A Generic Autonomic Signaling Protocol (GRASP)", [draft-ietf-anima-grasp-08](#) (work in progress), October 2016.

[I-D.ietf-anima-reference-model]

Behringer, M., Carpenter, B., Eckert, T., Ciavaglia, L., Pierre, P., Liu, B., Nobre, J., and J. Strassner, "A Reference Model for Autonomic Networking", [draft-ietf-anima-reference-model-02](#) (work in progress), July 2016.

[I-D.ietf-anima-stable-connectivity]

Eckert, T. and M. Behringer, "Using Autonomic Control Plane for Stable Connectivity of Network OAM", [draft-ietf-anima-stable-connectivity-01](#) (work in progress), July 2016.

[I-D.richardson-anima-6join-discovery]

Richardson, M., "GRASP discovery of Registrar by Join Assistant", [draft-richardson-anima-6join-discovery-00](#) (work in progress), October 2016.



- [RFC4122] Leach, P., Mealling, M., and R. Salz, "A Universally Unique IDentifier (UUID) URN Namespace", [RFC 4122](#), DOI 10.17487/RFC4122, July 2005, <<http://www.rfc-editor.org/info/rfc4122>>.
- [RFC4193] Hinden, R. and B. Haberman, "Unique Local IPv6 Unicast Addresses", [RFC 4193](#), DOI 10.17487/RFC4193, October 2005, <<http://www.rfc-editor.org/info/rfc4193>>.
- [RFC5082] Gill, V., Heasley, J., Meyer, D., Savola, P., Ed., and C. Pignataro, "The Generalized TTL Security Mechanism (GTSM)", [RFC 5082](#), DOI 10.17487/RFC5082, October 2007, <<http://www.rfc-editor.org/info/rfc5082>>.
- [RFC5280] Cooper, D., Santesson, S., Farrell, S., Boeyen, S., Housley, R., and W. Polk, "Internet X.509 Public Key Infrastructure Certificate and Certificate Revocation List (CRL) Profile", [RFC 5280](#), DOI 10.17487/RFC5280, May 2008, <<http://www.rfc-editor.org/info/rfc5280>>.
- [RFC5952] Kawamura, S. and M. Kawashima, "A Recommendation for IPv6 Address Text Representation", [RFC 5952](#), DOI 10.17487/RFC5952, August 2010, <<http://www.rfc-editor.org/info/rfc5952>>.
- [RFC6347] Rescorla, E. and N. Modadugu, "Datagram Transport Layer Security Version 1.2", [RFC 6347](#), DOI 10.17487/RFC6347, January 2012, <<http://www.rfc-editor.org/info/rfc6347>>.
- [RFC6550] Winter, T., Ed., Thubert, P., Ed., Brandt, A., Hui, J., Kelsey, R., Levis, P., Pister, K., Struik, R., Vasseur, JP., and R. Alexander, "RPL: IPv6 Routing Protocol for Low-Power and Lossy Networks", [RFC 6550](#), DOI 10.17487/RFC6550, March 2012, <<http://www.rfc-editor.org/info/rfc6550>>.
- [RFC6762] Cheshire, S. and M. Krochmal, "Multicast DNS", [RFC 6762](#), DOI 10.17487/RFC6762, February 2013, <<http://www.rfc-editor.org/info/rfc6762>>.
- [RFC6763] Cheshire, S. and M. Krochmal, "DNS-Based Service Discovery", [RFC 6763](#), DOI 10.17487/RFC6763, February 2013, <<http://www.rfc-editor.org/info/rfc6763>>.
- [RFC7404] Behringer, M. and E. Vyncke, "Using Only Link-Local Addressing inside an IPv6 Network", [RFC 7404](#), DOI 10.17487/RFC7404, November 2014, <<http://www.rfc-editor.org/info/rfc7404>>.



[RFC7575] Behringer, M., Pritikin, M., Bjarnason, S., Clemm, A., Carpenter, B., Jiang, S., and L. Ciavaglia, "Autonomic Networking: Definitions and Design Goals", [RFC 7575](#), DOI 10.17487/RFC7575, June 2015, <<http://www.rfc-editor.org/info/rfc7575>>.

[RFC7576] Jiang, S., Carpenter, B., and M. Behringer, "General Gap Analysis for Autonomic Networking", [RFC 7576](#), DOI 10.17487/RFC7576, June 2015, <<http://www.rfc-editor.org/info/rfc7576>>.

## [Appendix A](#). Background on the choice of routing protocol

In a pre-standard implementation, the "IPv6 Routing Protocol for Low-

Power and Lossy Networks (RPL, [[RFC6550](#)]) was chosen. This Appendix explains the reasoning behind that decision.

Requirements for routing in the ACP are:

- o Self-management: The ACP must build automatically, without human intervention. Therefore routing protocol must also work completely automatically. RPL is a simple, self-managing protocol, which does not require zones or areas; it is also self-configuring, since configuration is carried as part of the protocol (see [Section 6.7.6 of \[RFC6550\]](#)).
- o Scale: The ACP builds over an entire domain, which could be a large enterprise or service provider network. The routing protocol must therefore support domains of 100,000 nodes or more, ideally without the need for zoning or separation into areas.

RPL

has this scale property. This is based on extensive use of default routing. RPL also has other scalability improvements, such as selecting only a subset of peers instead of all possible ones, and trickle support for information synchronisation.

- o Low resource consumption: The ACP supports traditional network infrastructure, thus runs in addition to traditional protocols. The ACP, and specifically the routing protocol must have low resource consumption both in terms of memory and CPU

requirements.

Specifically, at edge nodes, where memory and CPU are scarce, consumption should be minimal. RPL builds a destination-oriented directed acyclic graph (DODAG), where the main resource consumption is at the root of the DODAG. The closer to the edge of the network, the less state needs to be maintained. This adapts nicely to the typical network design. Also, all changes below a common parent node are kept below that parent node.



- o Support for unstructured address space: In the Autonomic Networking Infrastructure, node addresses are identifiers, and may not be assigned in a topological way. Also, nodes may move topologically, without changing their address. Therefore, the routing protocol must support completely unstructured address space. RPL is specifically made for mobile ad-hoc networks, with no assumptions on topologically aligned addressing.
- o Modularity: To keep the initial implementation small, yet allow later for more complex methods, it is highly desirable that the routing protocol has a simple base functionality, but can import new functional modules if needed. RPL has this property with the concept of "objective function", which is a plugin to modify routing behaviour.
- o Extensibility: Since the Autonomic Networking Infrastructure is a new concept, it is likely that changes in the way of operation will happen over time. RPL allows for new objective functions to be introduced later, which allow changes to the way the routing protocol creates the DAGs.
- o Multi-topology support: It may become necessary in the future to support more than one DODAG for different purposes, using different objective functions. RPL allow for the creation of several parallel DODAGs, should this be required. This could be used to create different topologies to reach different roots.
- o No need for path optimisation: RPL does not necessarily compute the optimal path between any two nodes. However, the ACP does not require this today, since it carries mainly non-delay-sensitive feedback loops. It is possible that different optimisation schemes become necessary in the future, but RPL can be expanded (see point "Extensibility" above).

#### Authors' Addresses

Michael H. Behringer (editor)  
Cisco Systems  
Building D, 45 Allée des Ormes  
Mougins 06250  
France

Email: mbehring@cisco.com

Toerless Eckert

Email: tte+ietf@cs.fau.de





Internet-Draft  
2016

An Autonomic Control Plane

October

Steinthor Bjarnason  
Arbor Networks  
2727 South State Street, Suite 200  
Ann Arbor MI 48104  
United States

Email: [sbjarnason@arbor.net](mailto:sbjarnason@arbor.net)

