

AVT  
Internet-Draft  
Intended status: Standards Track  
Expires: February 15, 2009

R. Even  
REL  
P. Luthi  
Tandberg  
August 14, 2008

**RTP Payload Format for ITU-T Recommendation G.722.1  
draft-ietf-avt-rfc3047-bis-07.txt**

Status of this Memo

By submitting this Internet-Draft, each author represents that any applicable patent or other IPR claims of which he or she is aware have been or will be disclosed, and any of which he or she becomes aware will be disclosed, in accordance with [Section 6 of BCP 79](#).

Internet-Drafts are working documents of the Internet Engineering Task Force (IETF), its areas, and its working groups. Note that other groups may also distribute working documents as Internet-Drafts.

Internet-Drafts are draft documents valid for a maximum of six months and may be updated, replaced, or obsoleted by other documents at any time. It is inappropriate to use Internet-Drafts as reference material or to cite them other than as "work in progress."

The list of current Internet-Drafts can be accessed at <http://www.ietf.org/ietf/1id-abstracts.txt>.

The list of Internet-Draft Shadow Directories can be accessed at <http://www.ietf.org/shadow.html>.

This Internet-Draft will expire on February 15, 2009.

Copyright Notice

Copyright (C) The IETF Trust (2008).

## Abstract

International Telecommunication Union (ITU-T) Recommendation G.722.1 is a wide-band audio codec. This document describes the payload format for including G.722.1 generated bit streams within an RTP packet. The document also describes the syntax and semantics of the SDP parameters needed to support G.722.1 audio codec.

## Table of Contents

<a href="#">1.</a>	Introduction . . . . .	<a href="#">3</a>
<a href="#">2.</a>	Terminology . . . . .	<a href="#">4</a>
<a href="#">3.</a>	RTP usage for G.722.1 . . . . .	<a href="#">5</a>
<a href="#">3.1.</a>	RTP G.722.1 Header Fields . . . . .	<a href="#">5</a>
<a href="#">3.2.</a>	RTP payload format for G.722.1 . . . . .	<a href="#">5</a>
<a href="#">3.3.</a>	Multiple G.722.1 frames in a RTP packet . . . . .	<a href="#">7</a>
<a href="#">3.4.</a>	Computing the number of G.722.1 frames . . . . .	<a href="#">7</a>
<a href="#">4.</a>	IANA Considerations . . . . .	<a href="#">8</a>
<a href="#">4.1.</a>	Media Type Registration . . . . .	<a href="#">8</a>
<a href="#">4.1.1.</a>	Registration of media type audio/G7221 . . . . .	<a href="#">8</a>
<a href="#">5.</a>	SDP Parameters . . . . .	<a href="#">10</a>
<a href="#">5.1.</a>	Usage with the SDP Offer Answer Model . . . . .	<a href="#">10</a>
<a href="#">6.</a>	Security Considerations . . . . .	<a href="#">11</a>
<a href="#">7.</a>	Changes from <a href="#">RFC 3047</a> . . . . .	<a href="#">12</a>
<a href="#">8.</a>	Acknowledgements . . . . .	<a href="#">13</a>
<a href="#">9.</a>	RFC editor note . . . . .	<a href="#">14</a>
<a href="#">10.</a>	References . . . . .	<a href="#">15</a>
<a href="#">10.1.</a>	Normative References . . . . .	<a href="#">15</a>
<a href="#">10.2.</a>	Informative References . . . . .	<a href="#">15</a>
	Authors' Addresses . . . . .	<a href="#">16</a>
	Intellectual Property and Copyright Statements . . . . .	<a href="#">17</a>



## **1. Introduction**

ITU-T G.722.1 [[ITU.G7221](#)] is a low complexity coder, it compresses 50 Hz - 14 kHz audio signals into one of the following bit rates, 24 kbit/s, 32 kbit/s or 48 kbit/s.

The coder may be used for speech, music and other types of audio.

Some of the applications for which this coder is suitable are:

- o Real-time communications such as videoconferencing and telephony.
- o Streaming audio
- o Archival and messaging

ITU-T G.722.1 [[ITU.G7221](#)] uses 20 ms frames and a sampling rate clock of 16 kHz or 32kHz. The encoding and decoding algorithm can change the bit rate at any 20ms frame boundary, but no bit rate change notification is provided in-band with the bit stream.

For any given bit rate the number of bits in a frame is a constant. Within this fixed frame, G.722.1 uses variable length coding (e.g. Huffman coding) to represent most of the encoded parameters. All variable length codes are transmitted in order from the left most (most significant - MSB) bit to the right most (least significant - LSB) bit, see [[ITU.G7221](#)] for more details.

The ITU-T standardized bit rates for G.722.1 are 24 kbit/s or 32kbit/s at 16 KHz sample rate, and 24 kbit/s, 32 kbit/s or 48 kbit/s at 32 KHz sample rate. However, the coding algorithm itself has the capability to run at any user specified bit rate (not just 24, 32 and 48 kbit/s) while maintaining an audio bandwidth of 50 Hz to 14 kHz. This rate change is accomplished by a linear scaling of the codec operation, resulting in frames with size in bits equal to 1/50 of the corresponding bit rate.



## **2. Terminology**

The key words "MUST", "MUST NOT", "REQUIRED", "SHALL", "SHALL NOT", "SHOULD", "SHOULD NOT", "RECOMMENDED", "MAY", and "OPTIONAL" in this document are to be interpreted as described in [RFC2119](#) [[RFC2119](#)] and indicate requirement levels for compliant RTP implementations.

### 3. RTP usage for G.722.1

### 3.1. RTP G.722.1 Header Fields

The RTP header is defined in the RTP specification [RFC3550]. This section defines how fields in the RTP header are used.

Payload Type (PT): The assignment of an RTP payload type for this packet format is outside the scope of this document; it is specified by the RTP profile under which this payload format is used, or signaled dynamically out-of-band (e.g., using SDP).

Marker (M) bit: The M bit is set to zero.

Extension (X) bit: Defined by the RTP profile used.

Timestamp: A 32-bit word that corresponds to the sampling instant for the first frame in the RTP packet. The sampling frequency can be 16 KHz or 32 KHz. The RTP timestamp clock frequency of 32 KHz SHOULD be used unless only an RTP stream sampled at 16 KHz is going to be sent.

### 3.2. RTP payload format for G.722.1

The RTP payload for G.722.1 has the format shown in Figure 1. No additional header fields specific to this payload format are required.

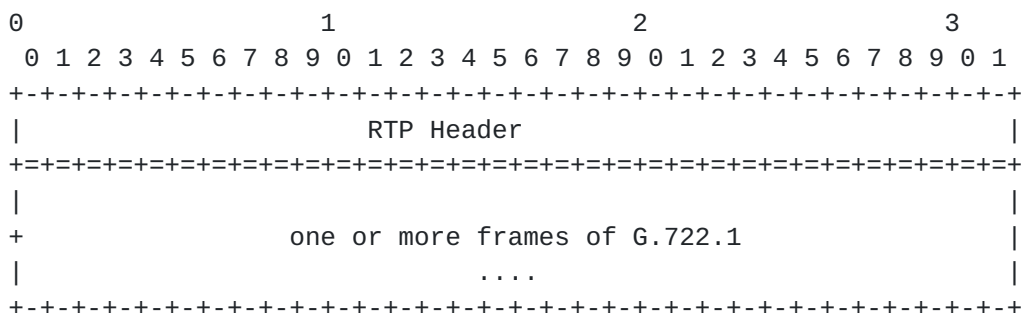


Figure 1: RTP payload for G.722.1

Because bit rate is not signaled in-band, a separate out-of-band method is REQUIRED to indicate the bit rate (see [section 5](#) for an example of signaling bit rate information using SDP). For the payload format specified here, the bit rate MUST remain constant for a particular payload type value. An application MAY switch bit rates and clock rates from packet to packet by defining different payload type value and switching between them.





The use of Huffman coding means that it is not possible to identify the various encoded parameters/fields contained within the bit stream without first completely decoding the entire frame. For the purposes of packetizing the bit stream in RTP, it is only necessary to consider the sequence of bits as output by the G.722.1 encoder, and present the same sequence to the decoder. The payload format described here maintains this sequence.

When operating at 24 kbit/s, 480 bits (60 octets) are produced per frame. When operating at 32 kbit/s, 640 bits (80 octets) are produced per frame. When operating at 48 kbit/s, 960 bits (120 octets) are produced per frame. Thus, all three bit rates allow for octet alignment without the need for padding bits.

Figure 2 illustrates how the G.722.1 bit stream MUST be mapped into an octet aligned RTP payload.

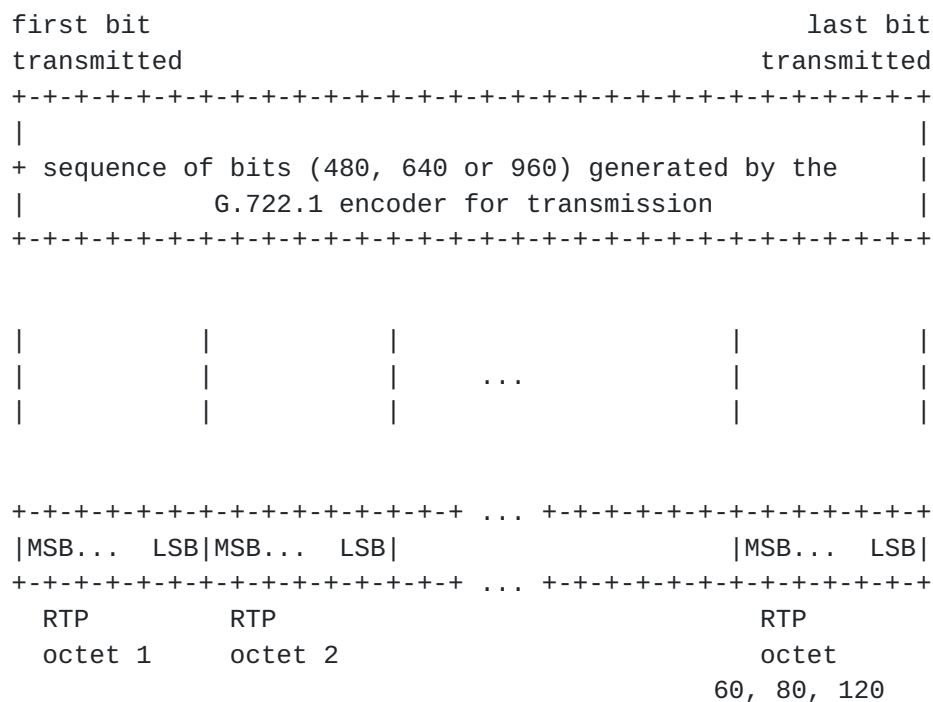


Figure 2: The G.722.1 encoder bit stream is split into a sequence of octets (60, 80 or 120 depending on the bit rate), and each octet is in turn mapped into an RTP octet.

When operating at non-standard rates the payload format MUST follow the guidelines illustrated in Figure 2. It is RECOMMENDED that values in the range 16000 to 48000 be used. Non standard rates MUST have a value that is a multiple of 400 (this maintains octet



alignment and does not then require (undefined) padding bits for each frame if not octet aligned). For example, a bit rate of 16.4 kbit/s will result in a frame of size 328 bits or 41 octets which are mapped into RTP per Figure 2.

### **3.3. Multiple G.722.1 frames in a RTP packet**

A sender may include more than one consecutive G.722.1 frame in a single RTP packet.

Senders have the following additional restrictions:

- o Sender SHOULD NOT include more G.722.1 frames in a single RTP packet than will fit in the MTU of the RTP transport protocol.
- o All frames contained in a single RTP packet MUST be of the same length and sampled at the same clock rate. They MUST have the same bit rate (octets per frame).
- o Frames MUST NOT be split between RTP packets.

It is RECOMMENDED that the number of frames contained within an RTP packet be consistent with the application. For example, in a telephony application where delay is important, then the fewer frames per packet the lower the delay, whereas for a delay insensitive streaming or messaging application, many frames per packet would be acceptable.

### **3.4. Computing the number of G.722.1 frames**

Information describing the number of frames contained in an RTP packet is not transmitted as part of the RTP payload. The only way to determine the number of G.722.1 frames is to count the total number of octets within the RTP packet, and divide the octet count by the number of expected octets per frame. This expected octet per frame count is derived from the bit rate, and is therefore a function of the payload type.



## **4. IANA Considerations**

This document updates the G7221 media type described in [RFC3047](#).

### **4.1. Media Type Registration**

This section describes the media types and names associated with this payload format. The section registers the media types, as per [RFC4288](#) [[RFC4288](#)]

#### **4.1.1. Registration of media type audio/G7221**

Media type name: audio

Media subtype name: G7221

Required parameters:

bitrate: the data rate for the audio bit stream. This parameter is mandatory because the bit rate is not signaled within the G.722.1 bit stream. At the standard G.722.1 bit rates, the value MUST be either 24000 or 32000 at 16 Khz sample rate, and 24000, 32000 or 48000 at 32 Khz sample rate. If using the non-standard bit rates, then it is RECOMMENDED that values in the range 16000 to 48000 be used. Non standard rates MUST have a value that is a multiple of 400 (this maintains octet alignment and does not then require (undefined) padding bits for each frame if not octet aligned).

Optional parameters:

rate: RTP timestamp clock rate, which is equal to the sampling rate. If the parameter is not specified a clock rate of 16 Khz is assumed.

ptime: see [RFC 4566](#). SHOULD be a multiple of 20 msec.

maxptime: see [RFC 4566](#). SHOULD be a multiple of 20 msec.

Encoding considerations:

This media type is framed and binary, see [section 4.8 in](#) [\[RFC4288\]](#).

Security considerations: See [Section 6](#)

Interoperability considerations:



Terminals SHOULD offer a media type at 16 Khz sample rate in order to interoperate with terminals that do not support the new 32 Khz sample rate.

Published specification: RFC yyy [see RFCeditor notes].

Applications which use this media type:

Audio and Video streaming and conferencing applications.

Additional information: none

Person and email address to contact for further information :

Roni Even: [roni.even@polycom.co.il](mailto:roni.even@polycom.co.il)

Intended usage: COMMON

Restrictions on usage:

This media type depends on RTP framing, and hence is only defined for transfer via RTP [[RFC3550](#)]. Transport within other framing protocols is not defined at this time.

Author: Roni Even

Change controller:

IETF Audio/Video Transport working group delegated from the IESG.





## 5. SDP Parameters

The media types audio/G7221 are mapped to fields in the Session Description Protocol (SDP) [[RFC4566](#)] as follows:

- o The media name in the "m=" line of SDP MUST be audio.
- o The encoding name in the "a=rtpmap" line of SDP MUST be G7221 (the media subtype).
- o The clock rate in the "a=rtpmap" line MUST be 16000 or 32000. For backward compatibility if the optional rate parameter is not specified the RTP timestamp clock rate may be based on this parameter.
- o Only one bitrate SHALL be defined (using the "bitrate=" parameter in the a=fmtp line) for each payload type. The optional "rate " parameter may be added using a semicolon as a separator.

### 5.1. Usage with the SDP Offer Answer Model

When offering G.722.1 over RTP using SDP in an Offer/Answer model [[RFC3264](#)] the following considerations are necessary.

The combination of the clock rate in the rtpmap and the bitrate parameter defines the configuration of each payload type. Each configuration intended to be used, MUST be declared.

There are two sampling clock rates defined for G.722.1 in this document. [RFC3047](#) [[RFC3047](#)] supported only the 16 Khz clock rate. Therefore a system that wants to use G.722.1 SHOULD offer a payload type with clock rate of 16000 for backward interoperability.

An example of an offer that includes a 16000 and 32000 clock rate is:

```
m=audio 49000 RTP/AVP 121 122
a=rtpmap:121 G7221/16000
a=fmtp:121 bitrate=24000
a=rtpmap:122 G7221/32000 ; rate=32000
a=fmtp:122 bitrate=48000
```



## **6. Security Considerations**

RTP packets using the payload format defined in this specification are subject to the security considerations discussed in the RTP specification [[RFC3550](#)], and any appropriate RTP profile. This implies that confidentiality of the media streams is achieved by encryption.

A potential denial-of-service threat exists for data encoding using compression techniques that have non-uniform receiver-end computational load. The attacker can inject pathological datagrams into the stream which are complex to decode and cause the receiver to be overloaded. However, this encoding does not exhibit any significant non-uniformity.



## **7. Changes from [RFC 3047](#)**

The new draft obsoletes [RFC3047](#) adding the support for the Superwideband (14 Khz) audio support defined in annex C of the new revision of ITU-T G.722.1.

Other changes

Update the text to be in line with the current rules for RFC and with media type registration conforming to [RFC 4288](#).

## **8. Acknowledgements**

The authors would like to thank Tom Taylor for his contribution to this work.

**9. RFC editor note**

Please replace RFC yyy giving the number assigned to this RFC.

## **10. References**

### **10.1. Normative References**

- [ITU.G7221] International Telecommunications Union, "Low-complexity coding at 24 and 32 kbit/s for hands-free operation in systems with low frame loss", ITU-T Recommendation G.722.1, 2005.
- [RFC2119] Bradner, S., "Key words for use in RFCs to Indicate Requirement Levels", [BCP 14](#), [RFC 2119](#), March 1997.
- [RFC3264] Rosenberg, J. and H. Schulzrinne, "An Offer/Answer Model with Session Description Protocol (SDP)", [RFC 3264](#), June 2002.
- [RFC3550] Schulzrinne, H., Casner, S., Frederick, R., and V. Jacobson, "RTP: A Transport Protocol for Real-Time Applications", STD 64, [RFC 3550](#), July 2003.
- [RFC4566] Handley, M., Jacobson, V., and C. Perkins, "SDP: Session Description Protocol", [RFC 4566](#), July 2006.

### **10.2. Informative References**

- [RFC3047] Luthi, P., "RTP Payload Format for ITU-T Recommendation G.722.1", [RFC 3047](#), January 2001.
- [RFC4288] Freed, N. and J. Klensin, "Media Type Specifications and Registration Procedures", [BCP 13](#), [RFC 4288](#), December 2005.





Authors' Addresses

Roni Even  
REL  
94 Derech Em Hamoshavot  
Petach Tikva 49130  
Israel

Email: [ron.even.tlv@gmail.com](mailto:ron.even.tlv@gmail.com)

Patrick Luthi  
Tandberg  
Philip Pedersens vei 22  
Lysaker 1366  
Norway

Email: [patrick.luthi@tandberg.no](mailto:patrick.luthi@tandberg.no)



## Full Copyright Statement

Copyright (C) The IETF Trust (2008).

This document is subject to the rights, licenses and restrictions contained in [BCP 78](#), and except as set forth therein, the authors retain all their rights.

This document and the information contained herein are provided on an "AS IS" basis and THE CONTRIBUTOR, THE ORGANIZATION HE/SHE REPRESENTS OR IS SPONSORED BY (IF ANY), THE INTERNET SOCIETY, THE IETF TRUST AND THE INTERNET ENGINEERING TASK FORCE DISCLAIM ALL WARRANTIES, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO ANY WARRANTY THAT THE USE OF THE INFORMATION HEREIN WILL NOT INFRINGE ANY RIGHTS OR ANY IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE.

## Intellectual Property

The IETF takes no position regarding the validity or scope of any Intellectual Property Rights or other rights that might be claimed to pertain to the implementation or use of the technology described in this document or the extent to which any license under such rights might or might not be available; nor does it represent that it has made any independent effort to identify any such rights. Information on the procedures with respect to rights in RFC documents can be found in [BCP 78](#) and [BCP 79](#).

Copies of IPR disclosures made to the IETF Secretariat and any assurances of licenses to be made available, or the result of an attempt made to obtain a general license or permission for the use of such proprietary rights by implementers or users of this specification can be obtained from the IETF on-line IPR repository at <http://www.ietf.org/ipr>.

The IETF invites any interested party to bring to its attention any copyrights, patents or patent applications, or other proprietary rights that may cover technology that may be required to implement this standard. Please address the information to the IETF at [ietf-ipr@ietf.org](mailto:ietf-ipr@ietf.org).

## Acknowledgment

Funding for the RFC Editor function is provided by the IETF Administrative Support Activity (IASA).

