

IETF RMCAT Working Group  
Internet-Draft  
Intended status: Standards Track  
Expires: January 16, 2019

Z. Sarker  
Ericsson AB  
C. Perkins  
University of Glasgow  
V. Singh  
callstats.io  
M. Ramalho  
Cisco Systems  
July 15, 2018

RTP Control Protocol (RTCP) Feedback for Congestion Control  
draft-ietf-avtcore-cc-feedback-message-02

## Abstract

This document describes an RTCP feedback message intended to enable congestion control for interactive real-time traffic using RTP. The feedback message is designed for use with a sender-based congestion control algorithm, in which the receiver of an RTP flow sends RTCP feedback packets to the sender containing the information the sender needs to perform congestion control.

## Status of This Memo

This Internet-Draft is submitted in full conformance with the provisions of [BCP 78](#) and [BCP 79](#).

Internet-Drafts are working documents of the Internet Engineering Task Force (IETF). Note that other groups may also distribute working documents as Internet-Drafts. The list of current Internet-Drafts is at <http://datatracker.ietf.org/drafts/current/>.

Internet-Drafts are draft documents valid for a maximum of six months and may be updated, replaced, or obsoleted by other documents at any time. It is inappropriate to use Internet-Drafts as reference material or to cite them other than as "work in progress."

This Internet-Draft will expire on January 16, 2019.

## Copyright Notice

Copyright (c) 2018 IETF Trust and the persons identified as the document authors. All rights reserved.

This document is subject to [BCP 78](#) and the IETF Trust's Legal Provisions Relating to IETF Documents (<http://trustee.ietf.org/license-info>) in effect on the date of

publication of this document. Please review these documents carefully, as they describe your rights and restrictions with respect to this document. Code Components extracted from this document must include Simplified BSD License text as described in Section 4.e of the Trust Legal Provisions and are provided without warranty as described in the Simplified BSD License.

## Table of Contents

<a href="#">1.</a>	Introduction . . . . .	<a href="#">2</a>
<a href="#">2.</a>	Terminology . . . . .	<a href="#">3</a>
<a href="#">3.</a>	RTCP Feedback for Congestion Control . . . . .	<a href="#">3</a>
<a href="#">3.1.</a>	RTCP Congestion Control Feedback Report . . . . .	<a href="#">4</a>
<a href="#">4.</a>	Feedback Frequency and Overhead . . . . .	<a href="#">6</a>
<a href="#">5.</a>	SDP Signalling . . . . .	<a href="#">7</a>
<a href="#">6.</a>	Design Rationale . . . . .	<a href="#">7</a>
<a href="#">7.</a>	Acknowledgements . . . . .	<a href="#">8</a>
<a href="#">8.</a>	IANA Considerations . . . . .	<a href="#">8</a>
<a href="#">9.</a>	Security Considerations . . . . .	<a href="#">9</a>
<a href="#">10.</a>	References . . . . .	<a href="#">9</a>
<a href="#">10.1.</a>	Normative References . . . . .	<a href="#">9</a>
<a href="#">10.2.</a>	Informative References . . . . .	<a href="#">11</a>
	Authors' Addresses . . . . .	<a href="#">11</a>

## [1.](#) Introduction

For interactive real-time traffic, such as video conferencing flows, the typical protocol choice is the Real-time Transport Protocol (RTP) running over the User Datagram Protocol (UDP). RTP does not provide any guarantee of Quality of Service (QoS), reliability, or timely delivery, and expects the underlying transport protocol to do so. UDP alone certainly does not meet that expectation. However, the RTP Control Protocol (RTCP) provides a mechanism by which the receiver of an RTP flow can periodically send transport and media quality metrics to the sender of that RTP flow. This information can be used by the sender to perform congestion control. In the absence of standardized messages for this purpose, designers of congestion control algorithms have developed proprietary RTCP messages that convey only those parameters needed for their respective designs. As a direct result, the different congestion control (i.e., rate adaptation) designs are not interoperable. To enable algorithm evolution as well as interoperability across designs (e.g., different rate adaptation algorithms), it is highly desirable to have generic congestion

control feedback format.

To help achieve interoperability for unicast RTP congestion control, this memo proposes a common RTCP feedback packet format that can be used by NADA [[I-D.ietf-rmcat-nada](#)], SCReAM [[RFC8298](#)], Google

Congestion Control [[I-D.ietf-rmcat-gcc](#)] and Shared Bottleneck Detection [[RFC8382](#)], and hopefully also by future RTP congestion control algorithms.

## 2. Terminology

The key words "MUST", "MUST NOT", "REQUIRED", "SHALL", "SHALL NOT", "SHOULD", "SHOULD NOT", "RECOMMENDED", "MAY", and "OPTIONAL" in this document are to be interpreted as described in [[RFC2119](#)].

In addition the terminology defined in [[RFC3550](#)], [[RFC3551](#)], [[RFC3611](#)], [[RFC4585](#)], and [[RFC5506](#)] applies.

## 3. RTCP Feedback for Congestion Control

Based on an analysis of NADA [[I-D.ietf-rmcat-nada](#)], SCReAM [[RFC8298](#)], Google Congestion Control [[I-D.ietf-rmcat-gcc](#)] and Shared Bottleneck Detection [[RFC8382](#)], the following per-RTP packet congestion control feedback information has been determined to be necessary:

- o RTP sequence number: The receiver of an RTP flow needs to feedback the sequence numbers of the received RTP packets to the sender, so the sender can determine which packets were received and which were lost. Packet loss is used as an indication of congestion by many congestion control algorithms.
- o Packet Arrival Time: The receiver of an RTP flow needs to feedback the arrival time of each RTP packet to the sender. Packet delay and/or delay variation (jitter) is used as a congestion signal by some congestion control algorithms.
- o Packet Explicit Congestion Notification (ECN) Marking: If ECN [[RFC3168](#)], [[RFC6679](#)] is used, it is necessary to feedback the 2-bit ECN mark in received RTP packets, indicating for each RTP packet whether it is marked not-ECT, ECT(0), ECT(1), or ECN-CE. If the path used by the RTP traffic is ECN capable the sender can

use Congestion Experienced (ECN-CE) marking information as a congestion control signal.

Every RTP flow is identified by its Synchronization Source (SSRC) identifier. Accordingly, the RTCP feedback format needs to group its reports by SSRC, sending one report block per received SSRC.


As a practical matter, we note that host operating system (OS) process interruptions can occur at inopportune times. Accordingly, recording RTP packet send times at the sender, and the corresponding RTP packet arrival times at the receiver, needs to be done with deliberate care. This is because the time duration of host OS

interruptions can be significant relative to the precision desired in the one-way delay estimates. Specifically, the send time needs to be recorded at the last opportunity prior to transmitting the RTP packet at the sender, and the arrival time at the receiver needs to be recorded at the earliest available opportunity.

### 3.1. RTCP Congestion Control Feedback Report

Congestion control feedback can be sent as part of a regular scheduled RTCP report, or in an RTP/AVPF early feedback packet. If sent as early feedback, congestion control feedback MAY be sent in a non-compound RTCP packet [[RFC5506](#)] if the RTP/AVPF profile [[RFC4585](#)] or the RTP/SAVPF profile [[RFC5124](#)] is used.

Irrespective of how it is transported, the congestion control feedback is sent as a Transport Layer Feedback Message (RTCP packet type 205). The format of this RTCP packet is shown in Figure 1:

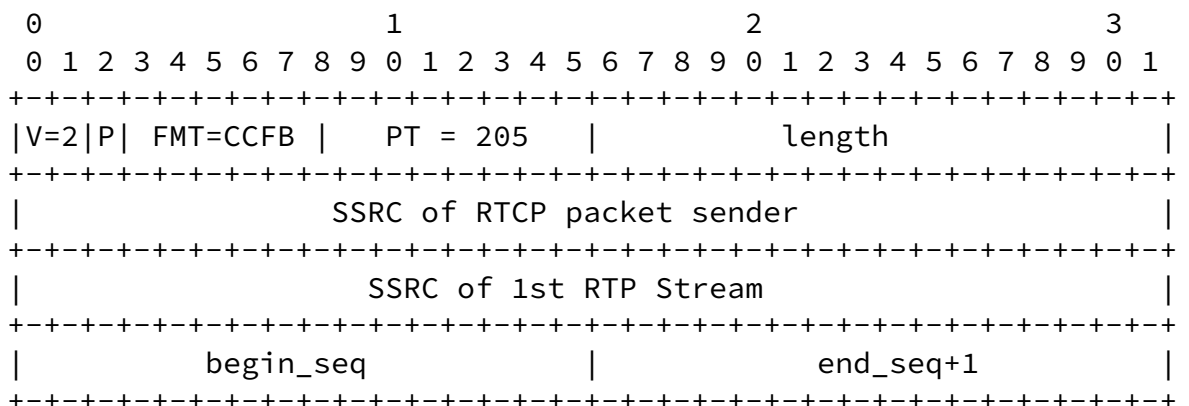

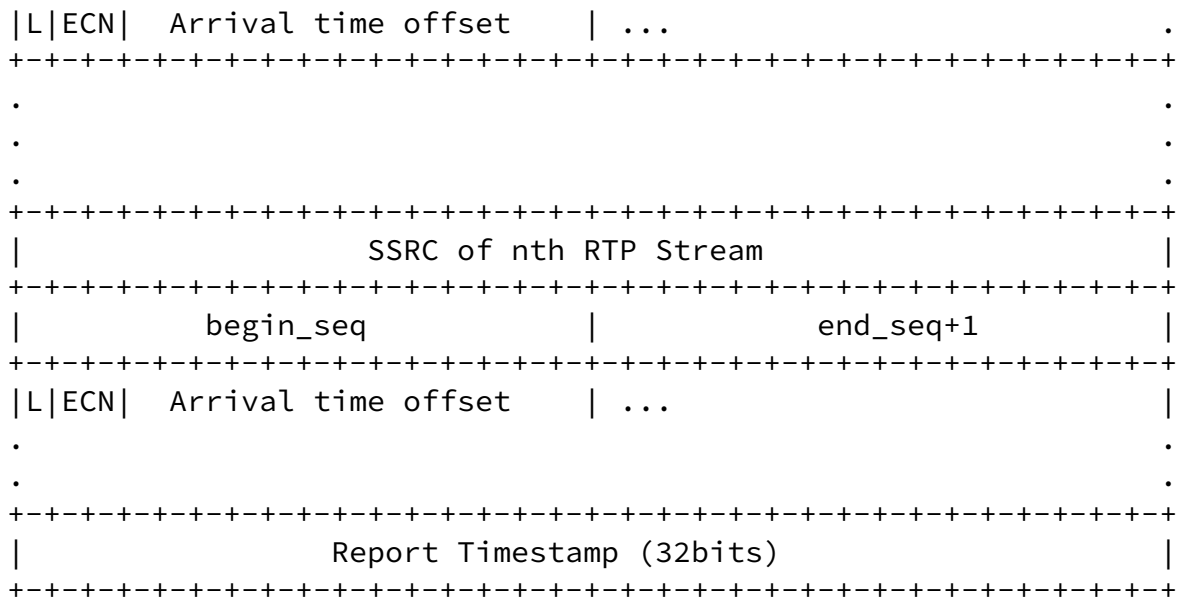


Figure 1: RTCP Congestion Control Feedback Packet Format

The first eight octets comprise a standard RTCP header, with PT=205 and FMT=CCFB indicating that this is a congestion control feedback packet, and with the SSRC set to that of the sender of the RTCP packet. (NOTE TO RFC EDITOR: please replace CCFB here and in the above diagram with the IANA assigned RTCP feedback packet type, and remove this note)

[Section 6.1 of \[RFC4585\]](#) requires the RTCP header to be followed by the SSRC of the RTP flow being reported upon. Accordingly, the RTCP header is followed by a report block for each SSRC from which RTP packets have been received, followed by a Report Timestamp.

Each report block begins with the SSRC of the received RTP Stream on which it is reporting. Following this, the report block contains a 16-bit packet metric block for each RTP packet with sequence number, seq, in the range  $begin\_seq \leq seq < end\_seq+1$  (calculated using arithmetic modulo 65535 to account for possible sequence number wrap-around). If the number of 16-bit packet metric blocks included in the report block is not a multiple of two, then 16 bits of zero padding MUST be added after the last packet metric block, to align the end of the packet metric blocks with the next 32 bit boundary. Each report block MUST NOT include more than 16384 packet metric

blocks (i.e., it MUST NOT report on more than one quarter of the sequence number space in a single report).

The contents of each 16-bit packet metric block comprises the L, ECN, and AT0 fields are as follows:

- o L (1 bit): is a boolean to indicate if the packet was received. 0 represents that the packet was not yet received and all the subsequent bits (ECN and AT0) are also set to 0. 1 represent the packet was received and the subsequent bits in the block need to be parsed.
- o ECN (2 bits): is the echoed ECN mark of the packet. These are set to 00 if not received, or if ECN is not used.
- o Arrival time offset (AT0, 13 bits): is the arrival time of the RTP packet at the receiver. It is measured as an offset from the time at which the RTCP congestion control feedback report packet is sent. The arrival time offset is calculated by subtracting the reception time of the RTP packet denoted by this 16 bit packet metric block from the Report Timestamp (RTS) field of the RTCP congestion control feedback report packet in which the packet metric report block is contained. The arrival time offset is measured in units of 1/1024 seconds (this unit is chosen to give exact offsets from the RTS field). If the measured value is greater than 8189/1024 seconds (the value that would be coded as

0x1FFD), the value 0x1FFE MUST be reported to indicate an over-range positive measurement. If the measurement is unavailable, the value 0x1FFF MUST be reported.

The RTCP congestion control feedback report packet concludes with the Report Timestamp field (RTS, 32 bits). This represents the time instant when the report packet was generated. The value of RTS field is derived from the same wallclock used to generate the NTP timestamp field in RTCP Sender Report (SR) packets. It is formatted as the middle 32 bits of an NTP format timestamp, as described in [Section 4 of \[RFC3550\]](#).

RTCP congestion control feedback packets SHOULD include a report block for each SSRC that is being congestion controlled. The sequence number ranges reported on in consecutive reports for an SSRC

SHOULD be consecutive and SHOULD NOT overlap (i.e., begin\_seq for a report is expected to be one greater, modulo 65535, than end\_seq of the previous report for that SSRC). If overlapping reports are sent, the information in the later report updates that in any previous reports for packets included in both reports (although note that such updated information will likely arrive too late to affect congestion control decisions at the sender). Reports that cover RTP sequence number ranges that are more than 16384 (i.e., one quarter of the sequence number space) ahead of the last end\_seq received from an SSRC, or behind the last begin\_seq received from an SSRC, modulo 65535 to account for wrap-around, SHOULD be ignored. An exception to this occurs if sender has sent RTP packets using more than one quarter of the sequence number space since it last received an RTCP congestion control feedback packet, then a report on recently sent RTP packets ought to be accepted, to allow recovery from report packet loss.

If no packets are received from an SSRC in a reporting interval, a report block MAY be sent with begin\_seq and end\_seq+1 both set to the highest sequence number previously received from that SSRC (or, the report can simply be omitted). The corresponding SR/RR packet will have a non-increased extended highest sequence number received field that will inform the sender that no packets have been received, but it can ease processing to have that information available in the congestion control feedback reports too.

#### 4. Feedback Frequency and Overhead

There is a trade-off between speed and accuracy of reporting, and the overhead of the reports. [[I-D.ietf-rmcat-rtp-cc-feedback](#)] discusses this trade-off, suggests desirable RTCP feedback rates, and provides guidance on how to configure the RTCP bandwidth fraction, etc., to make appropriate use of the reporting block described in this memo.

Specifications for RTP congestion control algorithms can also provide guidance.

It is a general understanding that the congestion control algorithms will work better with more frequent feedback – per packet feedback. However, RTCP bandwidth and transmission rules put some upper limits on how frequently the RTCP feedback messages can be sent from the RTP receiver to the RTP sender. It has been shown

[[I-D.ietf-rmcat-rtp-cc-feedback](#)] that in most cases a per frame feedback is a reasonable assumption on how frequent the RTCP feedback messages can be transmitted. It has also been noted that even if a higher frequency of feedback is desired it is not viable if the feedback messages starts to compete against the RTP traffic on the feedback path during congestion period. Analyzing the feedback interval requirement [[feedback-requirements](#)] it can be seen that the candidate algorithms can perform with a feedback interval range of 50-200ms. A value within this range need to be negotiated at session setup.

## 5. SDP Signalling

A new "ack" feedback parameter, "ccfb", is defined to indicate the use of the RTP Congestion Control feedback packet format defined in [Section 3](#). The ABNF definition of this SDP parameter extension is:

```
rtcp-fb-ack-param = <See Section 4.2 of \[RFC4584\]>
rtcp-fb-ack-param =/ ccfb-par
ccfb-par           = SP "ccfb"
```

The offer/answer rules for these SDP feedback parameters are specified in the RTP/AVPF profile [[RFC4585](#)].

## 6. Design Rationale

The primary function of RTCP SR/RR packets is to report statistics on the reception of RTP packets. The reception report blocks sent in these packets contain information about observed jitter, fractional packet loss, and cumulative packet loss. It was intended that this information could be used to support congestion control algorithms, but experience has shown that it is not sufficient for that purpose. An efficient congestion control algorithm requires more fine grained information on per packet reception quality than is provided by SR/RR packets to react effectively.

The Codec Control Messages for the RTP/AVPF profile [[RFC5104](#)] include a Temporary Maximum Media Bit Rate (TMMBR) message. This is used to convey a temporary maximum bit rate limitation from a receiver of RTP packets to their sender. Even though it was not designed to replace



based congestion control where the session bandwidth is high enough to send frequent TMMBR messages, especially when used with non-compound RTCP packets [[RFC5506](#)]. This approach requires the receiver of the RTP packets to monitor their reception, determine the level of congestion, and recommend a maximum bit rate suitable for current available bandwidth on the path; it also assumes that the RTP sender can/will respect that bit rate. This is the opposite of the sender based congestion control approach suggested in this memo, so TMMBR cannot be used to convey the information needed for a sender based congestion control. TMMBR could, however, be viewed a complementary mechanism that can inform the sender of the receiver's current view of acceptable maximum bit rate.

A number of RTCP eXtended Report (XR) blocks have previously been defined to report details of packet loss, arrival times [[RFC3611](#)], delay [[RFC6843](#)], and ECN marking [[RFC6679](#)]. It is possible to combine several such XR blocks to report the detailed loss, arrival time, and ECN marking marking information needed for effective sender-based congestion control. However, the result has high overhead both in terms of bandwidth and complexity, due to the need to stack multiple reports.

Considering these issues, we believe it appropriate to design a new RTCP feedback mechanism to convey information for sender based congestion control algorithms. The new congestion control feedback RTCP packet described in [Section 3](#) provides such a mechanism.

## [7.](#) Acknowledgements

This document is an outcome of RMCAT design team discussion. We would like to thank all participants specially Sergio Mena, Xiaoqing Zhu, Stefan Holmer, David, Ingemar Johansson, Randell Jesup, Ingemar Johansson, and Magnus Westerlund for their valuable contribution to the discussions and to the document.

## [8.](#) IANA Considerations

The IANA is requested to register one new RTP/AVPF Transport-Layer Feedback Message in the table for FMT values for RTPFB Payload Types [[RFC4585](#)] as defined in [Section 3.1](#):

Name: CCFB  
Long name: RTP Congestion Control Feedback  
Value: (to be assigned by IANA)  
Reference: (RFC number of this document, when published)

The IANA is also requested to register one new SDP "rtcp-fb" attribute "ack" parameter, "ccfb", in the SDP ("ack" and "nack" Attribute Values) registry:

Value name: ccfb  
Long name: Congestion Control Feedback  
Usable with: ack  
Reference: (RFC number of this document, when published)

## 9. Security Considerations

The security considerations of the RTP specification [[RFC3550](#)], the applicable RTP profile (e.g., [[RFC3551](#)], [[RFC3711](#)], or [[RFC4585](#)]), and the RTP congestion control algorithm that is in use (e.g., [[I-D.ietf-rmcat-nada](#)], [[RFC8298](#)], [[I-D.ietf-rmcat-gcc](#)], or [[RFC8382](#)]) apply.

A receiver that intentionally generates inaccurate RTCP congestion control feedback reports might be able to trick the sender into sending at a greater rate than the path can support, thereby congesting the path. This will negatively impact the quality of experience of that receiver. Since RTP is an unreliable transport, a sender can intentionally leave a gap in the RTP sequence number space without causing harm, to check that the receiver is correctly reporting losses.

An on-path attacker that can modify RTCP congestion control feedback packets can change the reports to trick the sender into sending at either an excessively high or excessively low rate, leading to denial of service. The secure RTCP profile [[RFC3711](#)] can be used to authenticate RTCP packets to protect against this attack.

## 10. References

### 10.1. Normative References

- [I-D.ietf-rmcat-rtp-cc-feedback]  
Perkins, C., "RTP Control Protocol (RTCP) Feedback for Congestion Control in Interactive Multimedia Conferences", [draft-ietf-rmcat-rtp-cc-feedback-03](#) (work in progress), November 2016.
- [RFC2119] Bradner, S., "Key words for use in RFCs to Indicate Requirement Levels", [BCP 14](#), [RFC 2119](#), DOI 10.17487/RFC2119, March 1997, <<https://www.rfc-editor.org/info/rfc2119>>.

- 
- [RFC3168] Ramakrishnan, K., Floyd, S., and D. Black, "The Addition of Explicit Congestion Notification (ECN) to IP", [RFC 3168](#), DOI 10.17487/RFC3168, September 2001, <<https://www.rfc-editor.org/info/rfc3168>>.
- [RFC3550] Schulzrinne, H., Casner, S., Frederick, R., and V. Jacobson, "RTP: A Transport Protocol for Real-Time Applications", STD 64, [RFC 3550](#), DOI 10.17487/RFC3550, July 2003, <<https://www.rfc-editor.org/info/rfc3550>>.
- [RFC3551] Schulzrinne, H. and S. Casner, "RTP Profile for Audio and Video Conferences with Minimal Control", STD 65, [RFC 3551](#), DOI 10.17487/RFC3551, July 2003, <<https://www.rfc-editor.org/info/rfc3551>>.
- [RFC3611] Friedman, T., Ed., Caceres, R., Ed., and A. Clark, Ed., "RTP Control Protocol Extended Reports (RTCP XR)", [RFC 3611](#), DOI 10.17487/RFC3611, November 2003, <<https://www.rfc-editor.org/info/rfc3611>>.
- [RFC3711] Baugher, M., McGrew, D., Naslund, M., Carrara, E., and K. Norrman, "The Secure Real-time Transport Protocol (SRTP)", [RFC 3711](#), DOI 10.17487/RFC3711, March 2004, <<https://www.rfc-editor.org/info/rfc3711>>.
- [RFC4585] Ott, J., Wenger, S., Sato, N., Burmeister, C., and J. Rey, "Extended RTP Profile for Real-time Transport Control Protocol (RTCP)-Based Feedback (RTP/AVPF)", [RFC 4585](#), DOI 10.17487/RFC4585, July 2006, <<https://www.rfc-editor.org/info/rfc4585>>.
- [RFC5124] Ott, J. and E. Carrara, "Extended Secure RTP Profile for Real-time Transport Control Protocol (RTCP)-Based Feedback (RTP/SAVPF)", [RFC 5124](#), DOI 10.17487/RFC5124, February 2008, <<https://www.rfc-editor.org/info/rfc5124>>.
- [RFC5506] Johansson, I. and M. Westerlund, "Support for Reduced-Size Real-Time Transport Control Protocol (RTCP): Opportunities and Consequences", [RFC 5506](#), DOI 10.17487/RFC5506, April

2009, <<https://www.rfc-editor.org/info/rfc5506>>.

[RFC6679] Westerlund, M., Johansson, I., Perkins, C., O'Hanlon, P., and K. Carlberg, "Explicit Congestion Notification (ECN) for RTP over UDP", [RFC 6679](#), DOI 10.17487/RFC6679, August 2012, <<https://www.rfc-editor.org/info/rfc6679>>.

Sarker, et al.

Expires January 16, 2019

[Page 10]

---

Internet-Draft

Congestion Control Feedback in RTCP

July 2018

## [10.2.](#) Informative References

[feedback-requirements]

"RMCAT Feedback Requirements",  
<://www.ietf.org/proceedings/95/slides/slides-95-rmcat-1.pdf>.

[I-D.ietf-rmcat-gcc]

Holmer, S., Lundin, H., Carlucci, G., Cicco, L., and S. Mascolo, "A Google Congestion Control Algorithm for Real-Time Communication", [draft-ietf-rmcat-gcc-02](#) (work in progress), July 2016.

[I-D.ietf-rmcat-nada]

Zhu, X., Pan, R., Ramalho, M., Cruz, S., Jones, P., Fu, J., and S. D'Aronco, "NADA: A Unified Congestion Control Scheme for Real-Time Media", [draft-ietf-rmcat-nada-04](#) (work in progress), March 2017.

[RFC5104] Wenger, S., Chandra, U., Westerlund, M., and B. Burman, "Codec Control Messages in the RTP Audio-Visual Profile with Feedback (AVPF)", [RFC 5104](#), DOI 10.17487/RFC5104, February 2008, <<https://www.rfc-editor.org/info/rfc5104>>.

[RFC6843] Clark, A., Gross, K., and Q. Wu, "RTP Control Protocol (RTCP) Extended Report (XR) Block for Delay Metric Reporting", [RFC 6843](#), DOI 10.17487/RFC6843, January 2013, <<https://www.rfc-editor.org/info/rfc6843>>.

[RFC8298] Johansson, I. and Z. Sarker, "Self-Clocked Rate Adaptation for Multimedia", [RFC 8298](#), DOI 10.17487/RFC8298, December 2017, <<https://www.rfc-editor.org/info/rfc8298>>.

[RFC8382] Hayes, D., Ed., Ferlin, S., Welzl, M., and K. Hiorth, "Shared Bottleneck Detection for Coupled Congestion Control for RTP Media", [RFC 8382](#), DOI 10.17487/RFC8382, June 2018, <<https://www.rfc-editor.org/info/rfc8382>>.

#### Authors' Addresses

Zaheduzzaman Sarker  
Ericsson AB  
Luleae  
Sweden

Phone: +46107173743  
Email: zaheduzzaman.sarker@ericsson.com

Sarker, et al.

Expires January 16, 2019

[Page 11]

---

Internet-Draft

Congestion Control Feedback in RTCP

July 2018

Colin Perkins  
University of Glasgow  
School of Computing Science  
Glasgow G12 8QQ  
United Kingdom

Email: [msp@csperkins.org](mailto:msp@csperkins.org)

Varun Singh  
CALLSTATS I/O Oy  
Annankatu 31-33 C 42  
Helsinki 00100  
Finland

Email: [varun.singh@iki.fi](mailto:varun.singh@iki.fi)  
URI: <http://www.callstats.io/>

Michael A. Ramalho  
Cisco Systems, Inc.  
6310 Watercrest Way Unit 203  
Lakewood Ranch, FL 34202  
USA

Phone: +1 919 476 2038  
Email: mramalho@cisco.com

Sarker, et al.

Expires January 16, 2019

[Page 12]