

Network Working Group  
Westerlund  
Internet-Draft  
Ericsson  
Obsoletes: [5117](#) (if approved)  
Wenger  
Intended status: Informational  
Vidyo  
Expires: February 8, 2015  
2014

M.

S.

August 7,

**RTP Topologies**  
**draft-ietf-avtcore-rtsp-topologies-update-03**

Abstract

This document discusses point to point and multi-endpoint topologies used in Real-time Transport Protocol (RTP)-based environments. In particular, centralized topologies commonly employed in the video conferencing industry are mapped to the RTP terminology.

This document is updated with additional topologies and is intended to replace [RFC 5117](#).

Status of This Memo

This Internet-Draft is submitted in full conformance with the provisions of [BCP 78](#) and [BCP 79](#).

Internet-Drafts are working documents of the Internet Engineering Task Force (IETF). Note that other groups may also distribute working documents as Internet-Drafts. The list of current Internet-Drafts is at <http://datatracker.ietf.org/drafts/current/>.

Internet-Drafts are draft documents valid for a maximum of six months and may be updated, replaced, or obsoleted by other documents at any time. It is inappropriate to use Internet-Drafts as reference material or to cite them other than as "work in progress."

This Internet-Draft will expire on February 8, 2015.

Copyright Notice

Copyright (c) 2014 IETF Trust and the persons identified as the document authors. All rights reserved.

This document is subject to [BCP 78](#) and the IETF Trust's Legal Provisions Relating to IETF Documents (<http://trustee.ietf.org/license-info>) in effect on the date of publication of this document. Please review these documents carefully, as they describe your rights and restrictions with respect to this document. Code Components extracted from this document must

Westerlund & Wenger  
1]

Expires February 8, 2015

[Page

include Simplified BSD License text as described in Section 4.e of the Trust Legal Provisions and are provided without warranty as described in the Simplified BSD License.

Table of Contents

<a href="#">1.</a>	Introduction . . . . .	
<a href="#">3</a>		
<a href="#">2.</a>	Definitions . . . . .	
<a href="#">3</a>		
<a href="#">2.1.</a>	Glossary . . . . .	
<a href="#">3</a>		
<a href="#">2.2.</a>	Definitions related to RTP grouping taxonomy . . . . .	
<a href="#">4</a>		
<a href="#">3.</a>	Topologies . . . . .	
<a href="#">5</a>		
<a href="#">3.1.</a>	Point to Point . . . . .	
<a href="#">5</a>		
<a href="#">3.2.</a>	Point to Point via Middlebox . . . . .	
<a href="#">6</a>		
<a href="#">3.2.1.</a>	Translators . . . . .	
<a href="#">6</a>		
<a href="#">3.2.2.</a>	Back to Back RTP sessions . . . . .	
<a href="#">10</a>		
<a href="#">3.3.</a>	Point to Multipoint Using Multicast . . . . .	
<a href="#">11</a>		
<a href="#">3.3.1.</a>	Any Source Multicast (ASM) . . . . .	
<a href="#">11</a>		
<a href="#">3.3.2.</a>	Source Specific Multicast (SSM) . . . . .	
<a href="#">12</a>		
<a href="#">3.3.3.</a>	SSM with Local Unicast Resources . . . . .	
<a href="#">14</a>		
<a href="#">3.4.</a>	Point to Multipoint Using Mesh . . . . .	
<a href="#">16</a>		
<a href="#">3.5.</a>	Point to Multipoint Using the <a href="#">RFC 3550</a> Translator . . . . .	
<a href="#">19</a>		
<a href="#">3.5.1.</a>	Relay - Transport Translator . . . . .	
<a href="#">19</a>		
<a href="#">3.5.2.</a>	Media Translator . . . . .	
<a href="#">20</a>		
<a href="#">3.6.</a>	Point to Multipoint Using the <a href="#">RFC 3550</a> Mixer Model . . . . .	
<a href="#">21</a>		
<a href="#">3.6.1.</a>	Media Mixing Mixer . . . . .	
<a href="#">23</a>		
<a href="#">3.6.2.</a>	Media Switching . . . . .	
<a href="#">26</a>		
<a href="#">3.7.</a>	Selective Forwarding Middlebox . . . . .	
<a href="#">28</a>		
<a href="#">3.8.</a>	Point to Multipoint Using Video Switching MCUs . . . . .	
<a href="#">31</a>		
<a href="#">3.9.</a>	Point to Multipoint Using RTCP-Terminating MCU . . . . .	
<a href="#">33</a>		

<a href="#">34</a>	<a href="#">3.10.</a> Split Component Terminal . . . . .
<a href="#">36</a>	<a href="#">3.11.</a> Non-Symmetric Mixer/Translators . . . . .
<a href="#">36</a>	<a href="#">3.12.</a> Combining Topologies . . . . .
<a href="#">37</a>	<a href="#">4.</a> Comparing Topologies . . . . .
<a href="#">37</a>	<a href="#">4.1.</a> Topology Properties . . . . .
<a href="#">37</a>	<a href="#">4.1.1.</a> All to All Media Transmission . . . . .
<a href="#">37</a>	<a href="#">4.1.2.</a> Transport or Media Interoperability . . . . .
<a href="#">38</a>	<a href="#">4.1.3.</a> Per Domain Bit-Rate Adaptation . . . . .
<a href="#">38</a>	<a href="#">4.1.4.</a> Aggregation of Media . . . . .
<a href="#">39</a>	<a href="#">4.1.5.</a> View of All Session Participants . . . . .
<a href="#">39</a>	<a href="#">4.1.6.</a> Loop Detection . . . . .
<a href="#">39</a>	<a href="#">4.2.</a> Comparison of Topologies . . . . .
<a href="#">40</a>	<a href="#">5.</a> Security Considerations . . . . .
<a href="#">40</a>	<a href="#">6.</a> IANA Considerations . . . . .
<a href="#">42</a>	<a href="#">7.</a> Acknowledgements . . . . .
<a href="#">43</a>	<a href="#">8.</a> References . . . . .
<a href="#">43</a>	<a href="#">8.1.</a> Normative References . . . . .
<a href="#">43</a>	<a href="#">8.2.</a> Informative References . . . . .
<a href="#">43</a>	Authors' Addresses . . . . .
<a href="#">44</a>	

## **1. Introduction**

Real-time Transport Protocol (RTP) [[RFC3550](#)] topologies describe methods for interconnecting RTP entities and their processing behavior of RTP and RTCP. This document tries to address past and existing confusion, especially with respect to terms not defined in RTP but in common use in the conversational communication industry, such as the Multipoint Control Unit or MCU.

When the Audio-Visual Profile with Feedback (AVPF) [[RFC4585](#)] was developed the main emphasis lay in the efficient support of point to point and small multipoint scenarios without centralized multipoint control. In practice, however, most multipoint conferences operate utilizing centralized units referred to as MCUs. MCUs may implement Mixer or Translator functionality (in RTP [[RFC3550](#)] terminology), and signalling support. They may also contain additional application layer functionality. This document focuses on the media transport aspects of the MCU that can be realized using RTP, as discussed below. Further considered are the properties of Mixers and Translators, and how some types of deployed MCUs deviate from these properties.

This document also codifies new multipoint architectures that have recently been introduced and which were not anticipated in [RFC 5117](#). These architectures use scalable video coding and simulcasting, and their associated centralized units are referred to as Selective Forwarding Units (SFU). This codification provides a common information basis for future discussion and specification work.

The document's attempt to clarify and explain sections of the Real-time Transport Protocol (RTP) spec [[RFC3550](#)] is informal. It is not intended to update or change what is normatively specified within [RFC 3550](#).

## **2. Definitions**

### **2.1. Glossary**

ASM: Any Source Multicast

AVPF: The Extended RTP Profile for RTCP-based Feedback

CSRC: Contributing Source

Link: The data transport to the next IP hop

Middlebox: A device that is on the Path that media travel between two Endpoints

Westerlund & Wenger  
3]

Expires February 8, 2015

[Page

MCU: Multipoint Control Unit

Path: The concatenation of multiple links, resulting in an end-to-end data transfer.

PtM: Point to Multipoint

PtP: Point to Point

SFU: Selective Forwarding Unit

SSM: Source-Specific Multicast

SSRC: Synchronization Source

## **2.2. Definitions related to RTP grouping taxonomy**

[Note to RFC editor: The following definitions have been taken from [draft-ietf-avtext-rtp-grouping-taxonomy-02](#) (taxonomy draft henceforth). It is avtcore working group agreement to not delay the publication of the topologies-update document through a dependency to the taxonomy draft. If, however, the taxonomy draft and this draft are in your work queue at the same time and there would be no significant additional delay (through your schedule, normative reference citations, or similar) in publishing both documents roughly in parallel, it would be preferable to replace the definition language with something like "as in [RFC YYYY]" where YYYY would be the RFC number of the published taxonomy draft.]

The following definitions have been taken from [draft-ietf-avtext-rtp-grouping-taxonomy-02](#), and are used in capitalized form throughout the document.

**Communication Session:** A Communication Session is an association among group of participants communicating with each other via a set of Multimedia Sessions.

**End Point:** A single addressable entity sending or receiving RTP packets. It may be decomposed into several functional blocks, but as long as it behaves as a single RTP stack entity it is classified as a single "End Point".

**Media Source:** A Media Source is the logical source of a reference clock synchronized, time progressing, digital media stream, called a Source Stream.

Westerlund & Wenger  
4]

Expires February 8, 2015

[Page

Multimedia Session: A multimedia session is an association among a group of participants engaged in the communication via one or more RTP Sessions.

### 3. Topologies

This subsection defines several topologies that are relevant for codec control but also RTP usage in other contexts. The section starts with point to point cases, with or without middleboxes. Then follows a number of different methods for establishing point to multipoint communication. These are structured around the most fundamental enabler, i.e., multicast, a mesh of connections, translators, mixers and finally MCUs and SFUs. The section ends by discussing de-composited terminals, asymmetric middlebox behaviors and combining topologies.

The topologies may be referenced in other documents by a shortcut name, indicated by the prefix "Topo-".

For each of the RTP-defined topologies, we discuss how RTP, RTCP, and the carried media are handled. With respect to RTCP, we also discuss the handling of RTCP feedback messages as defined in [RFC4585] and [RFC5104].

#### 3.1. Point to Point

Shortcut name: Topo-Point-to-Point

The Point to Point (PtP) topology (Figure 1) consists of two End Points, communicating using unicast. Both RTP and RTCP traffic are conveyed endpoint-to-endpoint, using unicast traffic only (even if, in exotic cases, this unicast traffic happens to be conveyed over an IP-multicast address).




Figure 1: Point to Point

The main property of this topology is that A sends to B, and only B, while B sends to A, and only A. This avoids all complexities of handling multiple End Points and combining the requirements stemming from them. Note that an End Point can still use multiple RTP Synchronization Sources (SSRCs) in an RTP session. The number of RTP sessions in use between A and B can also be of any number, subject only to system level limitations like the number range of ports.

Westerlund & Wenger  
5]

Expires February 8, 2015

[Page

RTCP feedback messages for the indicated SSRCs are communicated directly between the End Points. Therefore, this topology poses minimal (if any) issues for any feedback messages. For RTP sessions which use multiple SSRC per End Point it can be relevant to implement support for cross-reporting suppression as defined in "Sending Multiple Media Streams in a Single RTP Session" [[I-D.ietf-avtcore-rtp-multi-stream-optimisation](#)].

### **3.2. Point to Point via Middlebox**

This section discusses cases where two End Points communicate but have one or more middleboxes involved in the RTP session.

#### **3.2.1. Translators**

Shortcut name: Topo-PtP-Translator

Two main categories of Translators can be distinguished; Transport Translators and Media translators. Both Translator types share common attributes that separate them from Mixers. For each RTP stream that the Translator receives, it generates an individual RTP stream in the other domain. A translator keeps the SSRC for an RTP stream across the translation, whereas a Mixer can select a single RTP stream from multiple received RTP streams (in cases like audio/video switching), or send out an RTP stream composed of multiple mixed media received in multiple RTP streams (in cases like audio mixing or video tiling), but always under its own SSRC, possibly using the CSRC field to indicate the source(s) of the content. Mixers are more common in point to multipoint cases than in PtP.

The

reason is that in PtP use cases the primary focus of a middlebox is enabling interoperability, between otherwise non-interoperable End Points, such as transcoding to a codec the receiver supports, which can be done by a media translator.

As specified in [Section 7.1 of \[RFC3550\]](#), the SSRC space is common for all participants in the RTP session, independent of on which side

of the Translator the session resides. Therefore, it is the responsibility of the End Points (as the RTP session participants) to

run SSRC collision detection, and the SSRC is thus a field the Translator cannot change. Any SDES information associated with a SSRC or CSRC also needs to be forwarded between the domains for any SSRC/CSRC used in the different domains.

A Translator commonly does not use an SSRC of its own, and is not visible as an active participant in the RTP session. One reason to have its own SSRC is when a Translator acts as a quality monitor that

sends RTCP reports and therefore is required to have an SSRC.

Another example is the case when a Translator is prepared to use  
RTCP

Westerlund & Wenger  
6]

Expires February 8, 2015

[Page

feedback messages. This may, for example, occur in a translator configured to detect packet loss of important video packets and wants to trigger repair by the media sending End Point, by sending feedback messages. While such feedback could use the SSRC of the target for the translator (the receiving End Point), this in turn would require translation of the targets RTCP reports to make them consistent. It may be simpler to expose an additional SSRC in the session. The only concern is End Points failing to support the full RTP specification may have issues with multiple SSRCs reporting on the RTP streams sent by that End Point, as this use case may be viewed as exotic by implementers.

In general, a Translator implementation should consider which RTCP feedback messages or codec-control messages it needs to understand in relation to the functionality of the Translator itself. This is completely in line with the requirement to also translate RTCP messages between the domains.

**3.2.1.1. Transport Relay/Anchoring**

There exist a number of different types of middleboxes that might be inserted between two End Points on the transport level, e.g., to perform changes on the IP/UDP headers, and are, therefore, basic transport translators. These middleboxes come in many variations including NAT [[RFC3022](#)] traversal by pinning the media path to a public address domain relay, network topologies where the RTP stream is required to pass a particular point for audit by employing relaying, or preserving privacy by hiding each peer's transport addresses to the other party. Other protocols or functionalities that provide this behavior are TURN [[RFC5766](#)] servers, Session Border

Gateways and Media Processing Nodes with media anchoring functionalities.



Figure 2: Point to Point with Translator

A common element in these functions is that they are normally transparent at the RTP level, i.e., they perform no changes on any RTP or RTCP packet fields and only affect the lower layers. They may affect, however, the path the RTP and RTCP packets are routed between the End Points in the RTP session, and thereby indirectly affect the

RTP session. For this reason, one could believe that transport translator-type middleboxes do not need to be included in this document. This topology, however, can raise additional requirements in the RTP implementation and its interactions with the signalling

solution. Both in signalling and in certain RTCP fields, network addresses other than those of the relay can occur since B has a different network address than the relay (T). Implementations that cannot support this will also not work correctly when End Points are subject to NAT.

The transport relay implementations also have to take into account security considerations. In particular, source address filtering of incoming packets is usually important in relays, to prevent attackers

to inject traffic into a session, which one peer may, in the absence of adequate security in the relay, think it comes from the other peer.

#### **3.2.1.2. Transport Translator**

Transport Translators (Topo-Trn-Translator) do not modify the RTP stream itself, but are concerned with transport parameters. Transport parameters, in the sense of this section, comprise the transport addresses (to bridge different domains such unicast to multicast) and the media packetization to allow other transport protocols to be interconnected to a session (in gateways).

Translators that bridge between different protocol worlds need to be concerned about the mapping of the SSRC/CSRC (Contributing Source) concept to the non-RTP protocol. When designing a Translator to a non-RTP-based media transport, an important consideration is how to handle different sources and their identities. This problem space is not discussed henceforth.

Of the transport Translators, this memo is primarily interested in those that use RTP on both sides, and this is assumed henceforth.

The most basic transport translators that operate below the RTP level were already discussed in [Section 3.2.1.1.](#)

#### **3.2.1.3. Media Translator**

Media Translators (Topo-Media-Translator) modify the media inside the RTP stream. This process is commonly known as transcoding. The modification of the media can be as small as removing parts of the stream, and it can go all the way to a full decoding and re-encoding (down to the sample level or equivalent) utilizing a different media codec. Media Translators are commonly used to connect End Points without a common interoperability point in the media encoding.

Stand-alone Media Translators are rare. Most commonly, a combination of Transport and Media Translator is used to translate both the

media

Westerlund & Wenger  
8]

Expires February 8, 2015

[Page

and the transport aspects of the RTP stream carrying the media between two transport domains.

When media translation occurs, the Translator's task regarding handling of RTCP traffic becomes substantially more complex. In this

case, the Translator needs to rewrite End Point B's RTCP Receiver Report before forwarding them to End Point A. The rewriting is needed as the RTP stream received by B is not the same RTP stream as the other participants receive. For example, the number of packets transmitted to B may be lower than what A sends, due to the different

media format and data rate. Therefore, if the Receiver Reports were forwarded without changes, the extended highest sequence number would

indicate that B were substantially behind in reception, while most likely it would not be. Therefore, the Translator must translate that number to a corresponding sequence number for the stream the Translator received. Similar requirements exists for most other fields in the RTCP Receiver Reports.

A media Translator may in some cases act on behalf of the "real" source (the End Point originally sending the media to the Translator)

and respond to RTCP feedback messages. This may occur, for example, when a receiving End Point requests a bandwidth reduction, and the media Translator has not detected any congestion or other reasons for

bandwidth reduction between the sending End Point and itself. In that case, it is sensible that the media Translator reacts to codec control messages itself, for example, by transcoding to a lower media rate.

A variant of translator behaviour worth pointing out is the one depicted in Figure 3 of an End Point A sending a RTP stream containing media (only) to B. On the path there is a device T that on A's behalf manipulates the RTP streams. One common example is that T adds a second RTP stream containing Forward Error Correction (FEC) information in order to protect A's (non FEC-protected) RTP stream. In this case, T needs to semantically bind the new FEC RTP stream to A's media-carrying RTP stream, for example by using the same CNAME as A.

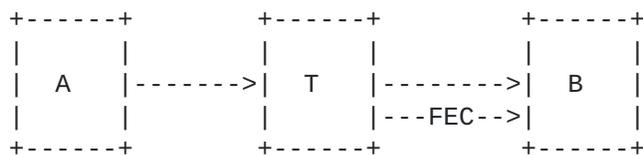


Figure 3: Media Translator adding FEC

there may also be cases where information is added into the original RTP stream, while leaving most or all of the original RTP packets

intact (with the exception of certain RTP header fields, such as the sequence number). One example is the injection of meta-data into the RTP stream, carried in their own RTP packets.

Similarly, a Media Translator can sometimes remove information from the RTP stream, while otherwise leaving the remaining RTP packets unchanged (again with the exception of certain RTP header fields).

Either type of functionality where T manipulates the RTP stream, or adds an accompanying RTP stream, on behalf of A is also covered under the media translator definition.

**3.2.2. Back to Back RTP sessions**

There exist middleboxes that interconnect two End Points A and B through themselves (MB), but not by being part of a common RTP session. They establish instead two different RTP sessions, one between A and the middlebox and another between the middlebox and B. This topology is called Topo-Back-To-Back

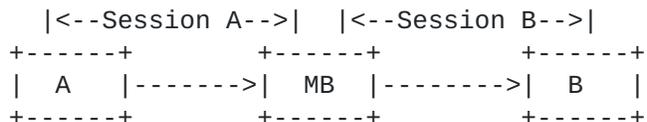


Figure 4: Back-to-back RTP sessions through Middlebox

The middlebox acts as an application-level gateway and bridges the two RTP sessions. This bridging can be as basic as forwarding the RTP payloads between the sessions, or more complex including media transcoding. The difference of this topology relative to the single RTP session context is the handling of the SSRCs and the other session-related identifiers, such as CNAMEs. With two different RTP sessions these can be freely changed and it becomes the middlebox's responsibility to maintain the correct relations.

The signalling or other above-RTP level functionalities referencing RTP streams may be what is most impacted by using two RTP sessions and changing identifiers. The structure with two RTP sessions also puts a congestion control requirement on the middlebox, because it becomes fully responsible for the media stream it sources into each of the sessions.

Adherence to congestion control can be solved locally on each of the two segments, or by bridging statistics from the receiving End Point through the middlebox to the sending End Point. From an implementation point, however, the latter requires dealing with a number of inconsistencies. First, packet loss must be detected for



an RTP stream sent from A to the middlebox, and that loss must be reported through a skipped sequence number in the RTP stream from the middlebox to B. This coupling and the resulting inconsistencies are conceptually easier to handle when considering the two RTP streams as belonging to a single RTP session.

**3.3. Point to Multipoint Using Multicast**

Multicast is an IP layer functionality that is available in some networks. Two main flavors can be distinguished: Any Source Multicast (ASM) [RFC1112] where any multicast group participant can send to the group address and expect the packet to reach all group participants; and Source Specific Multicast (SSM) [RFC3569], where only a particular IP host sends to the multicast group. Both these models are discussed below in their respective sections.

**3.3.1. Any Source Multicast (ASM)**

Shortcut name: Topo-ASM (was Topo-Multicast)

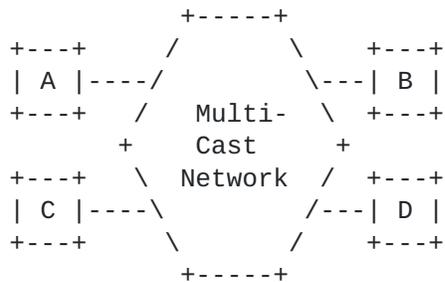


Figure 5: Point to Multipoint Using Multicast

Point to Multipoint (PtM) is defined here as using a multicast topology as a transmission model, in which traffic from any multicast group participant reaches all the other multicast group participants, except for cases such as:

- o packet loss, or
- o when a multicast group participant does not wish to receive the traffic for a specific multicast group and, therefore, has not subscribed to the IP multicast group in question. This scenario can occur, for example, where a multimedia session is distributed using two or more multicast groups and a multicast group participant is subscribed only to a subset of these sessions.

In the above context, "traffic" encompasses both RTP and RTCP traffic. The number of multicast group participants can vary

between

Westerlund & Wenger  
11]

Expires February 8, 2015

[Page

one and many, as RTP and RTCP scale to very large multicast groups (the theoretical limit of the number of participants in a single RTP session is in the range of billions). The above can be realized using Any Source Multicast (ASM).

For feedback usage, it is useful to define a "small multicast group" as a group where the number of multicast group participants is so low (and other factors such as the connectivity is so good) that it allows the participants to use early or immediate feedback, as defined in AVPF [[RFC4585](#)]. Even when the environment would allow for the use of a small multicast group, some applications may still want to use the more limited options for RTCP feedback available to large multicast groups, for example when there is a likelihood that the threshold of the small multicast group (in terms of multicast group participants) may be exceeded during the lifetime of a session.

RTCP feedback messages in multicast reach, like media data, every subscriber (subject to packet losses and multicast group subscription). Therefore, the feedback suppression mechanism discussed in [[RFC4585](#)] is typically required. Each individual End Point that is a multicast group participant needs to process every feedback message it receives, not only to determine if it is affected or if the feedback message applies only to some other End Point, but also to derive timing restrictions for the sending of its own feedback messages, if any.


### **3.3.2. Source Specific Multicast (SSM)**

In Any Source Multicast, any of the multicast group participants can send to all the other multicast group participants, by sending a packet to the multicast group. In contrast, Source Specific Multicast [[RFC3569](#)][[RFC4607](#)] refers to scenarios where only a single source (Distribution Source) can send to the multicast group, creating a topology that looks like the one below:

Westerlund & Wenger  
12]

Expires February 8, 2015

[Page

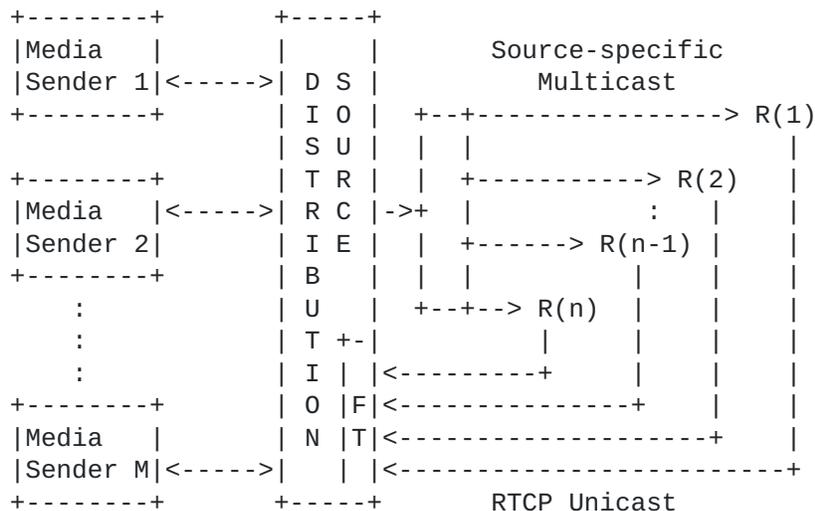

FT = Feedback Target  
 Transport from the Feedback Target to the Distribution Source is via unicast or multicast RTCP if they are not co-located.

Figure 6: Point to Multipoint using Source Specific Multicast

In the SSM topology (Figure 6) a number of RTP sending End Points (RTP sources henceforth) (1 to M) are allowed to send media to the SSM group. These sources send media to a dedicated distribution source, which forwards the RTP streams to the multicast group on behalf of the original RTP sources. The RTP streams reach the receiving End Points (Receivers henceforth) (R(1) to R(n)). The Receivers' RTCP messages cannot be sent to the multicast group, as the SSM multicast group by definition has only a single IP sender. To support RTCP, an RTP extension for SSM [[RFC5760](#)] was defined. It uses unicast transmission to send RTCP from each of the receivers to one or more Feedback Targets (FT). The feedback targets relay the RTCP unmodified, or provide a summary of the participants RTCP reports towards the whole group by forwarding the RTCP traffic to the distribution source. Figure 6 only shows a single feedback target integrated in the distribution source, but for scalability the FT can be distributed and each instance can have responsibility for sub-groups of the receivers. For summary reports, however, there typically must be a single feedback target aggregating all the summaries to a common message to the whole receiver group.

The RTP extension for SSM specifies how feedback (both reception information and specific feedback events) are handled. The more general problems associated with the use of multicast, where everyone

Westerlund & Wenger  
13]

Expires February 8, 2015

[Page

receives what the distribution source sends needs to be accounted for.

Aforementioned situation results in common behavior for RTP multicast:

1. Multicast applications often use a group of RTP sessions, not one. Each End Point needs to be a member of most or all of these RTP sessions in order to perform well.
2. Within each RTP session, the number of media sinks is likely to be much larger than the number of RTP sources.
3. Multicast applications need signalling functions to identify the relationships between RTP sessions.
4. Multicast applications need signalling functions to identify the relationships between SSRCs in different RTP sessions.

All multicast configurations share a signalling requirement: all of the End Points need to have the same RTP and payload type configuration. Otherwise, End Point A could, for example, be using payload type 97 to identify the video codec H.264, while End Point B would identify it as MPEG-2, with unpredictable but almost certainly not visually pleasing results.

Security solutions for this type of group communications are also challenging. First, the key-management and the security protocol must support group communication. Source authentication becomes more difficult and requires specialized solutions. For more discussion on this please review Options for Securing RTP Sessions [[RFC7201](#)].


### **3.3.3. SSM with Local Unicast Resources**

[RFC6285] "Unicast-Based Rapid Acquisition of Multicast RTP Sessions" results in additional extensions to SSM Topology.

Westerlund & Wenger  
14]

Expires February 8, 2015

[Page

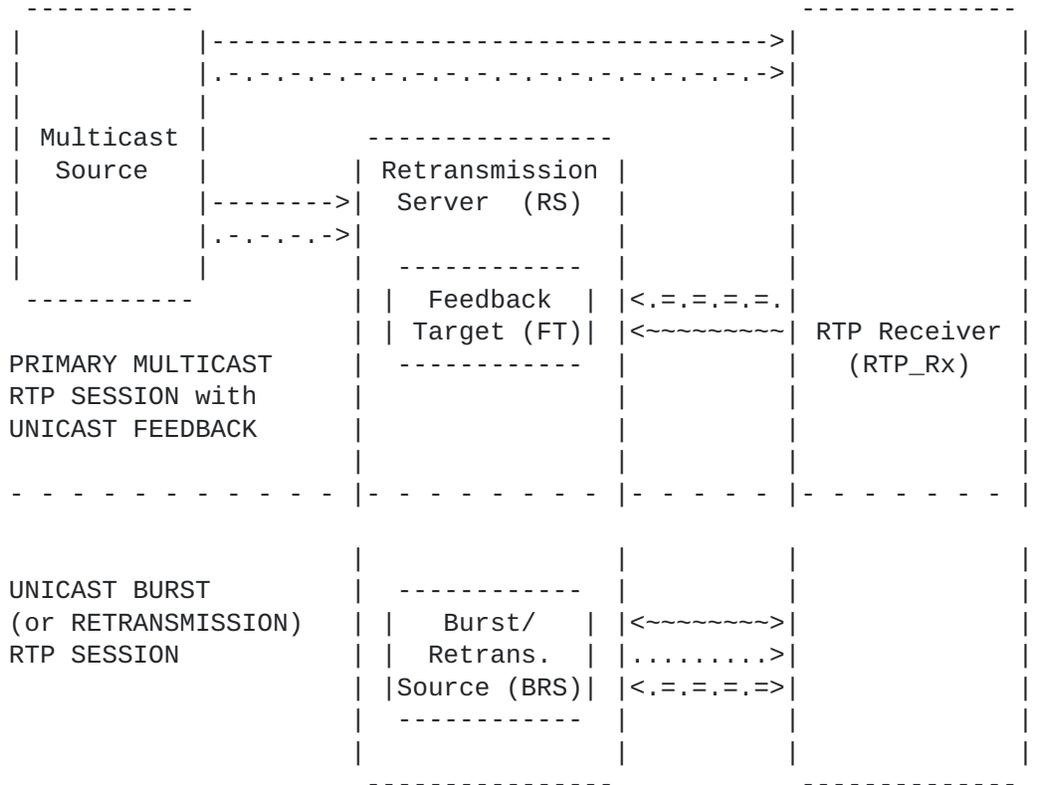

-----> Multicast RTP Stream  
 ....> Multicast RTCP Stream  
 .==.> Unicast RTCP Reports  
 ~~~~~> Unicast RTCP Feedback Messages  
 .....> Unicast RTP Stream

Figure 7

The Rapid acquisition extension allows an End Point joining an SSM multicast session to request media starting with the last sync-point (from where media can be decoded without requiring context established by the decoding of prior packets) to be sent at high speed until such time where, after decoding of these burst-delivered media packets, the correct media timing is established, i.e. media packets are received within adequate buffer intervals for this application. This is accomplished by first establishing a unicast PtP RTP session between the Burst/Retransmission Source (BRS, Figure 7) and the RTP Receiver. The unicast session is used to transmit cached packets from the multicast group at higher than normal speed in order to synchronize the receiver to the ongoing multicast RTP stream. Once the RTP receiver and its decoder have caught up with the multicast session's current delivery, the receiver switches over to receiving directly from the multicast group. The



(still existing) PtP RTP session is, in many deployed applications, be used as a repair channel, i.e., for RTP Retransmission traffic of those packets that were not received from the multicast group.

### 3.4. Point to Multipoint Using Mesh

Shortcut name: Topo-Mesh




Figure 8: Point to Multi-Point using Mesh

a Based on the RTP session definition, it is clearly possible to have joint RTP session involving three or more End Points over multiple unicast transport flows, like the joint three End point session depicted above. In this case, A needs to send its RTP streams and RTCP packets to both B and C over their respective transport flows. As long as all End Points do the same, everyone will have a joint view of the RTP session.

This topology does not create any additional requirements beyond the need to have multiple transport flows associated with a single RTP session. Note that an End Point may use a single local port to receive all these transport flows (in which case the sending port, IP address, or SSRC can be used to demultiplex), or it might have separate local reception ports for each of the End Points.









Westerlund & Wenger  
18]

Expires February 8, 2015

[Page

configuration in Figure 8, End Point A has no awareness of the conditions occurring in the session between End Points B and C (whereas, if a single RTP session were used, it would have such awareness).

Loop detection is also affected. With independent RTP sessions, the SSRC/CSRC cannot be used to determine when an End Point receives its own media stream, or a mixed media stream including its own media stream (a condition known as a loop). The identification of loops and, in most cases, their avoidance, has to be achieved by other means, for example through signaling or the use of an RTP external name space binding SSRC/CSRC among any communicating RTP sessions in the mesh.

**3.5. Point to Multipoint Using the [RFC 3550](#) Translator**

This section discusses some additional usages related to point to multipoint of Translators compared to the point to point only cases in [Section 3.2.1](#).

**3.5.1. Relay - Transport Translator**

Shortcut name: Topo-PtM-Trn-Translator

This section discusses Transport Translator only usages to enable multipoint sessions.

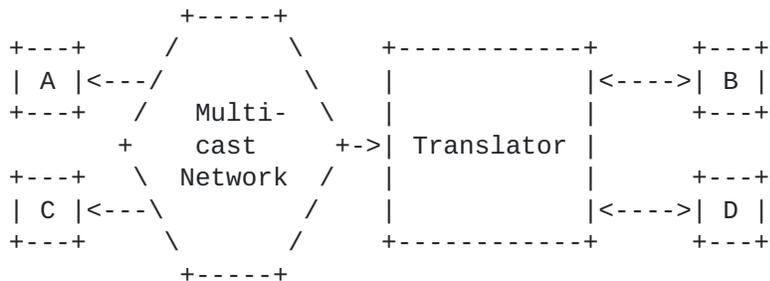


Figure 11: Point to Multipoint Using Multicast

Figure 11 depicts an example of a Transport Translator performing at least IP address translation. It allows the (non-multicast-capable) End Points B and D to take part in an any source multicast session involving End Points A and C, by having the Translator forward their unicast traffic to the multicast addresses in use, and vice versa. It must also forward B's traffic to D, and vice versa, to provide each of B and D with a complete view of the session.



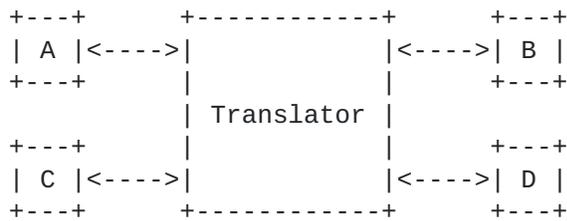


Figure 12: RTP Translator (Relay) with Only Unicast Paths

Another Translator scenario is depicted in Figure 12. The Translator

in this case connects multiple End Points through unicast. This can be implemented using a very simple transport Translator which, in this document, is called a relay. The relay forwards all traffic it receives, both RTP and RTCP, to all other End Points. In doing so,

a multicast network is emulated without relying on a multicast-capable network infrastructure.

For RTCP feedback this results in a similar set of considerations to those described in the ASM RTP topology. It also puts some additional signalling requirements onto the session establishment; for example, a common configuration of RTP payload types is required.

Transport translators and relays should always consider implementing source address filtering, to prevent attackers to inject traffic using the listening ports on the translator. The translator can, however, go one step further, and especially if explicit SSRC signalling is used, prevent End points to send SSRCs other than its own (that are, for example, used by other participants in the session). This can improve the security properties of the session, despite the use of group keys that on cryptographic level allows anyone to impersonate another in the same RTP session.

A Translator that doesn't change the RTP/RTCP packets content can be operated without the requiring it to have access to the security contexts used to protect the RTP/RTCP traffic between the participants.

### 3.5.2. Media Translator

In the context of multipoint communications a Media Translator is not

providing new mechanisms to establish a multipoint session. It is more of an enabler, or facilitator, that ensures a given End Point

or a defined sub-set of End Points can participate in the session.

If End Point B in Figure 11 were behind a limited network path, the Translator may perform media transcoding to allow the traffic

received from the other End Points to reach B without overloading  
the

Westerlund & Wenger  
20]

Expires February 8, 2015

[Page

path. This transcoding can help the other End Points in the multicast part of the session, by not requiring the quality transmitted by A to be lowered to the bitrates that B is actually capable of receiving (and vice versa).

### 3.6. Point to Multipoint Using the [RFC 3550](#) Mixer Model

Shortcut name: Topo-Mixer

A Mixer is a middlebox that aggregates multiple RTP streams that are part of a session by generating one or more new RTP streams and, in most cases, by manipulating the media data. One common application for a Mixer is to allow a participant to receive a session with a reduced amount of resources.

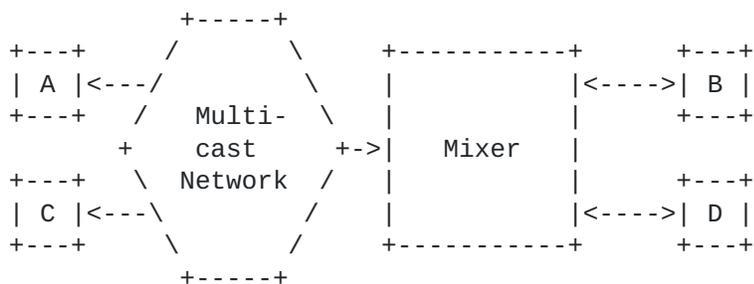


Figure 13: Point to Multipoint Using the [RFC 3550](#) Mixer Model

A Mixer can be viewed as a device terminating the RTP streams received from other End Points in the same RTP session. Using the media data carried in the received RTP streams, a Mixer generates derived RTP streams that are sent to the receiving End Points.

The content that the Mixer provides is the mixed aggregate of what the Mixer receives over the PtP or PtM paths, which are part of the same Communication Session.

The Mixer creates the Media Source and the source RTP stream just like an End Point, as it mixes the content (often in the uncompressed domain) and then encodes and packetizes it for transmission to a receiving endpoint. The CSRC Count (CC) and CSRC fields in the RTP header can be used to indicate the contributors to the newly generated RTP stream. The SSRCs of the to-be-mixed streams on the Mixer input appear as the CSRCs at the Mixer output. That output stream uses a unique SSRC that identifies the Mixer's stream. The CSRC should be forwarded between the different End Points to allow for loop detection and identification of sources that are part of the Communication Session. Note that [Section 7.1 of RFC 3550](#) requires the SSRC space to be shared between domains for these reasons. This



also implies that any SDES information normally needs to be forwarded across the mixer.

The Mixer is responsible for generating RTCP packets in accordance with its role. It is an RTP receiver and should therefore send RTCP receiver reports for the RTP streams it receives and terminates. In its role as an RTP sender, it should also generate RTCP sender reports for those RTP streams it sends. As specified in [Section 7.3 of RFC 3550](#), a Mixer must not forward RTCP unaltered between the two domains.

The Mixer depicted in Figure 13 is involved in three domains that need to be separated: the any source multicast network (including End Point A and C), End Point B, and End Point D. Assuming all four End Points in the conference are interested in receiving content from each other End Point, the Mixer produces different mixed RTP streams for B and D, as the one to B may contain content received from D, and vice versa. However, the Mixer may only need one SSRC per media type in each domain where it is the receiving entity and transmitter of mixed content.

In the multicast domain, a Mixer still needs to provide a mixed view of the other domains. This makes the Mixer simpler to implement and avoids any issues with advanced RTCP handling or loop detection, which would be problematic if the Mixer were providing non-symmetric behavior. Please see [Section 3.11](#) for more discussion on this topic. The mixing operation, however, in each domain could potentially be different.

A Mixer is responsible for receiving RTCP feedback messages and handling them appropriately. The definition of "appropriate" depends on the message itself and the context. In some cases, the reception of a codec-control message by the Mixer may result in the generation and transmission of RTCP feedback messages by the Mixer to the End Points in the other domain(s). In other cases, a message is handled by the Mixer locally and therefore not forwarded to any other domain.

When replacing the multicast network in Figure 13 (to the left of the Mixer) with individual unicast paths as depicted in Figure 14, the Mixer model is very similar to the one discussed in [Section 3.9](#) below. Please see the discussion in [Section 3.9](#) about the differences between these two models.

Westerlund & Wenger  
22]

Expires February 8, 2015

[Page

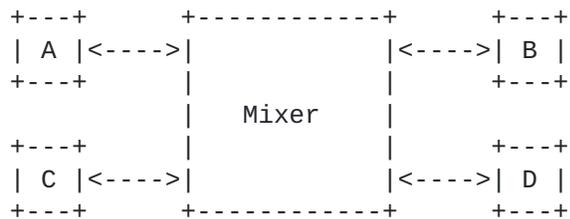


Figure 14: RTP Mixer with Only Unicast Paths

We now discuss in more detail the different mixing operations that a mixer can perform and how they can affect RTP and RTCP behavior.

### 3.6.1. Media Mixing Mixer

The media mixing mixer is likely the one that most think of when they hear the term "mixer". Its basic mode of operation is that it receives RTP streams from several End Points and selects the stream(s) to be included in a media-domain mix. The selection can be through static configuration or by dynamic, content dependent means such as voice activation. The mixer then creates a single outgoing RTP stream from this mix.

The most commonly deployed media mixer is probably the audio mixer, used in voice conferencing, where the output consists of a mixture of all the input audio signals; this needs minimal signalling to be successfully set up. From a signal processing viewpoint, audio mixing is relatively straightforward and commonly possible for a reasonable number of End Points. Assume, for example, that one wants to mix N streams from N different End Points. The mixer needs to decode those N streams, typically into the sample domain, and then produce N or N+1 mixes. Different mixes are needed so that each contributing source gets a mix of all other sources except its own, as this would result in an echo. When N is lower than the number of all End points, one may produce a mix of all N streams for the group that are currently not included in the mix, thus N+1 mixes. These audio streams are then encoded again, RTP packetized and sent out. In many cases, audio level normalization, noise suppression, and similar signal processing steps are also required or desirable before the actual mixing process commences.

In video, the term "mixing" has a different interpretation than audio. It is commonly used to refer to the process of spatially combining contributed video streams, which is also known as "tiling". The reconstructed, appropriately scaled down videos can be spatially arranged in a set of tiles, each tile containing the video from an

End Point (typically showing a human participant). Tiles can be of different sizes, so that, for example, a particularly important

Westerlund & Wenger  
23]

Expires February 8, 2015

[Page

participant, or the loudest speaker, is being shown on in larger tile

than other participants. A self-view picture can be included in the tiling, which can either be locally produced or be a feedback from a mixer-received and reconstructed video image. Such remote loopback allows for confidence monitoring, i.e., it enables the participant to

see himself/herself in the same quality as other participants see him/her. The tiling normally operates on reconstructed video in the sample domain. The tiled image is encoded, packetized, and sent by the mixer to the receiving End Points. It is possible that a middlebox with media mixing duties contains only a single mixer of the aforementioned type, in which case all participants necessarily see the same tiled video, even if it is being sent over different

RTP

streams. More common, however, are mixing arrangement where an individual mixer is available for each outgoing port of the middlebox, allowing individual compositions for each receiving End Point (a feature commonly referred to as personalized layout).

One problem with media mixing is that it consumes both large amounts of media processing resources (for the decoding and mixing process in

the uncompressed domain) and encoding resources (for the encoding of the mixed signal). Another problem is the quality degradation created by decoding and re-encoding the media, which is the result of

the lossy nature of most commonly used media codecs. A third problem

is the latency introduced by the media mixing, which can be substantial and annoyingly noticeable in case of video, or in case of

audio if that mixed audio is lip-synchronized with high latency video.

The advantage of media mixing is that it is straightforward for the End Points to handle the single media stream (which includes the mixed aggregate of many sources), as they don't need to handle multiple decodings, local mixing and composition. In fact, mixers were introduced in pre-RTP times so that legacy, single stream receiving endpoints (that, in some protocol environments, actually didn't need to be aware of the multipoint nature of teh conference) could successfully participate in what a user would recognize as a multiparty video conference.

Westerlund & Wenger  
24]

Expires February 8, 2015

[Page



Westerlund & Wenger  
25]

Expires February 8, 2015

[Page

from the End Point to mixer paths are used as CSRCs in another RTP session, then RTP1, RTP2 and RTP3 become one joint session as they have a common SSRC space. At this stage, the mixer also needs to consider which RTCP information it needs to expose in the different paths. In the above scenario, a mixer would normally expose nothing more than the Source Description (SDES) information and RTCP BYE for a CSRC leaving the session. The main goal would be to enable the correct binding against the application logic and other information sources. This also enables loop detection in the RTP session.

### **3.6.2. Media Switching**

Media switching mixers are used in limited functionality scenarios where no, or only very limited, concurrent presentation of multiple sources is required by the application, to more complex multi-stream usages with receiver mixing or tiling, including combined with simulcast and/or scalability between source and mixer. An RTP Mixer based on media switching avoids the media decoding and encoding operations in the mixer, as it conceptually forwards the encoded media stream as it was being sent to the mixer. It does not avoid, however, the decryption and re-encryption cycle as it rewrites RTP headers. Forwarding media (in contrast to reconstructing-mixing-encoding media) reduces the amount of computational resources needed in the mixer and increases the media quality (both in terms of fidelity and reduced latency).

A media switching mixer maintains a pool of SSRCs representing conceptual or functional RTP streams that the mixer can produce. These RTP streams are created by selecting media from one of the RTP streams received by the mixer and forwarded to the peer using the mixer's own SSRCs. The mixer can switch between available sources

if

that is required by the concept for the source, like the currently active speaker. Note that the mixer, in most cases, still needs to perform a certain amount of media processing, as many media formats do not allow to "tune into" the stream at arbitrary points in their bitstream.

To achieve a coherent RTP stream from the mixer's SSRC, the mixer needs to rewrite the incoming RTP packet's header. First the SSRC field must be set to the value of the Mixer's SSRC. Second, the sequence number must be the next in the sequence of outgoing packets it sent. Third, the RTP timestamp value needs to be adjusted using an offset that changes each time one switches media source.

Finally,

depending on the negotiation of the RTP payload type, the value representing this particular RTP payload configuration may have to

be

changed if the different End Point-to-mixer paths have not arrived

on

the same numbering for a given configuration. This also requires that the different End Points support a common set of codecs,

Westerlund & Wenger  
26]

Expires February 8, 2015

[Page

otherwise media transcoding for codec compatibility would still be required.

We now consider the operation of a media switching mixer that supports a video conference with six participating End Points (A-F) where the two most recent speakers in the conference are shown to each receiving End Point. The mixer has thus two SSRCs sending video to each peer, and each peer is capable of locally handling two video streams simultaneously.

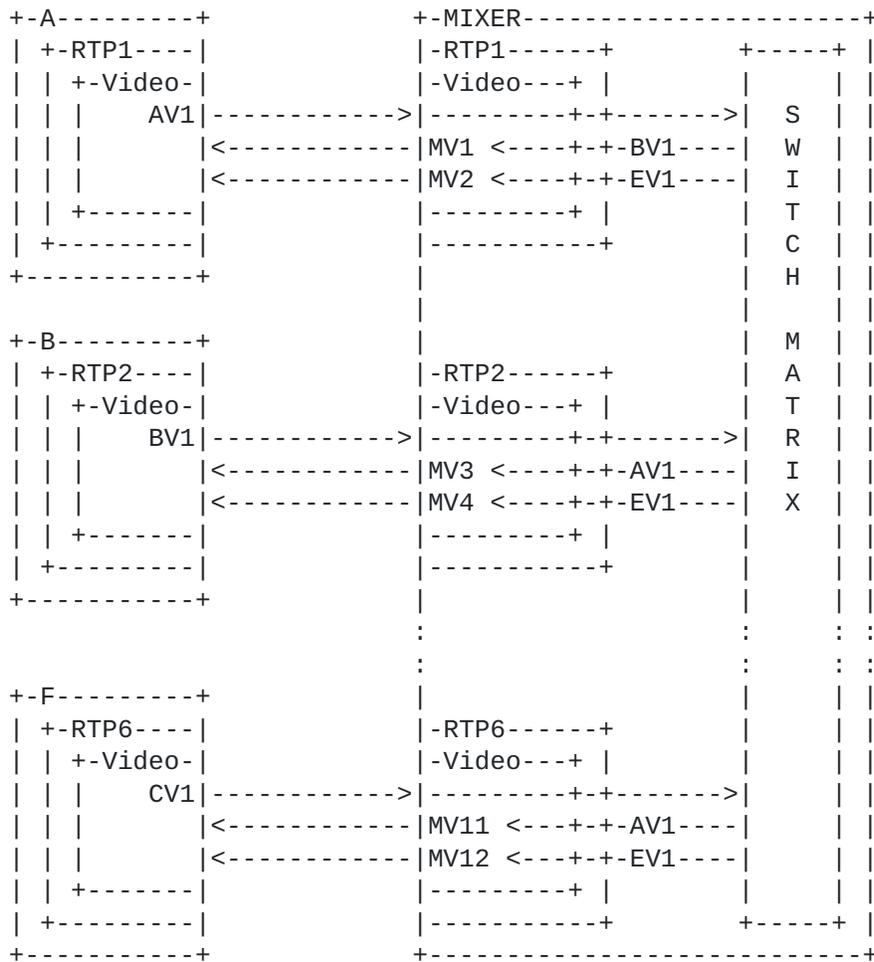


Figure 16: Media Switching RTP Mixer

The Media Switching RTP mixer can, similarly to the Media Mixing Mixer, reduce the bit-rate required for media transmission towards the different peers by selecting and forwarding only a sub-set of RTP streams it receives from the sending End Points. In cases the mixer

Westerlund & Wenger  
27]

Expires February 8, 2015

[Page

receives simulcast transmissions or a scalable encoding of the media source, the mixer has more degrees of freedom to select streams or sub-sets of stream to forward to a receiving End Point, both based on transport or End Point restrictions as well as application logic.

To ensure that a media receiver in an End Point can correctly decode the media in the RTP stream after a switch, a codec that uses temporal prediction needs to start its decoding from independent refresh points, or points in the bitstream offering similar functionality (like "dirty refresh points"). For some codecs, for example frame based speech and audio codecs, this is easily achieved by starting the decoding at RTP packet boundaries, as each packet boundary provides a refresh point (assuming proper packetization on the encoder side). For other codecs, particularly in video, refresh points are less common in the bitstream or may not be present at all without an explicit request to the respective encoder. The Full Intra Request [[RFC5104](#)] RTCP codec control message has been defined for this purpose.

In this type of mixer one could consider to fully terminate the RTP sessions between the different End Point and mixer paths. The same arguments and considerations as discussed in [Section 3.9](#) need to be taken into consideration and apply here.

### **3.7. Selective Forwarding Middlebox**

Another method for handling media in the RTP mixer is to "project", or make available, all potential RTP sources (SSRCs) into a per-End Point, independent RTP session. The middlebox can select which of the potential sources that are currently actively transmitting media will be sent to each of the End Points. This is similar to the media switching Mixer but has some important differences in RTP details.





Westerlund & Wenger  
29]

Expires February 8, 2015

[Page

number needs to be consecutively incremented based on the packet actually being transmitted in each RTP session. Therefore, the RTP sequence number offset will change each time a source is turned on in a RTP session. The timestamp (possibly offset) stays the same.

As the RTP sessions are independent, the SSRC numbers used can also be handled independently, thereby bypassing the requirement for SSRC collision detection and avoidance. On the other hand, tools such as remapping tables between the RTP sessions are required. For example,

the RTP stream that is being sent by End Point B to the middlebox (BV1) may use an SSRC value of 12345678. When that RTP stream is sent to End Point F by the middlebox, it can use any SSRC value, e.g.

87654321. As a result, each End Point may have a different view of the application usage of a particular SSRC. Any RTP level identity information, such as SDES items also needs to update the SSRC referenced, if the included SDES items are intended to be global. Thus the application must not use SSRC as references to RTP streams when communicating with other peers directly. This also affects

loop

detection which will fail to work, as there is no common namespace and identities across the different legs in the communication session

on RTP level. Instead this responsibility falls onto higher layers.

The middlebox is also responsible to receive any RTCP codec control requests coming from an End Point, and decide if it can act on the request locally or needs to translate the request into the RTP session that contains the media source. Both End Points and the middlebox need to implement conference related codec control functionalities to provide a good experience. Commonly used are

Full

Intra Request to request from the media source to provide switching points between the sources, and Temporary Maximum Media Bit-rate Request (TMMBR) to enable the middlebox to aggregate congestion control responses towards the media source so to enable it to adjust its bit-rate (obviously only in case the limitation is not in the source to middlebox link).

The selective forwarding middlebox has been introduced in recently developed videoconferencing systems in conjunction with, and to capitalize on, scalable video coding as well as simulcasting. An example of scalable video coding is Annex G of H.264, but other codecs, including H.264 AVC and VP8 also exhibit scalability, albeit only in the temporal dimension. In both scalable coding and simulcast cases the video signal is represented by a set of two or more bitstreams, providing a corresponding number of distinct fidelity points. The middlebox selects which parts of a scalable bitstream (or which bitstream, in the case of simulcasting) to forward to each of the receiving End Points. The decision may be

driven by a number of factors, such as available bit rate, desired layout, etc. Contrary to transcoding MCUs, these "Selective

Forwarding Units" (SFUs) have extremely low delay, and provide features that are typically associated with high-end systems (personalized layout, error localization) without any signal processing at the middlebox. They are also capable of scaling to a large number of concurrent users, and--due to their very low delay--can also be cascaded.

This version of the middlebox also puts different requirements on the

End Point when it comes to decoder instances and handling of the RTP streams providing media. As each projected SSRC can, at any time, provide media, the End Point either needs to be able to handle as many decoder instances as the middlebox received, or have efficient switching of decoder contexts in a more limited set of actual decoder

instances to cope with the switches. The application also gets more responsibility to update how the media provided is to be presented to the user.

Note that this topology could potentially be seen as a media translator which include an on/off logic as part of its media translation. The main difference would be a common global SSRC space

in the case of the Media Translator and the mapped one used in the above. It also has mixer aspects, as the streams it provides are not

basically translated version, but instead they have conceptual property assigned to them. Thus this topology appears to be some hybrid between the translator and mixer model.

The differences between selective forwarding middlebox and a switching mixer ([Section 3.6.2](#)) are minor, and they share most properties. The above requirement on having a large number of decoding instances or requiring efficient switching of decoder contexts, are one point of difference. The other is how the identification is performed, where the Mixer uses CSRC to provide information on what is included in a particular RTP stream that represent a particular concept. Selective forwarding gets the source

information through the SSRC, and instead have to use other mechanism

to make clear the streams current purpose.

### **3.8. Point to Multipoint Using Video Switching MCUs**

Shortcut name: Topo-Video-switch-MCU

Westerlund & Wenger  
31]

Expires February 8, 2015

[Page

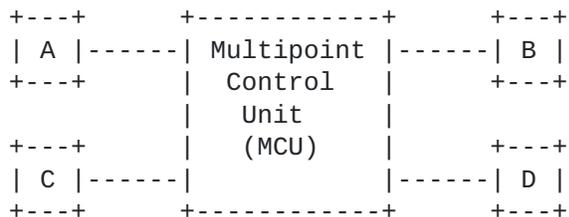


Figure 18: Point to Multipoint Using a Video Switching MCU

This PtM topology was popular in early implementations of multipoint videoconferencing systems due to its simplicity, and the corresponding middlebox design has been known as a "video switching MCU". The more complex RTCP-terminating MCUs, discussed in the next section, became the norm, however, when technology allowed implementations at acceptable costs.

A video switching MCU forwards to a participant a single media stream, selected from the available streams. The criteria for selection are often based on voice activity in the audio-visual conference, but other conference management mechanisms (like presentation mode or explicit floor control) are known to exist as well.

The video switching MCU may also perform media translation to modify the content in bit-rate, encoding, or resolution. However, it still may indicate the original sender of the content through the SSRC.

In this case, the values of the CC and CSRC fields are retained.

If not terminating RTP, the RTCP Sender Reports are forwarded for the currently selected sender. All RTCP Receiver Reports are freely forwarded between the End points. In addition, the MCU may also originate RTCP control traffic in order to control the session and/or report on status from its viewpoint.

The video switching MCU has most of the attributes of a Translator. However, its stream selection is a mixing behavior. This behavior has some RTP and RTCP issues associated with it. The suppression of all but one RTP stream results in most participants seeing only a subset of the sent RTP streams at any given time, often a single RTP stream per conference. Therefore, RTCP Receiver Reports only report on these RTP streams. Consequently, the End Points emitting RTP streams that are not currently forwarded receive a view of the session that indicates their RTP streams disappear somewhere en route. This makes the use of RTCP for congestion control, or any type of quality reporting, very problematic.

Westerlund & Wenger  
32]

Expires February 8, 2015

[Page

To avoid the aforementioned issues, the MCU needs to implement two features. First, it needs to act as a Mixer (see [Section 3.6](#)) and forward the selected RTP stream under its own SSRC and with the appropriate CSRC values. Second, the MCU needs to modify the RTCP RRs it forwards between the domains. As a result, it is recommended that one implement a centralized video switching conference using a Mixer according to [RFC 3550](#), instead of the shortcut implementation described here.

**3.9. Point to Multipoint Using RTCP-Terminating MCU**

Shortcut name: Topo-RTCP-terminating-MCU

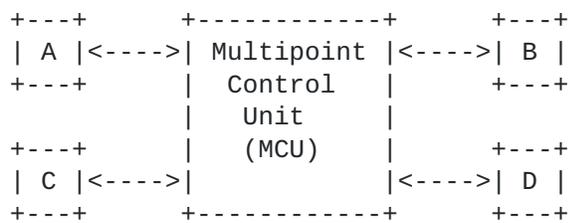


Figure 19: Point to Multipoint Using Content Modifying MCUs

In this PtM scenario, each End Point runs an RTP point-to-point session between itself and the MCU. This is a very commonly deployed topology in multipoint video conferencing. The content that the MCU provides to each participant is either:

- a. a selection of the content received from the other End Points,
- or
- b. the mixed aggregate of what the MCU receives from the other Ptp paths, which are part of the same Communication Session.

In case (a), the MCU may modify the content in terms of bit-rate, encoding format, or resolution. No explicit RTP mechanism is used to establish the relationship between the original RTP stream of the media being sent RTP stream the MCU sends. In other words, the outgoing RTP streams typically use a different SSRC, and may well use a different payload type (PT), even if this different PT happens to be mapped to the same media type. This is a result of the individually negotiated RTP session for each End Point.

In case (b), the MCU is the Media Source and generates the Source RTP Stream as it mixes the received content and then encodes and packetizes it for transmission to an End Point. According to RTP [[RFC3550](#)], the SSRC of the contributors are to be signalled using the

CSRC/CC mechanism. In practice, today, most deployed MCUs do not implement this feature. Instead, the identification of the End

Westerlund & Wenger  
33]

Expires February 8, 2015

[Page

Points whose content is included in the Mixer's output is not indicated through any explicit RTP mechanism. That is, most deployed

MCUs set the CSRC Count (CC) field in the RTP header to zero, thereby

indicating no available CSRC information, even if they could identify

the original sending End Points as suggested in RTP.

The main feature that sets this topology apart from what [RFC 3550](#) describes is the breaking of the common RTP session across the centralized device, such as the MCU. This results in the loss of explicit RTP-level indication of all participants. If one were using

the mechanisms available in RTP and RTCP to signal this explicitly, the topology would follow the approach of an RTP Mixer. The lack of explicit indication has at least the following potential problems:

1. Loop detection cannot be performed on the RTP level. When carelessly connecting two misconfigured MCUs, a loop could be generated.
2. There is no information about active media senders available in the RTP packet. As this information is missing, receivers cannot use it. It also deprives the client of information related to currently active senders in a machine-usable way, thus preventing clients from indicating currently active speakers in user interfaces, etc.

Note that many/most deployed MCUs (and video conferencing endpoints) rely on signalling layer mechanisms for the identification of the contributing sources, for example, a SIP conferencing package [[RFC4575](#)]. This alleviates, to some extent, the aforementioned issues resulting from ignoring RTP's CSRC mechanism.

### **3.10. Split Component Terminal**

Shortcut name: Topo-Split-Terminal

In some applications, for example in some telepresence systems, terminals may be not integrated into a single functional unit, but composed of more than one subunits. For example, a telepresence room

terminal employing multiple cameras and monitors may consist of multiple video conferencing subunits, each capable of handling a single camera and monitor. Another example would be a video conferencing terminal in which audio is handled by one subunit, and video by another. Each of these subunits uses its own network address. The various (media processing) subunits need (logically and

physically) to be interconnected by control functionality, but their media plane functionality may be split. This type of terminals is referred to as split component terminals.

An example for such a split component terminal is depicted in Figure 20. Within split component terminal A, at least audio and video subunits are addressed by their own network addresses. In some of these systems, the control stack subunit may also have its own network address.

From an RTP viewpoint, each of the subunits terminate RTP, and act as an End Point in the sense that each subunit includes its own, independent RTP stack. However, as the subunits are semantically part of the same terminal, it is appropriate that this semantic relationship is expressed in RTCP protocol elements, namely in the CNAME.

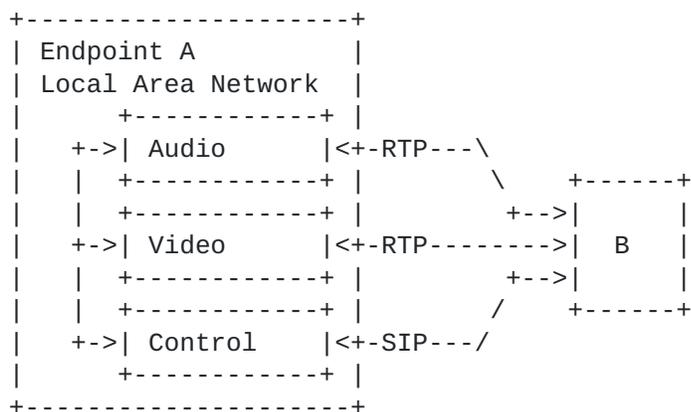


Figure 20: Split Component Terminal

In a compliant RTP implementation, it is not feasible for more than one subunit to be part of a given RTP session. When attempting to do so, a third party monitor would report the two subunits as two separate End Points with a CNAME collision. As a result, a fully conformant split component terminal is one where the subunits use separate RTP sessions to send and/or receive RTP streams intended for them.

In addition to the use of a common CNAME and the use of independent RTP sessions for the RTP streams generated or consumed by the various subunits, it is sensible that the subunits share a common clock, to ensure that synchronization and clock drift handling works, despite the fact that the components are separated. RTCP handling works correctly as long as each subunit participates in its own RTP session.

Westerlund & Wenger  
35]

Expires February 8, 2015

[Page

### **3.11. Non-Symmetric Mixer/Translators**

Shortcut name: Topo-Asymmetric

It is theoretically possible to construct an MCU that is a Mixer in one direction and a Translator in another. The main reason to consider this would be to allow topologies similar to Figure 13, where the Mixer does not need to mix in the direction from B or D towards the multicast domains with A and C. Instead, the RTP streams

from B and D are forwarded without changes. Avoiding this mixing would save media processing resources that perform the mixing in cases where it isn't needed. However, there would still be a need to

mix B's media towards D. Only in the direction B -> multicast domain

or D -> multicast domain would it be possible to work as a Translator. In all other directions, it would function as a Mixer.

The Mixer/Translator would still need to process and change the RTCP before forwarding it in the directions of B or D to the multicast domain. One issue is that A and C do not know about the mixed-media stream the Mixer sends to either B or D. Therefore, any reports related to these streams must be removed. Also, receiver reports related to A and C's RTP streams would be missing. To avoid A and C thinking that B and D aren't receiving A and C at all, the Mixer needs to insert locally generated reports reflecting the situation for the streams from A and C into B and D's Sender Reports. In the opposite direction, the Receiver Reports from A and C about B's and D's stream also need to be aggregated into the Mixer's Receiver Reports sent to B and D. Since B and D only have the Mixer as source

for the stream, all RTCP from A and C must be suppressed by the Mixer.

This topology is so problematic and it is so easy to get the RTCP processing wrong, that it is not recommended for implementation.

### **3.12. Combining Topologies**

Topologies can be combined and linked to each other using Mixers or Translators. However, care must be taken in handling the SSRC/CSRC space. A Mixer does not forward RTCP from sources in other domains, but instead generates its own RTCP packets for each domain it mixes into, including the necessary Source Description (SDES) information for both the CSRCs and the SSRCs. Thus, in a mixed domain, the only SSRCs seen will be the ones present in the domain, while there can be

CSRCs from all the domains connected together with a combination of Mixers and Translators. The combined SSRC and CSRC space is common over any Translator or Mixer. It is important to facilitate loop detection, something that is likely to be even more important in

combined topologies due to the mixed behavior between the domains.

Westerlund & Wenger  
36]

Expires February 8, 2015

[Page

Any hybrid, like the Topo-Video-switch-MCU or Topo-Asymmetric, requires considerable thought on how RTCP is dealt with.

#### **4. Comparing Topologies**

The topologies discussed in [Section 3](#) have different properties. This section first describes these properties and then analyzes how these properties are supported by the different topologies. Note that, even if a certain property is supported within a particular topology concept, the necessary functionality may be optional to implement.

##### **4.1. Topology Properties**

###### **4.1.1. All to All Media Transmission**

To recapitulate, multicast, and in particular Any Source Multicast (ASM), provides the functionality that everyone may send to, or receive from, everyone else within the session. Source-specific Multicast (SSM) can provide a similar functionality by having anyone intending to participate as sender to send its media to the SSM distribution source. The SSM distribution source forwards the media to all receivers subscribed to the multicast group. Mesh, MCUs, Mixers, SFMs and Translators may all provide that functionality at least on some basic level. However, there are some differences in which type of reachability they provide.

Closest to true IP-multicast-based, all-to-all transmission comes perhaps the transport Translator function called "relay" in [Section 3.5](#), as well as the Mesh with joint RTP sessions. Media Translators, Mesh with independent RTP Sessions, Mixers, SFUs and the

MCU variants do not provide a fully meshed forwarding on the transport level; instead, they only allow limited forwarding of content from the other session participants.

The "all to all media transmission" requires that any media transmitting End Point considers the path to the least capable receiving End Point. Otherwise, the media transmissions may overload

that path. Therefore, a sending End Point needs to monitor the path from itself to any of the receiving End Points, to detect the currently least capable receiver, and adapt its sending rate accordingly. As multiple End Points may send simultaneously, the available resources may vary. RTCP's Receiver Reports help performing this monitoring, at least on a medium time scale.

The resource consumption for performing all to all transmission varies depending with the topology. Both ASM and SSM have the benefit that only one copy of each packet traverses a particular



link. Using a relay causes the transmission of one copy of a packet per End Point-to-relay path and packet transmitted. However, in most

cases the links carrying the multiple copies will be the ones close to the relay (which can be assumed to be part of the network infrastructure with good connectivity to the backbone), rather than the End Points (which may be behind slower access links). The Mesh causes N-1 streams of transmitted packets to traverse the first hop link from the End Point, in an N End Point mesh. How long the different paths are common, is highly situation dependent.

The transmission of RTCP by design adapts to any changes in the number of participants due to the transmission algorithm, defined in the RTP specification [[RFC3550](#)], and the extensions in AVPF [[RFC4585](#)]

(when applicable). That way, the resources utilized for RTCP stay within the bounds configured for the session.

#### **4.1.2. Transport or Media Interoperability**

All Translators, Mixers, and RTCP-terminating MCU, and Mesh with individual RTP sessions, allow changing the media encoding or the transport to other properties of the other domain, thereby providing extended interoperability in cases where the End Points lack a common

set of media codecs and/or transport protocols. Selective Forwarding

Middleboxes can adopt the transport, and (at least) selectively forward the encoded streams that match a receiving End Point's capability. It requires an additional translator to change the media

encoding if the encoded streams do not match the receiving End Point's capabilities.

#### **4.1.3. Per Domain Bit-Rate Adaptation**

End Points are often connected to each other with a heterogeneous set

of paths. This makes congestion control in a Point to Multipoint set

problematic. For the ASM, SSM, Mesh with common RTP session, and Transport Relay scenario, each individual sending End Point has to adapt to the receiving End Point behind the least capable path, yielding suboptimal quality for the End Points behind the more capable paths. This is no longer an issue when Media Translators, Mixers, SFM or MCUs are involved, as each End Point only needs to adapt to the slowest path within its own domain. The Translator, Mixer, SFM, or MCU topologies all require their respective outgoing RTP streams to adjust the bit-rate, packet-rate, etc., to adapt to the least capable path in each of the other domains. That way one can avoid lowering the quality to the least-capable End Point in all the domains at the cost (complexity, delay, equipment) of the Mixer,

SFM or Translator, and potentially media sender (multicast/layered encoding and sending the different representations).

Westerlund & Wenger  
38]

Expires February 8, 2015

[Page

#### **4.1.4. Aggregation of Media**

In the all-to-all media property mentioned above and provided by ASM, SSM, Mesh with common RTP session, and relay, all simultaneous media transmissions share the available bit-rate. For End Points with limited reception capabilities, this may result in a situation where even a minimal acceptable media quality cannot be accomplished, because multiple RTP streams need to share the same resources. One solution to this problem is to provide for a Mixer, or MCU to aggregate the multiple RTP streams into a single one, where the single RTP stream takes up less resources in terms of bit-rate. This

aggregation can be performed according to different methods. Mixing or selection are two common methods. Selection is almost always possible and easy to implement. Mixing requires resources in the mixer, and may be relatively easy and not impairing the quality too badly (audio) or quite difficult (video tiling, which is not only computationally complex but also reduces the pixel count per stream, with corresponding loss in perceptual quality).

#### **4.1.5. View of All Session Participants**

The RTP protocol includes functionality to identify the session participants through the use of the SSRC and CSRC fields. In addition, it is capable of carrying some further identity information about these participants using the RTCP Source Descriptors (SDES). In topologies that provide a full all-to-all functionality, i.e. ASM, Mesh with common RTP session, Relay a compliant RTP implementation offers the functionality directly as specified in RTP.

In topologies that do not offer all-to-all communication, it is necessary that RTCP is handled correctly in domain bridging function.

RTP includes explicit specification text for Translators and Mixers, and for SFMs the required functionality can be derived from that text. However, the MCU described in [Section 3.8](#) cannot offer the full functionality for session participant identification through RTP

means. The topologies that create independent RTP sessions per End Point or pair of End Points, like Back-to-Back RTP session, MESH with

independent RTP sessions, and the RTCP terminating MCU RTCP terminating MCU ([Section 3.9](#)) do not support RTP based identification

of session participants. In all those cases, other non-RTP based mechanisms need to be implemented if such knowledge is required or desirable.

#### **4.1.6. Loop Detection**

In complex topologies with multiple interconnected domains, it is possible to unintentionally form media loops. RTP and RTCP support detecting such loops, as long as the SSRC and CSRC identities are maintained and correctly set in forwarded packets. Loop detection

will work in ASM, SSM, Mesh with joint RTP session, and Relay. It is likely that loop detection works for the video switching MCU [Section 3.8](#), at least as long as it forwards the RTCP between the End Points. However, the Back-to-Back RTP sessions, Mesh with independent RTP sessions, SFM, will definitely break the loop detection mechanism.

#### 4.2. Comparison of Topologies

The table below attempts to summarize the properties of the different topologies. The legend to the topology abbreviations are: Topo-Point-to-Point (PtP), Topo-ASM (ASM), Topo-SSM (SSM), Topo-Trns-Translator (TT), Topo-Media-Translator (including Transport Translator) (MT), Topo-Mesh with joint session (MJS), Topo-Mesh with individual sessions (MIS), Topo-Mixer (Mix), Topo-Asymmetric (ASY), Topo-Video-switch-MCU (VSM), and Topo-RTCP-terminating-MCU (RTM), Selective Forwarding Middlebox (SFM). In the table below, Y indicates Yes or full support, N indicates No support, (Y) indicates partial support, and N/A indicates not applicable.

| Property                          | PtP | ASM | SSM | TT | MT | MJS | MIS | Mix | ASY | VSM | RTM | SFM |
|-----------------------------------|-----|-----|-----|----|----|-----|-----|-----|-----|-----|-----|-----|
| All to All media Interoperability | N   | Y   | (Y) | Y  | Y  | Y   | (Y) | (Y) | (Y) | (Y) | (Y) | (Y) |
| Per Domain Adaptation             | N/A | N   | N   | Y  | Y  | Y   | Y   | Y   | Y   | N   | Y   | Y   |
| Aggregation of media              | N/A | N   | N   | N  | Y  | N   | Y   | Y   | Y   | N   | Y   | Y   |
| Full Session View                 | N   | N   | N   | N  | N  | N   | N   | Y   | (Y) | Y   | Y   | N   |
| Loop Detection                    | Y   | Y   | Y   | Y  | Y  | Y   | N   | Y   | Y   | (Y) | N   | N   |

Please note that the Media Translator also includes the transport Translator functionality.

#### 5. Security Considerations

The use of Mixers, SFMs and Translators has impact on security and the security functions used. The primary issue is that both Mixers, SFMs and Translators modify packets, thus preventing the use of integrity and source authentication, unless they are trusted devices that take part in the security context, e.g., the device can send Secure Realtime Transport Protocol (SRTP) and Secure Realtime Transport Control Protocol (SRTCP) [\[RFC3711\]](#) packets to End Points in the Communication Session. If encryption is employed, the media Translator, SFM and Mixer need to be able to decrypt the media to perform its function. A transport Translator may be used without access to the encrypted payload in cases where it translates parts that are not included in the encryption and integrity protection, for

example, IP address and UDP port numbers in a media stream using  
SRTP  
[\[RFC3711\]](#). However, in general, the Translator, SFM or Mixer needs

to be part of the signalling context and get the necessary security associations (e.g., SRTP crypto contexts) established with its RTP session participants.

Including the Mixer, SFM and Translator in the security context allows the entity, if subverted or misbehaving, to perform a number of very serious attacks as it has full access. It can perform all the attacks possible (see [RFC 3550](#) and any applicable profiles) as if the media session were not protected at all, while giving the impression to the human session participants that they are protected.

Transport Translators have no interactions with cryptography that works above the transport layer, such as SRTP, since that sort of Translator leaves the RTP header and payload unaltered. Media Translators, on the other hand, have strong interactions with cryptography, since they alter the RTP payload. A media Translator in a session that uses cryptographic protection needs to perform cryptographic processing to both inbound and outbound packets.

A media Translator may need to use different cryptographic keys for the inbound and outbound processing. For SRTP, different keys are required, because an [RFC 3550](#) media Translator leaves the SSRC unchanged during its packet processing, and SRTP key sharing is only allowed when distinct SSRCs can be used to protect distinct packet streams.

When the media Translator uses different keys to process inbound and outbound packets, each session participant needs to be provided with the appropriate key, depending on whether they are listening to the Translator or the original source. (Note that there is an architectural difference between RTP media translation, in which participants can rely on the RTP Payload Type field of a packet to determine appropriate processing, and cryptographically protected media translation, in which participants must use information that is not carried in the packet.)

When using security mechanisms with Translators, SFMs and Mixers, it is possible that the Translator, SFM or Mixer could create different security associations for the different domains they are working in. Doing so has some implications:

First, it might weaken security if the Mixer/Translator accepts a weaker algorithm or key in one domain than in another. Therefore, care should be taken that appropriately strong security parameters are negotiated in all domains. In many cases, "appropriate" translates to "similar" strength. If a key management system does allow the negotiation of security parameters resulting in a different

Westerlund & Wenger  
41]

Expires February 8, 2015

[Page

strength of the security, then this system should notify the participants in the other domains about this.

Second, the number of crypto contexts (keys and security related state) needed (for example, in SRTP [[RFC3711](#)]) may vary between Mixers, SFMs and Translators. A Mixer normally needs to represent only a single SSRCs per domain and therefore needs to create only

one

security association (SRTP crypto context) per domain. In contrast, a Translator needs one security association per participant it translates towards, in the opposite domain. Considering Figure 11, the Translator needs two security associations towards the multicast domain, one for B and one for D. It may be forced to maintain a set of totally independent security associations between itself and B

and

D respectively, so as to avoid two-time pad occurrences. These contexts must also be capable of handling all the sources present in the other domains. Hence, using completely independent security associations (for certain keying mechanisms) may force a Translator to handle  $N \cdot DM$  keys and related state; where N is the total number

of

SSRCs used over all domains and DM is the total number of domains.

The multicast based (ASM and SSM), Relay and Mesh with common RTP session are all topologies with multiple End Points that require shared knowledge about the different crypto contexts for the End Points. These multi-party topologies have special requirements on the key-management as well as the security functions. Specifically source-authentication in these environments has special requirements.

There exist a number of different mechanisms to provide keys to the different participants. One example is the choice between group keys

and unique keys per SSRC. The appropriate keying model is impacted by the topologies one intends to use. The final security properties are dependent on both the topologies in use and the keying mechanisms' properties, and need to be considered by the

application.

Exactly which mechanisms are used is outside of the scope of this document. Please review RTP Security Options [[RFC7201](#)] to get a better understanding of most of the available options.

## **6. IANA Considerations**

This document makes no request of IANA.

Note to RFC Editor: this section may be removed on publication as an RFC.

Westerlund & Wenger  
42]

Expires February 8, 2015

[Page

## 7. Acknowledgements

The authors would like to thank Bo Burman, Umesh Chandra, Roni Even, Keith Lantz, Ladan Gharai, Geoff Hunt, Mark Baugher, and Alex Eleftheriadis for their help in reviewing this document.

## 8. References

### 8.1. Normative References

- [RFC3550] Schulzrinne, H., Casner, S., Frederick, R., and V. Jacobson, "RTP: A Transport Protocol for Real-Time Applications", STD 64, [RFC 3550](#), July 2003.
- [RFC3711] Baugher, M., McGrew, D., Naslund, M., Carrara, E., and K. Norrman, "The Secure Real-time Transport Protocol (SRTP)", [RFC 3711](#), March 2004.
- [RFC4575] Rosenberg, J., Schulzrinne, H., and O. Levin, "A Session Initiation Protocol (SIP) Event Package for Conference State", [RFC 4575](#), August 2006.
- [RFC4585] Ott, J., Wenger, S., Sato, N., Burmeister, C., and J. Rey, "Extended RTP Profile for Real-time Transport Control Protocol (RTCP)-Based Feedback (RTP/AVPF)", [RFC 4585](#), July 2006.

### 8.2. Informative References

- [I-D.ietf-avtcore-rtp-multi-stream-optimisation] Lennox, J., Westerlund, M., Wu, W., and C. Perkins, "Sending Multiple Media Streams in a Single RTP Session: Grouping RTCP Reception Statistics and Other Feedback", [draft-ietf-avtcore-rtp-multi-stream-optimisation-03](#) (work in progress), July 2014.
- [RFC1112] Deering, S., "Host extensions for IP multicasting", STD 5, [RFC 1112](#), August 1989.
- [RFC3022] Srisuresh, P. and K. Egevang, "Traditional IP Network Address Translator (Traditional NAT)", [RFC 3022](#), January 2001.
- [RFC3569] Bhattacharyya, S., "An Overview of Source-Specific Multicast (SSM)", [RFC 3569](#), July 2003.
- [RFC4607] Holbrook, H. and B. Cain, "Source-Specific Multicast for IP", [RFC 4607](#), August 2006.

Westerlund & Wenger  
43]

Expires February 8, 2015

[Page

- [RFC5104] Wenger, S., Chandra, U., Westerlund, M., and B. Burman, "Codec Control Messages in the RTP Audio-Visual Profile with Feedback (AVPF)", [RFC 5104](#), February 2008.
- [RFC5760] Ott, J., Chesterfield, J., and E. Schooler, "RTP Control Protocol (RTCP) Extensions for Single-Source Multicast Sessions with Unicast Feedback", [RFC 5760](#), February 2010.
- [RFC5766] Mahy, R., Matthews, P., and J. Rosenberg, "Traversal Using Relays around NAT (TURN): Relay Extensions to Session Traversal Utilities for NAT (STUN)", [RFC 5766](#), April 2010.
- [RFC6465] Ivov, E., Marocco, E., and J. Lennox, "A Real-time Transport Protocol (RTP) Header Extension for Mixer-to-Client Audio Level Indication", [RFC 6465](#), December 2011.
- [RFC7201] Westerlund, M. and C. Perkins, "Options for Securing RTP Sessions", [RFC 7201](#), April 2014.

#### Authors' Addresses

Magnus Westerlund  
Ericsson  
Farogatan 6  
SE-164 80 Kista  
Sweden

Phone: +46 10 714 82 87  
Email: [magnus.westerlund@ericsson.com](mailto:magnus.westerlund@ericsson.com)

Stephan Wenger  
Vidyo  
433 Hackensack Ave  
Hackensack, NJ 07601  
USA

Email: [stewe@stewe.org](mailto:stewe@stewe.org)

