

AVTEXT Working Group  
INTERNET-DRAFT  
Intended Status: Standards Track  
Expires: January 30, 2015

J. Xia  
R. Even  
R. Huang  
Huawei  
L. Deng  
China Mobile  
July 29, 2014

RTP/RTCP Extension for RTP Splicing Notification  
draft-ietf-avtext-splicing-notification-00

## Abstract

Content splicing is a process that replaces the content of a main multimedia stream with other multimedia content, and delivers the substitutive multimedia content to the receivers for a period of time. The RTP mixer is designed to handle RTP splicing in [RFC6828], but how the RTP mixer knows when to start and end the splicing is still unspecified.

This memo defines two RTP/RTCP extensions to indicate the splicing related information to the RTP mixer: an RTP header extension that conveys the information in-band and an RTCP packet that conveys the information out-of-band.

## Status of this Memo

This Internet-Draft is submitted to IETF in full conformance with the provisions of [BCP 78](#) and [BCP 79](#).

Internet-Drafts are working documents of the Internet Engineering Task Force (IETF), its areas, and its working groups. Note that other groups may also distribute working documents as Internet-Drafts.

Internet-Drafts are draft documents valid for a maximum of six months and may be updated, replaced, or obsoleted by other documents at any time. It is inappropriate to use Internet-Drafts as reference material or to cite them other than as "work in progress."

The list of current Internet-Drafts can be accessed at <http://www.ietf.org/lid-abstracts.html>

The list of Internet-Draft Shadow Directories can be accessed at <http://www.ietf.org/shadow.html>

INTERNET DRAFT

RTP Splicing Notification

July 29, 2014

## Copyright and License Notice

Copyright (c) 2014 IETF Trust and the persons identified as the document authors. All rights reserved.

This document is subject to [BCP 78](#) and the IETF Trust's Legal Provisions Relating to IETF Documents (<http://trustee.ietf.org/license-info>) in effect on the date of publication of this document. Please review these documents carefully, as they describe your rights and restrictions with respect to this document. Code Components extracted from this document must include Simplified BSD License text as described in Section 4.e of the Trust Legal Provisions and are provided without warranty as described in the Simplified BSD License.

## Table of Contents

<a href="#">1</a>	Introduction . . . . .	<a href="#">3</a>
<a href="#">1.1</a>	Terminology . . . . .	<a href="#">3</a>
<a href="#">2</a>	Overview of RTP Splicing Notification . . . . .	<a href="#">4</a>
<a href="#">3</a>	Conveying Splicing Interval in RTP/RTCP extensions . . . . .	<a href="#">5</a>
<a href="#">3.1</a>	RTP Header Extension . . . . .	<a href="#">5</a>
<a href="#">3.2</a>	RTCP Splicing Notification Message . . . . .	<a href="#">6</a>
<a href="#">4</a>	Reducing Splicing Latency . . . . .	<a href="#">7</a>
<a href="#">5</a>	Failure Cases . . . . .	<a href="#">7</a>
<a href="#">6</a>	SDP Signaling . . . . .	<a href="#">8</a>
<a href="#">7</a>	Security Considerations . . . . .	<a href="#">9</a>
<a href="#">8</a>	IANA Considerations . . . . .	<a href="#">9</a>
<a href="#">8.1</a>	RTCP Control Packet Types . . . . .	<a href="#">9</a>
<a href="#">8.2</a>	RTP Compact Header Extensions . . . . .	<a href="#">10</a>
<a href="#">9</a>	Acknowledges . . . . .	<a href="#">10</a>
<a href="#">10</a>	References . . . . .	<a href="#">10</a>
<a href="#">10.1</a>	Normative References . . . . .	<a href="#">10</a>
<a href="#">10.2</a>	Informative References . . . . .	<a href="#">11</a>
	Authors' Addresses . . . . .	<a href="#">11</a>

INTERNET DRAFT

RTP Splicing Notification

July 29, 2014

## 1 Introduction

Splicing is a process that replaces some multimedia content with other multimedia content and delivers the substitutive multimedia content to the receivers for a period of time. In some predictable splicing cases, e.g., advertisement insertion, the splicing duration **MUST** be inside of the specific, pre-designated time slot. Certain timing information about when to start and end the splicing must be first acquired by the mixer to start the splicing. This document refers to this information as Splicing Interval.

[SCTE35] provides a method that encapsulates the Splicing Interval inside the MPEG2-TS layer in cable TV systems. But in RTP splicing scenario described in [[RFC6828](#)], the mixer has to decode the RTP packets, search and solve the Splicing Interval inside the payloads. The need for such processing enhances the workload of the mixer and limits the size of RTP sessions the mixer can support.

The document defines an RTP header extension [[RFC5285](#)] through which the main RTP sender can provide the Splicing Interval by including it in the RTP packets.

Nevertheless, the Splicing Interval conveyed in the RTP header extension might not reach the mixer successfully, any splicing unaware middlebox on the path between the RTP sender and the mixer might strip the RTP header extension.

To increase robustness against above case, the document also defines a new RTCP packet type in a complementary fashion to carry the Splicing Interval to the mixer even though RTCP is inherently unreliable too.

### 1.1 Terminology

The key words "MUST", "MUST NOT", "REQUIRED", "SHALL", "SHALL NOT", "SHOULD", "SHOULD NOT", "RECOMMENDED", "MAY", and "OPTIONAL" in this

document are to be interpreted as described in [RFC 2119](#) [[RFC2119](#)].

Most terminology defined in "Content Splicing for RTP Sessions" [[RFC6828](#)] applies to this document except the following one.

#### Splicing Interval:

A set of certain metadata that allows the mixer to know when to start and end the RTP splicing. The information consists of a couple of NTP-format timestamps on the splicing in point and on the splicing out point.

Xia

Expires January 30, 2015

[Page 3]

---

INTERNET DRAFT

RTP Splicing Notification

July 29, 2014

## [2](#) Overview of RTP Splicing Notification

According to RTP Splicing draft [[RFC6828](#)], a mixer is designed to do splicing on the RTP layer, but it cannot insert the substitutive content randomly but only do that at the reserved time slots set by the main RTP sender. This implies the mixer must first know the Splicing Interval from the main RTP sender before splicing starts.

When a new splicing is forthcoming, the main RTP sender **MUST** send the Splicing Interval to the mixer. Usually, the Splicing Interval **SHOULD** be sent more than once to against the possible packet loss. To enable the mixer to get the substitutive content before the splicing starts, the main RTP sender **MUST** send the Splicing Interval far enough in advance. Alternatively, the main RTP sender can estimate when to send the Splicing Interval based on the round-trip time (RTT) following the mechanisms in [section 6.4.1 of \[RFC3550\]](#) when the mixer sends RTCP RR to the main sender.

The substitutive sender also needs to learn the Splicing Interval from the main RTP sender in advance, and thus estimates when to transfer the substitutive content to the mixer. The Splicing Interval could be transmitted from the main RTP sender to the substitutive content using some out-of-band mechanisms, the details how to achieve that are beyond the scope of this memo. To ensure the Splicing Interval is valid to the main RTP sender and the substitutive RTP sender, the two senders **MUST** share a common reference clock, so the mixer can achieve accurate splicing.

In this document, the main RTP sender uses a couple of NTP-format

timestamps, derived from the common reference clock, to indicate when to start and end the splicing to the mixer: the timestamp of the first substitutive RTP packet on the splicing in point, and the timestamp of the first main RTP packet on the splicing out point.

When the substitutive RTP sender gets the Splicing Interval, it must prepare the substitutive stream. The RTP timestamp of the first substitutive RTP packet that would be presented on the receivers MUST correspond to the same time instant as the former NTP timestamp in the Splicing Interval. To enable mixer to know the first substitutive RTP packet it begins to output, the substitutive RTP sender MUST enable the mixer to know above RTP timestamp in advance, e.g., from prior receipt of RTCP SR message.

When the splicing will end, the RTP timestamp of the first main RTP packet that would be presented on the receivers MUST correspond to the same time instant as the latter NTP timestamp in the Splicing Interval.

### [3](#) Conveying Splicing Interval in RTP/RTCP extensions

This memo defines two backwards compatible RTP extensions to convey the Splicing Interval to the mixer: an RTP header extension and an RTCP splicing notification message.

#### [3.1](#) RTP Header Extention

The RTP header extension mechanism defined in [\[RFC5285\]](#) can be adapted to carry the Splicing Interval consisting of a couple of NTP-format timestamps.

One variant is defined for this header extension. It carries the 7 octets splicing-out NTP timestamp (lower 24-bit part of the Seconds of a NTP-format timestamp and the 32 bits of the Fraction of a NTP-format timestamp as defined in [\[RFC5905\]](#)), followed by the 8 octets splicing-in NTP timestamp (64-bit NTP-format timestamp as defined in [\[RFC5905\]](#)). The top 8 bits of the splicing-out NTP timestamp are referred from the top 8 bits of the splicing-in NTP timestamp, under the consumption that the splicing-out time is after the splicing-in time, and the splicing interval is less than  $2^{25}$  seconds, this order

allows full resolution for splicing-in NTP timestamp while keeping 4 octets alignment.

The format is shown in Figures 1.

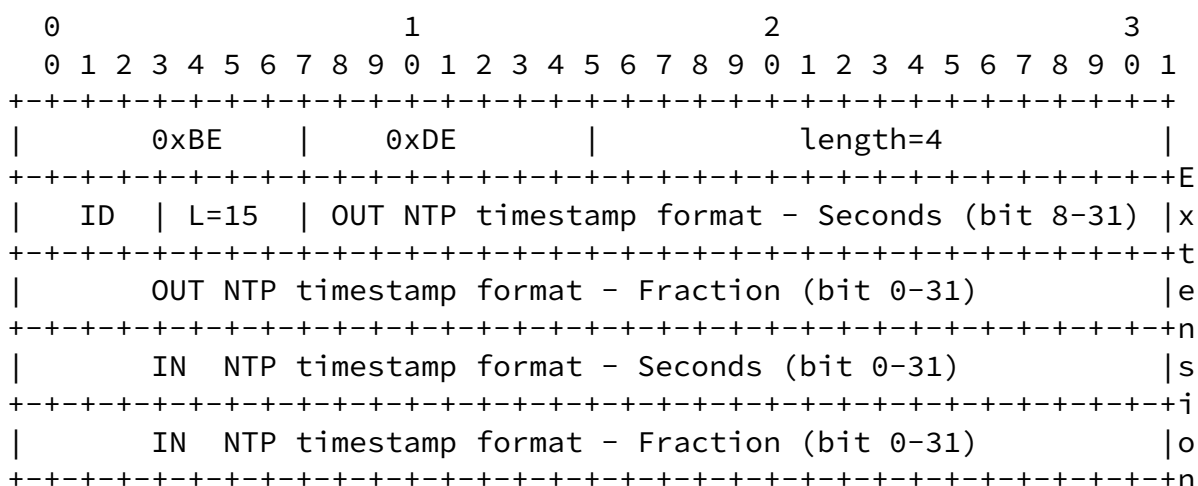


Figure 1: Sample hybrid NTP Encoding Using the One-Byte Header Format

Note that the inclusion of an RTP header extension will reduce the efficiency of RTP header compression. It is RECOMMENDED that the main sender begins to insert the RTP header extensions into a number of RTP packets in advance of the splicing starting, while leaving the

remain RTP packets unmarked.

After the mixer intercepts the RTP header extension and derives the Splicing Interval, it will generate its own stream and could not include the RTP header extension in outgoing packets to reduce header overhead.

Furthermore, whether the in-band NTP-format timestamps are included or not, RTCP splicing notification message in next section MUST be sent to provide robustness in the case of any splicing-unaware middlebox that might strip RTP header extensions.

### [3.2](#) RTCP Splicing Notification Message

Besides the RTP header extension, the main RTP sender includes the

Splicing Interval in an RTCP splicing notification message.

The RTCP splicing notification message is a new RTCP packet type. It has a fix header followed by a couple of NTP-format timestamps:

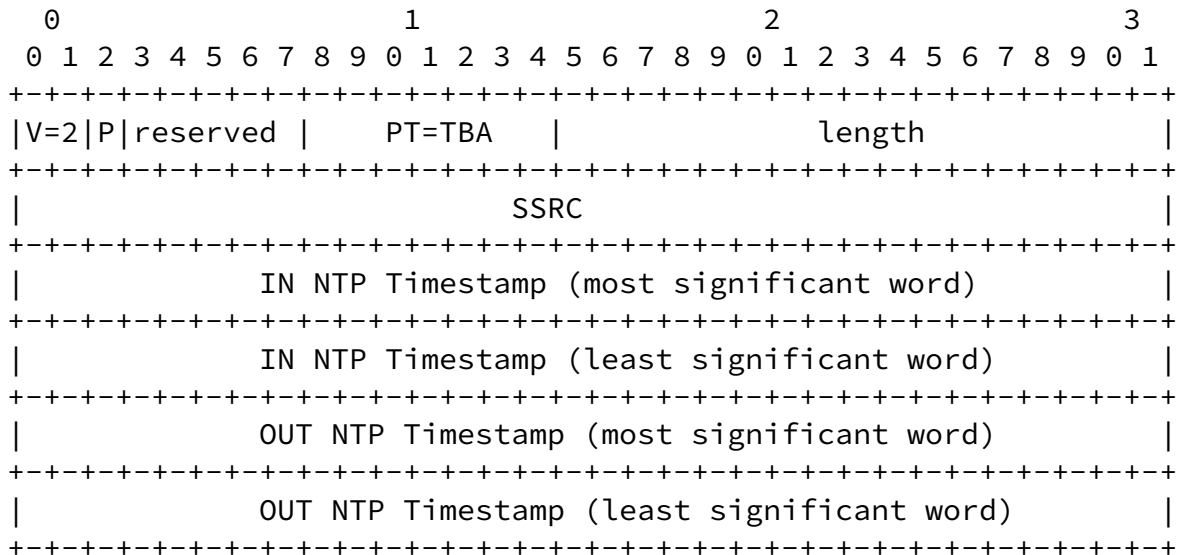


Figure 2: RTCP Splicing Notification Message

The RSI packet includes the following fields:

Length: 16 bits

As defined in [[RFC3550](#)], the length of the RTCP packet in 32-bit words minus one, including the header and any padding.

SSRC: 32 bits

The SSRC of the Main RTP Sender.

Timestamp: 64 bits

Indicates the wallclock time when this splicing starts and ends. The full-resolution NTP timestamp is used, which is a 64-bit, unsigned, fixed-point number with the integer part in the first 32 bits and the fractional part in the last 32 bits. This format is

similar to RTCP Sender Report ([Section 6.4.1 of \[RFC3550\]](#)).

The RTCP splicing notification message can be appended to RTCP SR the main RTP sender generates in compound RTCP packets, and hence follows the compound RTCP rules defined in [Section 6.1 in \[RFC3550\]](#).

If the use of non-compound RTCP [\[RFC5506\]](#) was previously negotiated between the sender and the mixer, the RTCP splicing notification message may be sent as non-compound RTCP packets.

When the mixer intercepts the RTCP splicing notification message, it MAY NOT forward the message to the receivers in order to reduce RTCP bandwidth consumption or to avoid downstream receivers from detecting splicing defined in [Section 4.5 in \[RFC6828\]](#).

#### [4](#) Reducing Splicing Latency

When splicing starts or ends, the mixer outputs the multimedia content from another sender to the receivers. Given that the receivers must first acquire certain information ([\[RFC6285\]](#) refers to this information as Reference Information) to start processing the multimedia data, either the main RTP sender or the substitutive sender SHOULD provide the Reference Information align with its multimedia content to reduce the delay caused by acquiring the Reference Information. The means by which the Reference Information is distributed to the receivers is out of scope of this memo.

Another latency element is synchronization caused delay. The receivers must receive enough synchronization metadata prior to synchronizing the separate components of the multimedia streams when splicing starts or ends. Either the main RTP sender or the substitutive sender SHOULD send the synchronization metadata early enough so that the receivers can play out the multimedia in a synchronized fashion. The mechanisms defined in [\[RFC6051\]](#) are RECOMMENDED to be adopted to reduce the possible synchronization delay.

#### [5](#) Failure Cases

This section examines the implications of losing RTCP splicing



notification message and other failure case, e.g., the RTP header extension is stripped on the path.

Given there may be splicing un-aware middlebox on the path between the main RTP sender and the mixer, one heuristics will be used to verify whether or not the Splicing Interval reaches the mixers.

If the mixer does not get the Splicing Interval when the splicing starts, it will still output the main content to the downstream receivers and forward the RTCP RR packets sent from downstream receivers to the main RTP sender. In such case, the main RTP sender can learn the splicing failed.

In a similar manner, the substitutive sender can learn the splicing failed if it does not receive any RTCP RR packets from downstream receivers when the splicing starts.

Upon the detection of a failure, the main RTP sender or the substitutive sender SHOULD check the path to the failed mixer, or fallback to the payload specific mechanisms, e.g., MPEG-TS splicing solution defined in [[SCTE35](#)].

## [6](#) SDP Signaling

This document defines the URI for declaring this header extension in an extmap attribute to be "urn:ietf:params:rtp-hdext:splicing-interval".

This document also reuses the Flow Identification (FID) semantics defined in SDP Grouping Framework [[RFC5888](#)] to represent the relationship between the main RTP stream and the substitutive RTP stream.

The next example shows how the "group" attribute used with FID semantics can indicate RTP splicing support on RTP sender.

```
v=0
o=xia 1122334455 1122334466 IN IP4 splicing.example.com
s=RTP Splicing Example
t=0 0
a=group:FID 1 2
m=video 30000 RTP/AVP 100
i=Main RTP Stream
c=IN IP4 233.252.0.1/127
a=rtpmap:100 MP2T/90000
a=extmap:1 urn:ietf:params:rtp-hdext:splicing-interval
```

```
a=mid: 1
m= video 30001 RTP/AVP 100
i=Substitutive RTP Stream
c=IN IP4 233.252.0.2/127
a=sendonly
a=mid: 2
```

Figure 3: Example SDP for a single-channel splicing scenario

The mixer receiving the SDP message above receives one MPEG2-TS stream (payload 100) from the main RTP sender (with multicast destination address of 233.252.0.1) on port 30000, and/or receives another MPEG2-TS stream from the substitutive RTP sender (with multicast destination address of 233.252.0.2) on port 30001. But at a particular point in time, the mixer only selects one stream and output the content from the chosen stream to the downstream receivers.

## 7 Security Considerations

The security considerations of the RTP specification [[RFC3550](#)], the general mechanism for RTP header extensions [[RFC5285](#)] and the security considerations of the RTP splicing specification [[RFC6828](#)] apply.

The RTP header extension defined in [Section 4.1](#) include two NTP-format timestamps. In the Secure Real-time Transport Protocol (SRTP)[[RFC3711](#)], RTP header extensions are authenticated but not encrypted. A malicious endpoint could choose to set the values in this header extension falsely, so as to falsely claim the splicing time.

In scenarios where this is a concern, additional mechanisms MUST be used to protect the confidentiality of the header extension. This mechanism could be header extension encryption [SRTP-ENCR-HDR], or a lower-level security and authentication mechanism such as IPsec [[RFC4301](#)].

## 8 IANA Considerations

### 8.1 RTCP Control Packet Types

Based on the guidelines suggested in [[RFC5226](#)], a new RTCP packet format has been registered with the RTCP Control Packet Type (PT)

Registry:

Xia

Expires January 30, 2015

[Page 9]

---

INTERNET DRAFT

RTP Splicing Notification

July 29, 2014

Name: SNM

Long name: Splicing Notification Message

Value: TBA

Reference: This document

## [8.2](#) RTP Compact Header Extensions

The IANA has also registered a new RTP Compact Header Extension [[RFC5285](#)], according to the following:

Extension URI: urn:ietf:params:rtp-hdrex:splicing-interval

Description: Splicing Interval

Contact: Jinwei Xia <xiajinwei@huawei.com>

Reference: This document

## [9](#) Acknowledges

TBD

## [10](#) References

### [10.1](#) Normative References

[RFC2119] Bradner, S., "Key words for use in RFCs to Indicate Requirement Levels", [BCP 14](#), [RFC 2119](#), March 1997.

[RFC3550] Schulzrinne, H., Casner, S., Frederick, R., and V. Jacobson, "RTP: A Transport Protocol for Real-Time Applications", STD 64, [RFC 3550](#), July 2003.

[RFC4566] Handley, M., Jacobson, V., and C. Perkins, "SDP: Session

Description Protocol", [RFC 4566](#), July 2006.

- [RFC5285] Singer, D. and H. Desineni, "A General Mechanism for RTP Header Extensions", [RFC 5285](#), July 2008.
- [RFC5888] Camarillo, G. and H. Schulzrinne, "The Session Description Protocol (SDP) Grouping Framework", [RFC 5888](#), June 2010.
- [RFC5905] Mills, D., Martin, J., Ed., Burbank, J., and W. Kasch,

Xia

Expires January 30, 2015

[Page 10]

---

INTERNET DRAFT

RTP Splicing Notification

July 29, 2014

"Network Time Protocol Version 4: Protocol and Algorithms Specification", [RFC 5905](#), June 2010.

- [RFC6051] Perkins, C. and T. Schierl, "Rapid Synchronisation of RTP Flows", [RFC 6051](#), November 2010.
- [RFC6828] Xia, J., "Content Splicing for RTP Sessions", [RFC 6828](#), January 2013.

## [10.2](#) Informative References

- [RFC3711] Baugher, M., McGrew, D., Naslund, M., Carrara, E., and K. Norrman, "The Secure Real-time Transport Protocol (SRTP)", [RFC 3711](#), March 2004.
- [RFC4301] Kent, S. and K. Seo, "Security Architecture for the Internet Protocol", [RFC 4301](#), December 2005.
- [RFC5226] Narten, T. and H. Alvestrand, "Guidelines for Writing an IANA Considerations Section in RFCs", [BCP 26](#), [RFC 5226](#), May 2008.
- [RFC5506] Johansson, I. and M. Westerlund, "Support for Reduced-Size Real-Time Transport Control Protocol (RTCP): Opportunities and Consequences", [RFC 5506](#), April 2009.
- [RFC6285] Ver Steeg, B., Begen, A., Van Caenegem, T., and Z. Vax, "Unicast-Based Rapid Acquisition of Multicast RTP Sessions", [RFC 6285](#), June 2011.
- [RFC6904] Lennox, J., "Encryption of Header Extensions in the Secure Real-Time Transport Protocol (SRTP)", April 2013.

[SCTE35] Society of Cable Telecommunications Engineers (SCTE),  
"Digital Program Insertion Cueing Message for Cable",  
2011.

#### Authors' Addresses

Jinwei Xia  
Huawei

Email: xiajinwei@huawei.com

Xia

Expires January 30, 2015

[Page 11]

---

INTERNET DRAFT

RTP Splicing Notification

July 29, 2014

Roni Even  
Huawei

Email: ron.even.tlv@gmail.com

Rachel Huang  
Huawei

Email: rachel.huang@huawei.com

Lingli Deng  
China Mobile

Email: denglingli@chinamobile.com

Xia

Expires January 30, 2015

[Page 12]