

BEHAVE  
Wing  
Internet-Draft  
Systems  
Expires: November 14, 2005  
2005

D.  
Cisco  
May 13,

**IGMP Proxy Behavior**  
**draft-ietf-behave-multicast-00**

Status of this Memo

By submitting this Internet-Draft, each author represents that any applicable patent or other IPR claims of which he or she is aware have been or will be disclosed, and any of which he or she becomes aware will be disclosed, in accordance with [Section 6 of BCP 79](#).

Internet-Drafts are working documents of the Internet Engineering Task Force (IETF), its areas, and its working groups. Note that other groups may also distribute working documents as Internet-Drafts.

Internet-Drafts are draft documents valid for a maximum of six months and may be updated, replaced, or obsoleted by other documents at any time. It is inappropriate to use Internet-Drafts as reference material or to cite them other than as "work in progress."

The list of current Internet-Drafts can be accessed at <http://www.ietf.org/ietf/1id-abstracts.txt>.

The list of Internet-Draft Shadow Directories can be accessed at <http://www.ietf.org/shadow.html>.

This Internet-Draft will expire on November 14, 2005.

Copyright Notice

Copyright (C) The Internet Society (2005).

Abstract

This document describes the behavior of an IGMP Proxy, as implemented in NAT devices, and places requirements on such devices.

Requirements Language

The key words "MUST", "MUST NOT", "REQUIRED", "SHALL", "SHALL NOT", "SHOULD", "SHOULD NOT", "RECOMMENDED", "MAY", and "OPTIONAL" in this document are to be interpreted as described in [RFC 2119](#) [1].

Wing  
1]

Expires November 14, 2005

[Page

Table of Contents

<a href="#">1.</a>	Problem Statement . . . . .	
<a href="#">3</a>		
<a href="#">2.</a>	Document Scope . . . . .	
<a href="#">3</a>		
<a href="#">3.</a>	Introduction . . . . .	
<a href="#">3</a>		
<a href="#">3.1</a>	Host Multicast Overview . . . . .	
<a href="#">4</a>		
<a href="#">4.</a>	NAT IGMP Proxy Requirements . . . . .	
<a href="#">5</a>		
<a href="#">4.1</a>	Perform Host and IGMP Proxy Functions . . . . .	
<a href="#">5</a>		
<a href="#">4.2</a>	IGMP Packets Sent Towards WAN Interface . . . . .	
<a href="#">5</a>		
<a href="#">4.3</a>	Keep NAT Binding Open . . . . .	
<a href="#">6</a>		
<a href="#">4.4</a>	Support Non-UDP Traffic . . . . .	
<a href="#">6</a>		
<a href="#">4.5</a>	Inform Upstream Router of Multicast Interest . . . . .	
<a href="#">6</a>		
<a href="#">5.</a>	RTP Considerations . . . . .	
<a href="#">6</a>		
<a href="#">6.</a>	Security Considerations . . . . .	
<a href="#">7</a>		
<a href="#">7.</a>	IANA Considerations . . . . .	
<a href="#">7</a>		
<a href="#">8.</a>	Acknowledgments . . . . .	
<a href="#">7</a>		
<a href="#">9.</a>	References . . . . .	
<a href="#">7</a>		
<a href="#">9.1</a>	Normative References . . . . .	
<a href="#">7</a>		
<a href="#">9.2</a>	Informational References . . . . .	
<a href="#">7</a>		
	Author's Address . . . . .	
<a href="#">8</a>		
	Intellectual Property and Copyright Statements . . . . .	
<a href="#">9</a>		

Wing  
2]

Expires November 14, 2005

[Page

## 1. Problem Statement

For users to accept and enjoy multicast, multicast UDP must work as seamlessly as unicast UDP. However, today's equipment has little consistency in multicast operation which results in inconsistent user experiences and failed multicast operation.

## 2. Document Scope

This document describes the behavior of a device which:

- o functions as an IGMP proxy on behalf of hosts,
- o receives multicast traffic from one interface (typically its WAN interface) and sends that multicast traffic to other interface(s),
- o uses IGMPv2 or IGMPv3, and
- o uses IPv4.

Specifically out of scope are:

- o sending multicast traffic,
- o PIM-SM [[13](#)],
- o IPv6, and,
- o IGMPv1.

Sending multicast traffic is out of scope because it requires NATting the source IP address of such transmitted multicast traffic. Similarly, PIM is used only between routers and the IGMP Proxy devices that are scoped in this document do not function as routers. IPv6 is out of scope because NAT is not considered necessary with IPv6. IGMPv1 is not significantly deployed on the Internet.

This document does not describe how to implement multicast, IGMPv2, or IGMPv3 in an IGMP Proxy device. Rather, it provides requirements for an IGMP Proxy device so that hosts behind the NAT can receive multicast traffic without any knowledge of the IGMP Proxy.

## 3. Introduction


As detailed in the Document Scope section, the primary functions of an IGMP proxy device are to collect IGMP traffic from one interface and relay it to another interface, and accept multicast traffic from that interface and route -- or replicate it -- to other interface(s).

Wing  
3]


Expires November 14, 2005

[Page

When a NAT isn't used, a host might be connected to the Internet in a configuration such as this:

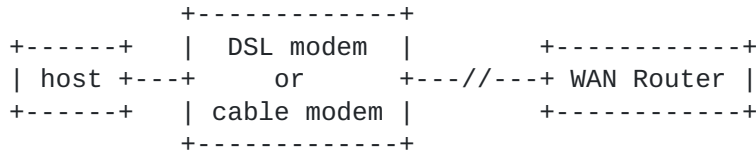

When an IGMP Proxy (NAT) device is added to such a network, its behavior is identical towards the upstream (WAN) router. Specifically, when dealing with multicast, the IGMP Proxy has the same behavior towards the WAN as if it was a host.

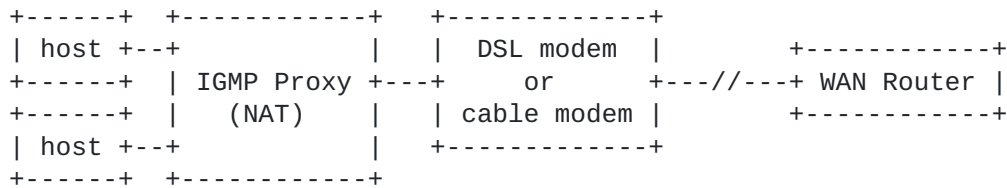

This document specifies how an IGMP Proxy provides multicast functionality to the hosts on its local LAN.

At the time of this writing, IGMPv2 [2] is still a common multicast signaling protocol, although new applications are now using IGMPv3 [3]. This document describes NAT requirements for both IGMPv2 and IGMPv3.

This document is a companion document to "NAT/Firewall Behavioral Requirements" [6], and uses the terminology defined in that document.

### 3.1 Host Multicast Overview

A host interested in receiving multicast traffic indicates its interest by sending an IGMP message to its local LAN. The contents of the IGMP message and the IP destination address is different for IGMPv2 and IGMPv3; see IGMPv2 [2] [section 9](#) and IGMPv3 [3] [section 4.2.14](#) for details.

The basic host operation is:

- o the IGMP Proxy listens on the for an IGMP message from hosts on its local network,
- o an application learns of a multicast address it's interested in receiving. This usually occurs via some sort of signaling (such as SIP [10] or SAP [8]), or by a user entering a multicast address directly into an application,

Wing  
4]

Expires November 14, 2005

[Page



- o the application sends an IGMP membership report to the local network,
- o The NAT performs specific aggregation functions (detailed in [RFC2236](#) and [RFC3376](#)), creates a NAT binding, and informs the upstream WAN router of its interest in receiving the multicast traffic by sending an IGMP membership report to the upstream router,
- o To indicate continued interest in receiving the multicast traffic, the application periodically re-transmits IGMP membership report messages, and these are aggregated by the NAT and periodically transmitted to the upstream router,
- o when all multicast listeners are no longer interested in multicast traffic (either due to not sending membership reports, or due to the NAT querying the hosts using IGMP), the NAT closes its NAT binding and informs the upstream WAN router to cease sending multicast traffic.

An IGMP Proxy would perform these operations, and would also route

--

or replicate -- incoming multicast traffic to the interface(s) where a host is interested in that multicast traffic.

#### **4. NAT IGMP Proxy Requirements**

This section lists the specific requirements for NATs that implement IGMP Proxies.

##### **4.1 Perform Host and IGMP Proxy Functions**

The IGMP Proxy MUST perform functions as if it were a host, as outlined in [Section 3.1](#). Additionally, the IGMP Proxy MUST also route incoming multicast packets to the interface that contained the host(s) interested in that multicast traffic. If hosts on multiple interfaces are interested in the same multicast traffic, the IGMP Proxy MUST replicate the traffic so that it is sent to all interfaces with interested hosts.

##### **4.2 IGMP Packets Sent Towards WAN Interface**

The IGMP packets sent by the NAT MUST follow the requirements in [RFC3376 section 4 \[3\]](#), specifically the TTL MUST be 1, IP precedence

MUST be Internetwork Control (Type of Service 0xc0), and it MUST carry the IP Router Alert option.

The IGMP packets sent by the NAT towards the WAN MUST use the NAT's public IP address as the source IP address.

Wing  
5]

Expires November 14, 2005

[Page

### **4.3 Keep NAT Binding Open**

The BEHAVE [6] document only requires that a NAT binding be kept open for inside-to-outside UDP flows. However, with multicast traffic, UDP traffic will only arrive outside-to-inside.

Hosts will periodically send IGMP Report messages to indicate continued interest in receiving the multicast traffic. As long as the IGMP Proxy sees a host is interested in receiving the flow, the NAT MUST continue to receive multicast traffic from the WAN and send it to the interfaces with interested hosts.

Per IGMPv3, the default transmission interval for the periodic Membership Report is one second. Per IGMPv2, the default transmission interval for the periodic Unsolicited Report Interval is

10 seconds. If a host no longer sends its periodic messages within those timeframes, the NAT MAY consider the host no longer wants to receive the multicast traffic and can inform the upstream WAN router and close the NAT binding. However, it is suggested that the NAT wait until 3 missing unsolicited reports (to account for packet loss on the LAN, especially wireless LANs), or that the NAT first query the host using IGMPv2 or IGMPv3.

### **4.4 Support Non-UDP Traffic**

Although multicast traffic is usually UDP, multicast traffic is not required to be UDP. Thus, a NAT MUST support multicast traffic of any IP protocol. This behavior will allow for seamless support of emerging protocols. This behavior MAY be configurable by the user.

### **4.5 Inform Upstream Router of Multicast Interest**

As long as a host is interested in receiving a multicast stream, the IGMP Proxy -- because it is acting like a host -- MUST also send periodic IGMP Report messages to the upstream WAN router to indicate continued interest in receiving the multicast traffic.

When all listeners behind the IGMP Proxy are no longer interested in the multicast traffic, the NAT MUST inform the upstream (WAN) router by sending an updated IGMP Membership Report, and the NAT MUST also delete its NAT binding. Informing the upstream router quickly is necessary to avoid wasting the bandwidth of the access link.

## **5. RTP Considerations**

A significant use of multicast is [RFC3550](#) [4] (RTP), which runs over UDP. A multicast listener would receive RTP over multicast UDP on port X, and would send unicast RTCP to the multicast RTP transmitter

Wing  
6]

Expires November 14, 2005

[Page

over port Y. Although [RFC3550](#) implies that  $X+1=Y$ , the NAT MUST NOT make this assumption because signaling can specify an alternate port for RTCP[5].

## **6. Security Considerations**

Compliance with this specification does not increase security risks beyond those already discussed in the Security Considerations section of IGMPv3 [[3](#)].

## **7. IANA Considerations**

This document does not require any IANA registrations.

## **8. Acknowledgments**

Thanks to Bryan McLaughlin and Yiqun Cai for their assistance in writing this document.

## **9. References**

### **9.1 Normative References**

- [1] Bradner, S., "Key words for use in RFCs to Indicate Requirement Levels", [BCP 14](#), [RFC 2119](#), March 1997.
- [2] Fenner, W., "Internet Group Management Protocol, Version 2", [RFC 2236](#), November 1997.
- [3] Cain, B., Deering, S., Kouvelas, I., Fenner, B., and A. Thyagarajan, "Internet Group Management Protocol, Version 3", [RFC 3376](#), October 2002.
- [4] Schulzrinne, H., Casner, S., Frederick, R., and V. Jacobson, "RTP: A Transport Protocol for Real-Time Applications", STD 64, [RFC 3550](#), July 2003.
- [5] Huitema, C., "Real Time Control Protocol (RTCP) attribute in Session Description Protocol (SDP)", [RFC 3605](#), October 2003.
- [6] Jennings, C., "NAT/Firewall Behavioral Requirements", [draft-audet-nat-behave-00](#) (work in progress), July 2004.

### **9.2 Informational References**

- [7] Deering, S., "Host extensions for IP multicasting", STD 5, [RFC 1112](#), August 1989.

Wing  
7]

Expires November 14, 2005

[Page

- [8] Handley, M., Perkins, C., and E. Whelan, "Session Announcement Protocol", [RFC 2974](#), October 2000.
- [9] Srisuresh, P. and K. Egevang, "Traditional IP Network Address Translator (Traditional NAT)", [RFC 3022](#), January 2001.
- [10] Rosenberg, J., Schulzrinne, H., Camarillo, G., Johnston, A., Peterson, J., Sparks, R., Handley, M., and E. Schooler, "SIP: Session Initiation Protocol", [RFC 3261](#), June 2002.
- [11] Droms, R., "Dynamic Host Configuration Protocol", [RFC 2131](#), March 1997.
- [12] Mamakos, L., Lidl, K., Evarts, J., Carrel, D., Simone, D., and R. Wheeler, "A Method for Transmitting PPP Over Ethernet (PPPoE)", [RFC 2516](#), February 1999.
- [13] Estrin, D., Farinacci, D., Helmy, A., Thaler, D., Deering, S., Handley, M., and V. Jacobson, "Protocol Independent Multicast-Sparse Mode (PIM-SM): Protocol Specification", [RFC 2362](#), June 1998.

Author's Address

Dan Wing  
Cisco Systems  
170 West Tasman Drive  
San Jose, CA 95134  
USA

Email: [dwing@cisco.com](mailto:dwing@cisco.com)

Wing  
8]

Expires November 14, 2005

[Page



## Intellectual Property Statement

The IETF takes no position regarding the validity or scope of any Intellectual Property Rights or other rights that might be claimed to pertain to the implementation or use of the technology described in this document or the extent to which any license under such rights might or might not be available; nor does it represent that it has made any independent effort to identify any such rights.

### Information

on the procedures with respect to rights in RFC documents can be found in [BCP 78](#) and [BCP 79](#).

Copies of IPR disclosures made to the IETF Secretariat and any assurances of licenses to be made available, or the result of an attempt made to obtain a general license or permission for the use of such proprietary rights by implementers or users of this specification can be obtained from the IETF on-line IPR repository at <http://www.ietf.org/ipr>.

The IETF invites any interested party to bring to its attention any copyrights, patents or patent applications, or other proprietary rights that may cover technology that may be required to implement this standard. Please address the information to the IETF at [ietf-ipr@ietf.org](mailto:ietf-ipr@ietf.org).

## Disclaimer of Validity

This document and the information contained herein are provided on an

"AS IS" basis and THE CONTRIBUTOR, THE ORGANIZATION HE/SHE REPRESENTS

OR IS SPONSORED BY (IF ANY), THE INTERNET SOCIETY AND THE INTERNET ENGINEERING TASK FORCE DISCLAIM ALL WARRANTIES, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO ANY WARRANTY THAT THE USE OF THE INFORMATION HEREIN WILL NOT INFRINGE ANY RIGHTS OR ANY IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE.

## Copyright Statement

Copyright (C) The Internet Society (2005). This document is subject to the rights, licenses and restrictions contained in [BCP 78](#), and except as set forth therein, the authors retain all their rights.

## Acknowledgment

Funding for the RFC Editor function is currently provided by the

Internet Society.

Wing  
9]

Expires November 14, 2005

[Page