

INTERNET-DRAFT
Intended status: Proposed Standard

V. Govindan
M. Mudigonda
A. Sajassi
Cisco Systems
G. Mirsky
ZTE
D. Eastlake
Futurewei Technologies
February 22, 2021

Expires: August 21, 2021

EVPN Network Layer Fault Management
draft-ietf-bess-evpn-bfd-03

Abstract

This document specifies proactive, in-band network layer OAM mechanisms to detect loss of continuity and miss-connection faults that affect unicast and multi-destination paths (used by Broadcast, Unknown Unicast, and Multicast traffic) in an Ethernet VPN (EVPN) network. The mechanisms specified in the draft are based on the widely adopted Bidirectional Forwarding Detection (BFD) protocol.

Status of this Memo

This Internet-Draft is submitted in full conformance with the provisions of [BCP 78](#) and [BCP 79](#).

Distribution of this document is unlimited. Comments should be sent to the authors or the BESS working group mailing list: bess@ietf.org.

Internet-Drafts are working documents of the Internet Engineering Task Force (IETF), its areas, and its working groups. Note that other groups may also distribute working documents as Internet-Drafts.

Internet-Drafts are draft documents valid for a maximum of six months and may be updated, replaced, or obsoleted by other documents at any time. It is inappropriate to use Internet-Drafts as reference material or to cite them other than as "work in progress."

The list of current Internet-Drafts can be accessed at <http://www.ietf.org/lid-abstracts.html>. The list of Internet-Draft Shadow Directories can be accessed at <http://www.ietf.org/shadow.html>.

Internet-Draft

EVPN Network Layer Fault Management

Table of Contents

1. Introduction.....	3
1.1 Terminology.....	3
2. Scope of this Document.....	5
3. Motivation for Running BFD at the EVPN Network Layer....	6
4. Fault Detection for Unicast Traffic.....	7
5. Fault Detection for BUM Traffic.....	8
5.1 Ingress Replication.....	8
5.2 P2MP Tunnels (Label Switched Multicast).....	8
6. BFD Packet Encapsulation.....	10
6.1 MPLS Encapsulation.....	10
6.1.1 Unicast MPLS Encapsulation.....	10
6.1.2 MPLS Ingress Replication (MP2P).....	11
6.1.3 MPLS LSM (Label Switched Multicast, P2MP).....	12
6.2 VXLAN Encapsulation.....	12
6.2.1 Unicast VXLAN Encapsulation.....	12
6.2.2 VXLAN Ingress Replication (MP2P).....	14
6.2.3 VXLAN LSM (Label Switched Multicast, P2MP).....	14
7. Scalability Considerations.....	15
8. IANA Considerations.....	16
8.1 Pseudowire Associated Channel Type.....	16
8.2 MAC Addresses.....	16
8.3 BFD Discriminator Attribute Type.....	16
9. Security Considerations.....	17
Acknowledgements.....	17
Normative References.....	18
Informative References.....	20
Authors' Addresses.....	21

1. Introduction

[ietf-bess-evpn-oam-req-frmwk] outlines the OAM requirements of Ethernet VPN networks (EVPN [[RFC7432](#)]). This document specifies mechanisms for proactive fault detection at the network (overlay) layer of EVPN. The mechanisms proposed in the draft use the widely adopted Bidirectional Forwarding Detection (BFD [[RFC5880](#)]) protocol.

EVPN fault detection mechanisms need to consider unicast traffic separately from Broadcast, Unknown Unicast, and Multicast (BUM) traffic since they map to different Forwarding Equivalency Classes (FECs) in EVPN. Hence this document proposes somewhat different fault detection mechanisms depending on the type of traffic and the type of tunnel used as follows:

- o Using BFD [[RFC5880](#)] for unicast traffic and BUM traffic via MP2P tunnels.
- o Using BFD Multipoint Active Tails [[RFC8563](#)] [mirsky-mpls-p2mp-bfd] for BUM traffic via a P2MP tunnel.

Packet loss and packet delay measurement are out of scope for this document.

1.1 Terminology

The key words "MUST", "MUST NOT", "REQUIRED", "SHALL", "SHALL NOT", "SHOULD", "SHOULD NOT", "RECOMMENDED", "NOT RECOMMENDED", "MAY", and "OPTIONAL" in this document are to be interpreted as described in [BCP 14](#) [[RFC2119](#)] [[RFC8174](#)] when, and only when, they appear in all capitals, as shown here.

The following acronyms are used in this document.

BFD - Bidirectional Forwarding Detection [[RFC5880](#)]

BUM - Broadcast, Unknown Unicast, and Multicast

CC - Continuity Check

CV - Connectivity Verification

EVI - EVPN Instance

EVPN - Ethernet VPN [[RFC7432](#)]

FEC - Forwarding Equivalency Class

GAL - Generic Associated Channel Label [[RFC5586](#)]

LSM - Label Switched Multicast (P2MP)

LSP - Label Switched Path

MP2MP - Multi-Point-to-Multi-Point

MP2P - Multi-Point-to-Point

OAM - Operations, Administration, and Maintenance

P2MP - Point-to-Multi-Point (LSM)

P2P - Point to Point.

PE - Provider Edge

VXLAN - Virtual eXtensible Local Area Network (VXLAN) [[RFC7348](#)]

[2](#). Scope of this Document

This document specifies BFD based mechanisms for proactive fault detection for EVPN as specified in [[RFC7432](#)] and also for EVPN using VXLAN encapsulation [[RFC8365](#)]. It covers the following:

- o Unicast traffic using Point-to-Point (P2P) and Multi-Point-to-Point (MP2P) tunnels.
- o BUM traffic using Multi-Point-to-Point (MP2P) tunnels (ingress replication).
- o BUM traffic using Point-to-Multi-Point (P2MP) tunnels (Label Switched Multicast (LSM)).

- o MPLS and VXLAN encapsulation.

This document does not discuss BFD mechanisms for:

- o EVPN variants like PBB-EVPN [[RFC7623](#)]. It is intended to address this in future versions.
- o Integrated Routing and Bridging (IRB) solution based on EVPN [[ietf-bess-evpn-inter-subnet-forwarding](#)]. It is intended to address this in future versions.
- o EVPN using other encapsulations such as NVGRE or MPLS over GRE [[RFC8365](#)].
- o BUM traffic using MP2MP tunnels.

This document specifies procedures for BFD asynchronous mode. BFD demand mode is outside the scope of this specification except as it is used in [[RFC8563](#)]. The use of the Echo function is outside the scope of this specification.

[3](#). Motivation for Running BFD at the EVPN Network Layer

The choice of running BFD at the network layer of the OAM model for EVPN [[ietf-bess-evpn-oam-req-frmwk](#)] was made after considering the following:

- o In addition to detecting link failures in the EVPN network, BFD

sessions at the network layer can be used to monitor the successful setup, such as label programming, of MP2P and P2MP EVPN tunnels transporting Unicast and BUM traffic. The scope of reachability detection covers the ingress and the egress EVPN PE (Provider Edge) nodes and the network connecting them.

- o Monitoring a representative set of path(s) or a particular path among multiple paths available between two EVPN PE nodes could be done by exercising entropy mechanisms such as entropy labels, when they are used, or VXLAN source ports. However, paths that cannot be realized by entropy variations cannot be monitored. The fault monitoring requirements outlined by [[ietf-bess-evpn-oam-req-frmwk](#)] are addressed by the mechanisms proposed by this draft.

BFD testing between EVPN PE nodes does not guarantee that the EVPN service is functioning. (This can be monitored at the service level, that is CE to CE.) For example, an egress EVPN-PE could understand EVPN labeling received but could switch data to an incorrect interface. However, BFD testing in the EVPN Network Layer does provide additional confidence that data transported using those tunnels will reach the expected egress node. When BFD testing in the EVPN overlay fails, that can be used as an indication of a Loss-of-Connectivity defect in the EVPN underlay that would cause EVPN service failure.

4. Fault Detection for Unicast Traffic

The mechanisms specified in BFD for MPLS LSPs [[RFC5884](#)] [[RFC7726](#)] are, except as otherwise provided herein, applied to test the handling of unicast EVPN traffic. When discriminators are required for de-multiplexing the BFD sessions, they can be advertised through BGP using the BFD Discriminator Attribute [ietf-bess-mvpn-fast-failover]. Discriminators are needed for MPLS since the label stack does not contain enough information to identify the sender of the packet.

The usage of MPLS entropy labels or various VXLAN source ports takes care of the requirement to monitor various paths of the multi-path server layer network [[RFC6790](#)]. Each unique realizable path between the participating PE routers MAY be monitored separately when such entropy is used. At least one path of multi-path connectivity between two PE routers MUST be tracked with BFD, but in that case the granularity of fault-detection will be coarser.

To support unicast fault management to a PE node, that PE MUST allocate or be configured with a BFD discriminator to be used for the BFD messages to it. By default, it advertises this discriminator with BGP using the BFD Discriminator Attribute [ietf-bess-mvpn-fast-failover] with BFD Mode TBD4 in an EVPN MAC/IP Advertisement Route [[RFC7432](#)] and extracts its peer's discriminator from such an attribute. however, these discriminators MAY be exchanged out-of-band or through some other mechanism outside the scope of this document.

If configured to do so, once a PE knows a unicast route and discriminator for another PE, it endeavors to bring UP and maintain a BFD session to that other PE. Once the BFD session is UP, the ends of the BFD session MUST NOT change the local discriminator values of the BFD Control packets they generate, unless they first bring down the session as specified in [[RFC5884](#)]. The BFD session is brought down if a PE is no longer configured to maintain it or if a route and discriminator are no longer available.

5. Fault Detection for BUM Traffic

[Section 5.1](#) below discusses BUM traffic fault detection for MP2P tunnels using ingress replication and [Section 5.2](#) discusses such fault detection for P2MP tunnels.

5.1 Ingress Replication

Ingress replication uses separate MP2P tunnels for transporting BUM traffic from the ingress PE (head) to a set of one or more egress PEs (tails). The fault detection mechanism specified by this document takes advantage of the fact that the head makes a unique copy for each tail.

Another key aspect to be considered in EVPN is the advertisement of the Inclusive Multicast Ethernet Tag Route [[RFC7432](#)]. The BUM traffic flows from a head node to a particular tail only after the head receives such inclusive multicast route from the tail. This route contains the BUM EVPN MPLS label (downstream allocated) corresponding to the MP2P tunnel for MPLS encapsulation and contains the IP address of the PE originating the inclusive multicast route for use in VXLAN encapsulation. It also contains a BFD Discriminator Attribute [[ietf-bess-mvpn-fast-failover](#)] with BFD Mode TDB4 giving the BFD discriminator that will be used by the tail. This is the P2P mode since a P2P BFD session is used in the MP2P case.

There MAY exist multiple BFD sessions between a head PE and an individual tail due to (1) the usage of MPLS entropy labels [[RFC6790](#)] or VXLAN source ports for an inclusive multicast FEC and (2) due to multiple MP2P tunnels indicated by different tail labels or IP addresses for MPLS or VXLAN. If configured to do so, once a PE knows a multicast route and discriminator for another PE it endeavors to bring UP and maintain a BFD session to that other PE. Once a BFD session for a path is UP, the ends of the BFD session MUST NOT change the local discriminator values of the BFD Control packets they generate, unless they first bring down the session as specified in [[RFC5884](#)]. The BFD session is brought down if a PE is no longer configured to maintain it or if a route and discriminator are no longer available.

[5.2](#) P2MP Tunnels (Label Switched Multicast)

Fault detection for BUM traffic distributed using a P2MP tunnel uses BFD Multipoint Active Tails in one of the three methods providing head notification depending on configuration. Sections [5.2.2](#) and 5.2.3 of [\[RFC8563\]](#) describe two of these methods ("Head Notification

and Tail Solicitation with Multipoint Polling" and "Head Notification with Composite Polling"). The third method ("Head Notification without Polling") is touched on in [Section 5.2.1 of \[RFC8563\]](#) and fully specified in [\[mirsky-mpls-p2mp-bfd\]](#). All three of these modes assume the existence of a unicast path from each tail to the head. In addition, Head Notification with Composite Polling assumes a head to tail unicast path.

The BUM traffic flows from a head node to the tails after the head receives an Inclusive Multicast Tag Route [\[RFC7432\]](#). This contains the BUM EVPN MPLS label (upstream allocated) corresponding to the P2MP tunnel for MPLS encapsulation. It also contains a BFD Discriminator Attribute [\[ietf-bess-mvpn-fast-failover\]](#) with BFD Mode 1 and with a Source IP Address TLV giving the address associated with the MultiPoint Head of the P2MP session. This BFD discriminator advertised by a tail in the inclusive multicast route or otherwise configured at or communicated to the head MUST be used in any reverse unicast traffic so the head can determine which tail is responding. If configured to do so, once a PE knows a P2MP multicast route and needed discriminators, it brings UP and maintains a BFD active tails session to the tails. The BFD session is brought down if a PE is no longer configured to maintain it or if the multicast route and discriminators are no longer available.

For MPLS encapsulation of the head to tails BFD, Label Switched Multicast is used. For VXLAN encapsulation, BFD is delivered to the tails through underlay multicast using an outer multicast IP address.

[6. BFD Packet Encapsulation](#)

The sections below discuss the MPLS and VXLAN encapsulations of BFD for EVPN network layer fault management.


[6.1 MPLS Encapsulation](#)

This section describes use of the Generic Associated Channel Label (GAL) for BFD encapsulation in MPLS based EVPN network layer fault management.

[6.1.1 Unicast MPLS Encapsulation](#)

As shown in Figure 1, the packet initially contains the following labels: LSP label (transport), the optional entropy label, the EVPN Unicast label, and then the Generic Associated Channel label with the G-ACh type set to TBD1. The G-ACh payload of the packet MUST contain the destination L2 header (in overlay space) followed by the IP header that encapsulates the BFD packet. The MAC address of the inner packet is used to validate the <EVI, MAC> in the receiving node.

- The destination MAC MUST be the dedicated unicast MAC TBD3 (see [Section 8](#)) or the MAC address of the destination PE.
- The destination IP address MUST be 127.0.0.1/32 for IPv4 [[RFC1812](#)] or ::1/128 for IPv6 [[RFC4291](#)].
- The destination IP port MUST be 3784 [[RFC5881](#)].
- The source IP port MUST be in the range 49152 through 65535.
- The discriminator values for BFD are obtained through BGP as discussed in [Section 4](#).

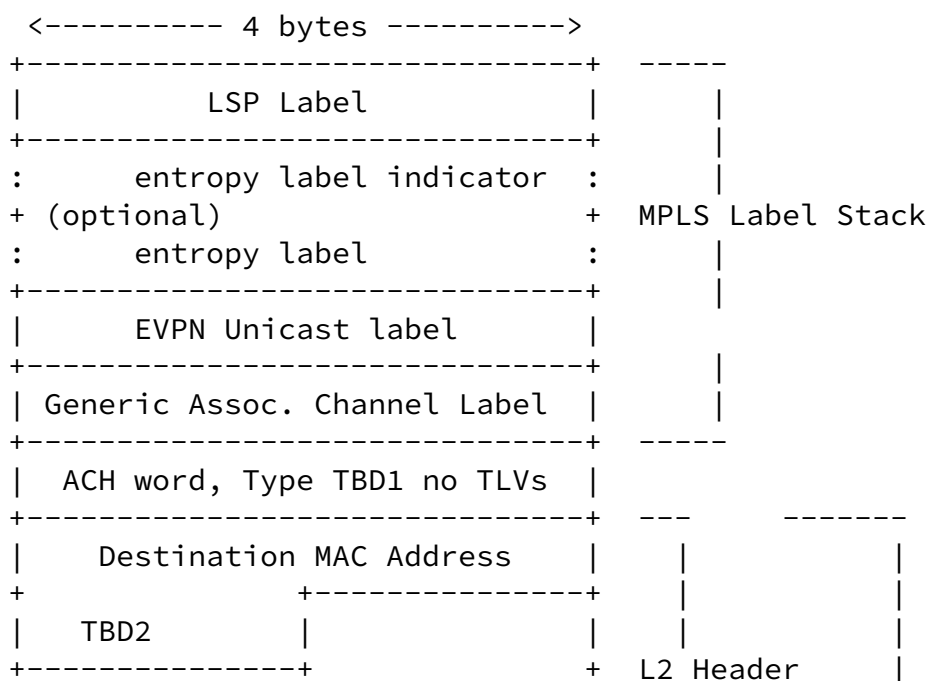

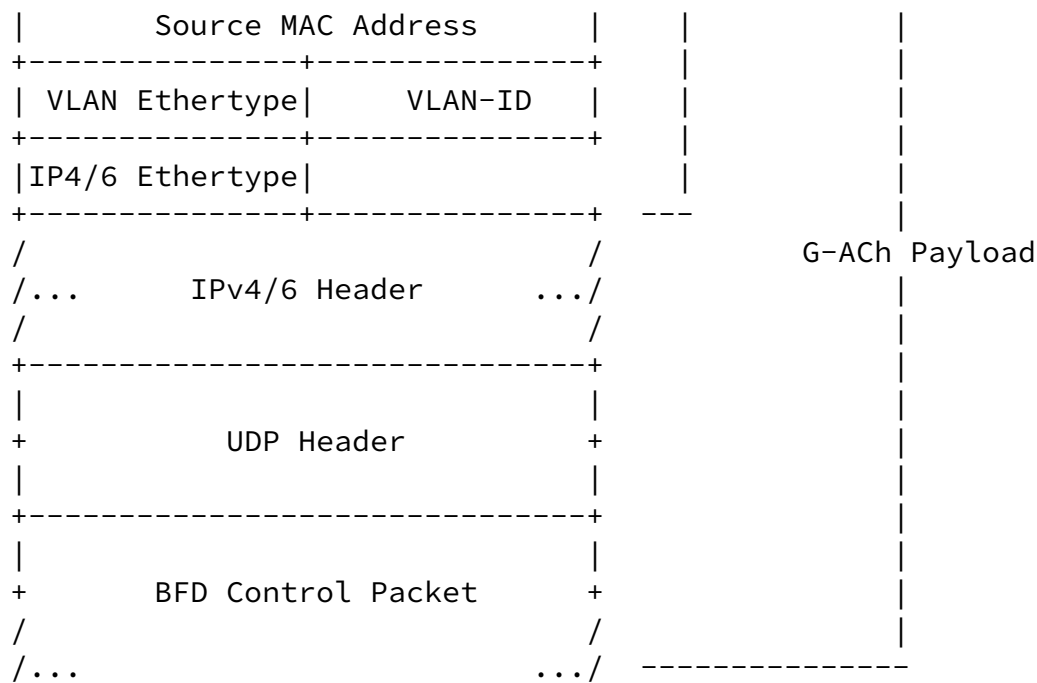


Figure 1. MPLS Unicast Encapsulation

6.1.2 MPLS Ingress Replication (MP2P)

The packet initially contains the following labels: LSP label (transport), the optional entropy label, the BUM label, and the split horizon label [[RFC7432](#)] (where applicable). The G-ACh type is set to TBD1. The G-ACh payload of the packet is as described in [Section 6.1.1](#) except that the destination MAC address is the dedicated multicast MAC TBD2.

6.1.3 MPLS LSM (Label Switched Multicast, P2MP)

The encapsulation is the same as in [Section 6.1.2](#) for ingress replication except that the transport label identifies the P2MP tunnel, in effect the set of tail PEs, rather than identifying a single destination PE at the end of an MP2P tunnel.

6.2 VXLAN Encapsulation

This section describes the use of the VXLAN [RFC7348] [RFC8365] for BFD encapsulation in VXLAN based EVPN fault management.

[6.2.1](#) Unicast VXLAN Encapsulation

Figure 2 below shows the unicast VXLAN encapsulation. The outer and inner IP headers have a unicast source IP address of the BFD message source and a destination IP address of the BFD message destination

The destination UDP port MUST be 3784 [RFC5881]. The source port MUST be in the range 49152 through 65535. If the BFD source has multiple IP addresses, entropy MAY be further obtained by using any of those addresses assuming the source is prepared for responses directed to the IP address used.

<----- 4 bytes ----->
+-----+ ---

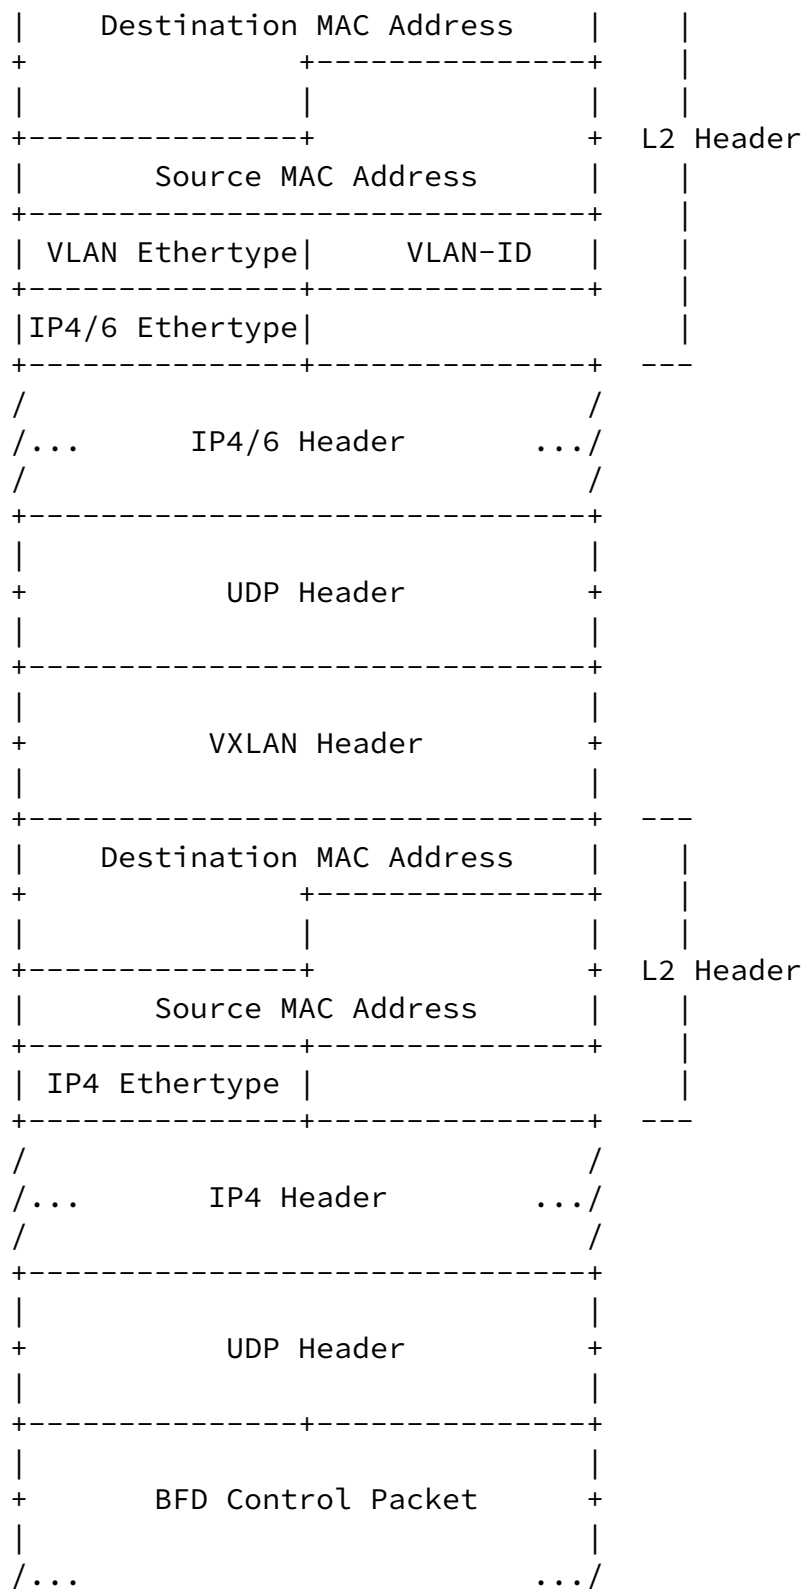


Figure 2. VXLAN Unicast Encapsulation

[6.2.2](#) VXLAN Ingress Replication (MP2P)

The BFD packet construction is as given in [Section 6.2.1](#) except as follows:

- (1) The destination IP address used by the BFD message source is that advertised by the destination PE in its Inclusive Multicast EVPN route for the MP2P tunnel in question; and
- (2) The Your BFD discriminator used is the one advertised by the BFD destination using BGP as discussed in [Section 5.1](#) for the MP2P tunnel.

[6.2.3](#) VXLAN P2MP

The VXLAN encapsulation for the head-to-tails BFD packets uses the multicast destination IP corresponding to the VXLAN VNI.

The destination port MUST be 3784. For entropy purposes, the source port can vary but MUST be in the range 49152 through 65535 [[RFC5881](#)]. If the head PE has multiple IP addresses, entropy MAY be further obtained by using any of those addresses.

The Your BFD discriminator is the value distributed for this multicast fault management purpose as discussed in [Section 5.2](#).

[7](#). Scalability Considerations

The mechanisms proposed by this draft could affect the packet load on the network and its elements especially when supporting configurations involving a large number of EVIs. The option of slowing down or speeding up BFD timer values can be used by an administrator or a network management entity to maintain the overhead incurred due to fault monitoring at an acceptable level.

[8.](#) IANA Considerations

The following IANA Actions are requested.

[8.1](#) Pseudowire Associated Channel Type

IANA is requested to assign a channel type from the "Pseudowire Associated Channel Types" registry in [[RFC4385](#)] as follows.

Value	Description	Reference
-----	-----	-----
TBD1	BFD-EVPN OAM	[this document]

[8.2](#) MAC Addresses

IANA is requested to assign parallel multicast and unicast MAC addresses under the IANA OUI [0x01005E900101 and 0x00005E900101 suggested] as follows:

IANA Multicast 48-bit MAC Addresses

Address	Usage	Reference
-----	-----	-----
TBD2	EVPN Network Layer OAM	[this document]

IANA Unicast 48-bit MAC Addresses

Address	Usage	Reference
---------	-------	-----------

-----	-----	-----
TBD3	EVPN Network Layer OAM	[this document]

8.3 BFD Discriminator Attribute Type

IANA is requested to assign a value from the IETF Review range in the BFD Mode sub-registry on the Border Gateway Protocol Parameters Registry web page as follows:

Value	Description	Reference
-----	-----	-----
TBD4	P2P BFD Session	[this document]

9. Security Considerations

Security considerations discussed in [[RFC5880](#)], [[RFC5883](#)], and [[RFC8029](#)] apply.

MPLS security considerations [[RFC5920](#)] apply to BFD Control packets encapsulated in a MPLS label stack. When BPD Control packets are routed, the authentication considerations discussed in [[RFC5883](#)] should be followed.

VXLAN BFD security considerations in [[RFC8971](#)] apply to BFD packets encapsulate in VXLAN.

Acknowledgements

The authors wish to thank the following for their comments and suggestions:

Mach Chen

Normative References

- [ietf-bess-mvpn-fast-failover] Morin, T., Kebler, R., Mirsky, G., "Multicast VPN fast upstream failover", [draft-ietf-bess-mvpn-fast-failover](#) (in RFC Editor's queue), February 2019.
- [mirsky-mpls-p2mp-bfd] G. Mirsky, S. Mishra, "BFD for Multipoint Networks over Point-to-Multi-Point MPLS LSP", [draft-mirsky-mpls-p2mp-bfd](#) (work in progress), November 2020.
- [RFC1812] Baker, F., Ed., "Requirements for IP Version 4 Routers", [RFC 1812](#), DOI 10.17487/RFC1812, June 1995, <<https://www.rfc-editor.org/info/rfc1812>>.

- [RFC2119] Bradner, S., "Key words for use in RFCs to Indicate Requirement Levels", [BCP 14](#), [RFC 2119](#), DOI 10.17487/RFC2119, March 1997, <<http://www.rfc-editor.org/info/rfc2119>>.
- [RFC4291] Hinden, R. and S. Deering, "IP Version 6 Addressing Architecture", [RFC 4291](#), DOI 10.17487/RFC4291, February 2006, <<https://www.rfc-editor.org/info/rfc4291>>.
- [RFC4385] Bryant, S., Swallow, G., Martini, L., and D. McPherson, "Pseudowire Emulation Edge-to-Edge (PWE3) Control Word for Use over an MPLS PSN", [RFC 4385](#), DOI 10.17487/RFC4385, February 2006, <<http://www.rfc-editor.org/info/rfc4385>>.
- [RFC5586] Bocci, M., Ed., Vigoureux, M., Ed., and S. Bryant, Ed., "MPLS Generic Associated Channel", [RFC 5586](#), DOI 10.17487/RFC5586, June 2009, <<https://www.rfc-editor.org/info/rfc5586>>.
- [RFC5880] Katz, D. and D. Ward, "Bidirectional Forwarding Detection (BFD)", [RFC 5880](#), DOI 10.17487/RFC5880, June 2010, <<http://www.rfc-editor.org/info/rfc5880>>.
- [RFC5881] Katz, D. and D. Ward, "Bidirectional Forwarding Detection (BFD) for IPv4 and IPv6 (Single Hop)", [RFC 5881](#), DOI 10.17487/RFC5881, June 2010, <<https://www.rfc-editor.org/info/rfc5881>>.
- [RFC5883] Katz, D. and D. Ward, "Bidirectional Forwarding Detection (BFD) for Multihop Paths", [RFC 5883](#), DOI 10.17487/RFC5883, June 2010, <<https://www.rfc-editor.org/info/rfc5883>>.

- [RFC5884] Aggarwal, R., Kompella, K., Nadeau, T., and G. Swallow, "Bidirectional Forwarding Detection (BFD) for MPLS Label Switched Paths (LSPs)", [RFC 5884](#), DOI 10.17487/RFC5884, June 2010, <<https://www.rfc-editor.org/info/rfc5884>>.
- [RFC6790] Kompella, K., Drake, J., Amante, S., Henderickx, W., and L.

Yong, "The Use of Entropy Labels in MPLS Forwarding", [RFC 6790](#), DOI 10.17487/RFC6790, November 2012, <<http://www.rfc-editor.org/info/rfc6790>>.

- [RFC7348] Mahalingam, M., Dutt, D., Duda, K., Agarwal, P., Kreeger, L., Sridhar, T., Bursell, M., and C. Wright, "Virtual eXtensible Local Area Network (VXLAN): A Framework for Overlaying Virtualized Layer 2 Networks over Layer 3 Networks", [RFC 7348](#), DOI 10.17487/RFC7348, August 2014, <<https://www.rfc-editor.org/info/rfc7348>>.
- [RFC7432] Sajassi, A., Ed., Aggarwal, R., Bitar, N., Isaac, A., Uttaro, J., Drake, J., and W. Henderickx, "BGP MPLS-Based Ethernet VPN", [RFC 7432](#), DOI 10.17487/RFC7432, February 2015, <<http://www.rfc-editor.org/info/rfc7432>>.
- [RFC7726] Govindan, V., Rajaraman, K., Mirsky, G., Akiya, N., and S. Aldrin, "Clarifying Procedures for Establishing BFD Sessions for MPLS Label Switched Paths (LSPs)", [RFC 7726](#), DOI 10.17487/RFC7726, January 2016, <<https://www.rfc-editor.org/info/rfc7726>>.
- [RFC8029] Kompella, K., Swallow, G., Pignataro, C., Ed., Kumar, N., Aldrin, S., and M. Chen, "Detecting Multiprotocol Label Switched (MPLS) Data-Plane Failures", [RFC 8029](#), DOI 10.17487/RFC8029, March 2017, <<https://www.rfc-editor.org/info/rfc8029>>.
- [RFC8174] Leiba, B., "Ambiguity of Uppercase vs Lowercase in [RFC 2119](#) Key Words", [BCP 14](#), [RFC 8174](#), DOI 10.17487/RFC8174, May 2017, <<https://www.rfc-editor.org/info/rfc8174>>.
- [RFC8365] Sajassi, A., Ed., Drake, J., Ed., Bitar, N., Shekhar, R., Uttaro, J., and W. Henderickx, "A Network Virtualization Overlay Solution Using Ethernet VPN (EVPN)", [RFC 8365](#), DOI 10.17487/RFC8365, March 2018, <<https://www.rfc-editor.org/info/rfc8365>>.
- [RFC8563] Katz, D., Ward, D., Pallagatti, S., Ed., and G. Mirsky, Ed., "Bidirectional Forwarding Detection (BFD) Multipoint Active Tails", [RFC 8563](#), DOI 10.17487/RFC8563, April 2019, <<https://www.rfc-editor.org/info/rfc8563>>.

Informative References

- [ietf-bess-evpn-inter-subnet-forwarding] Sajassi, A., Salam, S., Thoria, S., Rekhter, Y., Drake, J., Yong, L., and L. Dunbar, "Integrated Routing and Bridging in EVPN", [draft-ietf-bess-evpn-inter-subnet-forwarding-13](#) (work in progress), February 2021.
- [ietf-bess-evpn-oam-req-frmwk] Salam, S., Sajassi, A., Aldrin, S., J. Drake, and D. Eastlake, "EVPN Operations, Administration and Maintenance Requirements and Framework", [draft-ietf-bess-evpn-oam-req-frmwk-04](#), work in progress, July 2019.
- [RFC5920] Fang, L., Ed., "Security Framework for MPLS and GMPLS Networks", [RFC 5920](#), DOI 10.17487/RFC5920, July 2010, <<https://www.rfc-editor.org/info/rfc5920>>.
- [RFC7623] Sajassi, A., Ed., Salam, S., Bitar, N., Isaac, A., and W. Henderickx, "Provider Backbone Bridging Combined with Ethernet VPN (PBB-EVPN)", [RFC 7623](#), DOI 10.17487/RFC7623, September 2015, <<http://www.rfc-editor.org/info/rfc7623>>.
- [RFC8971] Pallagatti, S., Ed., Mirsky, G., Ed., Paragiri, S., Govindan, V., and M. Mudigonda, "Bidirectional Forwarding Detection (BFD) for Virtual eXtensible Local Area Network (VXLAN)", [RFC 8971](#), DOI 10.17487/RFC8971, December 2020, <<https://www.rfc-editor.org/info/rfc8971>>.

Internet-Draft

EVPN Network Layer Fault Management

Authors' Addresses

Vengada Prasad Govindan
Cisco Systems

Email: venggovi@cisco.com

Mudigonda Mallik
Cisco Systems

Email: mmudigon@cisco.com

Ali Sajassi
Cisco Systems
170 West Tasman Drive
San Jose, CA 95134, USA

Email: sajassi@cisco.com

Gregory Mirsky
ZTE Corp.

Email: gregimirsky@gmail.com

Donald Eastlake, 3rd
Futurewei Technologies
2386 Panoramic Circle
Apopka, FL 32703 USA

Phone: +1-508-333-2270
Email: d3e3e3@gmail.com

Internet-Draft

EVPN Network Layer Fault Management

Copyright, Disclaimer, and Additional IPR Provisions

Copyright (c) 2021 IETF Trust and the persons identified as the document authors. All rights reserved.

This document is subject to [BCP 78](http://trustee.ietf.org/license-info) and the IETF Trust's Legal Provisions Relating to IETF Documents (<http://trustee.ietf.org/license-info>) in effect on the date of publication of this document. Please review these documents carefully, as they describe your rights and restrictions with respect to this document. Code Components extracted from this document must include Simplified BSD License text as described in Section 4.e of the Trust Legal Provisions and are provided without warranty as described in the Simplified BSD License.

