

BESS Workgroup
Internet Draft
Intended status: Standards Track

J. Rabadan, Ed.
W. Henderickx
Nokia

J. Drake
W. Lin
Juniper

A. Sajassi
Cisco

Expires: April 22, 2018

October 19, 2017

IP Prefix Advertisement in EVPN
draft-ietf-bess-evpn-prefix-advertisement-07

Abstract

EVPN provides a flexible control plane that allows intra-subnet connectivity in an MPLS and/or NVO-based network. In some networks, there is also a need for a dynamic and efficient inter-subnet connectivity across Tenant Systems and End Devices that can be physical or virtual and do not necessarily participate in dynamic routing protocols. This document defines a new EVPN route type for the advertisement of IP Prefixes and explains some use-case examples where this new route-type is used.

Status of this Memo

This Internet-Draft is submitted in full conformance with the provisions of [BCP 78](#) and [BCP 79](#).

Internet-Drafts are working documents of the Internet Engineering Task Force (IETF), its areas, and its working groups. Note that other groups may also distribute working documents as Internet-Drafts.

Internet-Drafts are draft documents valid for a maximum of six months and may be updated, replaced, or obsoleted by other documents at any time. It is inappropriate to use Internet-Drafts as reference material or to cite them other than as "work in progress."

The list of current Internet-Drafts can be accessed at <http://www.ietf.org/ietf/1id-abstracts.txt>

The list of Internet-Draft Shadow Directories can be accessed at <http://www.ietf.org/shadow.html>

This Internet-Draft will expire on April 20, 2018.

Copyright Notice

Copyright (c) 2017 IETF Trust and the persons identified as the document authors. All rights reserved.

This document is subject to [BCP 78](#) and the IETF Trust's Legal Provisions Relating to IETF Documents (<http://trustee.ietf.org/license-info>) in effect on the date of publication of this document. Please review these documents carefully, as they describe your rights and restrictions with respect to this document. Code Components extracted from this document must include Simplified BSD License text as described in Section 4.e of the Trust Legal Provisions and are provided without warranty as described in the Simplified BSD License.

Table of Contents

1. Terminology	3
2. Introduction and Problem Statement	4
2.1 Inter-Subnet Connectivity Requirements in Data Centers	4
2.2 The Requirement for a New EVPN Route Type	7
3. The BGP EVPN IP Prefix Route	8
3.1 IP Prefix Route Encoding	9
3.2 Overlay Indexes and Recursive Lookup Resolution	10
4. Overlay Index Use-Cases	13
4.1 TS IP Address Overlay Index Use-Case	13
4.2 Floating IP Overlay Index Use-Case	15
4.3 Bump-in-the-Wire Use-Case	17
4.4 IP-VRF-to-IP-VRF Model	20
4.4.1 Interface-less IP-VRF-to-IP-VRF Model	21
4.4.2 Interface-ful IP-VRF-to-IP-VRF with SBD-facing IRB	24
4.4.3 Interface-ful IP-VRF-to-IP-VRF with Unnumbered SBD-facing IRB	27
5. Conclusions	30
6. Conventions used in this document	31
7. Security Considerations	31
8. IANA Considerations	31
9. References	31
9.1 Normative References	31
9.2 Informative References	31
10. Acknowledgments	32
11. Contributors	32
12. Authors' Addresses	32

1. Terminology

GW IP: Gateway IP Address.

IPL: IP address length.

ML: MAC address length.

NVE: Network Virtualization Edge.

TS: Tenant System.

VA: Virtual Appliance.

RT-2: EVPN route type 2, i.e. MAC/IP advertisement route.

RT-5: EVPN route type 5, i.e. IP Prefix route.

AC: Attachment Circuit.

ARP: Address Resolution Protocol.

ND: Neighbor Discovery Protocol.

Ethernet NVO tunnel: it refers to Network Virtualization Overlay tunnels with Ethernet payload. Examples of this type of tunnels are VXLAN or nvGRE.

IP NVO tunnel: it refers to Network Virtualization Overlay tunnels with IP payload (no MAC header in the payload).

EVI: EVPN Instance spanning the NVE/PE devices that are participating on that EVPN.

MAC-VRF: A Virtual Routing and Forwarding table for Media Access Control (MAC) addresses on an NVE/PE, as per [[RFC7432](#)].

BD: Broadcast Domain. As per [[RFC7432](#)], an EVI consists of a single or multiple BDs. In case of VLAN-bundle and VLAN-based service models (see [[RFC7432](#)]), a BD is equivalent to an EVI. In case of VLAN-aware bundle service model, an EVI contains multiple BDs. Also, in this document, BD and subnet are equivalent terms.

BT: Bridge Table. The instantiation of a BD in a MAC-VRF.

IP-VRF: A VPN Routing and Forwarding table for IP routes on an NVE/PE. The IP routes could be populated by EVPN and IP-VPN address families.

IRB: Integrated Routing and Bridging interface. It connects an IP-VRF to a BD (or subnet).

SBD: Supplementary Broadcast Domain. A BD that does not have any ACs, only IRB interfaces, and it is used to provide connectivity among all the IP-VRFs of the tenant. The SBD is only required in IP-VRF-to-IP-VRF use-cases (see [section 4.4.](#)).

2. Introduction and Problem Statement

Inter-subnet connectivity is used for certain tenants within the Data Center. [[EVPN-INTERSUBNET](#)] defines some fairly common inter-subnet forwarding scenarios where TSeS can exchange packets with TSeS located in remote subnets. In order to achieve this, [[EVPN-INTERSUBNET](#)] describes how MAC/IPs encoded in TS RT-2 routes are not only used to populate MAC-VRF and overlay ARP tables, but also IP-VRF tables with the encoded TS host routes (/32 or /128). In some cases, EVPN may advertise IP Prefixes and therefore provide aggregation in the IP-VRF tables, as opposed to program individual host routes. This document complements the scenarios described in [[EVPN-INTERSUBNET](#)] and defines how EVPN may be used to advertise IP Prefixes. Interoperability between EVPN and L3VPN [[RFC4364](#)] IP Prefix routes is out of the scope of this document.

[Section 2.1](#) describes the inter-subnet connectivity requirements in Data Centers. [Section 2.2](#) explains why a new EVPN route type is required for IP Prefix advertisements. Once the need for a new EVPN route type is justified, sections [3](#), [4](#) and [5](#) will describe this route type and how it is used in some specific use cases.

2.1 Inter-Subnet Connectivity Requirements in Data Centers

[RFC7432] is used as the control plane for a Network Virtualization Overlay (NVO3) solution in Data Centers (DC), where Network Virtualization Edge (NVE) devices can be located in Hypervisors or TORs, as described in [[EVPN-OVERLAY](#)].

If we use the term Tenant System (TS) to designate a physical or virtual system identified by MAC and maybe IP addresses, and connected to a BD by an Attachment Circuit, the following considerations apply:

- o The Tenant Systems may be Virtual Machines (VMs) that generate traffic from their own MAC and IP.
- o The Tenant Systems may be Virtual Appliance entities (VAs) that forward traffic to/from IP addresses of different End Devices

sitting behind them.

- o These VAs can be firewalls, load balancers, NAT devices, other appliances or virtual gateways with virtual routing instances.
- o These VAs do not necessarily participate in dynamic routing protocols and hence rely on the EVPN NVEs to advertise the routes on their behalf.
- o In all these cases, the VA will forward traffic to other TSes using its own source MAC but the source IP will be the one associated to the End Device sitting behind or a translated IP address (part of a public NAT pool) if the VA is performing NAT.
- o Note that the same IP address could exist behind two of these TS. One example of this would be certain appliance resiliency mechanisms, where a virtual IP or floating IP can be owned by one of the two VAs running the resiliency protocol (the master VA). Virtual Router Redundancy Protocol (VRRP), [RFC5798](#), is one particular example of this. Another example is multi-homed subnets, i.e. the same subnet is connected to two VAs.
- o Although these VAs provide IP connectivity to VMs and subnets behind them, they do not always have their own IP interface connected to the EVPN NVE, e.g. layer-2 firewalls are examples of VAs not supporting IP interfaces.

Figure 1 illustrates some of the examples described above.

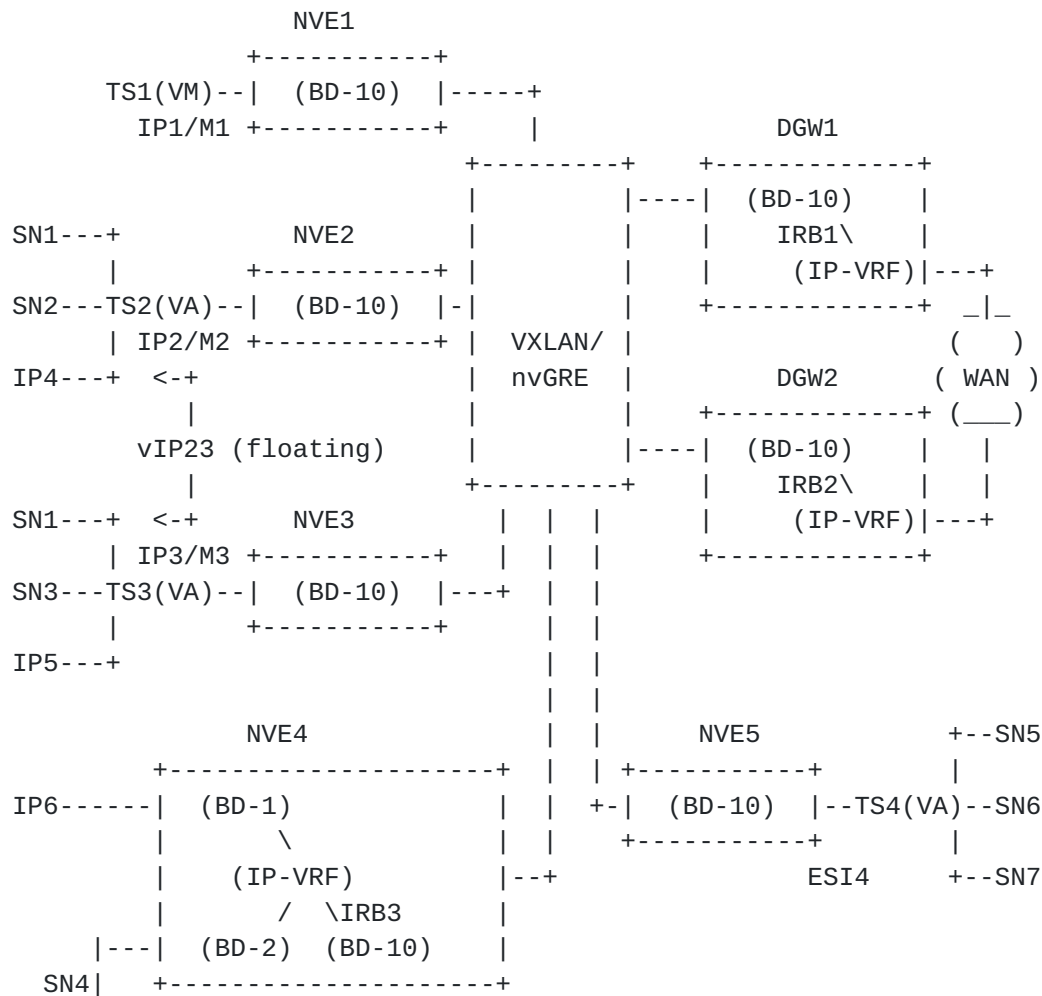


Figure 1 DC inter-subnet use-cases

Where:

NVE1, NVE2, NVE3, NVE4, NVE5, DGW1 and DGW2 share the same BD for a particular tenant. BD-10 is comprised of the collection of BD instances defined in all the NVEs. All the hosts connected to BD-10 belong to the same IP subnet. The hosts connected to BD-10 are listed below:

- o TS1 is a VM that generates/receives traffic from/to IP1, where IP1 belongs to the BD-10 subnet.
- o TS2 and TS3 are Virtual Appliances (VA) that send/receive traffic from/to the subnets and hosts sitting behind them (SN1, SN2, SN3, IP4 and IP5). Their IP addresses (IP2 and IP3) belong to the BD-10 subnet and they can also generate/receive traffic. When these VAs receive packets destined to their own MAC addresses (M2 and M3) they will route the packets to the proper subnet or host. These VAs

do not support routing protocols to advertise the subnets connected to them and can move to a different server and NVE when the Cloud Management System decides to do so. These VAs may also support redundancy mechanisms for some subnets, similar to VRRP, where a floating IP is owned by the master VA and only the master VA forwards traffic to a given subnet. E.g.: vIP23 in figure 1 is a floating IP that can be owned by TS2 or TS3 depending on who the master is. Only the master will forward traffic to SN1.

- o Integrated Routing and Bridging interfaces IRB1, IRB2 and IRB3 have their own IP addresses that belong to the BD-10 subnet too. These IRB interfaces connect the BD-10 subnet to Virtual Routing and Forwarding (IP-VRF) instances that can route the traffic to other subnets for the same tenant (within the DC or at the other end of the WAN).
- o TS4 is a layer-2 VA that provides connectivity to subnets SN5, SN6 and SN7, but does not have an IP address itself in the BD-10. TS4 is connected to a physical port on NVE5 assigned to Ethernet Segment Identifier 4.

All the above DC use cases require inter-subnet forwarding and therefore the individual host routes and subnets:

- a) MUST be advertised from the NVEs (since VAs and VMs do not participate in dynamic routing protocols) and
- b) MAY be associated to an Overlay Index that can be a VA IP address, a floating IP address, a MAC address or an ESI. An Overlay Index is a next-hop that requires a recursive resolution and it is described in [section 3.2](#).

[2.2](#) The Requirement for a New EVPN Route Type

[RFC7432] defines a MAC/IP route (also referred as RT-2) where a MAC address can be advertised together with an IP address length (IPL) and IP address (IP). While a variable IPL might have been used to indicate the presence of an IP prefix in a route type 2, there are several specific use cases in which using this route type to deliver IP Prefixes is not suitable.

One example of such use cases is the "floating IP" example described in [section 2.1](#). In this example we need to decouple the advertisement of the prefixes from the advertisement of MAC address of either M2 or M3", otherwise the solution gets highly inefficient and does not scale.

E.g.: if we are advertising 1k prefixes from M2 (using RT-2) and the

floating IP owner changes from M2 to M3, we would need to withdraw 1k routes from M2 and re-advertise 1k routes from M3. However if we use a separate route type, we can advertise the 1k routes associated to the floating IP address (vIP23) and only one RT-2 for advertising the ownership of the floating IP, i.e. vIP23 and M2 in the route type 2. When the floating IP owner changes from M2 to M3, a single RT-2 withdraw/update is required to indicate the change. The remote DGW will not change any of the 1k prefixes associated to vIP23, but will only update the ARP resolution entry for vIP23 (now pointing at M3).

Other reasons to decouple the IP Prefix advertisement from the MAC/IP route are listed below:

- o Clean identification, operation and troubleshooting of IP Prefixes, independent of and not subject to the interpretation of the IPL and the IP value. E.g.: a default IP route 0.0.0.0/0 must always be easily and clearly distinguished from the absence of IP information.
- o In MAC/IP routes, the MAC information is part of the NLRI, so if IP Prefixes were to be advertised using MAC/IP routes, the MAC information would always be present and part of the route key.

The following sections describe how EVPN is extended with a new route type for the advertisement of IP prefixes and how this route is used to address the current and future inter-subnet connectivity requirements existing in the Data Center.

3. The BGP EVPN IP Prefix Route

The current BGP EVPN NLRI as defined in [[RFC7432](#)] is shown below:

```
+-----+
|   Route Type (1 octet)   |
+-----+
|   Length (1 octet)      |
+-----+
| Route Type specific (variable) |
+-----+
```

Where the route type field can contain one of the following specific values (refer to the IANA "EVPN Route Types registry"):

- + 1 - Ethernet Auto-Discovery (A-D) route
- + 2 - MAC/IP advertisement route

+ 3 - Inclusive Multicast Route

+ 4 - Ethernet Segment Route

This document defines an additional route type that IANA has added to the registry, and will be used for the advertisement of IP Prefixes:

+ 5 - IP Prefix Route

The support for this new route type is OPTIONAL.

Since this new route type is OPTIONAL, an implementation not supporting it MUST ignore the route, based on the unknown route type value, as specified by [Section 5.4 in \[RFC7606\]](#).

The detailed encoding of this route and associated procedures are described in the following sections.

[3.1](#) IP Prefix Route Encoding

An IP Prefix advertisement route NLRI consists of the following fields:

```
+-----+
|      RD      (8 octets)      |
+-----+
|Ethernet Segment Identifier (10 octets)|
+-----+
| Ethernet Tag ID (4 octets)    |
+-----+
| IP Prefix Length (1 octet)    |
+-----+
| IP Prefix (4 or 16 octets)    |
+-----+
| GW IP Address (4 or 16 octets)|
+-----+
| MPLS Label (3 octets)        |
+-----+
```

Where:

- o RD, Ethernet Tag ID and MPLS Label fields will be used as defined in [\[RFC7432\]](#) and [\[EVPN-OVERLAY\]](#).
- o The Ethernet Segment Identifier will be a non-zero 10-byte identifier if the ESI is used as an Overlay Index (see the definition of Overlay Index in [section 3.2](#)). It will be zero

otherwise.

- o The IP Prefix Length can be set to a value between 0 and 32 (bits) for ipv4 and between 0 and 128 for ipv6, and specifies the number of bits in the Prefix.
- o The IP Prefix will be a 32 or 128-bit field (ipv4 or ipv6). The size of this field does not depend on the value of the IP Prefix Length field.
- o The GW IP (Gateway IP Address) will be a 32 or 128-bit field (ipv4 or ipv6), and will encode an IP address as an overlay index for the IP Prefixes. The GW IP field SHOULD be zero if it is not used as an Overlay Index. Refer to [section 3.2](#) for the definition and use of the Overlay Index.
- o The MPLS Label field is encoded as 3 octets, where the high-order 20 bits contain the label value. When sending, the label value SHOULD be zero if recursive resolution based on overlay index is used. If the received MPLS Label value is zero, the route MUST contain an Overlay Index and the ingress NVE/PE MUST do recursive resolution to find the egress NVE/PE. If the received Label value is non-zero, the route will not be used for recursive resolution unless a local policy says so.
- o The total route length will indicate the type of prefix (ipv4 or ipv6) and the type of GW IP address (ipv4 or ipv6). Note that the IP Prefix + the GW IP should have a length of either 64 or 256 bits, but never 160 bits (ipv4 and ipv6 mixed values are not allowed).

The RD, Eth-Tag ID, IP Prefix Length and IP Prefix will be part of the route key used by BGP to compare routes. The rest of the fields will not be part of the route key.

An IP Prefix Route MAY be sent along with a Router's MAC Extended Community (defined in [[EVPN-INTERSUBNET](#)]).

[3.2](#) Overlay Indexes and Recursive Lookup Resolution

RT-5 routes support recursive lookup resolution through the use of Overlay Indexes as follows:

- o An Overlay Index can be an ESI, IP address in the address space of the tenant or MAC address and it is used by an NVE as the next-hop for a given IP Prefix. An Overlay Index always needs a recursive route resolution on the NVE/PE that installs the RT-5 into one of

its IP-VRFs, so that the NVE knows to which egress NVE/PE it needs to forward the packets. It is important to note that recursive resolution of the Overlay Index applies upon installation into an IP-VRF, and not upon BGP propagation (for instance, on an ASBR). Also, as a result of the recursive resolution, the egress NVE/PE is not necessarily the same NVE that originated the RT-5.

- o The Overlay Index is indicated along with the RT-5 in the ESI field, GW IP field or Router's MAC Extended Community, depending on whether the IP Prefix next-hop is an ESI, IP address or MAC address in the tenant space. The Overlay Index for a given IP Prefix is set by local policy at the NVE that originates an RT-5 for that IP Prefix (typically managed by the Cloud Management System).
- o In order to enable the recursive lookup resolution at the ingress NVE, an NVE that is a possible egress NVE for a given Overlay Index must originate a route advertising itself as the BGP next hop on the path to the system denoted by the Overlay Index. For instance:
 - . If an NVE receives an RT-5 that specifies an Overlay Index, the NVE cannot use the RT-5 in its IP-VRF unless (or until) it can recursively resolve the Overlay Index.
 - . If the RT-5 specifies an ESI as the Overlay Index, recursive resolution can only be done if the NVE has received and installed an RT-1 (Auto-Discovery per-EVI) route specifying that ESI.
 - . If the RT-5 specifies a GW IP address as the Overlay Index, recursive resolution can only be done if the NVE has received and installed an RT-2 (MAC/IP route) specifying that IP address in the IP address field of its NLRI.
 - . If the RT-5 specifies a MAC address as the Overlay Index, recursive resolution can only be done if the NVE has received and installed an RT-2 (MAC/IP route) specifying that MAC address in the MAC address field of its NLRI.

Note that the RT-1 or RT-2 routes needed for the recursive resolution may arrive before or after the given RT-5 route.

- o Irrespective of the recursive resolution, if there is no IGP or BGP route to the BGP next-hop of an RT-5, BGP should fail to install the RT-5 even if the Overlay Index can be resolved.
- o The ESI and GW IP fields MAY both be zero, however they MUST NOT both be non-zero at the same time. A route containing a non-zero GW IP and a non-zero ESI (at the same time) will be treated as-withdraw.

The indirection provided by the Overlay Index and its recursive lookup resolution is required to achieve fast convergence in case of

a failure of the object represented by the Overlay Index (see the example described in [section 2.2](#)).

Table 1 shows the different RT-5 field combinations allowed by this specification and what Overlay Index must be used by the receiving NVE/PE in each case. When the Overlay Index is "None" in Table 1, the receiving NVE/PE will not perform any recursive resolution, and the actual next-hop is given by the RT-5's BGP next-hop.

ESI	GW-IP	MAC*	Label	Overlay Index
Non-Zero	Zero	Zero	Don't Care	ESI
Non-Zero	Zero	Non-Zero	Don't Care	ESI
Zero	Non-Zero	Zero	Don't Care	GW-IP
Zero	Zero	Non-Zero	Zero	MAC
Zero	Zero	Non-Zero	Non-Zero	MAC or None**
Zero	Zero	Zero	Non-Zero	None***

Table 1 - RT-5 fields and Indicated Overlay Index

Table NOTES:

- * MAC with Zero value means no Router's MAC extended community is present along with the RT-5. Non-Zero indicates that the extended community is present and carries a valid MAC address. Examples of invalid MAC addresses are broadcast or multicast MAC addresses. The presence of the Router's MAC extended community alone is not enough to indicate the use of the MAC address as the overlay index, since the extended community can be used for other purposes.
- ** In this case, the Overlay Index may be the RT-5's MAC address or None, depending on the local policy of the receiving NVE/PE.
- *** The Overlay Index is None. This is a special case used for IP-VRF-to-IP-VRF where the NVE/PEs are connected by IP NVO tunnels as opposed to Ethernet NVO tunnels.

Table 2 shows the different inter-subnet use-cases described in this document and the corresponding coding of the Overlay Index in the route type 5 (RT-5).

Section	Use-case	Overlay Index in the RT-5
4.1	TS IP address	GW IP
4.2	Floating IP address	GW IP
4.3	"Bump in the wire"	ESI or MAC
4.4	IP-VRF-to-IP-VRF	GW IP, MAC or None

Table 2 - Use-cases and Overlay Indexes for Recursive Resolution

The above use-cases are representative of the different Overlay Indexes supported by RT-5 (GW IP, ESI, MAC or None). Any other use-case using a given Overlay Index, SHOULD follow the procedures described in this document for the same Overlay Index.

4. Overlay Index Use-Cases

This section describes some use-cases for the Overlay Index types used with the IP Prefix route.

4.1 TS IP Address Overlay Index Use-Case

The following figure illustrates an example of inter-subnet forwarding for subnets sitting behind Virtual Appliances (on TS2 and TS3).

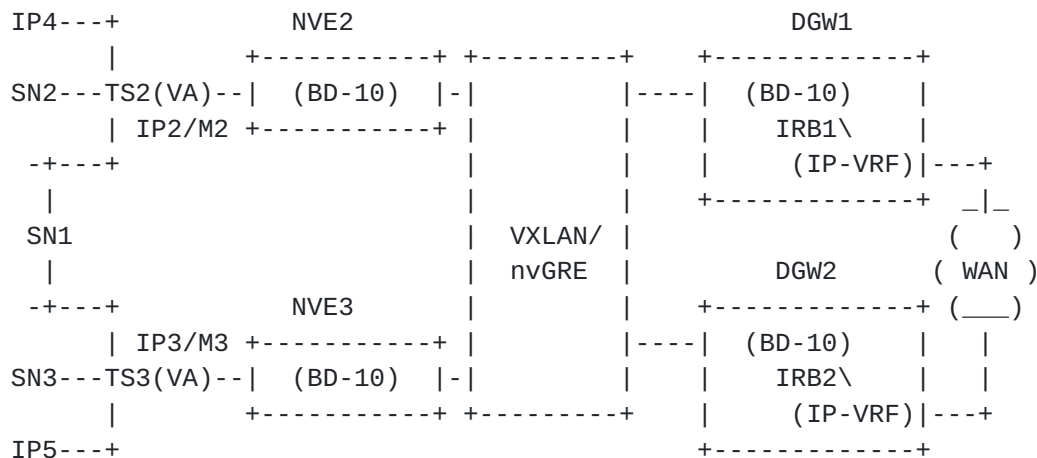


Figure 2 TS IP address use-case

An example of inter-subnet forwarding between subnet SN1/24 and a subnet sitting in the WAN is described below. NVE2, NVE3, DGW1 and DGW2 are running BGP EVPN. TS2 and TS3 do not participate in dynamic

routing protocols, and they only have a static route to forward the traffic to the WAN. We assume SN1/24 is dual-homed to NVE2 and NVE3.

In this case, a GW IP is used as an Overlay Index. Although a different Overlay Index type could have been used, this use-case assumes that the operator knows the VA's IP addresses beforehand, whereas the VA's MAC address is unknown and the VA's ESI is zero. Because of this, the GW IP is the suitable Overlay Index to be used with the RT-5s. The NVEs know the GW IP to be used for a given Prefix by policy.

(1) NVE2 advertises the following BGP routes on behalf of TS2:

- o Route type 2 (MAC/IP route) containing: ML=48, M=M2, IPL=32, IP=IP2 and [[RFC5512](#)] BGP Encapsulation Extended Community with the corresponding Tunnel-type. The MAC and IP addresses may be learned via ARP-snooping (ND-snooping if IPv6).
- o Route type 5 (IP Prefix route) containing: IPL=24, IP=SN1, ESI=0, GW IP address=IP2. The prefix and GW IP are learned by policy.

(2) Similarly, NVE3 advertises the following BGP routes on behalf of TS3:

- o Route type 2 (MAC/IP route) containing: ML=48, M=M3, IPL=32, IP=IP3 (and BGP Encapsulation Extended Community).
- o Route type 5 (IP Prefix route) containing: IPL=24, IP=SN1, ESI=0, GW IP address=IP3.

(3) DGW1 and DGW2 import both received routes based on the route-targets:

- o Based on the BD-10 route-target in DGW1 and DGW2, the MAC/IP route is imported and M2 is added to the BD-10 along with its corresponding tunnel information. For instance, if VXLAN is used, the VTEP will be derived from the MAC/IP route BGP next-hop and VNI from the MPLS Label1 field. IP2 - M2 is added to the ARP table. Similarly, M3 is added to BD-10 and IP3 - M3 to the ARP table.
- o Based on the BD-10 route-target in DGW1 and DGW2, the IP Prefix route is also imported and SN1/24 is added to the IP-VRF with Overlay Index IP2 pointing at the local BD-10. In this example, we assume the RT-5 from NVE2 is preferred over the RT-5 from NVE3. If both routes were equally preferable and ECMP enabled, SN1/24 would also be added to the routing table

with Overlay Index IP3.

- (4) When DGW1 receives a packet from the WAN with destination IPx, where IPx belongs to SN1/24:
- o A destination IP lookup is performed on the DGW1 IP-VRF routing table and Overlay Index=IP2 is found. Since IP2 is an Overlay Index a recursive route resolution is required for IP2.
 - o IP2 is resolved to M2 in the ARP table, and M2 is resolved to the tunnel information given by the BD FIB (e.g. remote VTEP and VNI for the VXLAN case).
 - o The IP packet destined to IPx is encapsulated with:
 - . Source inner MAC = IRB1 MAC.
 - . Destination inner MAC = M2.
 - . Tunnel information provided by the BD (VNI, VTEP IPs and MACs for the VXLAN case).
- (5) When the packet arrives at NVE2:
- o Based on the tunnel information (VNI for the VXLAN case), the BD-10 context is identified for a MAC lookup.
 - o Encapsulation is stripped-off and based on a MAC lookup (assuming MAC forwarding on the egress NVE), the packet is forwarded to TS2, where it will be properly routed.
- (6) Should TS2 move from NVE2 to NVE3, MAC Mobility procedures will be applied to the MAC route IP2/M2, as defined in [\[RFC7432\]](#). Route type 5 prefixes are not subject to MAC mobility procedures, hence no changes in the DGW IP-VRF routing table will occur for TS2 mobility, i.e. all the prefixes will still be pointing at IP2 as Overlay Index. There is an indirection for e.g. SN1/24, which still points at Overlay Index IP2 in the routing table, but IP2 will be simply resolved to a different tunnel, based on the outcome of the MAC mobility procedures for the MAC/IP route IP2/M2.

Note that in the opposite direction, TS2 will send traffic based on its static-route next-hop information (IRB1 and/or IRB2), and regular EVPN procedures will be applied.

[4.2 Floating IP Overlay Index Use-Case](#)

Sometimes Tenant Systems (TS) work in active/standby mode where an upstream floating IP - owned by the active TS - is used as the Overlay Index to get to some subnets behind. This redundancy mode, already introduced in [section 2.1](#) and 2.2, is illustrated in Figure 3.

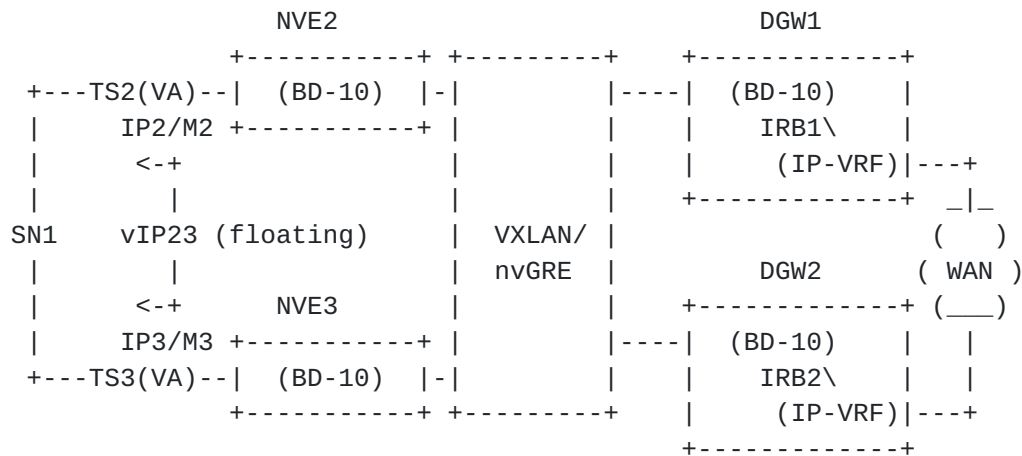


Figure 3 Floating IP Overlay Index for redundant TS

In this use-case, a GW IP is used as an Overlay Index for the same reasons as in 4.1. However, this GW IP is a floating IP that belongs to the active TS. Assuming TS2 is the active TS and owns IP23:

- (1) NVE2 advertises the following BGP routes for TS2:
 - o Route type 2 (MAC/IP route) containing: ML=48, M=M2, IPL=32, IP=IP23 (and BGP Encapsulation Extended Community). The MAC and IP addresses may be learned via ARP-snooping.
 - o Route type 5 (IP Prefix route) containing: IPL=24, IP=SN1, ESI=0, GW IP address=IP23. The prefix and GW IP are learned by policy.
- (2) NVE3 advertises the following BGP route for TS3 (it does not advertise an RT-2 for IP23/M3):
 - o Route type 5 (IP Prefix route) containing: IPL=24, IP=SN1, ESI=0, GW IP address=IP23. The prefix and GW IP are learned by policy.
- (3) DGW1 and DGW2 import both received routes based on the route-target:
 - o M2 is added to the BD-10 FIB along with its corresponding tunnel information. For the VXLAN use case, the VTEP will be

derived from the MAC/IP route BGP next-hop and VNI from the VNI/VSID field. IP23 - M2 is added to the ARP table.

- o SN1/24 is added to the IP-VRF in DGW1 and DGW2 with Overlay index IP23 pointing at M2 in the local BD-10.
- (4) When DGW1 receives a packet from the WAN with destination IPx, where IPx belongs to SN1/24:
- o A destination IP lookup is performed on the DGW1 IP-VRF routing table and Overlay Index=IP23 is found. Since IP23 is an Overlay Index, a recursive route resolution for IP23 is required.
 - o IP23 is resolved to M2 in the ARP table, and M2 is resolved to the tunnel information given by the BD (remote VTEP and VNI for the VXLAN case).
 - o The IP packet destined to IPx is encapsulated with:
 - . Source inner MAC = IRB1 MAC.
 - . Destination inner MAC = M2.
 - . Tunnel information provided by the BD FIB (VNI, VTEP IPs and MACs for the VXLAN case).
- (5) When the packet arrives at NVE2:
- o Based on the tunnel information (VNI for the VXLAN case), the BD-10 context is identified for a MAC lookup.
 - o Encapsulation is stripped-off and based on a MAC lookup (assuming MAC forwarding on the egress NVE), the packet is forwarded to TS2, where it will be properly routed.
- (6) When the redundancy protocol running between TS2 and TS3 appoints TS3 as the new active TS for SN1, TS3 will now own the floating IP23 and will signal this new ownership (GARP message or similar). Upon receiving the new owner's notification, NVE3 will issue a route type 2 for M3-IP23 and NVE2 will withdraw the RT-2 for M2-IP23. DGW1 and DGW2 will update their ARP tables with the new MAC resolving the floating IP. No changes are made in the IP-VRF routing table.

[4.3](#) Bump-in-the-Wire Use-Case

Figure 5 illustrates an example of inter-subnet forwarding for an IP Prefix route that carries a subnet SN1. In this use-case, TS2 and TS3 are layer-2 VA devices without any IP address that can be included as an Overlay Index in the GW IP field of the IP Prefix route. Their MAC addresses are M2 and M3 respectively and are connected to BD-10. Note that IRB1 and IRB2 (in DGW1 and DGW2 respectively) have IP addresses in a subnet different than SN1.

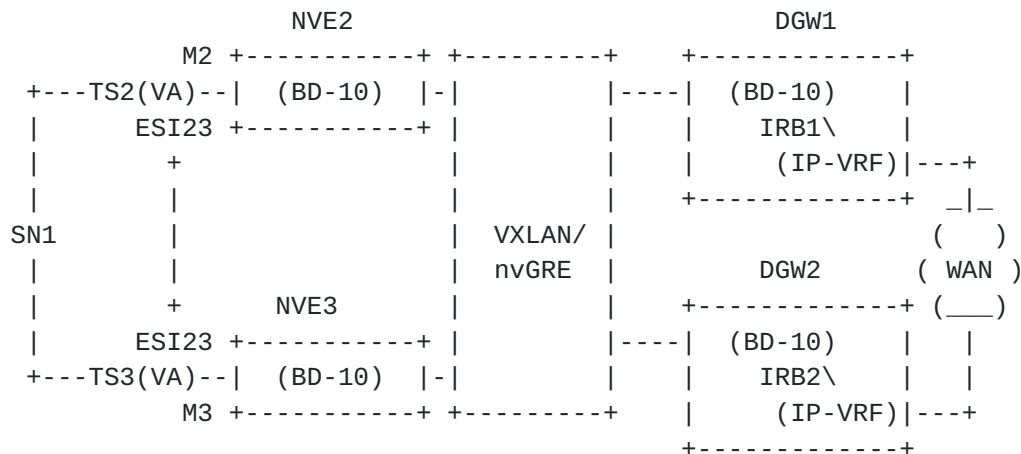


Figure 5 Bump-in-the-wire use-case

Since neither TS2 nor TS3 can participate in any dynamic routing protocol and have no IP address assigned, there are two potential Overlay Index types that can be used when advertising SN1:

- an ESI, i.e. ESI23, that can be provisioned on the attachment ports of NVE2 and NVE3, as shown in Figure 5.
- or the VA's MAC address, that can be added to NVE2 and NVE3 by policy.

The advantage of using an ESI as Overlay Index as opposed to the VA's MAC address, is that the forwarding to the egress NVE can be done purely based on the state of the AC in the ES (notified by the AD per-EVI route) and all the EVPN multi-homing redundancy mechanisms can be re-used. For instance, the [\[RFC7432\]](#) mass-withdrawal mechanism for fast failure detection and propagation can be used. This section assumes that an ESI Overlay Index is used in this use-case but it does not prevent the use of the VA's MAC address as an Overlay Index. If a MAC is used as Overlay Index, the control plane must follow the procedures described in [section 4.4.3](#).

The model supports VA redundancy in a similar way as the one described in [section 4.2](#) for the floating IP Overlay Index use-case, except that it uses the EVPN Ethernet A-D per-EVI route instead of

the MAC advertisement route to advertise the location of the Overlay Index. The procedure is explained below:

(1) Assuming TS2 is the active TS in ESI23, NVE2 advertises the following BGP routes:

- o Route type 1 (Ethernet A-D route for BD-10) containing: ESI=ESI23 and the corresponding tunnel information (VNI/VSID field), as well as the BGP Encapsulation Extended Community as per [[EVPN-OVERLAY](#)].
- o Route type 5 (IP Prefix route) containing: IPL=24, IP=SN1, ESI=ESI23, GW IP address=0. The Router's MAC Extended Community defined in [[EVPN-INTERSUBNET](#)] is added and carries the MAC address (M2) associated to the TS behind which SN1 sits. M2 may be learned by policy.

(2) NVE3 advertises the following BGP route for TS3 (no AD per-EVI route is advertised):

- o Route type 5 (IP Prefix route) containing: IPL=24, IP=SN1, ESI=23, GW IP address=0. The Router's MAC Extended Community is added and carries the MAC address (M3) associated to the TS behind which SN1 sits. M3 may be learned by policy.

(3) DGW1 and DGW2 import the received routes based on the route-target:

- o The tunnel information to get to ESI23 is installed in DGW1 and DGW2. For the VXLAN use case, the VTEP will be derived from the Ethernet A-D route BGP next-hop and VNI from the VNI/VSID field (see [[EVPN-OVERLAY](#)]).
- o The RT-5 coming from the NVE that advertised the RT-1 is selected and SN1/24 is added to the IP-VRF in DGW1 and DGW2 with Overlay Index ESI23 and MAC = M2.

(4) When DGW1 receives a packet from the WAN with destination IPx, where IPx belongs to SN1/24:

- o A destination IP lookup is performed on the DGW1 IP-VRF routing table and Overlay Index=ESI23 is found. Since ESI23 is an Overlay Index, a recursive route resolution is required to find the egress NVE where ESI23 resides.
- o The IP packet destined to IPx is encapsulated with:

- . Source inner MAC = IRB1 MAC.

- . Destination inner MAC = M2 (this MAC will be obtained from the Router's MAC Extended Community received along with the RT-5 for SN1). Note that the Router's MAC Extended Community is used in this case to carry the TS' MAC address, as opposed to the NVE/PE's MAC address.
- . Tunnel information for the NVO tunnel is provided by the Ethernet A-D route per-EVI for ESI23 (VNI and VTEP IP for the VXLAN case).

(5) When the packet arrives at NVE2:

- o Based on the tunnel demultiplexer information (VNI for the VXLAN case), the BD-10 context is identified for a MAC lookup (assuming MAC disposition model) or the VNI MAY directly identify the egress interface (for a label or VNI disposition model).
 - o Encapsulation is stripped-off and based on a MAC lookup (assuming MAC forwarding on the egress NVE) or a VNI lookup (in case of VNI forwarding), the packet is forwarded to TS2, where it will be forwarded to SN1.
- (6) If the redundancy protocol running between TS2 and TS3 follows an active/standby model and there is a failure, appointing TS3 as the new active TS for SN1, TS3 will now own the connectivity to SN1 and will signal this new ownership. Upon receiving the new owner's notification, NVE3's AC will become active and issue a route type 1 for ESI23, whereas NVE2 will withdraw its Ethernet A-D route for ESI23. DGW1 and DGW2 will update their tunnel information to resolve ESI23. The destination inner MAC will be changed to M3.

4.4 IP-VRF-to-IP-VRF Model

This use-case is similar to the scenario described in "IRB forwarding on NVEs for Tenant Systems" in [[EVPN-INTERSUBNET](#)], however the new requirement here is the advertisement of IP Prefixes as opposed to only host routes.

In the examples described in sections [4.1](#), [4.2](#) and [4.3](#), the BD instance can connect IRB interfaces and any other Tenant Systems connected to it. EVPN provides connectivity for:

1. Traffic destined to the IRB or TS IP interfaces as well as
2. Traffic destined to IP subnets sitting behind the TS, e.g. SN1 or SN2.

In order to provide connectivity for (1), MAC/IP routes (RT-2) are needed so that IRB or TS MACs and IPs can be distributed.

Connectivity type (2) is accomplished by the exchange of IP Prefix routes (RT-5) for IPs and subnets sitting behind certain Overlay Indexes, e.g. GW IP or ESI or TS MAC.

In some cases, IP Prefix routes may be advertised for subnets and IPs sitting behind an IRB. We refer to this use-case as the "IP-VRF-to-IP-VRF" model.

[EVPN-INTERSUBNET] defines an asymmetric IRB model and a symmetric IRB model, based on the required lookups at the ingress and egress NVE: the asymmetric model requires an ip-lookup and a mac-lookup at the ingress NVE, whereas only a mac-lookup is needed at the egress NVE; the symmetric model requires ip and mac lookups at both, ingress and egress NVE. From that perspective, the IP-VRF-to-IP-VRF use-case described in this section is a symmetric IRB model.

Note that, in an IP-VRF-to-IP-VRF scenario, out of the many subnets that a tenant may have, it may be the case that only a few are attached to a given NVE/PE's IP-VRF. In order to provide inter-subnet connectivity among the set of NVE/PEs where the tenant is connected, a new "Supplementary Broadcast Domain" (SBD) is created on all of them. This SBD is instantiated as a regular BD (with no ACs) in each NVE/PE and has a IRB interfaces that connect the SBD to the IP-VRF. If no recursive resolution is needed, the SBD may not be needed and the IP-VRFs may be connected directly by Ethernet or IP NVO tunnels. Depending on the existence and characteristics of the SBD and IRB interfaces for the IP-VRFs, there are three different IP-VRF-to-IP-VRF scenarios identified and described in this document:

- 1) Interface-less model: no SBD and no overlay indexes required.
- 2) Interface-ful with SBD-facing IRB model: it requires SBD, as well as GW IP addresses as overlay indexes.
- 3) Interface-ful with unnumbered SBD-facing IRB model: it requires SBD, as well as MAC addresses as overlay indexes.

Inter-subnet IP multicast is outside the scope of this document.

4.4.1 Interface-less IP-VRF-to-IP-VRF Model

Figure 6 will be used for the description of this model.

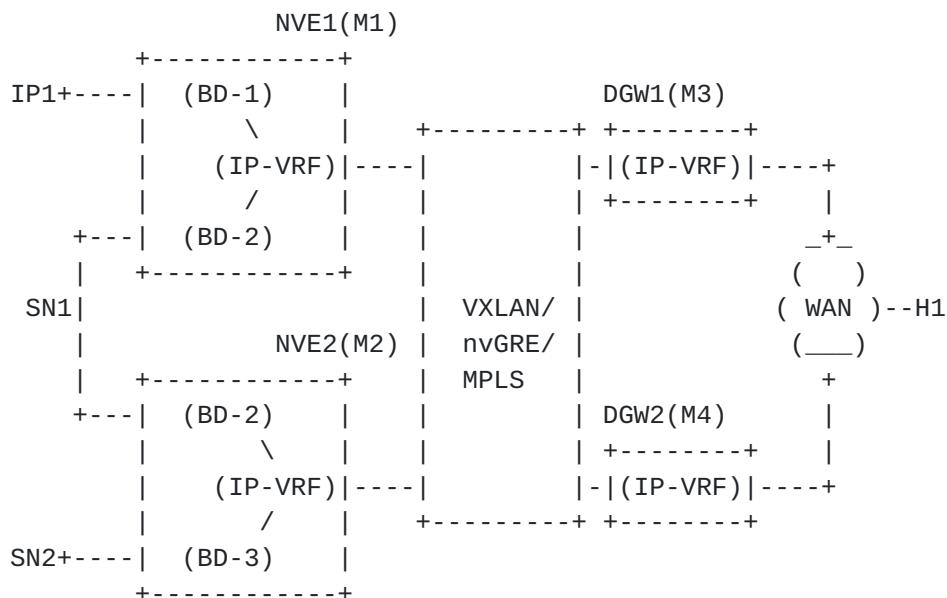


Figure 6 Interface-less IP-VRF-to-IP-VRF model

In this case:

- The NVEs and DGWs must provide connectivity between hosts in SN1, SN2, IP1 and hosts sitting at the other end of the WAN, for example, H1. We assume the DGWs import/export IP and/or VPN-IP routes from/to the WAN.
- The IP-VRF instances in the NVE/DGWs are directly connected through NVO tunnels, and no IRBs and/or BD instances are instantiated to connect the IP-VRFs.
- The solution must provide layer-3 connectivity among the IP-VRFs for Ethernet NVO tunnels, for instance, VXLAN or nvGRE.
- The solution may provide layer-3 connectivity among the IP-VRFs for IP NVO tunnels, for example, VXLAN GPE (with IP payload).

In order to meet the above requirements, the EVPN route type 5 will be used to advertise the IP Prefixes, along with the Router's MAC Extended Community as defined in [\[EVPN-INTERSUBNET\]](#) if the advertising NVE/DGW uses Ethernet NVO tunnels. Each NVE/DGW will advertise an RT-5 for each of its prefixes with the following fields:

- o RD as per [\[RFC7432\]](#).

- o Eth-Tag ID=0.
- o IP address length and IP address, as explained in the previous sections.
- o GW IP address=0.
- o ESI=0
- o MPLS label or VNI corresponding to the IP-VRF.

Each RT-5 will be sent with a route-target identifying the tenant (IP-VRF) and two BGP extended communities:

- o The first one is the BGP Encapsulation Extended Community, as per [\[RFC5512\]](#), identifying the tunnel type.
- o The second one is the Router's MAC Extended Community as per [\[EVPN-INTERSUBNET\]](#) containing the MAC address associated to the NVE advertising the route. This MAC address identifies the NVE/DGW and MAY be re-used for all the IP-VRFs in the NVE. The Router's MAC Extended Community MUST be sent if the route is associated to an Ethernet NVO tunnel, for instance, VXLAN. If the route is associated to an IP NVO tunnel, for instance VXLAN GPE with IP payload, the Router's MAC Extended Community SHOULD NOT be sent.

The following example illustrates the procedure to advertise and forward packets to SN1/24 (ipv4 prefix advertised from NVE1):

(1) NVE1 advertises the following BGP route:

- o Route type 5 (IP Prefix route) containing:
 - . IPL=24, IP=SN1, Label=10.
 - . GW IP= SHOULD be set to 0.
 - . [\[RFC5512\]](#) BGP Encapsulation Extended Community.
 - . Router's MAC Extended Community that contains M1.
 - . Route-target identifying the tenant (IP-VRF).

(2) DGW1 imports the received routes from NVE1:

- o DGW1 installs SN1/24 in the IP-VRF identified by the RT-5 route-target.

- o Since GW IP=ESI=0, the Label is a non-zero value and the local policy indicates this interface-less model, DGW1 will use the Label and next-hop of the RT-5, as well as the MAC address conveyed in the Router's MAC Extended Community (as inner destination MAC address) to set up the forwarding state and later encapsulate the routed IP packets.
- (3) When DGW1 receives a packet from the WAN with destination IPx, where IPx belongs to SN1/24:
- o A destination IP lookup is performed on the DGW1 IP-VRF routing table. The lookup yields SN1/24.
 - o Since the RT-5 for SN1/24 had a GW IP=ESI=0, a non-zero Label and next-hop and the model is interface-less, DGW1 will not need a recursive lookup to resolve the route.
 - o The IP packet destined to IPx is encapsulated with: Source inner MAC = DGW1 MAC, Destination inner MAC = M1, Source outer IP (tunnel source IP) = DGW1 IP, Destination outer IP (tunnel destination IP) = NVE1 IP. The Source and Destination inner MAC addresses are not needed if IP NVO tunnels are used.
- (4) When the packet arrives at NVE1:
- o NVE1 will identify the IP-VRF for an IP-lookup based on the Label (the Destination inner MAC is not needed to identify the IP-VRF).
 - o An IP lookup is performed in the routing context, where SN1 turns out to be a local subnet associated to BD-2. A subsequent lookup in the ARP table and the BD FIB will provide the forwarding information for the packet in BD-2.

The model described above is called Interface-less model since the IP-VRFs are connected directly through tunnels and they don't require those tunnels to be terminated in core BDs instead, like in sections 4.4.2 or 4.4.3. An EVPN IP-VRF-to-IP-VRF implementation is REQUIRED to support the ingress and egress procedures described in this section.

4.4.2 Interface-ful IP-VRF-to-IP-VRF with SBD-facing IRB

Figure 7 will be used for the description of this model.

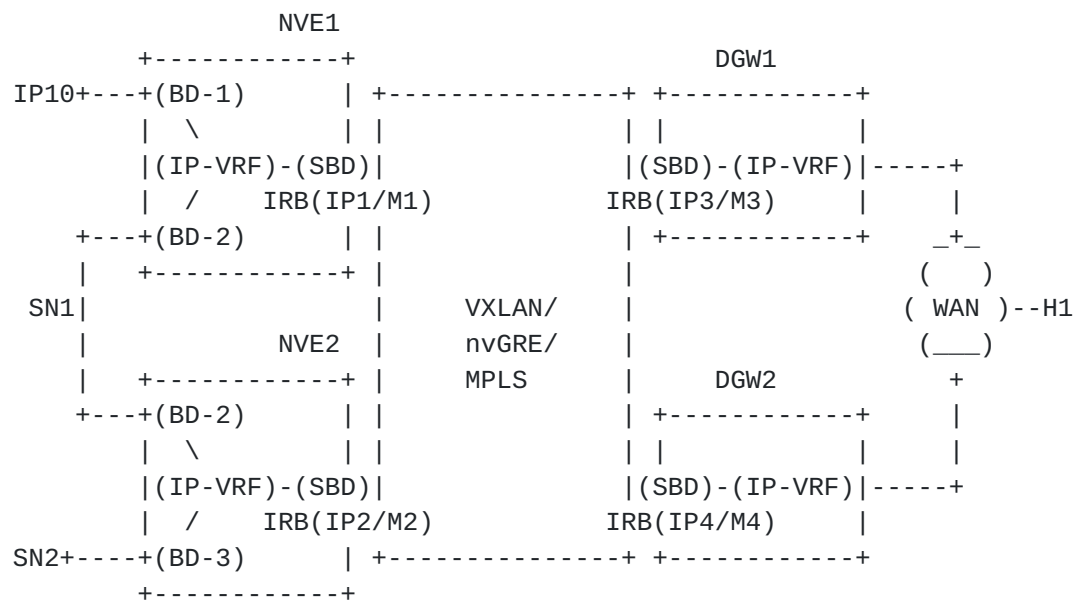


Figure 7 Interface-ful with core-facing IRB model

In this model:

- As in [section 4.4.1](#), the NVEs and DGWs must provide connectivity between hosts in SN1, SN2, IP1 and hosts sitting at the other end of the WAN.
- However, the NVE/DGWs are now connected through Ethernet NVO tunnels terminated in the SBD instance. The IP-VRFs use IRB interfaces for their connectivity to the SBD.
- Each SBD-facing IRB has an IP and a MAC address, where the IP address must be reachable from other NVEs or DGWs.
- The SBD is attached to all the NVE/DGWs in the tenant domain BDs.
- The solution must provide layer-3 connectivity for Ethernet NVO tunnels, for instance, VXLAN or nvGRE.

EVPN type 5 routes will be used to advertise the IP Prefixes, whereas EVPN RT-2 routes will advertise the MAC/IP addresses of each SBD-facing IRB interface. Each NVE/DGW will advertise an RT-5 for each of its prefixes with the following fields:

- o RD as per [\[RFC7432\]](#).
- o Eth-Tag ID=0.

- o IP address length and IP address, as explained in the previous sections.
- o GW IP address=IRB-IP (this is the Overlay Index that will be used for the recursive route resolution).
- o ESI=0
- o Label value SHOULD be zero since the RT-5 route requires a recursive lookup resolution to an RT-2 route. It is ignored on reception, and, when forwarding packets, the MPLS label or VNI from the RT-2's MPLS Label1 field is used.

Each RT-5 will be sent with a route-target identifying the tenant (IP-VRF). The Router's MAC Extended Community SHOULD NOT be sent in this case.

The following example illustrates the procedure to advertise and forward packets to SN1/24 (ipv4 prefix advertised from NVE1):

(1) NVE1 advertises the following BGP routes:

- o Route type 5 (IP Prefix route) containing:
 - . IPL=24, IP=SN1, Label= SHOULD be set to 0.
 - . GW IP=IP1 (core-facing IRB's IP)
 - . Route-target identifying the tenant (IP-VRF).
- o Route type 2 (MAC/IP route for the core-facing IRB) containing:
 - . ML=48, M=M1, IPL=32, IP=IP1, Label=10.
 - . A [[RFC5512](#)] BGP Encapsulation Extended Community.
 - . Route-target identifying the SBD. This route-target MAY be the same as the one used with the RT-5.

(2) DGW1 imports the received routes from NVE1:

- o DGW1 installs SN1/24 in the IP-VRF identified by the RT-5 route-target.
 - . Since GW IP is different from zero, the GW IP (IP1) will be used as the Overlay Index for the recursive route resolution

to the RT-2 carrying IP1.

- (3) When DGW1 receives a packet from the WAN with destination IPx, where IPx belongs to SN1/24:
- o A destination IP lookup is performed on the DGW1 IP-VRF routing table. The lookup yields SN1/24, which is associated to the Overlay Index IP1. The forwarding information is derived from the RT-2 received for IP1.
 - o The IP packet destined to IPx is encapsulated with: Source inner MAC = M3, Destination inner MAC = M1, Source outer IP (source VTEP) = DGW1 IP, Destination outer IP (destination VTEP) = NVE1 IP.
- (4) When the packet arrives at NVE1:
- o NVE1 will identify the IP-VRF for an IP-lookup based on the Label and the inner MAC DA.
 - o An IP lookup is performed in the routing context, where SN1 turns out to be a local subnet associated to BD-2. A subsequent lookup in the ARP table and the BD FIB will provide the forwarding information for the packet in BD-2.

The model described above is called 'Interface-ful with SBD-facing IRB model' since the tunnels connecting the DGWs and NVEs need to be terminated into the SBD. The SBD is connected to the IP-VRFs via core-facing IRB interfaces, and that allows the recursive resolution of RT-5s to GW IP addresses. An EVPN IP-VRF-to-IP-VRF implementation is REQUIRED to support the ingress and egress procedures described in this section.

4.4.3 Interface-ful IP-VRF-to-IP-VRF with Unnumbered SBD-facing IRB

Figure 8 will be used for the description of this model. Note that this model is similar to the one described in [section 4.4.2](#), only without IP addresses on the SBD-facing IRB interfaces.

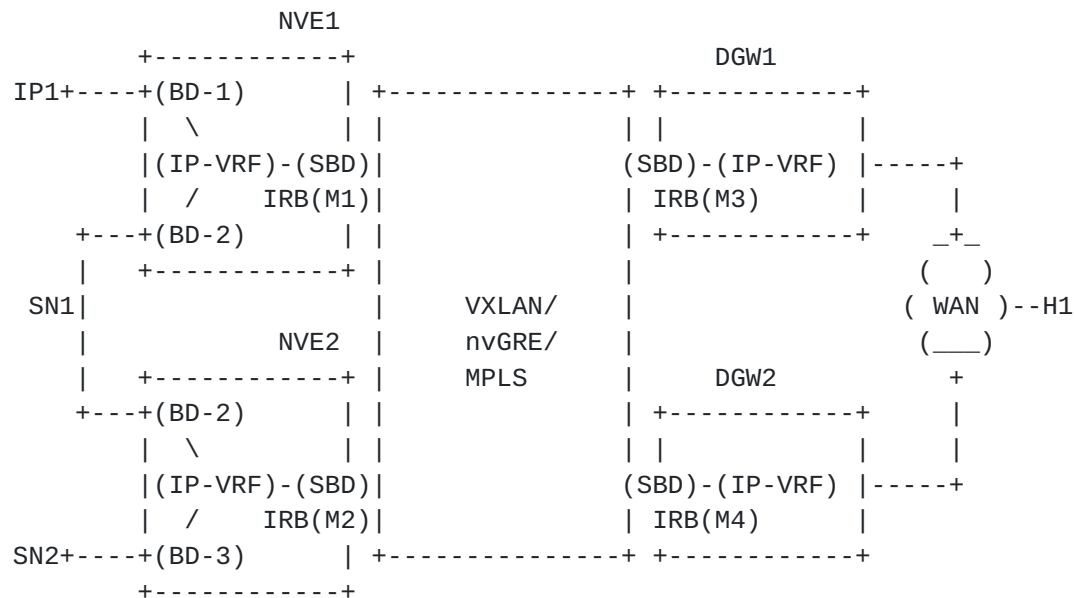


Figure 8 Interface-ful with unnumbered core-facing IRB model

In this model:

- As in [section 4.4.1](#) and 4.4.2, the NVEs and DGWs must provide connectivity between hosts in SN1, SN2, IP1 and hosts sitting at the other end of the WAN.
- As in [section 4.4.2](#), the NVE/DGWs are connected through Ethernet NVO tunnels terminated in the SBD instance. The IP-VRFs use IRB interfaces for their connectivity to the SBD.
- However, each SBD-facing IRB has a MAC address only, and no IP address (that is why the model refers to an 'unnumbered' SBD-facing IRB). In this model, there is no need to have IP reachability to the SBD-facing IRB interfaces themselves and there is a requirement to save IP addresses on those interfaces.
- As in [section 4.4.2](#), the SBD is composed of all the NVE/DGW BDs of the tenant that need inter-subnet-forwarding.
- As in [section 4.4.2](#), the solution must provide layer-3 connectivity for Ethernet NVO tunnels, for instance, VXLAN or nvGRE.

This model will also make use of the RT-5 recursive resolution. EVPN type 5 routes will advertise the IP Prefixes along with the Router's MAC Extended Community used for the recursive lookup, whereas EVPN RT-2 routes will advertise the MAC addresses of each SBD-facing IRB

interface (this time without an IP).

Each NVE/DGW will advertise an RT-5 for each of its prefixes with the same fields as described in 4.4.2 except for:

- o GW IP address= SHOULD be set to 0.

Each RT-5 will be sent with a route-target identifying the tenant (IP-VRF) and the Router's MAC Extended Community containing the MAC address associated to SBD-facing IRB interface. This MAC address MAY be re-used for all the IP-VRFs in the NVE.

The example is similar to the one in [section 4.4.2](#):

(1) NVE1 advertises the following BGP routes:

- o Route type 5 (IP Prefix route) containing the same values as in the example in [section 4.4.2](#), except for:
 - . GW IP= SHOULD be set to 0.
 - . Router's MAC Extended Community containing M1 (this will be used for the recursive lookup to a RT-2).
- o Route type 2 (MAC route for the core-facing IRB) with the same values as in [section 4.4.2](#) except for:
 - . ML=48, M=M1, IPL=0, Label=10.

(2) DGW1 imports the received routes from NVE1:

- o DGW1 installs SN1/24 in the IP-VRF identified by the RT-5 route-target.
 - . The MAC contained in the Router's MAC Extended Community sent along with the RT-5 (M1) will be used as the Overlay Index for the recursive route resolution to the RT-2 carrying M1.

(3) When DGW1 receives a packet from the WAN with destination IPx, where IPx belongs to SN1/24:

- o A destination IP lookup is performed on the DGW1 IP-VRF routing table. The lookup yields SN1/24, which is associated to the Overlay Index M1. The forwarding information is derived from the RT-2 received for M1.
- o The IP packet destined to IPx is encapsulated with: Source

inner MAC = M3, Destination inner MAC = M1, Source outer IP (source VTEP) = DGW1 IP, Destination outer IP (destination VTEP) = NVE1 IP.

(4) When the packet arrives at NVE1:

- o NVE1 will identify the IP-VRF for an IP-lookup based on the Label and the inner MAC DA.
- o An IP lookup is performed in the routing context, where SN1 turns out to be a local subnet associated to BD-2. A subsequent lookup in the ARP table and the BD FIB will provide the forwarding information for the packet in BD-2.

The model described above is called Interface-ful with SBD-facing IRB model (as in [section 4.4.2](#)), only this time the SBD-facing IRB does not have an IP address. This model is OPTIONAL for an EVPN IP-VRF-to-IP-VRF implementation.

5. Conclusions

An EVPN route (type 5) for the advertisement of IP Prefixes is described in this document. This new route type has a differentiated role from the RT-2 route and addresses the Data Center (or NVO-based networks in general) inter-subnet connectivity scenarios described in this document. Using this new RT-5, an IP Prefix may be advertised along with an Overlay Index that can be a GW IP address, a MAC or an ESI, or without an Overlay Index, in which case the BGP next-hop will point at the egress NVE/ASBR/ABR and the MAC in the Router's MAC Extended Community will provide the inner MAC destination address to be used. As discussed throughout the document, the EVPN RT-2 does not meet the requirements for all the DC use cases, therefore this EVPN route type 5 is required.

The EVPN route type 5 decouples the IP Prefix advertisements from the MAC/IP route advertisements in EVPN, hence:

- a) Allows the clean and clear advertisements of ipv4 or ipv6 prefixes in an NLRI with no MAC addresses.
- b) Since the route type is different from the MAC/IP Advertisement route, the current [[RFC7432](#)] procedures do not need to be modified.
- c) Allows a flexible implementation where the prefix can be linked to different types of Overlay/Underlay Indexes: overlay IP address, overlay MAC addresses, overlay ESI, underlay BGP next-hops, etc.

- d) An EVPN implementation not requiring IP Prefixes can simply discard them by looking at the route type value.

6. Conventions used in this document

The key words "MUST", "MUST NOT", "REQUIRED", "SHALL", "SHALL NOT", "SHOULD", "SHOULD NOT", "RECOMMENDED", "MAY", and "OPTIONAL" in this document are to be interpreted as described in [RFC-2119](#) [[RFC2119](#)].

7. Security Considerations

The security considerations discussed in [[RFC7432](#)] apply to this document.

8. IANA Considerations

This document requests the allocation of value 5 in the "EVPN Route Types" registry defined by [[RFC7432](#)]:

Value	Description	Reference
5	IP Prefix route	[this document]

9. References

9.1 Normative References

[[RFC4364](#)] Rosen, E. and Y. Rekhter, "BGP/MPLS IP Virtual Private Networks (VPNs)", [RFC 4364](#), DOI 10.17487/RFC4364, February 2006, <<http://www.rfc-editor.org/info/rfc4364>>.

[[RFC7432](#)] Sajassi, A., Ed., Aggarwal, R., Bitar, N., Isaac, A., Uttaro, J., Drake, J., and W. Henderickx, "BGP MPLS-Based Ethernet VPN", [RFC 7432](#), DOI 10.17487/RFC7432, February 2015, <<http://www.rfc-editor.org/info/rfc7432>>.

[[RFC7606](#)] Chen, E., Scudder, J., Mohapatra, P., and K. Patel, "Revised Error Handling for BGP UPDATE Messages", [RFC 7606](#), August 2015, <<http://www.rfc-editor.org/info/rfc7606>>.

9.2 Informative References

[EVPN-INTERSUBNET] Sajassi et al., "IP Inter-Subnet Forwarding in EVPN", [draft-ietf-bess-evpn-inter-subnet-forwarding-03.txt](#), work in progress, February, 2017

[EVPN-OVERLAY] Sajassi-Drake et al., "A Network Virtualization Overlay Solution using EVPN", [draft-ietf-bess-evpn-overlay-08.txt](#), work in progress, March, 2017

10. Acknowledgments

The authors would like to thank Mukul Katiyar and Jeffrey Zhang for their valuable feedback and contributions. The following people also helped improving this document with their feedback: Tony Przygienda and Thomas Morin. Special THANK YOU to Eric Rosen for his detailed review, it really helped improve the readability and clarify the concepts.

11. Contributors

In addition to the authors listed on the front page, the following co-authors have also contributed to this document:

Senthil Sathappan
Florin Balus
Aldrin Isaac
Senad Palislaamovic

12. Authors' Addresses

Jorge Rabadan (Editor)
Nokia
777 E. Middlefield Road
Mountain View, CA 94043 USA
Email: jorge.rabadan@nokia.com

Wim Henderickx
Nokia
Email: wim.henderickx@nokia.com

John E. Drake
Juniper
Email: jdrake@juniper.net

Ali Sajassi
Cisco
Email: sajassi@cisco.com

Wen Lin
Juniper

Email: wlin@juniper.net