

Network Working Group  
Internet Draft

Expires: July, 2008

D. Katz  
Juniper Networks  
D. Ward  
Cisco Systems  
January, 2008

**Bidirectional Forwarding Detection**  
**draft-ietf-bfd-base-07.txt**

Status of this Memo

By submitting this Internet-Draft, each author represents that any applicable patent or other IPR claims of which he or she is aware have been or will be disclosed, and any of which he or she becomes aware will be disclosed, in accordance with [Section 6 of BCP 79](#).

Internet-Drafts are working documents of the Internet Engineering Task Force (IETF), its areas, and its working groups. Note that other groups may also distribute working documents as Internet-Drafts.

Internet-Drafts are draft documents valid for a maximum of six months and may be updated, replaced, or obsoleted by other documents at any time. It is inappropriate to use Internet-Drafts as reference material or to cite them other than as "work in progress."

The list of current Internet-Drafts can be accessed at  
<http://www.ietf.org/1id-abstracts.html>

The list of Internet-Draft Shadow Directories can be accessed at  
<http://www.ietf.org/shadow.html>

Abstract

This document describes a protocol intended to detect faults in the bidirectional path between two forwarding engines, including interfaces, data link(s), and to the extent possible the forwarding engines themselves, with potentially very low latency. It operates independently of media, data protocols, and routing protocols. Comments on this draft should be directed to [rtg-bfd@ietf.org](mailto:rtg-bfd@ietf.org).

## Conventions used in this document

The key words "MUST", "MUST NOT", "REQUIRED", "SHALL", "SHALL NOT", "SHOULD", "SHOULD NOT", "RECOMMENDED", "MAY", and "OPTIONAL" in this document are to be interpreted as described in [RFC-2119](#) [KEYWORDS].

## Table of Contents

<a href="#">1.</a>	Introduction . . . . .	<a href="#">3</a>
<a href="#">2.</a>	Design . . . . .	<a href="#">4</a>
<a href="#">3.</a>	Protocol Overview . . . . .	<a href="#">5</a>
<a href="#">3.1</a>	Addressing and Session Establishment . . . . .	<a href="#">5</a>
<a href="#">3.2</a>	Operating Modes . . . . .	<a href="#">5</a>
<a href="#">4.</a>	BFD Control Packet Format . . . . .	<a href="#">7</a>
<a href="#">4.1</a>	Generic BFD Control Packet Format . . . . .	<a href="#">7</a>
<a href="#">4.2</a>	Simple Password Authentication Section Format . . . . .	<a href="#">11</a>
4.3	Keyed MD5 and Meticulous Keyed MD5 Authentication Section Format . . . . .	<a href="#">12</a>
4.4	Keyed SHA1 and Meticulous Keyed SHA1 Authentication Section Format . . . . .	<a href="#">13</a>
<a href="#">5.</a>	BFD Echo Packet Format . . . . .	<a href="#">14</a>
<a href="#">6.</a>	Elements of Procedure . . . . .	<a href="#">15</a>
<a href="#">6.1</a>	Overview . . . . .	<a href="#">15</a>
<a href="#">6.2</a>	BFD State Machine . . . . .	<a href="#">16</a>
<a href="#">6.3</a>	Demultiplexing and the Discriminator Fields . . . . .	<a href="#">18</a>
<a href="#">6.4</a>	The Echo Function and Asymmetry . . . . .	<a href="#">19</a>
<a href="#">6.5</a>	The Poll Sequence . . . . .	<a href="#">19</a>
<a href="#">6.6</a>	Demand Mode . . . . .	<a href="#">20</a>
<a href="#">6.7</a>	Authentication . . . . .	<a href="#">21</a>
<a href="#">6.7.1</a>	Enabling and Disabling Authentication . . . . .	<a href="#">22</a>
<a href="#">6.7.2</a>	Simple Password Authentication . . . . .	<a href="#">22</a>
6.7.3	Keyed MD5 and Meticulous Keyed MD5 Authentication	23
6.7.4	Keyed SHA1 and Meticulous Keyed SHA1 Authentication	25
<a href="#">6.8</a>	Functional Specifics . . . . .	<a href="#">27</a>
<a href="#">6.8.1</a>	State Variables . . . . .	<a href="#">27</a>
<a href="#">6.8.2</a>	Timer Negotiation . . . . .	<a href="#">30</a>
<a href="#">6.8.3</a>	Timer Manipulation . . . . .	<a href="#">31</a>
<a href="#">6.8.4</a>	Calculating the Detection Time . . . . .	<a href="#">32</a>
<a href="#">6.8.5</a>	Detecting Failures with the Echo Function . . . . .	<a href="#">33</a>
<a href="#">6.8.6</a>	Reception of BFD Control Packets . . . . .	<a href="#">34</a>
<a href="#">6.8.7</a>	Transmitting BFD Control Packets . . . . .	<a href="#">36</a>
<a href="#">6.8.8</a>	Reception of BFD Echo Packets . . . . .	<a href="#">39</a>
<a href="#">6.8.9</a>	Transmission of BFD Echo Packets . . . . .	<a href="#">39</a>
<a href="#">6.8.10</a>	Min Rx Interval Change . . . . .	<a href="#">40</a>
<a href="#">6.8.11</a>	Min Tx Interval Change . . . . .	<a href="#">40</a>
<a href="#">6.8.12</a>	Detect Multiplier Change . . . . .	<a href="#">40</a>
<a href="#">6.8.13</a>	Enabling or Disabling the Echo Function . . . . .	<a href="#">40</a>



<a href="#">6.8.14</a>	Enabling or Disabling Demand Mode . . . . .	<a href="#">41</a>
<a href="#">6.8.15</a>	Forwarding Plane Reset . . . . .	<a href="#">41</a>
<a href="#">6.8.16</a>	Administrative Control . . . . .	<a href="#">41</a>
<a href="#">6.8.17</a>	Concatenated Paths . . . . .	<a href="#">42</a>
<a href="#">6.8.18</a>	Holding Down Sessions . . . . .	<a href="#">42</a>
	Backward Compatibility (Non-Normative) . . . . .	<a href="#">43</a>
	Contributors . . . . .	<a href="#">44</a>
	Acknowledgements . . . . .	<a href="#">44</a>
	Security Considerations . . . . .	<a href="#">44</a>
	IANA Considerations . . . . .	<a href="#">45</a>
	Normative References . . . . .	<a href="#">45</a>
	Authors' Addresses . . . . .	<a href="#">46</a>
	Changes from the previous draft . . . . .	<a href="#">46</a>
	IPR Notice . . . . .	<a href="#">46</a>

## **[1. Introduction](#)**

An increasingly important feature of networking equipment is the rapid detection of communication failures between adjacent systems, in order to more quickly establish alternative paths. Detection can come fairly quickly in certain circumstances when data link hardware comes into play (such as SONET alarms.) However, there are media that do not provide this kind of signaling (such as Ethernet), and some media may not detect certain kinds of failures in the path, for example, failing interfaces or forwarding engine components.

Networks use relatively slow "Hello" mechanisms, usually in routing protocols, to detect failures when there is no hardware signaling to help out. The time to detect failures ("Detection Times") available in the existing protocols are no better than a second, which is far too long for some applications and represents a great deal of lost data at gigabit rates. Furthermore, routing protocol Hellos are of no help when those routing protocols are not in use, and the semantics of detection are subtly different--they detect a failure in the path between the two routing protocol engines.

The goal of BFD is to provide low-overhead, short-duration detection of failures in the path between adjacent forwarding engines, including the interfaces, data link(s), and to the extent possible the forwarding engines themselves.

An additional goal is to provide a single mechanism that can be used for liveness detection over any media, at any protocol layer, with a wide range of Detection Times and overhead, to avoid a proliferation of different methods.



This document specifies the details of the base protocol. The use of some mechanisms are application dependent and are specified in a separate series of application documents. These issues are so noted.

Note that many of the exact mechanisms are implementation dependent and will not affect interoperability, and are thus outside the scope of this specification. Those issues are so noted.

## 2. Design

BFD is designed to detect failures in communication with a forwarding plane next hop. It is intended to be implemented in some component of the forwarding engine of a system, in cases where the forwarding and control engines are separated. This not only binds the protocol more to the forwarding plane, but decouples the protocol from the fate of the routing protocol engine, making it useful in concert with various "graceful restart" mechanisms for those protocols. BFD may also be implemented in the control engine, though doing so may preclude the detection of some kinds of failures.

BFD operates on top of any data protocol being forwarded between two systems. It is always run in a unicast, point-to-point mode. BFD packets are carried as the payload of whatever encapsulating protocol is appropriate for the medium and network. BFD may be running at multiple layers in a system. The context of the operation of any particular BFD session is bound to its encapsulation.

BFD can provide failure detection on any kind of path between systems, including direct physical links, virtual circuits, tunnels, MPLS LSPs, multihop routed paths, and unidirectional links (so long as there is some return path, of course.) Multiple BFD sessions can be established between the same pair of systems when multiple paths between them are present in at least one direction, even if a lesser number of paths are available in the other direction (multiple parallel unidirectional links or MPLS LSPs, for example.)

The BFD state machine implements a three-way handshake, both when establishing a BFD session and when tearing it down for any reason, to ensure that both systems are aware of the state change.

BFD can be abstracted as a simple service. The service primitives provided by BFD are to create, destroy, and modify a session, given the destination address and other parameters. BFD in return provides a signal to its clients indicating when the BFD session goes up or down.



### **3. Protocol Overview**

BFD is a simple hello protocol that in many respects is similar to the detection components of well-known routing protocols. A pair of systems transmit BFD packets periodically over each path between the two systems, and if a system stops receiving BFD packets for long enough, some component in that particular bidirectional path to the neighboring system is assumed to have failed. Under some conditions, systems may negotiate to not send periodic BFD packets in order to reduce overhead.

A path is only declared to be operational when two-way communication has been established between systems, though this does not preclude the use of unidirectional links.

A separate BFD session is created for each communications path and data protocol in use between two systems.

Each system estimates how quickly it can send and receive BFD packets in order to come to an agreement with its neighbor about how rapidly detection of failure will take place. These estimates can be modified in real time in order to adapt to unusual situations. This design also allows for fast systems on a shared medium with a slow system to be able to more rapidly detect failures between the fast systems while allowing the slow system to participate to the best of its ability.

#### **3.1. Addressing and Session Establishment**

A BFD session is established based on the needs of the application that will be making use of it. It is up to the application to determine the need for BFD, and the addresses to use--there is no discovery mechanism in BFD. For example, an OSPF [[OSPF](#)] implementation may request a BFD session to be established to a neighbor discovered using the OSPF Hello protocol.

#### **3.2. Operating Modes**

BFD has two operating modes which may be selected, as well as an additional function that can be used in combination with the two modes.

The primary mode is known as Asynchronous mode. In this mode, the systems periodically send BFD Control packets to one another, and if a number of those packets in a row are not received by the other system, the session is declared to be down.





The second mode is known as Demand mode. In this mode, it is assumed that a system has an independent way of verifying that it has connectivity to the other system. Once a BFD session is established, such a system may ask the other system to stop sending BFD Control packets, except when the system feels the need to verify connectivity explicitly, in which case a short sequence of BFD Control packets is exchanged, and then the far system quiesces. Demand mode may operate independently in each direction, or simultaneously.

An adjunct to both modes is the Echo function. When the Echo function is active, a stream of BFD Echo packets is transmitted in such a way as to have the other system loop them back through its forwarding path. If a number of packets of the echoed data stream are not received, the session is declared to be down. The Echo function may be used with either Asynchronous or Demand modes. Since the Echo function is handling the task of detection, the rate of periodic transmission of Control packets may be reduced (in the case of Asynchronous mode) or eliminated completely (in the case of Demand mode.)

Pure asynchronous mode is advantageous in that it requires half as many packets to achieve a particular Detection Time as does the Echo function. It is also used when the Echo function cannot be supported for some reason.

The Echo function has the advantage of truly testing only the forwarding path on the remote system. This may reduce round-trip jitter and thus allow more aggressive Detection Times, as well as potentially detecting some classes of failure that might not otherwise be detected.

The Echo function may be enabled individually in each direction. It is enabled in a particular direction only when the system that loops the Echo packets back signals that it will allow it, and when the system that sends the Echo packets decides it wishes to.

Demand mode is useful in situations where the overhead of a periodic protocol might prove onerous, such as a system with a very large number of BFD sessions. It is also useful when the Echo function is being used symmetrically. Demand mode has the disadvantage that Detection Times are essentially driven by the heuristics of the system implementation and are not known to the BFD protocol. Demand mode may not be used when the path round trip time is greater than the desired Detection Time. See [section 6.6](#) for more details.



## 4. BFD Control Packet Format

### 4.1. Generic BFD Control Packet Format

BFD Control packets are sent in an encapsulation appropriate to the environment. The specific encapsulation is outside of the scope of this specification. See the appropriate application document for encapsulation details.

The BFD Control packet has a Mandatory Section and an optional Authentication Section. The format of the Authentication Section, if present, is dependent on the type of authentication in use.

The Mandatory Section of a BFD Control packet has the following format:

```

      0                               1                               2                               3
      0 1 2 3 4 5 6 7 8 9 0 1 2 3 4 5 6 7 8 9 0 1 2 3 4 5 6 7 8 9 0 1
+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+
|Vers |  Diag  |Sta|P|F|C|A|D|M| Detect Mult |   Length   |
+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+
|
|                               My Discriminator                               |
+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+
|
|                               Your Discriminator                               |
+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+
|
|                               Desired Min TX Interval                               |
+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+
|
|                               Required Min RX Interval                               |
+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+
|
|                               Required Min Echo RX Interval                               |
+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+

```

An optional Authentication Section may be present:

```

      0                               1                               2                               3
      0 1 2 3 4 5 6 7 8 9 0 1 2 3 4 5 6 7 8 9 0 1 2 3 4 5 6 7 8 9 0 1
+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+
|  Auth Type  |  Auth Len  |   Authentication Data...   |
+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+

```

#### Version (Vers)

The version number of the protocol. This document defines protocol version 1.



### Diagnostic (Diag)

A diagnostic code specifying the local system's reason for the last session state change to states Down or AdminDown. Values are:

- 0 -- No Diagnostic
- 1 -- Control Detection Time Expired
- 2 -- Echo Function Failed
- 3 -- Neighbor Signaled Session Down
- 4 -- Forwarding Plane Reset
- 5 -- Path Down
- 6 -- Concatenated Path Down
- 7 -- Administratively Down
- 8 -- Reverse Concatenated Path Down
- 9-31 -- Reserved for future use

This field allows remote systems to determine the reason that the previous session failed, for example.

### State (Sta)

The current BFD session state as seen by the transmitting system. Values are:

- 0 -- AdminDown
- 1 -- Down
- 2 -- Init
- 3 -- Up

### Poll (P)

If set, the transmitting system is requesting verification of connectivity, or of a parameter change, and is expecting a packet with the Final (F) bit in reply. If clear, the transmitting system is not requesting verification.

### Final (F)

If set, the transmitting system is responding to a received BFD Control packet that had the Poll (P) bit set. If clear, the transmitting system is not responding to a Poll.



### Control Plane Independent (C)

If set, the transmitting system's BFD implementation does not share fate with its control plane (in other words, BFD is implemented in the forwarding plane and can continue to function through disruptions in the control plane.) If clear, the transmitting system's BFD implementation shares fate with its control plane.

The use of this bit is application dependent and is outside the scope of this specification. See specific application specifications for details.

### Authentication Present (A)

If set, the Authentication Section is present and the session is to be authenticated.

### Demand (D)

If set, Demand mode is active in the transmitting system (the system wishes to operate in Demand mode, knows that the session is up in both directions, and is directing the remote system to cease the periodic transmission of BFD Control packets.) If clear, Demand mode is not active in the transmitting system.

### Multipoint (M)

This bit is reserved for future point-to-multipoint extensions to BFD. It must be zero on both transmit and receipt.

### Detect Mult

Detection time multiplier. The negotiated transmit interval, multiplied by this value, provides the Detection Time for the transmitting system in Asynchronous mode.

### Length

Length of the BFD Control packet, in bytes.





### My Discriminator

A unique, nonzero discriminator value generated by the transmitting system, used to demultiplex multiple BFD sessions between the same pair of systems.

### Your Discriminator

The discriminator received from the corresponding remote system. This field reflects back the received value of My Discriminator, or is zero if that value is unknown.

### Desired Min TX Interval

This is the minimum interval, in microseconds, that the local system would like to use when transmitting BFD Control packets. The value zero is reserved.

### Required Min RX Interval

This is the minimum interval, in microseconds, between received BFD Control packets that this system is capable of supporting. If this value is zero, the transmitting system does not want the remote system to send any periodic BFD Control packets.

### Required Min Echo RX Interval

This is the minimum interval, in microseconds, between received BFD Echo packets that this system is capable of supporting. If this value is zero, the transmitting system does not support the receipt of BFD Echo packets.

### Auth Type

The authentication type in use, if the Authentication Present (A) bit is set.

- 0 - Reserved
- 1 - Simple Password
- 2 - Keyed MD5
- 3 - Meticulous Keyed MD5
- 4 - Keyed SHA1
- 5 - Meticulous Keyed SHA1



6-255 - Reserved for future use

#### Auth Len

The length, in bytes, of the authentication section, including the Auth Type and Auth Len fields.

### **4.2. Simple Password Authentication Section Format**

If the Authentication Present (A) bit is set in the header, and the Authentication Type field contains 1 (Simple Password), the Authentication Section has the following format:

```

      0                               1                               2                               3
      0 1 2 3 4 5 6 7 8 9 0 1 2 3 4 5 6 7 8 9 0 1 2 3 4 5 6 7 8 9 0 1
+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+
|  Auth Type  |  Auth Len   |  Auth Key ID  |  Password...  |
+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+
|                                     ...                                     |
+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+

```

#### Auth Type

The Authentication Type, which in this case is 1 (Simple Password.)

#### Auth Len

The length of the Authentication Section, in bytes. For Simple Password authentication, the length is equal to the password length plus three.

#### Auth Key ID

The authentication key ID in use for this packet. This allows multiple keys to be active simultaneously.


#### Password

The simple password in use on this session. The password MUST be from 1 to 16 bytes in length.



### 4.3. Keyed MD5 and Meticulous Keyed MD5 Authentication Section Format

If the Authentication Present (A) bit is set in the header, and the Authentication Type field contains 2 (Keyed MD5) or 3 (Meticulous Keyed MD5), the Authentication Section has the following format:

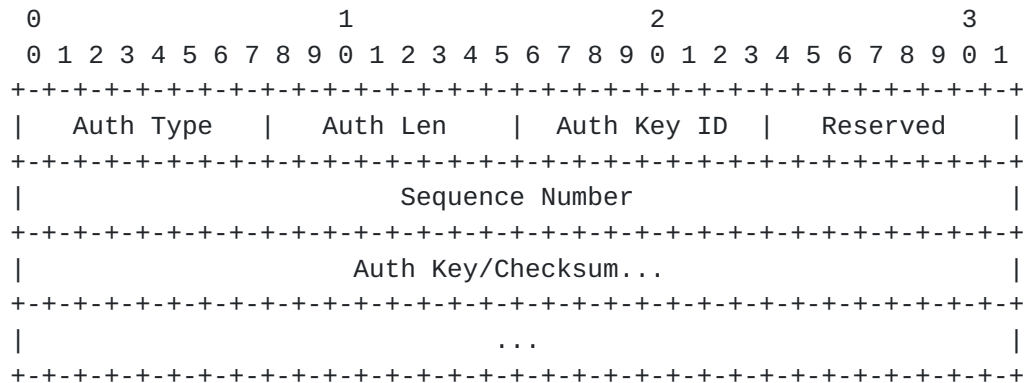

#### Auth Type

The Authentication Type, which in this case is 2 (Keyed MD5) or 3 (Meticulous Keyed MD5).

#### Auth Len

The length of the Authentication Section, in bytes. For Keyed MD5 and Meticulous Keyed MD5 authentication, the length is 24.

#### Auth Key ID

The authentication key ID in use for this packet. This allows multiple keys to be active simultaneously.

#### Reserved

This byte must be set to zero on transmit, and ignored on receipt.

#### Sequence Number

The Sequence Number for this packet. For Keyed MD5 Authentication, this value is incremented occasionally. For Meticulous Keyed MD5 Authentication, this value is incremented for each successive packet transmitted for a session. This provides




protection against replay attacks.

#### Auth Key/Checksum

This field carries the 16 byte MD5 checksum for the packet. When the checksum is calculated, the shared MD5 key is stored in this field. (See [section 6.7.3](#) for details.)

#### 4.4. Keyed SHA1 and Meticulous Keyed SHA1 Authentication Section Format

If the Authentication Present (A) bit is set in the header, and the Authentication Type field contains 4 (Keyed SHA1) or 5 (Meticulous Keyed SHA1), the Authentication Section has the following format:

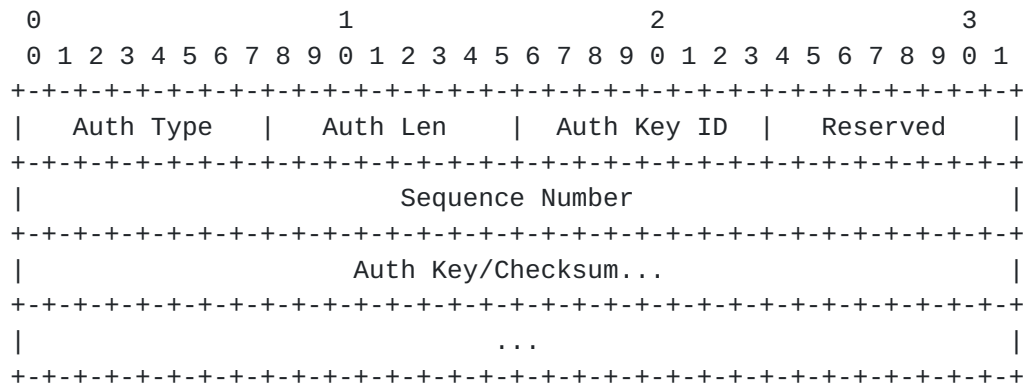

#### Auth Type

The Authentication Type, which in this case is 4 (Keyed SHA1) or 5 (Meticulous Keyed SHA1).

#### Auth Len

The length of the Authentication Section, in bytes. For Keyed SHA1 and Meticulous Keyed SHA1 authentication, the length is 28.

#### Auth Key ID

The authentication key ID in use for this packet. This allows multiple keys to be active simultaneously.





#### Reserved

This byte must be set to zero on transmit, and ignored on receipt.

#### Sequence Number

The Sequence Number for this packet. For Keyed SHA1 Authentication, this value is incremented occasionally. For Meticulous Keyed SHA1 Authentication, this value is incremented for each successive packet transmitted for a session. This provides protection against replay attacks.

#### Auth Key/Checksum

This field carries the 20 byte SHA1 checksum for the packet. When the checksum is calculated, the shared SHA1 key is stored in this field. (See [section 6.7.4](#) for details.)

## **5. BFD Echo Packet Format**

BFD Echo packets are sent in an encapsulation appropriate to the environment. See the appropriate application documents for the specifics of particular environments.

The payload of a BFD Echo packet is a local matter, since only the sending system ever processes the content. The only requirement is that sufficient information is included to demultiplex the received packet to the correct BFD session after it is looped back to the sender. The contents are otherwise outside the scope of this specification.



## **6. Elements of Procedure**

This section discusses the normative requirements of the protocol in order to achieve interoperability. It is important for implementors to enforce only the requirements specified in this section, as misguided pedantry has been proven by experience to adversely affect interoperability.

Remember that all references of the form "bfd.Xx" refer to internal state variables (defined in [section 6.8.1](#)), whereas all references to "the Xxx field" refer to fields in the protocol packets themselves (defined in [section 4](#)).

### **6.1. Overview**

A system may take either an Active role or a Passive role in session initialization. A system taking the Active role MUST send BFD Control packets for a particular session, regardless of whether it has received any BFD packets for that session. A system taking the Passive role MUST NOT begin sending BFD packets for a particular session until it has received a BFD packet for that session, and thus has learned the remote system's discriminator value. At least one system MUST take the Active role (possibly both.) The role that a system takes is specific to the application of BFD, and is outside the scope of this specification.

A session begins with the periodic, slow transmission of BFD Control packets. When bidirectional communication is achieved, the BFD session comes Up.

Once the BFD session is Up, a system can choose to start the Echo function if it desires to and the other system signals that it will allow it. The rate of transmission of Control packets is typically kept low when the Echo function is active.

If the Echo function is not active, the transmission rate of Control packets may be increased to a level necessary to achieve the Detection Time requirements for the session.

Once the session is up, a system may signal that it has entered Demand mode, and the transmission of BFD Control packets by the remote system ceases. Other means of implying connectivity are used to keep the session alive. If either system wishes to verify bidirectional connectivity, it can initiate a short exchange of BFD Control packets (a "Poll Sequence"; see [section 6.5](#)) to do so.

If Demand mode is not active, and no Control packets are received in



the calculated Detection Time (see [section 6.8.4](#)), the session is declared Down. This is signaled to the remote end via the State (Sta) field in outgoing packets.

If sufficient Echo packets are lost, the session is declared down in the same manner. See [section 6.8.5](#).

If Demand mode is active and no appropriate Control packets are received in response to a Poll Sequence, the session is declared down in the same manner. See [section 6.6](#).

If the session goes down, the transmission of Echo packets (if any) ceases, and the transmission of Control packets goes back to the slow rate.

Once a session has been declared down, it cannot come back up until the remote end first signals that it is down (by leaving the Up state), thus implementing a three-way handshake.

A session may be kept administratively down by entering the AdminDown state and sending an explanatory diagnostic code in the Diagnostic field.

## **[6.2](#). BFD State Machine**

The BFD state machine is quite straightforward. There are three states through which a session normally proceeds, two for establishing a session (Init and Up) and one for tearing down a session (Down.) This allows a three-way handshake for both session establishment and session teardown (assuring that both systems are aware of all session state changes.) A fourth state (AdminDown) exists so that a session can be administratively put down indefinitely.

Each system communicates its session state in the State (Sta) field in the BFD Control packet, and that received state in combination with the local session state drives the state machine.

Down state means that the session is down (or has just been created.) A session remains in Down state until the remote system indicates that it agrees that the session is down by sending a BFD Control packet with the State field set to anything other than Up. If that packet signals Down state, the session advances to Init state; if that packet signals Init state, the session advances to Up state. Semantically, Down state indicates that the forwarding path is unavailable, and that appropriate actions should be taken by the applications monitoring the state of the BFD session. A system MAY



hold a session in Down state indefinitely (by simply refusing to advance the session state.) This may be done for operational or administrative reasons, among others.

Init state means that the remote system is communicating, and the local system desires to bring the session up, but the remote system does not yet realize it. A session will remain in Init state until either a BFD Control Packet is received that is signaling Init or Up state (in which case the session advances to Up state) or until the Detection Time expires, meaning that communication with the remote system has been lost (in which case the session advances to Down state.)

Up state means that the BFD session has successfully been established, and implies that connectivity between the systems is working. The session will remain in the Up state until either connectivity fails, or the session is taken down administratively. If either the remote system signals Down state, or the Detection Time expires, the session advances to Down state.

AdminDown state means that the session is being held administratively down. This causes the remote system to enter Down state, and remain there until the local system exits AdminDown state. AdminDown state has no semantic implications for the availability of the forwarding path.

The following diagram provides an overview of the state machine. Transitions involving AdminDown state are deleted for clarity (but are fully specified in sections [6.8.6](#) and [6.8.16](#).) The notation on each arc represents the state of the remote system (as received in the State field in the BFD Control packet) or indicates the expiration of the Detection Timer.





Note that it is permissible for a system to change its discriminator during a session without affecting the session state, since only that system uses its discriminator for demultiplexing purposes (by having the other system reflect it back.) The implications on an implementation for changing the discriminator value is outside the scope of this specification.



#### **6.4. The Echo Function and Asymmetry**

The Echo function can be run independently in each direction between a pair of systems. For whatever reason, a system may advertise that it is willing to receive (and loop back) Echo packets, but may not wish to ever send any. The fact that a system is sending Echo packets is not directly signaled to the system looping them back.

When a system is using the Echo function, it is advantageous to choose a sedate reception rate for Control packets, since liveness detection is being handled by the Echo packets. This can be controlled by manipulating the Required Min RX Interval field (see [section 6.8.3.](#))

If the Echo function is only being run in one direction, the system not running the Echo function will more likely wish to receive fairly rapid Control packets in order to achieve its desired Detection Time. Since BFD allows independent transmission rates in each direction, this is easily accomplished.

A system SHOULD otherwise advertise the lowest value of Required Min RX Interval and Required Min Echo RX Interval that it can under the circumstances, to give the other system more freedom in choosing its transmission rate. Note that a system is committing to be able to receive both streams of packets at the rate it advertises, so this should be taken into account when choosing the values to advertise.

#### **6.5. The Poll Sequence**

A Poll Sequence is an exchange of BFD Control packets that is used in some circumstances to ensure that the remote system is aware of parameter changes. It is also used in Demand mode (see [section 6.6](#)) to validate bidirectional connectivity.

A Poll Sequence consists of a system sending periodic BFD Control packets with the Poll (P) bit set. When the other system receives a Poll, it immediately transmits a BFD Control packet with the Final (F) bit set, independent of any periodic BFD Control packets it may be sending (see [section 6.8.7](#)). When the system sending the Poll sequence receives a packet with Final, the Poll Sequence is terminated, and any subsequent BFD Control packets are sent with the Poll bit cleared. A BFD Control packet MUST NOT have both the Poll (P) and Final (F) bits set.

If periodic BFD Control packets are already being sent (the remote system is not in Demand mode), the Poll Sequence MUST be performed by setting the Poll (P) bit on those scheduled periodic transmissions;



additional packets MUST NOT be sent.

After a Poll Sequence is terminated, the system requesting the Poll Sequence will cease the periodic transmission of BFD Control packets if the remote end is in Demand mode; otherwise it will return to the periodic transmission of BFD Control packets with the Poll (P) bit clear.

Typically, the entire sequence consists of a single packet in each direction, though packet losses or relatively long packet latencies may result in multiple Poll packets to be sent before the sequence terminates.

#### **6.6. Demand Mode**

Demand mode is requested independently in each direction by virtue of a system setting the Demand (D) bit in its BFD Control packets. The Demand bit can only be set if both systems think the session is up. The system receiving the Demand bit ceases the periodic transmission of BFD Control packets. If both systems are operating in Demand mode, no periodic BFD Control packets will flow in either direction.

Demand mode requires that some other mechanism is used to imply continuing connectivity between the two systems. The mechanism used does not have to be the same in both directions, and is outside of the scope of this specification. One possible mechanism is the receipt of traffic from the remote system; another is the use of the Echo function.

When a system in Demand mode wishes to verify bidirectional connectivity, it initiates a Poll Sequence (see [section 6.5](#)). If no response is received to a Poll, the Poll is repeated until the Detection Time expires, at which point the session is declared to be down. Note that if Demand mode is operating only on the local system, the Poll Sequence is performed by simply setting the Poll (P) bit in regular periodic BFD Control packets, as required by [section 6.6](#).

The Detection Time in Demand mode is calculated differently than in Asynchronous mode; it is based on the transmit rate of the local system, rather than the transmit rate of the remote system. This ensures that the Poll Sequence mechanism works properly. See [section 6.8.4](#) for more details.

Note that this mechanism requires that the Detection Time negotiated is greater than the round trip time between the two systems, or the Poll mechanism will always fail. Enforcement of this requirement is



outside the scope of this specification.

Demand mode MAY be enabled or disabled at any time, independently in each direction, by setting or clearing the Demand (D) bit in the BFD Control packet, without affecting the BFD session state. Note that the Demand bit MUST NOT be set unless both systems perceive the session to be Up (the local system thinks the session is Up, and the remote system last reported Up state in the State (Sta) field of the BFD Control packet.)

When the transmitted value of the Demand (D) bit is to be changed, the transmitting system MUST initiate a Poll Sequence in conjunction with changing the bit in order to ensure that both systems are aware of the change.

If Demand mode is active on either or both systems, a Poll Sequence MUST be initiated whenever the contents of the next BFD Control packet to be sent would be different than the contents of the previous packet, with the exception of the Poll (P) and Final (F) bits. This ensures that parameter changes are transmitted to the remote system and that the remote system acknowledges these changes.

Because the underlying detection mechanism is unspecified, and may differ between the two systems, the overall Detection Time characteristics of the path will not be fully known to either system. The total Detection Time for a particular system is the sum of the time prior to the initiation of the Poll Sequence, plus the calculated Detection Time.

Note that if Demand mode is enabled in only one direction, continuous bidirectional connectivity verification is lost (only connectivity in the direction from the system in Demand mode to the other system will be verified.) Resolving the issue of one system requesting Demand mode while the other requires continuous bidirectional connectivity verification is outside the scope of this specification.

### **6.7. Authentication**

An optional Authentication Section may be present in the BFD Control packet. In its generic form, the purpose of the Authentication Section is to carry all necessary information, based on the authentication type in use, to allow the receiving system to determine the validity of the received packet. The exact mechanism depends on the authentication type in use, but in general the transmitting system will put information in the Authentication Section that vouches for the packet's validity, and the receiving system will examine the Authentication Section and either accept the





packet for further processing, or discard it.

Note that in the subsections below, to "accept" a packet means only that the packet has passed authentication; it may in fact be discarded for other reasons as described in the general packet reception rules described in [section 6.8.6](#).

Implementations supporting authentication MUST support SHA1 authentication. Other forms of authentication are optional.

#### **[6.7.1](#). Enabling and Disabling Authentication**

It may be desirable to enable or disable authentication on a session without disturbing the session state. The exact mechanism for doing so is outside the scope of this specification. However, it is useful to point out some issues in supporting this mechanism.

In a simple implementation, a BFD session will fail when authentication is either turned on or turned off, because the packet acceptance rules essentially require the local and remote machines to do so in a more or less synchronized fashion (within the Detection Time)--a packet with authentication will only be accepted if authentication is "in use" (and likewise packets without authentication).

One possible approach is to build an implementation such that authentication is configured, but not considered "in use" until the first packet containing a matching authentication section is received (providing the necessary synchronization.) Likewise, authentication could be configured off, but still considered "in use" until the receipt of the first packet without the authentication section.

In order to avoid security risks, implementations using this method should only allow the authentication state to be changed once without some form of intervention (so that authentication cannot be turned on and off repeatedly simply based on the receipt of BFD Control packets from remote systems.)

#### **[6.7.2](#). Simple Password Authentication**

The most straightforward (and weakest) form of authentication is Simple Password Authentication. In this method of authentication, one or more Passwords (with corresponding Key IDs) are configured in each system and one of these Password/ID pairs is carried in each BFD Control packet. The receiving system accepts the packet if the Password and Key ID matches one of the Password/ID pairs configured



in that system.

#### Transmission Using Simple Password Authentication

The currently selected password and Key ID for the session MUST be stored in the Authentication Section of each outgoing BFD Control packet. The Auth Type field MUST be set to 1 (Simple Password.) The Auth Len field MUST be set to the proper length (4 to 19 bytes.)

#### Reception Using Simple Password Authentication

If the received BFD Control packet does not contain an Authentication Section, or the Auth Type is not 1 (Simple Password), then the received packet MUST be discarded.

If the Auth Key ID field does not match the ID of a configured password, the received packet MUST be discarded.

If the Auth Len field is not equal to the length of the password selected by the Key ID, plus three, the packet MUST be discarded.

If the Password field does not match the password selected by the Key ID, the packet MUST be discarded.

Otherwise, the packet MUST be accepted.

#### **6.7.3. Keyed MD5 and Meticulous Keyed MD5 Authentication**

The Keyed MD5 and Meticulous Keyed MD5 Authentication mechanisms are very similar to those used in other protocols. In these methods of authentication, one or more secret keys (with corresponding Key IDs) are configured in each system. One of the Keys is included in an MD5 [MD5] checksum calculated over the outgoing BFD Control packet, but the Key itself is not carried in the packet. To help avoid replay attacks, a sequence number is also carried in each packet. For Keyed MD5, the sequence number is occasionally incremented. For Meticulous Keyed MD5, the sequence number is incremented on every packet.

The receiving system accepts the packet if the Key ID matches one of the configured Keys, an MD5 checksum including the selected key matches that carried in the packet, and if the sequence number is greater than or equal to the last sequence number received (for Keyed MD5), or strictly greater than the last sequence number received (for Meticulous Keyed MD5.)



### Transmission Using Keyed MD5 and Meticulous Keyed MD5 Authentication

The Auth Type field MUST be set to 2 (Keyed MD5) or 3 (Meticulous Keyed MD5.) The Auth Len field MUST be set to 24. The Auth Key ID field MUST be set to the ID of the current authentication key. The Sequence Number field MUST be set to `bfd.XmitAuthSeq`.

The current authentication key value MUST be placed into the Auth Key/Checksum field. An MD5 checksum MUST be calculated over the entire BFD control packet. The resulting checksum MUST be stored in the Auth Key/Checksum field prior to transmission (replacing the secret key, which MUST NOT be carried in the packet.)

For Keyed MD5, `bfd.XmitAuthSeq` MAY be incremented in a circular fashion (when treated as an unsigned 32 bit value.) `bfd.XmitAuthSeq` SHOULD be incremented when the session state changes, or when the transmitted BFD Control packet carries different contents than the previously transmitted packet. The decision as to when to increment `bfd.XmitAuthSeq` is outside the scope of this specification. See the section entitled "Security Considerations" below for a discussion.

For Meticulous Keyed MD5, `bfd.XmitAuthSeq` MUST be incremented in a circular fashion (when treated as an unsigned 32 bit value.)

### Receipt Using Keyed MD5 and Meticulous Keyed MD5 Authentication

If the received BFD Control packet does not contain an Authentication Section, or the Auth Type is not correct (2 for Keyed MD5, or 3 for Meticulous Keyed MD5), then the received packet MUST be discarded.

If the Auth Key ID field does not match the ID of a configured authentication key, the received packet MUST be discarded.

If the Auth Len field is not equal to 24, the packet MUST be discarded.

Replace the contents of the Auth Key/Checksum field with the authentication key selected by the received Auth Key ID field. If the MD5 checksum of the entire BFD Control packet is not equal to the received value of the Auth Key/Checksum field, the received packet MUST be discarded.

If `bfd.AuthSeqKnown` is 1, examine the Sequence Number field. For Keyed MD5, if the Sequence Number lies outside of the range of `bfd.RcvAuthSeq` to `bfd.RcvAuthSeq+(3*Detect Mult)` inclusive (when



treated as an unsigned 32 bit circular number space), the received packet MUST be discarded. For Meticulous Keyed MD5, if the Sequence Number lies outside of the range of `bfd.RcvAuthSeq+1` to `bfd.RcvAuthSeq+(3*Detect Mult)` inclusive (when treated as an unsigned 32 bit circular number space, the received packet MUST be discarded.

Otherwise (`bfd.AuthSeqKnown` is 0), `bfd.AuthSeqKnown` MUST be set to 1, `bfd.RcvAuthSeq` MUST be set to the value of the received Sequence Number field, and the received packet MUST be accepted.

#### **6.7.4. Keyed SHA1 and Meticulous Keyed SHA1 Authentication**

The Keyed SHA1 and Meticulous Keyed SHA1 Authentication mechanisms are very similar to those used in other protocols. In these methods of authentication, one or more secret keys (with corresponding Key IDs) are configured in each system. One of the Keys is included in a SHA1 [[SHA1](#)] checksum calculated over the outgoing BFD Control packet, but the Key itself is not carried in the packet. To help avoid replay attacks, a sequence number is also carried in each packet. For Keyed SHA1, the sequence number is occasionally incremented. For Meticulous Keyed SHA1, the sequence number is incremented on every packet.

The receiving system accepts the packet if the Key ID matches one of the configured Keys, a SHA1 checksum including the selected key matches that carried in the packet, and if the sequence number is greater than or equal to the last sequence number received (for Keyed SHA1), or strictly greater than the last sequence number received (for Meticulous Keyed SHA1.)

#### **Transmission Using Keyed SHA1 and Meticulous Keyed SHA1 Authentication**

The Auth Type field MUST be set to 4 (Keyed SHA1) or 5 (Meticulous Keyed SHA1.) The Auth Len field MUST be set to 28. The Auth Key ID field MUST be set to the ID of the current authentication key. The Sequence Number field MUST be set to `bfd.XmitAuthSeq`.

The current authentication key value MUST be placed into the Auth Key/Checksum field. A SHA1 checksum MUST be calculated over the entire BFD control packet. The resulting checksum MUST be stored in the Auth Key/Checksum field prior to transmission (replacing the secret key, which MUST NOT be carried in the packet.)

For Keyed SHA1, `bfd.XmitAuthSeq` MAY be incremented in a circular





fashion (when treated as an unsigned 32 bit value.)  
bfd.XmitAuthSeq SHOULD be incremented when the session state changes, or when the transmitted BFD Control packet carries different contents than the previously transmitted packet. The decision as to when to increment bfd.XmitAuthSeq is outside the scope of this specification. See the section entitled "Security Considerations" below for a discussion.

For Meticulous Keyed SHA1, bfd.XmitAuthSeq MUST be incremented in a circular fashion (when treated as an unsigned 32 bit value.)

#### Receipt Using Keyed SHA1 and Meticulous Keyed SHA1 Authentication

If the received BFD Control packet does not contain an Authentication Section, or the Auth Type is not correct (4 for Keyed SHA1, or 5 for Meticulous Keyed SHA1), then the received packet MUST be discarded.

If the Auth Key ID field does not match the ID of a configured authentication key, the received packet MUST be discarded.

If the Auth Len field is not equal to 28, the packet MUST be discarded.

Replace the contents of the Auth Key/Checksum field with the authentication key selected by the received Auth Key ID field. If the SHA1 checksum of the entire BFD Control packet is not equal to the received value of the Auth Key/Checksum field, the received packet MUST be discarded.

If bfd.AuthSeqKnown is 1, examine the Sequence Number field. For Keyed SHA1, if the Sequence Number lies outside of the range of bfd.RcvAuthSeq to bfd.RcvAuthSeq+(3\*Detect Mult) inclusive (when treated as an unsigned 32 bit circular number space), the received packet MUST be discarded. For Meticulous Keyed SHA1, if the Sequence Number lies outside of the range of bfd.RcvAuthSeq+1 to bfd.RcvAuthSeq+(3\*Detect Mult) inclusive (when treated as an unsigned 32 bit circular number space, the received packet MUST be discarded.

Otherwise (bfd.AuthSeqKnown is 0), bfd.AuthSeqKnown MUST be set to 1, bfd.RcvAuthSeq MUST be set to the value of the received Sequence Number field, and the received packet MUST be accepted.



## **6.8. Functional Specifics**

The following section of this specification is normative. The means by which this specification is achieved is outside the scope of this specification.

When a system is said to have "the Echo function active," it means that the system is sending BFD Echo packets, implying that the session is Up and the other system has signaled its willingness to loop back Echo packets.

When the local system is said to have "Demand mode active," it means that `bfd.DemandMode` is 1 in the local system (see [section 6.8.1](#)), the session is Up, and the remote system is signaling that the session is in state Up.

When the remote system is said to have "Demand mode active," it means that `bfd.RemoteDemandMode` is 1 (the remote system set the Demand (D) bit in the last received BFD Control packet), the session is Up, and the remote system is signaling that the session is in state Up.

### **6.8.1. State Variables**

A minimum amount of information about a session needs to be tracked in order to achieve the elements of procedure described here. The following is a set of state variables that are helpful in describing the mechanisms of BFD. Any means of tracking this state may be used so long as the protocol behaves as described.

When the text refers to initializing a state variable, this takes place only at the time that the session (and the corresponding state variables) is created. The state variables are subsequently manipulated by the state machine and are never reinitialized, even if the session fails and is reestablished.

Once session state is created, and at least one BFD Control packet is received from the remote end, it MUST be preserved for at least one Detection Time (see [section 6.8.4](#)) subsequent to the receipt of the last BFD Control packet, regardless of the session state. This preserves timing parameters in case the session flaps. A system MAY preserve session state longer than this. The preservation or destruction of session state when no BFD Control packets for this session have been received from the remote system is outside the scope of this specification.

All state variables in this specification are of the form "bfd.Xx" and should not be confused with fields carried in the protocol



packets, which are always spelled out to match the names in [section 4](#).

#### `bfd.SessionState`

The perceived state of the session (Init, Up, Down, or AdminDown.) The exact action taken when the session state changes is outside the scope of this specification, though it is expected that this state change (particularly to and from Up state) is reported to other components of the system. This variable MUST be initialized to Down.

#### `bfd.RemoteSessionState`

The session state last reported by the remote system in the State (Sta) field of the BFD Control packet. This variable MUST be initialized to Down.

#### `bfd.LocalDiscr`

The local discriminator for this BFD session, used to uniquely identify it. It MUST be unique across all BFD sessions on this system, and nonzero. It SHOULD be set to a random (but still unique) value to improve security. The value is otherwise outside the scope of this specification.

#### `bfd.RemoteDiscr`

The remote discriminator for this BFD session. This is the discriminator chosen by the remote system, and is totally opaque to the local system. This MUST be initialized to zero. If a period of a Detection Time passes without the receipt of a valid, authenticated BFD packet from the remote system, this variable MUST be set to zero.

#### `bfd.LocalDiag`

The diagnostic code specifying the reason for the most recent local session state change to states Down or AdminDown. This MUST be initialized to zero (No Diagnostic.)



**bfd.DesiredMinTxInterval**

The minimum interval, in microseconds, between transmitted BFD Control packets that this system would like to use at the current time. The actual interval is negotiated between the two systems. This MUST be initialized to a value of at least one second (1,000,000 microseconds) according to the rules described in [section 6.8.3](#). The setting of this variable is otherwise outside the scope of this specification.

**bfd.RequiredMinRxInterval**

The minimum interval, in microseconds, between received BFD Control packets that this system requires. The setting of this variable is outside the scope of this specification. A value of zero means that this system does not want to receive any periodic BFD Control packets. See [section 6.8.18](#) for details.

**bfd.RemoteMinRxInterval**

The last value of Required Min RX Interval received from the remote system in a BFD Control packet. This variable MUST be initialized to 1.

**bfd.DemandMode**

Set to 1 if the local system wishes to use Demand mode, or 0 if not.

**bfd.RemoteDemandMode**

Set to 1 if the remote system wishes to use Demand mode, or 0 if not. This is the value of the Demand (D) bit in the last received BFD Control packet. This variable MUST be initialized to zero.

**bfd.DetectMult**

The desired Detection Time multiplier for BFD Control packets. The negotiated Control packet transmission interval, multiplied by this variable, will be the Detection Time for this session (as seen by the remote system.) This variable MUST be a





nonzero integer, and is otherwise outside the scope of this specification. See [section 6.8.4](#) for further information.

#### bfd.AuthType

The authentication type in use for this session, as defined in [section 4.1](#), or zero if no authentication is in use.

#### bfd.RcvAuthSeq

A 32 bit unsigned integer containing the next sequence number for keyed MD5 or SHA1 authentication expected to be received. The initial value is unimportant.

#### bfd.XmitAuthSeq

A 32 bit unsigned integer containing the next sequence number for keyed MD5 or SHA1 authentication to be transmitted. This variable MUST be initialized to a random 32 bit value.

#### bfd.AuthSeqKnown

Set to 1 if the next sequence number for keyed MD5 or SHA1 authentication expected to be received is known, or 0 if it is not known. This variable MUST be initialized to zero.

This variable MUST be set to zero after no packets have been received on this session for at least twice the Detection Time. This ensures that the sequence number can be resynchronized if the remote system restarts.

### **[6.8.2. Timer Negotiation](#)**

The time values used to determine BFD packet transmission intervals and the session Detection Time are continuously negotiated, and thus may be changed at any time. The negotiation and time values are independent in each direction for each session.

Each system reports in the BFD Control packet how rapidly it would like to transmit BFD packets, as well as how rapidly it is prepared to receive them. With the exceptions listed in the remainder of this section, a system MUST NOT transmit BFD Control packets at an interval less than the larger of `bfd.DesiredMinTxInterval` and



`bfd.RemoteMinRxInterval`. In other words, the system reporting the slower rate determines the transmission rate.

The periodic transmission of BFD Control packets SHOULD be jittered by up to 25%, that is, the interval SHOULD be reduced by a random value of 0 to 25%, in order to avoid self-synchronization. Thus, the average interval between packets may be up to 12.5% less than that negotiated.

If `bfd.DetectMult` is equal to 1, the interval between transmitted BFD Control packets MUST be no more than 90% of the negotiated transmission interval, and MUST be no less than 75% of the negotiated transmission interval. This is to ensure that, on the remote system, the calculated `DetectTime` does not pass prior to the receipt of the next BFD Control packet.

### **6.8.3. Timer Manipulation**

The time values used to determine BFD packet transmission intervals and the session Detection Time may be modified at any time without affecting the state of the session. When the timer parameters are changed for any reason, the requirements of this section apply.

If either `bfd.DesiredMinTxInterval` is changed or `bfd.RequiredMinRxInterval` is changed, a Poll Sequence MUST be initiated (see [section 6.5](#)). If the timing is such that a system receiving a Poll Sequence wishes to change the parameters described in this paragraph, the new parameter values may be carried in packets with the Final (F) bit set, even if the Poll Sequence has not yet been sent.

If `bfd.DesiredMinTxInterval` is increased and `bfd.SessionState` is Up, the actual transmission interval used MUST NOT change until the Poll Sequence described above has terminated. This is to ensure that the remote system updates its Detection Time before the transmission interval increases.

If `bfd.RequiredMinRxInterval` is reduced and `bfd.SessionState` is Up, the previous value of `bfd.RequiredMinRxInterval` MUST be used when calculating the Detection Time for the remote system until the Poll Sequence described above has terminated. This is to ensure that the remote system is transmitting packets at the higher rate (and those packets are being received) prior to the Detection Time being reduced.

When `bfd.SessionState` is not Up, the system MUST set `bfd.DesiredMinTxInterval` to a value of not less than one second



(1,000,000 microseconds.) This is intended to ensure that the bandwidth consumed by BFD sessions that are not Up is negligible, particularly in the case where a neighbor may not be running BFD.

If the local system reduces its transmit interval due to `bfd.RemoteMinRxInterval` being reduced (the remote system has advertised a reduced value in Required Min RX Interval), and the remote system is not in Demand mode, the local system MUST honor the new interval immediately. In other words, the local system cannot wait longer than the new interval between the previous packet transmission and the next one. If this interval has already passed since the last transmission (because the new interval is significantly shorter), the local system MUST send the next periodic BFD Control packet as soon as practicable.

When the Echo function is active, a system SHOULD set `bfd.RequiredMinRxInterval` to a value of not less than one second (1,000,000 microseconds.) This is intended to keep received BFD Control traffic at a negligible level, since the actual detection function is being performed using BFD Echo packets.

In any case other than those explicitly called out above, timing parameter changes MUST be effected immediately (changing the transmission rate and/or the Detection Time).

Note that the Poll Sequence mechanism is ambiguous if more than one parameter change is made that would require its use, and those multiple changes are spread across multiple packets (since the semantics of the returning Final are unclear.) Therefore, if multiple changes are made that require the use of a Poll Sequence, there are three choices: 1) they MUST be communicated in a single BFD Control packet (so the semantics of the Final reply are clear), or 2) sufficient time must have transpired since the Poll Sequence was completed to disambiguate the situation (at least a round trip time since the last Poll was transmitted) prior to the initiation of another Poll Sequence, or 3) an additional BFD Control packet with the Final (F) bit \*clear\* MUST be received after the Poll Sequence has completed prior to the initiation of another Poll Sequence (this option is not available when Demand mode is active.)

#### **6.8.4. Calculating the Detection Time**

The Detection Time (the period of time without receiving BFD packets after which the session is determined to have failed) is not carried explicitly in the protocol. Rather, it is calculated independently in each direction by the receiving system based on the negotiated transmit interval and the detection multiplier. Note that there may be different Detection Times in each direction.



The calculation of the Detection Time is slightly different when in Demand mode versus Asynchronous mode.

In Asynchronous mode, the Detection Time calculated in the local system is equal to the value of Detect Mult received from the remote system, multiplied by the agreed transmit interval of the remote system (the greater of `bfd.RequiredMinRxInterval` and the last received `Desired Min TX Interval`.) The Detect Mult value is (roughly speaking, due to jitter) the number of packets that have to be missed in a row to declare the session to be down.

If Demand mode is not active, and a period of time equal to the Detection Time passes without receiving a BFD Control packet from the remote system, and `bfd.SessionState` is `Init` or `Up`, the session has gone down--the local system MUST set `bfd.SessionState` to `Down` and `bfd.LocalDiag` to 1 (`Control Detection Time Expired`.)

In Demand mode, the Detection Time calculated in the local system is equal to `bfd.DetectMult`, multiplied by the agreed transmit interval of the local system (the greater of `bfd.DesiredMinTxInterval` and `bfd.RemoteMinRxInterval`.) `bfd.DetectMult` is (roughly speaking, due to jitter) the number of packets that have to be missed in a row to declare the session to be down.

If Demand mode is active, and a period of time equal to the Detection Time passes after the initiation of a Poll Sequence (the transmission of the first BFD Control packet with the Poll bit set), the session has gone down--the local system MUST set `bfd.SessionState` to `Down`, and `bfd.LocalDiag` to 1 (`Control Detection Time Expired`.)

(Note that a packet is considered to have been received, for the purposes of Detection Time expiration, only if it has not been "discarded" according to the rules of [section 6.8.6](#).)

#### **6.8.5. Detecting Failures with the Echo Function**

When the Echo function is active and a sufficient number of Echo packets have not arrived as they should, the session has gone down--the local system MUST set `bfd.SessionState` to `Down`, and `bfd.LocalDiag` to 2 (`Echo Function Failed`.)

The means by which the Echo function failures are detected is outside of the scope of this specification. Any means which will detect a communication failure is acceptable.





#### **6.8.6. Reception of BFD Control Packets**

When a BFD Control packet is received, the following procedure **MUST** be followed, in the order specified. If the packet is discarded according to these rules, processing of the packet **MUST** cease at that point.

If the version number is not correct (1), the packet **MUST** be discarded.

If the Length field is less than the minimum correct value (24 if the A bit is clear, or 26 if the A bit is set), the packet **MUST** be discarded.

If the Length field is greater than the payload of the encapsulating protocol, the packet **MUST** be discarded.

If the Detect Mult field is zero, the packet **MUST** be discarded.

If the Multipoint (M) bit is nonzero, the packet **MUST** be discarded.

If the My Discriminator field is zero, the packet **MUST** be discarded.

If the Your Discriminator field is nonzero, it **MUST** be used to select the session with which this BFD packet is associated. If no session is found, the packet **MUST** be discarded.

If the Your Discriminator field is zero and the State field is not Down or AdminDown, the packet **MUST** be discarded.

If the Your Discriminator field is zero, the session **MUST** be selected based on some combination of other fields, possibly including source addressing information, the My Discriminator field, and the interface over which the packet was received. The exact method of selection is application-specific and is thus outside the scope of this specification. If a matching session is not found, a new session may be created, or the packet may be discarded. This choice is outside the scope of this specification.

If the A bit is set and no authentication is in use (bfd.AuthType is zero), the packet **MUST** be discarded.

If the A bit is clear and authentication is in use (bfd.AuthType is nonzero), the packet **MUST** be discarded.



If the A bit is set, the packet MUST be authenticated under the rules of [section 6.7](#), based on the authentication type in use (bfd.AuthType.) This may cause the packet to be discarded.

Set bfd.RemoteDiscr to the value of My Discriminator.

Set bfd.RemoteState to the value of the State (Sta) field.

Set bfd.RemoteDemandMode to the value of the Demand (D) bit.

Set bfd.RemoteMinRxInterval to the value of Required Min RX Interval.

If the Required Min Echo RX Interval field is zero, the transmission of Echo packets, if any, MUST cease.

If a Poll Sequence is being transmitted by the local system and the Final (F) bit in the received packet is set, the Poll Sequence MUST be terminated.

Update the transmit interval as described in [section 6.8.2](#).

Update the Detection Time as described in [section 6.8.4](#).

If bfd.SessionState is AdminDown  
    Discard the packet

If received state is AdminDown  
    If bfd.SessionState is not Down  
        Set bfd.LocalDiag to 3 (Neighbor signaled session down)  
        Set bfd.SessionState to Down

Else

    If bfd.SessionState is Down  
        If received State is Down  
            Set bfd.SessionState to Init  
        Else if received State is Init  
            Set bfd.SessionState to Up

    Else if bfd.SessionState is Init  
        If received State is Init or Up  
            Set bfd.SessionState to Up

    Else (bfd.SessionState is Up)  
        If received State is Down  
            Set bfd.LocalDiag to 3 (Neighbor signaled session down)  
            Set bfd.SessionState to Down



Check to see if Demand mode should become active or not (see [section 6.6](#)).

If bfd.RemoteDemandMode is 1, bfd.SessionState is Up, and bfd.RemoteSessionState is Up, Demand mode is active on the remote system and the local system MUST cease the periodic transmission of BFD Control packets (see [section 6.8.7](#).)

If bfd.RemoteDemandMode is 0, or bfd.SessionState is not Up, or bfd.RemoteSessionState is not Up, Demand mode is not active on the remote system and the local system MUST send periodic BFD Control packets (see [section 6.8.7](#).)

If the Poll (P) bit is set, send a BFD Control packet to the remote system with the Poll (P) bit clear, and the Final (F) bit set (see [section 6.8.7](#).)

If the packet was not discarded, it has been received for purposes of the Detection Time expiration rules in [section 6.8.4](#).

#### **[6.8.7](#). Transmitting BFD Control Packets**

BFD Control packets MUST be transmitted periodically at the rate determined according to [section 6.8.2](#), except as specified in this section.

The transmit interval MUST be recalculated whenever bfd.DesiredMinTxInterval changes, or whenever bfd.RemoteMinRxInterval changes, and is equal to the greater of those two values. See sections [6.8.2](#) and [6.8.3](#) for details on transmit timers.

A system MUST NOT transmit BFD Control packets if bfd.RemoteDiscr is zero and the system is taking the Passive role.

A system MUST NOT periodically transmit BFD Control packets if bfd.RemoteMinRxInterval is zero.

A system MUST NOT periodically transmit BFD Control packets if Demand mode is active on the remote system (bfd.RemoteDemandMode is 1, bfd.SessionState is Up, and bfd.RemoteSessionState is Up) and a Poll Sequence is not being transmitted.

If a BFD Control packet is received with the Poll (P) bit set to 1, the receiving system MUST transmit a BFD Control packet with the Poll (P) bit clear and the Final (F) bit set as soon as practicable, without respect to the transmission timer or any other transmission limitations, without respect to the session state, and without



respect to whether Demand mode is active on either system. A system MAY limit the rate at which such packets are transmitted. If rate limiting is in effect, the advertised value of Desired Min TX Interval MUST be greater than or equal to the interval between transmitted packets imposed by the rate limiting function.

A system MUST NOT set the Demand (D) bit unless bfd.DemandMode is 1, bfd.SessionState is Up, and bfd.RemoteSessionState is Up.

A BFD Control packet SHOULD be transmitted during the interval between periodic Control packet transmissions when the contents of that packet would differ from that in the previously transmitted packet (other than the Poll and Final bits) in order to more rapidly communicate a change in state.

The contents of transmitted BFD Control packets MUST be set as follows:

#### Version

Set to the current version number (1).

#### Diagnostic (Diag)

Set to bfd.LocalDiag.

#### State (Sta)

Set to the value indicated by bfd.SessionState.

#### Poll (P)

Set to 1 if the local system is sending a Poll Sequence, or 0 if not.

#### Final (F)

Set to 1 if the local system is responding to a Control packet received with the Poll (P) bit set, or 0 if not.





**Control Plane Independent (C)**

Set to 1 if the local system's BFD implementation is independent of the control plane (it can continue to function through a disruption of the control plane.)

**Authentication Present (A)**

Set to 1 if authentication is in use on this session (bfd.AuthType is nonzero), or 0 if not.

**Demand (D)**

Set to bfd.DemandMode if bfd.SessionState is Up and bfd.RemoteSessionState is Up. Otherwise it is set to 0.

**Multipoint (M)**

Set to 0.

**Detect Mult**

Set to bfd.DetectMult.

**Length**

Set to the appropriate length, based on the fixed header length (24) plus any Authentication Section.

**My Discriminator**

Set to bfd.LocalDiscr.

**Your Discriminator**

Set to bfd.RemoteDiscr.



#### Desired Min TX Interval

Set to `bfd.DesiredMinTxInterval`.

#### Required Min RX Interval

Set to `bfd.RequiredMinRxInterval`.

#### Required Min Echo RX Interval

Set to the minimum required Echo packet receive interval for this session. If this field is set to zero, the local system is unwilling or unable to loop back BFD Echo packets to the remote system, and the remote system will not send Echo packets.

#### Authentication Section

Included and set according to the rules in [section 6.7](#) if authentication is in use (`bfd.AuthType` is nonzero.) Otherwise this section is not present.

### **[6.8.8](#). Reception of BFD Echo Packets**

A received BFD Echo packet MUST be demultiplexed to the appropriate session for processing. A means of detecting missing Echo packets MUST be implemented, which most likely involves processing of the Echo packets that are received. The processing of received Echo packets is otherwise outside the scope of this specification.

### **[6.8.9](#). Transmission of BFD Echo Packets**

BFD Echo packets MUST NOT be transmitted when `bfd.SessionState` is not Up. BFD Echo packets MUST NOT be transmitted unless the last BFD Control packet received from the remote system contains a nonzero value in Required Min Echo RX Interval.

BFD Echo packets MAY be transmitted when `bfd.SessionState` is Up. The interval between transmitted BFD Echo packets MUST NOT be less than the value advertised by the remote system in Required Min Echo RX Interval, except as follows:

A 25% jitter MAY be applied to the rate of transmission, such that the actual interval MAY be between 75% and 100% of the advertised



value. A single BFD Echo packet MAY be transmitted between normally scheduled Echo transmission intervals.

The transmission of BFD Echo packets is otherwise outside the scope of this specification.

#### **6.8.10. Min Rx Interval Change**

When it is desired to change the rate at which BFD Control packets arrive from the remote system, `bfd.RequiredMinRxInterval` can be changed at any time to any value. The new value will be transmitted in the next outgoing Control packet, and the remote system will adjust accordingly. See [section 6.8.3](#) for further requirements.

#### **6.8.11. Min Tx Interval Change**

When it is desired to change the rate at which BFD Control packets are transmitted to the remote system (subject to the requirements of the neighboring system), `bfd.DesiredMinTxInterval` can be changed at any time to any value. The rules in [section 6.8.3](#) apply.

#### **6.8.12. Detect Multiplier Change**

When it is desired to change the detect multiplier, the value of `bfd.DetectMult` can be changed to any nonzero value. The new value will be transmitted with the next BFD Control packet, and the use of a Poll Sequence is not necessary. See [section 6.6](#) for additional requirements.

#### **6.8.13. Enabling or Disabling The Echo Function**

If it is desired to start or stop the transmission of BFD Echo packets, this MAY be done at any time (subject to the transmission requirements detailed in [section 6.8.9](#).)

If it is desired to enable or disable the looping back of received BFD Echo packets, this MAY be done at any time by changing the value of Required Min Echo RX Interval to zero or nonzero in outgoing BFD Control packets.



#### **6.8.14. Enabling or Disabling Demand Mode**

If it is desired to start or stop Demand mode, this MAY be done at any time by setting `bfd.DemandMode` to the proper value. Demand mode will subsequently become active under the rules described in [section 6.6](#).

If Demand mode is no longer active on the remote system, the local system MUST begin transmitting periodic BFD Control packets as described in [section 6.8.7](#).

#### **6.8.15. Forwarding Plane Reset**

When the forwarding plane in the local system is reset for some reason, such that the remote system can no longer rely on the local forwarding state, the local system MUST set `bfd.LocalDiag` to 4 (Forwarding Plane Reset), and set `bfd.SessionState` to Down.

#### **6.8.16. Administrative Control**

There may be circumstances where it is desirable to administratively enable or disable a BFD session. When this is desired, the following procedure MUST be followed:

```
If enabling session
    Set bfd.SessionState to Down

Else
    Set bfd.SessionState to AdminDown
    Set bfd.LocalDiag to an appropriate value
    Cease the transmission of BFD Echo packets
```

If signaling is received from outside BFD that the underlying path has failed, an implementation MAY administratively disable the session with the diagnostic Path Down.

Other scenarios MAY use the diagnostic Administratively Down.

BFD Control packets SHOULD be transmitted for at least a Detection Time after transitioning to AdminDown state in order to ensure that the remote system is aware of the state change. BFD Control packets MAY be transmitted indefinitely after transitioning to AdminDown state in order to maintain session state in each system (see [section 6.8.18](#) below.)





#### **6.8.17. Concatenated Paths**

If the path being monitored by BFD is concatenated with other paths, it may be desirable to propagate the indication of a failure of one of those paths across the BFD session (providing an interworking function for liveness monitoring between BFD and other technologies.)

Two diagnostic codes are defined for this purpose: Concatenated Path Down and Reverse Concatenated Path Down. The first propagates forward path failures (in which the concatenated path fails in the direction toward the interworking system), and the second propagates reverse path failures (in which the concatenated path fails in the direction away from the interworking system, assuming a bidirectional link.)

A system MAY signal one of these failure states by simply setting `bfd.LocalDiag` to the appropriate diagnostic code. Note that the BFD session is not taken down. If Demand mode is not active on the remote system, no other action is necessary, as the diagnostic code will be carried via the periodic transmission of BFD Control packets. If Demand mode is active on the remote system (the local system is not transmitting periodic BFD Control packets), a Poll Sequence MUST be initiated to ensure that the diagnostic code is transmitted. Note that if the BFD session subsequently fails, the diagnostic code will be overwritten with a code detailing the cause of the failure. It is up to the interworking agent to perform the above procedure again, once the BFD session reaches Up state, if the propagation of the concatenated path failure is to resume.

#### **6.8.18. Holding Down Sessions**

A system may choose to prevent a BFD session from being established. One possible reason might be to manage the rate at which sessions are established. This can be done by holding the session in Down or AdminDown state, as appropriate.

There are two related mechanisms that are available to help with this task. First, a system is required to maintain session state (including timing parameters), even when a session is down, until a Detection Time has passed without the receipt of any BFD Control packets. This means that a system may take down a session and transmit an arbitrarily large value in the Required Min RX Interval field to control the rate at which it receives packets.

Additionally, a system may transmit a value of zero for Required Min RX Interval to indicate that the remote system should send no packets whatsoever.



So long as the local system continues to transmit BFD Control packets, the remote system is obligated to obey the value carried in Required Min RX Interval. If the remote system does not receive any BFD Control packets for a Detection Time, it resets `bfd.RemoteMinRxIvl` to a small value and then can transmit at its own rate.

#### Backward Compatibility (Non-Normative)

Although Version 0 of this document is unlikely to have been deployed widely, some implementors may wish to have a backward compatibility mechanism. Note that any mechanism may be potentially used that does not alter the protocol definition, so interoperability should not be an issue.

The suggested mechanism described here has the property that it will converge on version 1 if both systems implement it, even if one system is upgraded from version 0 within a Detection Time. It will interoperate with a system that implements only one version (or is configured to support only one version.) A system should obviously not perform this function if it is configured to or is only capable of using a single version.

A BFD session will enter a "negotiation holddown" if it is configured for automatic versioning and either has just started up, or the session has been manually cleared. The session is set to AdminDown state and Version 1. During the holddown period, which lasts for one Detection Time, the system sends BFD Control packets as usual, but ignores received packets. After the holddown time is complete, the state transitions to Down and normal operation resumes.

When a system is not in holddown, if it doing automatic versioning and is currently using Version 1, if any Version 0 packet is received for the session, it switches immediately to Version 0. If it is currently using Version 0 and a Version 1 packet is received that indicates that the neighbor is in state AdminDown, it switches to Version 1. If using Version 0 and a Version 1 packet is received indicating a state other than AdminDown, the packet is ignored (per spec.)

If the version being used is changed, the session goes down as appropriate for the new version (Down state for Version 1 or Failing state for Version 0.)



## Contributors

Kireeti Kompella and Yakov Rekhter of Juniper Networks were also significant contributors to this document.

## Acknowledgments

This document was inspired by (and is intended to replace) the Protocol Liveness Protocol draft, written by Kireeti Kompella.

Demand mode was inspired by [draft-ietf-ipsec-dpd-03.txt](#), by G. Huang et al.

The authors would also like to thank Mike Shand, John Scudder, Stewart Bryant, Pekka Savola, and Richard Spencer for their substantive input.

The authors would also like to thank Owen Wheeler for hosting teleconferences between the authors of this specification and multiple vendors in order address implementation and clarity issues.

## Security Considerations

As BFD may be tied into the stability of the network infrastructure (such as routing protocols), the effects of an attack on a BFD session may be very serious. This ultimately has denial-of-service effects, as links may be declared to be down (or falsely declared to be up.)

When BFD is run over network layer protocols, a significant denial-of-service risk is created, as BFD packets may be trivial to spoof. When the session is directly connected across a single link (physical, or a secure tunnel such as IPsec), the TTL or Hop Count MUST be set to the maximum on transmit, and checked to be equal to the maximum value on reception (and the packet dropped if this is not the case.) See [[GTSM](#)] for more information on this technique. If BFD is run across multiple hops or an insecure tunnel (such as GRE), the Authentication Section SHOULD be utilized.

The level of security provided by the Authentication Section varies based on the authentication type used. Simple Password authentication is obviously only as secure as the secrecy of the passwords used, and should be considered only if the BFD session is guaranteed to be run over an infrastructure not subject to packet



interception. Its chief advantage is that it minimizes the computational effort required for authentication.

Keyed MD5 authentication is much stronger than Simple Password authentication since the keys cannot be discerned by intercepting packets. It is vulnerable to replay attacks in between increments of the sequence number. The sequence number can be incremented as seldom (or as often) as desired, trading off resistance to replay attacks with the computational effort required for authentication.

Meticulous Keyed MD5 authentication is stronger yet, as it requires the sequence number to be incremented for every packet. Replay attack vulnerability is reduced due to the requirement that the sequence number must be incremented on every packet, the window size of acceptable packets is small, and the initial sequence number is randomized. There is still a window of attack at the beginning of the session while the sequence number is being determined. This authentication scheme requires an MD5 calculation on every packet transmitted and received.

Using SHA1 rather than MD5 is believed to have stronger security properties. All comments about MD5 in this section also apply to SHA1.

If both systems randomize their Local Discriminator values at the beginning of a session, replay attacks may be further mitigated, regardless of the authentication type in use. Since the Local Discriminator may be changed at any time during a session, this mechanism may also help mitigate attacks.

#### IANA Considerations

This document has no actions for IANA.

#### Normative References

[GTSM] Gill, V., et al, "The Generalized TTL Security Mechanism (GTSM)", [RFC 5082](#), October 2007.

[KEYWORD] Bradner, S., "Key words for use in RFCs to Indicate Requirement Levels", [RFC 2119](#), March 1997.

[MD5] Rivest, R., "The MD5 Message-Digest Algorithm", [RFC 1321](#), April 1992.





[OSPF] Moy, J., "OSPF Version 2", [RFC 2328](#), April 1998.

[SHA1] "Secure Hash Standard", United States of America, National Institute of Science and Technology, Federal Information Processing Standard (FIPS) 180-1, April 1993.

#### Authors' Addresses

Dave Katz  
Juniper Networks  
1194 N. Mathilda Ave.  
Sunnyvale, California 94089-1206 USA  
Phone: +1-408-745-2000  
Email: [dkatz@juniper.net](mailto:dkatz@juniper.net)

Dave Ward  
Cisco Systems  
170 W. Tasman Dr.  
San Jose, CA 95134 USA  
Phone: +1-408-526-4000  
Email: [dward@cisco.com](mailto:dward@cisco.com)

#### Changes from the Previous Draft

A correction was made to the description of Demand mode in [section 6.6](#). Another correction was made to the interaction between timing changes and the transmission of a Poll Sequence in [section 6.8.3](#). The requirement to clear `bfd.RemoteDiscr` when the remote system falls silent was added to [section 6.8.1](#). The continuing transmission of Control packets in AdminDown state was added to [section 6.8.16](#). All other changes are purely editorial in nature.

#### IPR Notice

The IETF has been notified of intellectual property rights claimed in regard to some or all of the specification contained in this document. For more information consult the online list of claimed rights.

The IETF takes no position regarding the validity or scope of any Intellectual Property Rights or other rights that might be claimed to



pertain to the implementation or use of the technology described in this document or the extent to which any license under such rights might or might not be available; nor does it represent that it has made any independent effort to identify any such rights. Information on the procedures with respect to rights in RFC documents can be found in [BCP 78](#) and [BCP 79](#).

Copies of IPR disclosures made to the IETF Secretariat and any assurances of licenses to be made available, or the result of an attempt made to obtain a general license or permission for the use of such proprietary rights by implementers or users of this specification can be obtained from the IETF on-line IPR repository at <http://www.ietf.org/ipr>.

The IETF invites any interested party to bring to its attention any copyrights, patents or patent applications, or other proprietary rights that may cover technology that may be required to implement this standard. Please address the information to the IETF at [ietf-ipr@ietf.org](mailto:ietf-ipr@ietf.org).

#### Full Copyright Notice

Copyright (C) The IETF Trust (2008).

This document is subject to the rights, licenses and restrictions contained in [BCP 78](#), and except as set forth therein, the authors retain all their rights.

This document and the information contained herein are provided on an "AS IS" basis and THE CONTRIBUTOR, THE ORGANIZATION HE/SHE REPRESENTS OR IS SPONSORED BY (IF ANY), THE INTERNET SOCIETY, THE IETF TRUST AND THE INTERNET ENGINEERING TASK FORCE DISCLAIM ALL WARRANTIES, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO ANY WARRANTY THAT THE USE OF THE INFORMATION HEREIN WILL NOT INFRINGE ANY RIGHTS OR ANY IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE.

#### Acknowledgement

Funding for the RFC Editor function is currently provided by the Internet Society.

This document expires in July, 2008.



