

BIER Workgroup
Internet Draft
Intended status: Standard Track

H. Bidgoli, Ed.
A. Dolganow
J. Kotalwar
Nokia
Fengman Xu
Verizon
IJ. Wijnand
Mankamana Mishra
Cisco Systems, Inc.
Z. Zhang
Juniper Networks

Expires: December 23, 2018

June 21, 2018

PIM Signaling Through BIER Core
draft-ietf-bier-pim-signaling-03

Abstract

Bit Index Explicit Replication (BIER) is an architecture that provides multicast forwarding through a "BIER domain" without requiring intermediate routers to maintain multicast related per-flow state. Neither does BIER require an explicit tree-building protocol for its operation. A multicast data packet enters a BIER domain at a "Bit-Forwarding Ingress Router" (BFIR), and leaves the BIER domain at one or more "Bit-Forwarding Egress Routers" (BFERs). The BFIR router adds a BIER header to the packet. Such header contains a bit-string in which each bit represents exactly one BFER to forward the packet to. The set of BFERs to which the multicast packet needs to be forwarded is expressed by the according set of bits switched on in BIER packet header.

This document describes the procedure needed for PIM Joins and Prunes to be signaled through a BIER core. Allowing PIM routers to run traditional PIM multicast services through a BIER core.

Status of this Memo

This Internet-Draft is submitted in full conformance with the provisions of [BCP 78](#) and [BCP 79](#).

Internet-Drafts are working documents of the Internet Engineering Task Force (IETF), its areas, and its working groups. Note that other groups may also distribute working documents as Internet-Drafts.

Internet-Drafts are draft documents valid for a maximum of six months and may be updated, replaced, or obsoleted by other documents at any time. It is inappropriate to use Internet-Drafts as reference material or to cite them other than as "work in progress." The list of current Internet-Drafts can be accessed at <http://www.ietf.org/ietf/1id-abstracts.txt>

The list of Internet-Draft Shadow Directories can be accessed at <http://www.ietf.org/shadow.html>

This Internet-Draft will expire on October 8, 2017.

Copyright Notice

Copyright (c) 2018 IETF Trust and the persons identified as the document authors. All rights reserved.

This document is subject to [BCP 78](#) and the IETF Trust's Legal Provisions Relating to IETF Documents (<http://trustee.ietf.org/license-info>) in effect on the date of publication of this document. Please review these documents carefully, as they describe your rights and restrictions with respect to this document. Code Components extracted from this document must include Simplified BSD License text as described in Section 4.e of the Trust Legal Provisions and are provided without warranty as described in the Simplified BSD License.

Table of Contents

1.	Introduction	3
2.	Conventions used in this document	3
2.1.	Definitions	3
3.	PIM Signaling Through BIER domain	5
3.1.	Ingress BBR procedure	6
3.1.1.	Determining EBBR on IBBR	6
3.1.4.	BIER packet construction at IBBR	7
3.2.	Signaling PIM through the BIER domain procedure	7
3.3.	EBBR procedure	7
4.	Datapath Forwarding	8
4.1.	BFIR tracking of (S,G)	8
4.2.	Datapath traffic flow	8
5.	PIM-ASM behavior	8
6.	Applicability to MVPN	9
7.	IANA Considerations	9
8.	Security Considerations	9
9.	References	9
9.1.	Normative References	10

9.2. Informative References	10
10. Acknowledgments	10
Appendix A	10
A.1. SPF	10
A.2. Indirect next-hop	10
A.2.1. Static Route	11
A.2.2. Interior Border Gateway Protocol (iBGP)	11
A.3. Inter-area support	11
A.3.1. Inter-area Route summarization	11

[1. Introduction](#)

Consider large networks deploying traditional PIM multicast service. Typically, each portion of these large networks have their own mandates and requirements.

It might be desirable to deploy BIER technology in some part of these networks to replace traditional PIM services. In such cases downstream PIM states need to be signaled over BIER Domain toward the source.

This draft explains the procedure to signal PIM joins and prunes through a BIER Domain, as such enable provisioning of traditional pim services through a BIER Domain.

[2. Conventions used in this document](#)

The key words "MUST", "MUST NOT", "REQUIRED", "SHALL", "SHALL NOT", "SHOULD", "SHOULD NOT", "RECOMMENDED", "MAY", and "OPTIONAL" in this document are to be interpreted as described in [RFC 2119](#) [[RFC2119](#)].

[2.1. Definitions](#)

Some of the terminology specified in [I-D. [rfc8279](#)] is replicated here and extended by necessary definitions:

BIER:

Bit Index Explicit Replication (The overall architecture of forwarding multicast using a Bit Position).

BFR:

Bit Forwarding Router (A router that participates in Bit Index Multipoint Forwarding). A BFR is identified by a unique BFR-prefix in a BIER domain.

BFIR:

Bit Forwarding Ingress Router (The ingress border router that inserts the BM into the packet). Each BFIR must have a valid BFR-id assigned. In this draft BIER will be used for forwarding and tunneling of control plain packet (i.e. PIM) and forwarding dataplane packets. BFIR is term used for dataplane packet forwarding.

BFER:

Bit Forwarding Egress Router. A router that participates in Bit Index Forwarding as leaf. Each BFER must be a BFR. Each BFER must have a valid BFR-id assigned. In this draft BIER will be used for forwarding and tunneling of control plain packet (i.e. PIM) and forwarding dataplain packets. BFIR is term used for dataplain packet forwarding.

BBR:

BIER Boundary router. The router between the PIM domain and BIER domain. Maintains PIM adjacency for all routers attached to it on the PIM domain and terminates the PIM adjacency toward the BIER domain.

IBBR:

Ingress BIER Boundary Router. The ingress router from signaling point of view. It maintains PIM adjacency toward the PIM domain and determines if PIM joins and prunes arriving from PIM domain need to be signaled across the BIER domain. If so it terminates the PIM adjacency toward the BIER domain and signals the PIM joins/prunes through the BIER core.

EBBR:

Egress BIER Boundary Router. The egress router in BIER domain from signaling point of view. It terminates the BIER packet and forwards the signaled joins and prunes into PIM Domain.

BFT:

Bit Forwarding Tree used to reach all BFERs in a domain.

BIFT:

Bit Index Forwarding Table.

The ingress BBR will determine if an arriving pim join or prune needs

to be signaled across the bier domain. While the egress BBR will determine if the arriving bier packet is a signaling packet and if so it will generate a pim signaling packet toward its attach pim domain.

The BFER and BFIR are BBR from datapath point of view. It should be noted the new procedures in this draft are only applicable to signaling and there are no changes from datapath point of view.

3.1. Ingress BBR procedure

IBBR will create pim adjacency to all pim routers attach to it toward the pim domain.

When a PIM join or prune for certain (S,G) arrives, the IBBR first determines weather the join or prune is meant for a source that is reachable through the bier domain. As an example, this source is located on a disjoint PIM domain that is reachable through the BIER domain. If so the ibbr will try to resolve the source via an ebbbr closest to the source.

The procedure to find the ebbbr (BFIR from datapath point of view) can be via many mechanisms explained in more detail in upcoming section.

After discovering the EBBR and its BFR-ID (flooded via IGP BIER extension), the IBBR will construct the BIER header. The signaling packet, in this case the PIM join/prune packet, is encapsulated in the BIER header and transported through BIER domain to EBBR.

The IBBR will track all the PIM interfaces on the attach pim domain which are interested in a certain (S,G). It creates multicast states for arriving (S,G)s from pim domain, with incoming interface as BIER "tunnel" interface and outgoing interface as the pim domain interface(s) on which PIM Join(s) were received on.

3.1.1. Determining EBBR on IBBR

As it was explained in previous section, IBBR needs to determine the EBBR closest to the source. This is needed to encode the BIER header BitString field to forward the signaling packet through the BIER domain.

It should be noted, the PIM domains can be either part of the same IGP area as BIER domain(single area) or are stitched to the BIER domain via an ABR or ASBR routers. As such on IBBR, there can be many different procedures to determine the EBBR. Some examples of these

procedures have been provided in [Appendix A](#).

3.1.4. BIER packet construction at IBBR

The BIER header will be encoded with the BFR-id of the IBBR(with appropriate bit set in the bitstring) and the PIM signaling packet is then encapsulated in the packet.

```

    0 1 2 3 4 5 6 7 8 9 0 1 2 3 4 5 6 7 8 9 0 1 2 3 4 5 6 7 8 9 0 1
+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+
|          BIFT-id          | TC |S|      TTL      |
+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+
|Nibble| Ver | BSL |          Entropy          |
+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+
|OAM|Rsv|  DSCP  | Proto |          BFIR-id      |
+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+
|          BitString (first 32 bits)          ~
+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+
~
+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+
~
+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+
          BitString (last 32 bits)          |
+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+

```

BIERHeader.Proto = IPv4 or IPv6

BIERHeader.BitString= Bit corresponding to the BFR-ID of the EBBR

BIERHeader.BFIR-id = BFR-Id of the BER originating the encapsulated PIM packet, i.e. the IBBR.

Rest of the values in the BIER header are determined based on the network (MPLS/non-MPLS), capabilities (BSL), and network configuration.

3.2. Signaling PIM through the BIER domain procedure

Throughout the BIER domain the BIER forwarding procedure is in par with [RFC 8279](#). No BIER router will examine the BIER packet encapsulating the PIM signaling packet. As such there is no multicast state build in the BIER domain.

The packet will be forwarded through the BIER domain until it reaches the BER with matching BFR-ID as in the BIERHeader.Bitstring. EBBR will remove the BIER header and examine the PIM IPv4 or IPv6 signaling packet farther as per EBBR Procedure section.

3.3. EBBR procedure

After receiving the BIER packet and determining this packet is a signaling packet, EBBR will remove the BIER header from PIM packet. It will do a route lookup for the source of the pim signaling packet. If the source is on a locally attach pim domain, it forwards the PIM packet toward the source.

With same token the EBBR creates a multicast state with incoming interface as same interface that PIM join packet was forwarded and outgoing interfaces of BIER tunnel with BIER-Header.BFIR-id and its corresponding Sub-Domain as one of the BFER of the tunnel.

The EBBR will also build a forwarding table for the arriving (S,G) using the BIERHeader.BFIR-id and the Sub-Domain they arrived on, in short it tracks all IBFRs interested in this (S,G). This is explained in [section 4.1](#).

It should be noted EBBR will maintain PIM adjacency toward the PIM domain and all PIM routers which are connected to it.

At this point the end-to-end multicast traffic flow setup is complete.

[4. Datapath Forwarding](#)

[4.1. BFIR tracking of \(S,G\)](#)

For a specific Source and Group, BFIR (EBBR) should track all the interested BFERs (IBFRs) via arriving PIM signaling from BIER Domain. BFIR should build its multicast tree with incoming interface (IIF) as PIM interface (in PIM domain) and out going interfaces OIFs set as the <SD, BFR-ID> of the interested BFERs (in BIER Domain).

[4.2. Datapath traffic flow](#)

When the multicast data traffic arrives on the BFIR (EBBR) the router will find all the interested BFERs for that specific (S,G). The router then constructs the BIERHeader.BitString with all the BFER interested in the group and will forward the packet to the BIER domain. The BFER(s) will accept the packets and remove the BIER header and forward the multicast packet as per pre-build multicast state for (G) and its outgoing interfaces.

[5. PIM-ASM behavior](#)

In case of PIM ASM the procedure for LEAFs joining RP is same as above. It should be noted that for ASM, the EBBR is determined with respect to the RP instead of the source.

6. Applicability to MVPN

With just minor changes, the above procedures apply to MVPN as well, with BFIR/BFER/EBBR/IBBR being VPN PEs.

All the PIM related procedures, and the determination of EBBR happens in the context of a VRF, following procedures for PIM-MVPN.

When a PIM packet arrives from PIM domain attached to the vrf (IBBR), and it is determine that the source is reachable via the vrf through the BIER domain, a PIM signaling message is sent via BIER to the EBBR. In this case usually the PE terminating the PIM-MVPN is the EBBR. A label is imposed before the BIER header is imposed, and the "proto" field in the BIER header is set to 1 (for "MPLS packet with downstream-assigned label at top of stack"). The label is advertised by the EBBR/BFIR to associate incoming packets to its correct VRF. In many scenarios a label is already bound to the VRF loopback address on the EBBR/BFIR and it can be used.

When a multicast data packet is sent via BIER by an EBBR/BFIR, a label is imposed before the BIER packet is imposed, and the "proto" field in the BIER header is set to 1 (for "MPLS packet with downstream-assigned label at top of stack"). The label is assigned to the VPN consistently on all VRFs [[draft-zzhang-bess-mvpn-evpn-aggregation-label](#)].

If the more complicated label allocation scheme is needed for the data packets as specified in [[draft-zzhang-bess-mvpn-evpn-aggregation-label](#)], then additional PMSI signaling is needed as specified in [[RFC6513](#)].

To support per-area subdomain in this case, the ABRs would need to become VPN PEs and maintain per-VPN state so it is unlikely practical.

7. IANA Considerations

This document contains no actions for IANA.

8. Security Considerations

The procedures of this document do not, in themselves, provide privacy, integrity, or authentication for the control plane or the data plane. For a discussion of the security considerations regarding the use of BIER, please see [RFC8279](#) and [RFC8296](#). Security considerations regarding PIM protocol is based on [RFC4601](#).

9. References

9.1. Normative References

[BIER_ARCH] Wijnands, IJ., Rosen, E., Dolganow, A., Przygienda, T., and S. Aldrin, "Multicast using Bit Index Explicit Replication", [rfc 8279](#), October 2016.

9.2. Informative References

[BIER_MVPN] Rosen, E., Ed., Sivakumar, M., Wijnands, IJ., Aldrin, S., Dolganow, A., and T. Przygienda, "Multicast VPN Using Bier", internet-draft [draft-ietf-bier-mvpn-11](#), March 2018.

[ISIS_BIER_EXTENSIONS] Ginsberg, L., Przygienda, T., Aldrin, S., and Z. Zhang, "BIER Support via ISIS", internet-draft [draft-ietf-bier-isis-extensions-11.txt](#), June 2018.

[OSPF_BIER_EXTENSIONS] Psenak, P., Kumar, N., Wijnands, IJ., Dolganow, A., Przygienda, T., Zhang, Z., and S. Aldrin, "OSPF Extensions for Bit Index Explicit Replication", internet-draft [draft-ietf-ospf-bier-extensions-18.txt](#), June 2018.

10. Acknowledgments <Add any acknowledgements>

Appendix A

This section provides some examples and routing procedures that can be used to determine the EBBR on IBBR. It should be noted, the PIM domains can be either part of the same IGP area as BIER domain(single area) or are stitched to the BIER domain via an ABR or ASBR routers. As such on IBBR, there can be many different procedures to determine the EBBR. Not all procedures are listed below.

A.1. SPF

On IBBR SPF procedures can be used to find the EBBR closest to the source.

Assuming the BIER domain is consist of all BIER forwarding routers, SPF calculation can identify the router advertising the prefix for the source. A post process can find the EBBR by walking from the advertising router back to the IBBR in the reverse direction of shortest path tree branch until the first BFR is encountered.

A.2. Indirect next-hop

Alternatively, the route to the source could have an indirect next-hop that identifies the EBBR. These methods are explained in the following sections.

[A.2.1. Static Route](#)

On IBBR there can be a static route configured for the source, with source next-hop set as EBBR BIER prefix.

[A.2.2. Interior Border Gateway Protocol \(iBGP\)](#)

Consider the following topology:

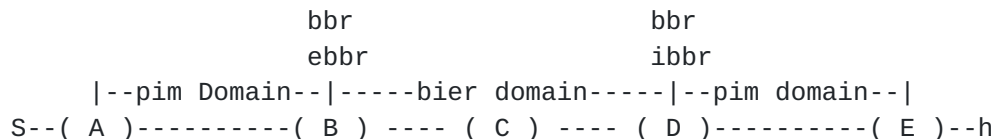


Figure 2

Suppose BGP is enable between EBBR (B) and IBBR (D) and the PIM Domain routes are redistributed to the BIER domain via BGP. This would include the Multicast Source IP address (S), which resides in the PIM Domain. In such case BGP should use the same loopback interface as its next-hop as the BBR prefix. This will ensure that all PIM domain routes, including the Multicast Source IP address (S) are resolve via BBR's bier prefix id as thier next-hop. When the host (h) triggers a PIM join message to IBBR (D), IBBR tries to resolve (S). It resolves (S) via BGP installed route and realizes its next-hop is EBBR (B). IBBR will use this next-hop (B) to find its corresponding BIER bit index.

This procedure is inline with [RFC6826](#) mLDP in-band signaling [section 2](#).

[A.3. Inter-area support](#)

If each area has its own BIER sub-domain, the above procedure for post-SPF could identify one of the ABRs and the EBBR. If a sub-domain spans multiple areas, then additional procedures as described in A.2 is needed.

[A.3.1. Inter-area Route summarization](#)

In a multi-area topology, a BIER sub-domain can span a single area. Suppose this single area is constructed entirely of Bier capable routers and the ABRs are the BIER Boundary Routers attaching the BIER sub-domain in this area to PIM domains in adjacent areas. These BBRs can summarize the PIM domain routes via summary routes, as an example for OSPF, a type 3 summary LSAs can be used to advertise summary routes from a PIM domain area to the BIER area. In such scenarios the

IBBR can be configured to look up the Source via IGP database and use the summary routes and its Advertising Router field to resolve the EBBR. The IBBR needs to ensure that the IGP summary route is generated by a BFR. This can be achieved by ensuring that bier sub-tlv exists for this route. If multiple BBRs (ABRs) have generated the same summary route the lowest Advertising Router IP can be selected or a vendor specific hashing algorithm can select the summary route from one of the BBRs.

Hooman Bidgoli (editor)
Nokia
600 March Rd.
Ottawa, Ontario K2K 2E6
Canada

Email: hooman.bidgoli@nokia.com

Fengman Xu
Verizon
400 International PKWY
Richardson, Tx 75081
US

Email: fengman.xu@verizon.com

Jayant Kotalwar
Nokia
380 N Bernardo Ave
Mountain View, CA 94043
US

Email: jayant.kotalwar@nokia.com

Andrew Dolganow
Nokia
750D Chai Chee Rd
06-06, Viva Business Park
Singapore 469004

Email: Andrew.dolganow@nokia.com

IJsbrand Wijnands
Cisco System
De Kleetlaan 6a
Diegem 1831
Belgium

Email: ice@cisco.com

Mankamana Mishra
Cisco System
821 alder drive
Milpitas California
USA

Email: mankamis@cisco.com

Zhaohui Zhang
Juniper Networks
USA

EMail: zzhang@juniper.net

