

Network Working Group
INTERNET-DRAFT
Expires in: April 2006

Scott Poretsky
Reef Point Systems

Shankar Rao
Qwest Communications

October 2006

Methodology Guidelines for
Accelerated Stress Benchmarking
<[draft-ietf-bmwg-acc-bench-meth-06.txt](#)>

Intellectual Property Rights (IPR) statement:

By submitting this Internet-Draft, each author represents that any applicable patent or other IPR claims of which he or she is aware have been or will be disclosed, and any of which he or she becomes aware will be disclosed, in accordance with [Section 6 of BCP 79](#).

Status of this Memo

Internet-Drafts are working documents of the Internet Engineering Task Force (IETF), its areas, and its working groups. Note that other groups may also distribute working documents as Internet-Drafts.

Internet-Drafts are draft documents valid for a maximum of six months and may be updated, replaced, or obsoleted by other documents at any time. It is inappropriate to use Internet-Drafts as reference material or to cite them other than as "work in progress."

The list of current Internet-Drafts can be accessed at
<http://www.ietf.org/ietf/lid-abstracts.txt>.

The list of Internet-Draft Shadow Directories can be accessed at
<http://www.ietf.org/shadow.html>.

Copyright Notice

Copyright (C) The Internet Society (2006).

ABSTRACT

Routers in an operational network are configured with multiple protocols and security policies while simultaneously forwarding traffic and being managed. To accurately benchmark a router for deployment it is necessary to test the router under accelerated operational conditions, which is known as Stress Testing. This document provides the Methodology Guidelines for performing Accelerated Stress Benchmarking of networking devices.

This document provides the Methodology for performing Stress Benchmarking of networking devices. Descriptions of Test Topology, Benchmarks and Reporting Format are provided in addition to procedures for conducting various test cases. The methodology is to be used with the companion terminology document [4].

Stress Testing of networking devices provides the following benefits:

1. Evaluation of multiple protocols enabled simultaneously as configured in deployed networks
2. Evaluation of system and software stability
3. Evaluation of manageability under stressful conditions
4. Identification of buffer overflow conditions
5. Identification of software coding bugs such as:
 - a. Memory leaks
 - b. Suboptimal CPU utilization
 - c. Coding logic

These benefits produce significant advantages for network operations:

1. Increased stability of routers and protocols
2. Hardened routers to DoS attacks
3. Verified manageability under stress
4. Planning router resources for growth and scale

2. Existing definitions

The key words "MUST", "MUST NOT", "REQUIRED", "SHALL", "SHALL NOT", "SHOULD", "SHOULD NOT", "RECOMMENDED", "MAY", and "OPTIONAL" in this document are to be interpreted as described in [BCP 14](#), [RFC 2119](#) [6]. [RFC 2119](#) defines the use of these key words to help make the intent of standards track documents as clear as possible. While this document uses these keywords, this document is not a standards track document.

Terms related to Accelerated Stress Benchmarking are defined in [4].

3. Test Setup

3.1 Test Topologies

Figure 1 shows the physical configuration to be used for the methodologies provided in this document. The number of interfaces between the tester and DUT will scale depending upon the number of control protocol sessions and traffic forwarding interfaces. A separate device may be required to externally manage the device in the case that the test equipment does not support such functionality. Figure 2 shows the logical configuration for the

stress test methodologies. Each plane MAY be emulated by single or multiple test equipment.

3.2 Test Considerations

The Accelerated Stress Benchmarking test can be applied in service provider test environments to benchmark DUTs under stress in an environment that reflects conditions found in an operational network. A particular Configuration Set is defined and the DUT is benchmarked using this configuration set and the Instability Conditions. Varying Configuration Sets and/or Instability Conditions applied in an iterative fashion can provide an accurate characterization of the DUT to help determine future network deployments.

For the management plane SNMP Gets SHOULD be performed continuously. Management sessions SHOULD be open simultaneously and be repeatedly open and closed using access protocols such as telnet and SSH. Open management sessions SHOULD have valid and invalid configuration and show commands entered. For the security plane, tunnels for protocols such as IPsec SHOULD be established and flapped. Policies for Firewalls and ACLs SHOULD be repeatedly added and removed via management sessions.

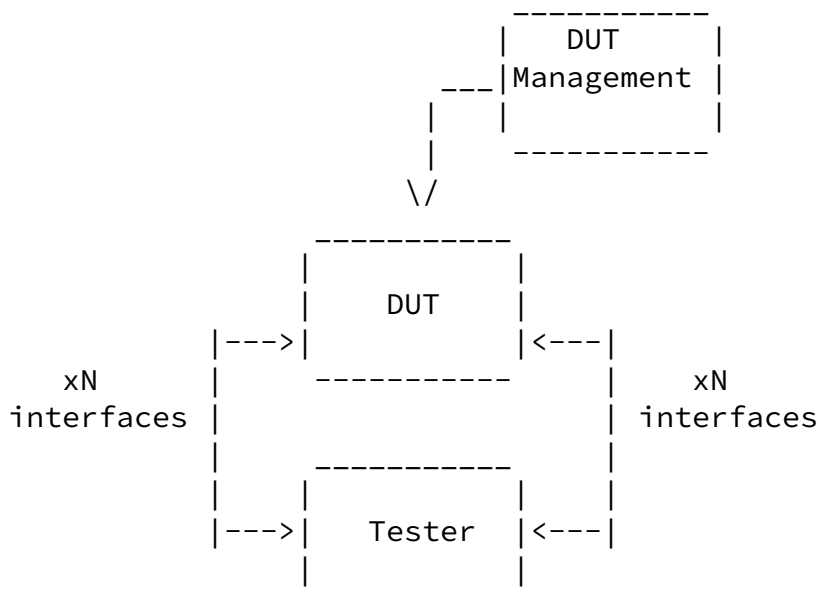


Figure 1. Physical Configuration

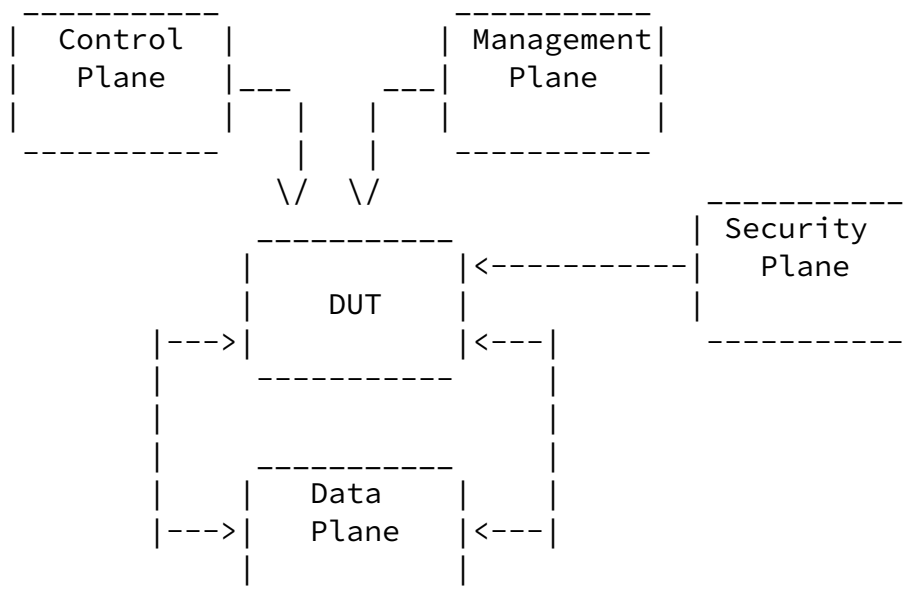


Figure 2. Logical Configuration

3.3 Reporting Format

Each methodology requires reporting of information for test repeatability when benchmarking the same or different devices. The information that are the Configuration Sets, Instability Conditions, and Benchmarks, as defined in [4]. Example reporting formats for each are provided below. Benchmarks MUST be reported as provided below.

3.3.1 Configuration Sets

The minimum Configuration Set that MUST be used is as follows:

PARAMETER	UNITS
Number of IGP Adjacencies	Adjacencies
Number of IGP Routes	Routes
Number of Nodes per Area	Nodes
Number of Areas per Node	Areas
SNMP GET Rate	SNMP Gets/minute
Telnet Establishment Rate	Sessions/Hour
Concurrent Telnet Sessions	Sessions
FTP Establishment Rate	Sessions/Hour
Concurrent FTP Session	Sessions

SSH Establishment Rate	Sessions/Hour
Concurrent SSH sessions	Sessions
DATA TRAFFIC	
Traffic Forwarding	Enabled/Disabled
Aggregate Offered Load	bps (or pps)
Number of Ingress Interfaces	interfaces
Number of Egress Interfaces	interfaces
Packet Size(s)	bytes
Offered Load (interface)	array of bps
Number of Flows	flows
Encapsulation(flow)	array of encapsulation types

Configuration Sets MAY include and are not limited to the following examples.

Example Routing Protocol Configuration Set-

PARAMETER	UNITS
BGP	Enabled/Disabled
Number of EBGP Peers	Peers
Number of IBGP Peers	Peers
Number of BGP Route Instances	Routes
Number of BGP Installed Routes	Routes
MBGP	Enabled/Disabled
Number of MBGP Route Instances	Routes
Number of MBGP Installed Routes	Routes
IGP	Enabled/Disabled
IGP-TE	Enabled/Disabled
Number of IGP Adjacencies	Adjacencies
Number of IGP Routes	Routes
Number of Nodes per Area	Nodes
Number of Areas per Node	Areas

Example MPLS Protocol Configuration Set-

PARAMETER	UNITS
MPLS-TE	Enabled/Disabled
Number of Tunnels as Ingress	Tunnels
Number of Tunnels as Mid-Point	Tunnels
Number of Tunnels as Egress	Tunnels
LDP	Enabled/Disabled
Number of Sessions	Sessions
Number of FECs	FECs

Example Multicast Protocol Configuration Set-

PARAMETER	UNITS
PIM-SM	Enabled/Disabled

RP	Enabled/Disabled
Number of Multicast Groups	Groups
MSDP	Enabled/Disabled

Example Data Plane Configuration Set-

PARAMETER	UNITS
Traffic Forwarding	Enabled/Disabled
Aggregate Offered Load	bps (or pps)
Number of Ingress Interfaces	interfaces
Number of Egress Interfaces	interfaces
TRAFFIC PROFILE	
Packet Size(s)	bytes
Offered Load (interface)	array of bps
Number of Flows	flows
Encapsulation(flow)	array of encapsulation type

Example Management Configuration Set-

PARAMETER	UNITS
SNMP GET Rate	SNMP Gets/minute
Logging	Enabled/Disabled
Protocol Debug	Enabled/Disabled
Telnet Establishment Rate	Sessions/Hour
Concurrent Telnet Sessions	Sessions
FTP Establishment Rate	Sessions/Hour
Concurrent FTP Session	Sessions
SSH Establishment Rate	Sessions/Hour
Concurrent SSH sessions	Sessions
Packet Statistics Collector	Enabled/Disabled
Statistics Sampling Rate	X:1 packets

Example Security Configuration Set -

PARAMETER	UNITS
Packet Filters	Enabled/Disabled
Number of Filters For-Me	filters
Number of Filter Rules For-Me	rules
Number of Traffic Filters	filters
Number of Traffic Filter Rules	rules
IPsec tunnels	tunnels
RADIUS	Enabled/Disabled
TACACS	Enabled/Disabled

Example SIP Configuration Set -

PARAMETER	UNITS
Session Rate	Sessions per Second
Media Streams per Session	Streams per session
Total Sessions	Sessions

3.3.2 Startup Conditions

Startup Conditions MAY include and are not limited to the following examples:

PARAMETER	UNITS
EBGP peering sessions negotiated	Total EBGP Sessions
IBGP peering sessions negotiated	Total IBGP Sessions
ISIS adjacencies established	Total ISIS Adjacencies
ISIS routes learned rate	ISIS Routes per Second
IPsec tunnels negotiated	Total IPsec Tunnels
IPsec tunnel establishment rate	IPsec tunnels per second

3.3.3 Instability Conditions

Instability Conditions MAY include and are not limited to the following examples:

PARAMETER	UNITS
Interface Shutdown Cycling Rate	interfaces per minute
ISIS Route Flap Rate	routes per minutes
LSP Reroute Rate	LSP per minute
Overloaded Links	number
Amount Links Overloaded	% of bandwidth
FTP Rate	Mb/minute
IPsec Tunnel Flap Rate	tunnels per minute
Filter Policy Changes	policies per hour
SSH Session Rate	SSH sessions per hour
Telnet Session Rate	Telnet session per hour
Command Entry Rate	Commands per Hour
Message Flood Rate	Messages

3.3.4 Benchmarks

Benchmarks are as defined in [4] and MUST be reported as follow:

PARAMETER	UNITS	PHASE
Stable Aggregate Forwarding Rate	pps	Startup
Stable Latency	seconds	Startup
Stable Session Count	sessions	Startup
Unstable Aggregate Forwarding Rate	pps	Instability
Degraded Aggregate Forwarding Rate	pps	Instability
Ave. Degraded Aggregate Forwarding Rate	pps	Instability
Unstable Latency	seconds	Instability
Unstable Uncontrolled Sessions Lost	sessions	Instability
Recovered Aggregate Forwarding Rate	pps	Recovery
Recovered Latency	seconds	Recovery
Recovery Time	seconds	Recovery
Recovered Uncontrolled Sessions	sessions	Recovery

4. Stress Test Procedure

4.1 General Methodology with Multiple Instability Conditions

Objective

To benchmark the DUT under accelerated stress when there are multiple instability conditions.

Procedure

1. Report Configuration Set
2. Begin Startup Conditions with the DUT
3. Establish Configuration Sets with the DUT
4. Report Stability Benchmarks
5. Apply Instability Conditions
6. Apply Instability Condition specific to test case.
7. Report Instability Benchmarks
8. Stop applying all Instability Conditions
9. Report Recovery Benchmarks
10. Optional - Change Configuration Set and/or Instability Conditions for next iteration

Expected Results

Ideally the Forwarding Rates, Latencies, and Session Counts will be measured to be the same at each phase. If no packet or session loss occurs then the Instability Conditions MAY be increased for a repeated iteration (step 10 of the procedure).

Example Procedure

1. Report Configuration Set

BGP Enabled
10 EBGP Peers
30 IBGP Peers
500K BGP Route Instances
160K BGP FIB Routes

ISIS Enabled
ISIS-TE Disabled
30 ISIS Adjacencies
10K ISIS Level-1 Routes
250 ISIS Nodes per Area

MPLS Disabled
IP Multicast Disabled

IPsec Enabled
10K IPsec tunnels
640 Firewall Policies
100 Firewall Rules per Policy

Traffic Forwarding Enabled
Aggregate Offered Load 10Gbps
30 Ingress Interfaces
30 Egress Interfaces
Packet Size(s) = 64, 128, 256, 512, 1024, 1280, 1518 bytes
Forwarding Rate[1..30] = 1Gbps
10000 Flows
Encapsulation[1..5000] = IPv4
Encapsulation[5001..10000] = IPsec
Logging Enabled
Protocol Debug Disabled
SNMP Enabled
SSH Enabled
 10 Concurrent SSH Sessions
FTP Enabled
RADIUS Enabled
TACACS Disabled
Packet Statistics Collector Enabled

2. Begin Startup Conditions with the DUT

10 EBGP peering sessions negotiated
30 EBGP peering sessions negotiated
1K BGP routes learned per second
30 ISIS Adjacencies
1K ISIS routes learned per second
10K IPsec tunnels negotiated

3. Establish Configuration Sets with the DUT

4. Report Stability Benchmarks as follow:

Stable Aggregate Forwarding Rate
Stable Latency
Stable Session Count

It is RECOMMENDED that the benchmarks be measured and recorded at one-second intervals.

5. Apply Instability Conditions

Interface Shutdown Cycling Rate = 1 interface every 5
minutes

BGP Session Flap Rate = 1 session every 10 minutes

BGP Route Flap Rate = 100 routes per minute

ISIS Route Flap Rate = 100 routes per minute

IPsec Tunnel Flap Rate = 1 tunnel per minute

Overloaded Links = 5 of 30

Amount Links Overloaded = 20%

SNMP GETs = 1 per sec

SSH Session Rate = 6 sessions per hour

SSH Session Duration = 10 minutes

Command Rate via SSH = 20 commands per minute

FTP Restart Rate = 10 continuous transfers (Puts/Gets)
per hour

FTP Transfer Rate = 100 Mbps

Statistics Sampling Rate = 1:1 packets

RADIUS Server Loss Rate = 1 per Hour

RADIUS Server Loss Duration = 3 seconds

6. Apply Instability Condition specific to test case.

7. Report Instability Benchmarks as follow:

Unstable Aggregate Forwarding Rate

Degraded Aggregate Forwarding Rate

Ave. Degraded Aggregate Forwarding Rate

Unstable Latency

Unstable Uncontrolled Sessions Lost

It is RECOMMENDED that the benchmarks be measured and recorded at one-second intervals.

8. Stop applying all Instability Conditions

9. Report Recovery Benchmarks as follow:

Recovered Aggregate Forwarding Rate

Recovered Latency

Recovery Time

Recovered Uncontrolled Sessions Lost

It is RECOMMENDED that the benchmarks be measured and

recorded at one-second intervals.

10. Optional - Change Configuration Set and/or Instability Conditions for next iteration

4.2 General Methodology with a Single Instability Condition

Objective

To benchmark the DUT under accelerated stress when there is a single instability conditions.

Procedure

1. Report Configuration Set
2. Begin Startup Conditions with the DUT
3. Establish Configuration Sets with the DUT
4. Report Stability Benchmarks
5. Apply single Instability Condition
6. Report Instability Benchmarks
7. Stop applying all Instability Condition
8. Report Recovery Benchmarks
9. Optional - Change Configuration Set and/or Instability Conditions for next iteration

Expected Results

Ideally the Forwarding Rates, Latencies, and Session Counts will be measured to be the same at each phase. If no packet or session loss occurs then the Instability Conditions MAY be increased for a repeated iteration (step 10 of the procedure).

5. IANA Considerations

This document requires no IANA considerations.

6. Security Considerations

Documents of this type do not directly affect the security of the Internet or of corporate networks as long as benchmarking is not performed on devices or systems connected to operating networks.

7. Normative References

- [1] Bradner, S., Editor, "Benchmarking Terminology for Network Interconnection Devices", [RFC 1242](#), October 1991.

- [2] Mandeville, R., "Benchmarking Terminology for LAN Switching Devices", [RFC 2285](#), October 1998.
- [3] Bradner, S. and McQuaid, J., "Benchmarking Methodology for Network Interconnect Devices", [RFC 2544](#), March 1999.
- [4] Poretsky, S. and Rao, S., "Terminology for Accelerated Stress Benchmarking", [draft-ietf-bmwg-acc-bench-term-10](#), work in progress, October 2006.
- [5] Bradner, S., "Key words for use in RFCs to Indicate Requirement Levels", [RFC 2119](#), March 1997.

8. Informative References

- [RFC3871] [RFC 3871](#) "Operational Security Requirements for Large Internet Service Provider (ISP) IP Network Infrastructure. G. Jones, Ed.. IETF, September 2004.
- [NANOG25] "Core Router Evaluation for Higher Availability", Scott Poretsky, NANOG 25, October 8, 2002, Toronto, CA.
- [IEEECQR] "Router Stress Testing to Validate Readiness for Network Deployment", Scott Poretsky, IEEE CQR 2003.
- [CONVMETH] Poretsky, S., "Benchmarking Methodology for IGP Data Plane Route Convergence", [draft-ietf-bmwg-igp-dataplane-conv-meth-11](#), work in progress, October 2006.

Poretsky and Rao

[Page 11]

INTERNET-DRAFT

Methodology Guidelines October 2006
for Accelerated Stress Benchmarking

9. Author's Address

Scott Poretsky
Reef Point Systems
8 New England Executive Park
Burlington, MA 01803
USA
Phone: + 1 781 395 5090
EMail: sporetsky@reefpoint.com

Shankar Rao
1801 California Street
8th Floor
Qwest Communications

Denver, CO 80202
USA
Phone: + 1 303 437 6643
Email: shankar.rao@qwest.com

INTERNET-DRAFT Methodology Guidelines October 2006
for Accelerated Stress Benchmarking

Full Copyright Statement

Copyright (C) The Internet Society (2006).

This document is subject to the rights, licenses and restrictions contained in [BCP 78](#), and except as set forth therein, the authors retain all their rights.

This document and the information contained herein are provided on an "AS IS" basis and THE CONTRIBUTOR, THE ORGANIZATION HE/SHE REPRESENTS OR IS SPONSORED BY (IF ANY), THE INTERNET SOCIETY AND THE INTERNET ENGINEERING TASK FORCE DISCLAIM ALL WARRANTIES, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO ANY WARRANTY THAT THE USE OF THE INFORMATION HEREIN WILL NOT INFRINGE ANY RIGHTS OR ANY IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE.

Intellectual Property

The IETF takes no position regarding the validity or scope of any Intellectual Property Rights or other rights that might be claimed to pertain to the implementation or use of the technology described in this document or the extent to which any license under such rights might or might not be available; nor does it represent that it has made any independent effort to identify any such rights. Information on the procedures with respect to rights in RFC documents can be found in [BCP 78](#) and [BCP 79](#).

Copies of IPR disclosures made to the IETF Secretariat and any assurances of licenses to be made available, or the result of an attempt made to obtain a general license or permission for the use of such proprietary rights by implementers or users of this specification can be obtained from the IETF on-line IPR repository at <http://www.ietf.org/ipr>.

The IETF invites any interested party to bring to its attention any copyrights, patents or patent applications, or other proprietary rights that may cover technology that may be required to implement this standard. Please address the information to the IETF at ietf-ipr@ietf.org.

Acknowledgement

Funding for the RFC Editor function is currently provided by the Internet Society.