

Network Working Group  
Internet-Draft  
Intended status: Standards Track  
Expires: June 4, 2011

A. Takacs  
Ericsson  
L. Berger  
LabN Consulting, L.L.C.  
D. Caviglia  
Ericsson  
D. Fedyk  
Alcatel-Lucent  
J. Meuric  
France Telecom Orange  
December 1, 2010

**GMPLS Asymmetric Bandwidth Bidirectional Label Switched Paths (LSPs)  
draft-ietf-ccamp-asymm-bw-bidir-lsps-bis-00.txt**

**Abstract**

This document defines a method for the support of GMPLS asymmetric bandwidth bidirectional Label Switched Paths (LSPs). The presented approach is applicable to any switching technology and builds on the original Resource Reservation Protocol (RSVP) model for the transport of traffic-related parameters.

**Status of this Memo**

This Internet-Draft is submitted in full conformance with the provisions of [BCP 78](#) and [BCP 79](#).

Internet-Drafts are working documents of the Internet Engineering Task Force (IETF). Note that other groups may also distribute working documents as Internet-Drafts. The list of current Internet-Drafts is at <http://datatracker.ietf.org/drafts/current/>.

Internet-Drafts are draft documents valid for a maximum of six months and may be updated, replaced, or obsoleted by other documents at any time. It is inappropriate to use Internet-Drafts as reference material or to cite them other than as "work in progress."

This Internet-Draft will expire on June 4, 2011.

**Copyright Notice**

Copyright (c) 2010 IETF Trust and the persons identified as the document authors. All rights reserved.

This document is subject to [BCP 78](#) and the IETF Trust's Legal Provisions Relating to IETF Documents

(<http://trustee.ietf.org/license-info>) in effect on the date of publication of this document. Please review these documents carefully, as they describe your rights and restrictions with respect to this document. Code Components extracted from this document must include Simplified BSD License text as described in Section 4.e of the Trust Legal Provisions and are provided without warranty as described in the Simplified BSD License.

## Table of Contents

<a href="#">1.</a>	<a href="#">Introduction . . . . .</a>	<a href="#">3</a>
<a href="#">1.1.</a>	<a href="#">Background . . . . .</a>	<a href="#">3</a>
<a href="#">1.2.</a>	<a href="#">Approach Overview . . . . .</a>	<a href="#">4</a>
<a href="#">1.3.</a>	<a href="#">Conventions Used in This Document . . . . .</a>	<a href="#">4</a>
<a href="#">2.</a>	<a href="#">Generalized Asymmetric Bandwidth Bidirectional LSPs . . . . .</a>	<a href="#">5</a>
<a href="#">2.1.</a>	<a href="#">UPSTREAM_FLOWSPEC Object . . . . .</a>	<a href="#">5</a>
<a href="#">2.1.1.</a>	<a href="#">Procedures . . . . .</a>	<a href="#">5</a>
<a href="#">2.2.</a>	<a href="#">UPSTREAM_TSPEC Object . . . . .</a>	<a href="#">5</a>
<a href="#">2.2.1.</a>	<a href="#">Procedures . . . . .</a>	<a href="#">6</a>
<a href="#">2.3.</a>	<a href="#">UPSTREAM_ADSPEC Object . . . . .</a>	<a href="#">6</a>
<a href="#">2.3.1.</a>	<a href="#">Procedures . . . . .</a>	<a href="#">6</a>
<a href="#">3.</a>	<a href="#">Packet Formats . . . . .</a>	<a href="#">7</a>
<a href="#">4.</a>	<a href="#">Compatibility . . . . .</a>	<a href="#">9</a>
<a href="#">5.</a>	<a href="#">IANA Considerations . . . . .</a>	<a href="#">10</a>
<a href="#">5.1.</a>	<a href="#">UPSTREAM_FLOWSPEC Object . . . . .</a>	<a href="#">10</a>
<a href="#">5.2.</a>	<a href="#">UPSTREAM_TSPEC Object . . . . .</a>	<a href="#">10</a>
<a href="#">5.3.</a>	<a href="#">UPSTREAM_ADSPEC Object . . . . .</a>	<a href="#">10</a>
<a href="#">6.</a>	<a href="#">Security Considerations . . . . .</a>	<a href="#">11</a>
<a href="#">7.</a>	<a href="#">References . . . . .</a>	<a href="#">12</a>
<a href="#">7.1.</a>	<a href="#">Normative References . . . . .</a>	<a href="#">12</a>
<a href="#">7.2.</a>	<a href="#">Informative References . . . . .</a>	<a href="#">12</a>
	<a href="#">Authors' Addresses . . . . .</a>	<a href="#">14</a>



## **1. Introduction**

GMPLS [[RFC3473](#)] introduced explicit support for bidirectional Label Switched Paths (LSPs). The defined support matched the switching technologies covered by GMPLS, notably Time Division Multiplexing (TDM) and lambdas; specifically, it only supported bidirectional LSPs with symmetric bandwidth allocation. Symmetric bandwidth requirements are conveyed using the semantics objects defined in [[RFC2205](#)] and [[RFC2210](#)].

GMPLS asymmetric bandwidth bidirectional LSPs are bidirectional LSPs that have different bandwidth reservations in each direction. Support for bidirectional LSPs with asymmetric bandwidth, was previously discussed in the context of Ethernet, notably [GMPLS-PBBTE] and [[RFC6003](#)]. In that context, asymmetric bandwidth support was considered to be a capability that was unlikely to be deployed, and hence [[RFC5467](#)] was published as Experimental. The MPLS Transport Profile, MPLS-TP, requires that asymmetric bandwidth bidirectional LSPs be supported, see [[RFC5654](#)], and therefore this document is being published on the Standards Track. This document has no technical changes from the approach defined in [[RFC5467](#)]. This document removes an alternate approach that is not part of the Standards Track solution.

### **1.1. Background**

Bandwidth parameters are transported within RSVP ([[RFC2210](#)], [[RFC3209](#)], and [[RFC3473](#)]) via several objects that are opaque to RSVP. While opaque to RSVP, these objects support a particular model for the communication of bandwidth information between an RSVP session sender (ingress) and receiver (egress). The original model of communication, defined in [[RFC2205](#)] and maintained in [[RFC3209](#)], used the SENDER\_TSPEC and ADSPEC objects in Path messages and the FLOWSPEC object in Resv messages. The SENDER\_TSPEC object was used to indicate a sender's data generation capabilities. The FLOWSPEC object was issued by the receiver and indicated the resources that should be allocated to the associated data traffic. The ADSPEC object was used to inform the receiver and intermediate hops of the actual resources allocated for the associated data traffic.

With the introduction of bidirectional LSPs in [[RFC3473](#)], the model of communication of bandwidth parameters was implicitly changed. In the context of [[RFC3473](#)] bidirectional LSPs, the SENDER\_TSPEC object indicates the desired resources for both upstream and downstream directions. The FLOWSPEC object is simply confirmation of the allocated resources. The definition of the ADSPEC object is either unmodified and only has meaning for downstream traffic, or is implicitly or explicitly ([[RFC4606](#)] and [MEF-TRAFFIC]) irrelevant.



## 1.2. Approach Overview

The approach for supporting asymmetric bandwidth bidirectional LSPs defined in this document builds on the original RSVP model for the transport of traffic-related parameters and GMPLS's support for bidirectional LSPs.

The defined approach is generic and can be applied to any switching technology supported by GMPLS. With this approach, the existing SENDER\_TSPEC, ADSPEC, and FLOWSPEC objects are complemented with the addition of new UPSTREAM\_TSPEC, UPSTREAM\_ADSPEC, and UPSTREAM\_FLOWSPEC objects. The existing objects are used in the original fashion defined in [RFC2205] and [RFC2210], and refer only to traffic associated with the LSP flowing in the downstream direction. The new objects are used in exactly the same fashion as the old objects, but refer to the upstream traffic flow. Figure 1 shows the bandwidth-related objects used for asymmetric bandwidth bidirectional LSPs.

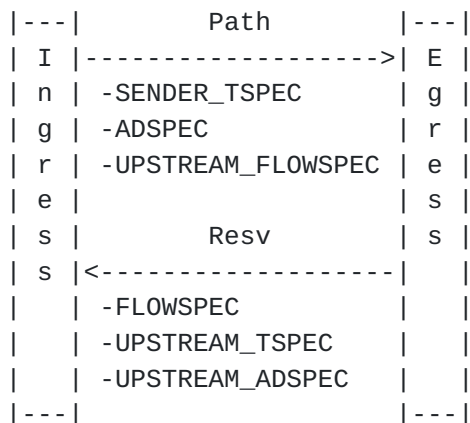


Figure 1: Generic Asymmetric Bandwidth Bidirectional LSPs

The extensions defined in this document are limited to Point-to-Point (P2P) LSPs. Support for Point-to-Multipoint (P2MP) bidirectional LSPs is not currently defined and, as such, not covered in this document.

## 1.3. Conventions Used in This Document

The key words "MUST", "MUST NOT", "REQUIRED", "SHALL", "SHALL NOT", "SHOULD", "SHOULD NOT", "RECOMMENDED", "MAY", and "OPTIONAL" in this document are to be interpreted as described in [RFC2119].



## **2.    Generalized Asymmetric Bandwidth Bidirectional LSPs**

The setup of an asymmetric bandwidth bidirectional LSP is signaled using the bidirectional procedures defined in [\[RFC3473\]](#) together with the inclusion of the new UPSTREAM\_FLOWSPEC, UPSTREAM\_TSPEC, and UPSTREAM\_ADSPEC objects.

The new upstream objects carry the same information and are used in the same fashion as the existing downstream objects; they differ in that they relate to traffic flowing in the upstream direction while the existing objects relate to traffic flowing in the downstream direction. The new objects also differ in that they are carried on messages traveling in the opposite direction.

### **2.1.    UPSTREAM\_FLOWSPEC Object**

The format of an UPSTREAM\_FLOWSPEC object is the same as a FLOWSPEC object. This includes the definition of class types and their formats. The class number of the UPSTREAM\_FLOWSPEC object is 120 (of the form 0bbbbbbb).

#### **2.1.1.    Procedures**

The Path message of an asymmetric bandwidth bidirectional LSP MUST contain an UPSTREAM\_FLOWSPEC object and MUST use the bidirectional LSP formats and procedures defined in [\[RFC3473\]](#). The C-Type of the UPSTREAM\_FLOWSPEC object MUST match the C-Type of the SENDER\_TSPEC object used in the Path message. The contents of the UPSTREAM\_FLOWSPEC object MUST be constructed using a format and procedures consistent with those used to construct the FLOWSPEC object that will be used for the LSP, e.g., [\[RFC2210\]](#) or [\[RFC4328\]](#).

Nodes processing a Path message containing an UPSTREAM\_FLOWSPEC object MUST use the contents of the UPSTREAM\_FLOWSPEC object in the upstream label and the resource allocation procedure defined in [Section 3.1 of \[RFC3473\]](#). Consistent with [\[RFC3473\]](#), a node that is unable to allocate a label or internal resources based on the contents of the UPSTREAM\_FLOWSPEC object MUST issue a PathErr message with a "Routing problem/MPLS label allocation failure" indication.

### **2.2.    UPSTREAM\_TSPEC Object**

The format of an UPSTREAM\_TSPEC object is the same as a SENDER\_TSPEC object. This includes the definition of class types and their formats. The class number of the UPSTREAM\_TSPEC object is 121 (of the form 0bbbbbbb).





### **2.2.1. Procedures**

The UPSTREAM\_TSPEC object describes the traffic flow that originates at the egress. The UPSTREAM\_TSPEC object MUST be included in any Resv message that corresponds to a Path message containing an UPSTREAM\_FLOWSPEC object. The C-Type of the UPSTREAM\_TSPEC object MUST match the C-Type of the corresponding UPSTREAM\_FLOWSPEC object. The contents of the UPSTREAM\_TSPEC object MUST be constructed using a format and procedures consistent with those used to construct the FLOWSPEC object that will be used for the LSP, e.g., [[RFC2210](#)] or [[RFC4328](#)]. The contents of the UPSTREAM\_TSPEC object MAY differ from contents of the UPSTREAM\_FLOWSPEC object based on application data transmission requirements.

When an UPSTREAM\_TSPEC object is received by an ingress, the ingress MAY determine that the original reservation is insufficient to satisfy the traffic flow. In this case, the ingress MAY issue a Path message with an updated UPSTREAM\_FLOWSPEC object to modify the resources requested for the upstream traffic flow. This modification might require the LSP to be re-routed, and in extreme cases might result in the LSP being torn down when sufficient resources are not available.

### **2.3. UPSTREAM\_ADSPEC Object**

The format of an UPSTREAM\_ADSPEC object is the same as an ADSPEC object. This includes the definition of class types and their formats. The class number of the UPSTREAM\_ADSPEC object is 122 (of the form 0bbbbbbb).

#### **2.3.1. Procedures**

The UPSTREAM\_ADSPEC object MAY be included in any Resv message that corresponds to a Path message containing an UPSTREAM\_FLOWSPEC object. The C-Type of the UPSTREAM\_TSPEC object MUST be consistent with the C-Type of the corresponding UPSTREAM\_FLOWSPEC object. The contents of the UPSTREAM\_ADSPEC object MUST be constructed using a format and procedures consistent with those used to construct the ADSPEC object that will be used for the LSP, e.g., [[RFC2210](#)] or [MEF-TRAFFIC]. The UPSTREAM\_ADSPEC object is processed using the same procedures as the ADSPEC object and, as such, MAY be updated or added at transit nodes.



### 3. Packet Formats

This section presents the RSVP message-related formats as modified by this section. This document modifies formats defined in [\[RFC2205\]](#), [\[RFC3209\]](#), and [\[RFC3473\]](#). See [\[RFC5511\]](#) for the syntax used by RSVP. Unmodified formats are not listed. Three new objects are defined in this section:

Object name	Applicable RSVP messages
-----	-----
UPSTREAM_FLOWSPEC	Path, PathTear, PathErr, and Notify (via sender descriptor)
UPSTREAM_TSPEC	Resv, ResvConf, ResvTear, ResvErr, and Notify (via flow descriptor list)
UPSTREAM_ADSPEC	Resv, ResvConf, ResvTear, ResvErr, and Notify (via flow descriptor list)

The format of the sender description for bidirectional asymmetric LSPs is:

```

<sender descriptor> ::= <SENDER_TEMPLATE> <SENDER_TSPEC>
                        [ <ADSPEC> ]
                        [ <RECORD_ROUTE> ]
                        [ <SUGGESTED_LABEL> ]
                        [ <RECOVERY_LABEL> ]
                        <UPSTREAM_LABEL>
                        <UPSTREAM_FLOWSPEC>

```

The format of the flow descriptor list for bidirectional asymmetric LSPs is:



```
<flow descriptor list> ::= <FF flow descriptor list>
                           | <SE flow descriptor>
```

```
<FF flow descriptor list> ::= <FLOWSPEC>
                               <UPSTREAM_TSPEC> [ <UPSTREAM_ADSPEC> ]
                               <FILTER_SPEC>
                               <LABEL> [ <RECORD_ROUTE> ]
                               | <FF flow descriptor list>
                               <FF flow descriptor>
```

```
<FF flow descriptor> ::= [ <FLOWSPEC> ]
                           [ <UPSTREAM_TSPEC> ] [ <UPSTREAM_ADSPEC> ]
                           <FILTER_SPEC> <LABEL>
                           [ <RECORD_ROUTE> ]
```

```
<SE flow descriptor> ::= <FLOWSPEC>
                           <UPSTREAM_TSPEC> [ <UPSTREAM_ADSPEC> ]
                           <SE filter spec list>
```

<SE filter spec list> is unmodified by this document.



#### **4.   Compatibility**

This extension reuses and extends semantics and procedures defined in [[RFC2205](#)], [[RFC3209](#)], and [[RFC3473](#)] to support bidirectional LSPs with asymmetric bandwidth. To indicate the use of asymmetric bandwidth, three new objects are defined. Each of these objects is defined with class numbers in the form 0bbbbbbb. Per [[RFC2205](#)], nodes not supporting this extension will not recognize the new class numbers and should respond with an "Unknown Object Class" error. The error message will propagate to the ingress, which can then take action to avoid the path with the incompatible node or may simply terminate the session.





## **5.    IANA Considerations**

IANA has assigned new values for namespaces defined in this section and reviewed in this subsection.

The IANA has made the assignments described below in the "Class Names, Class Numbers, and Class Types" section of the "RSVP PARAMETERS" registry.

### **5.1.    UPSTREAM\_FLOWSPEC Object**

A new class named UPSTREAM\_FLOWSPEC has been created in the 0bbbbbbb range (120) with the following definition:

Class Types or C-types:

Same values as FLOWSPEC object (C-Num 9)

### **5.2.    UPSTREAM\_TSPEC Object**

A new class named UPSTREAM\_TSPEC has been created in the 0bbbbbbb range (121) with the following definition:

Class Types or C-types:

Same values as SENDER\_TSPEC object (C-Num 12)

### **5.3.    UPSTREAM\_ADSPEC Object**

A new class named UPSTREAM\_ADSPEC has been created in the 0bbbbbbb range (122) with the following definition:

Class Types or C-types:

Same values as ADSPEC object (C-Num 13)



## **6. Security Considerations**

This document introduces new message objects for use in GMPLS signaling [[RFC3473](#)] -- specifically the UPSTREAM\_TSPEC, UPSTREAM\_ADSPEC, and UPSTREAM\_FLOWSPEC objects. These objects parallel the existing SENDER\_TSPEC, ADSPEC, and FLOWSPEC objects but are used in the opposite direction. As such, any vulnerabilities that are due to the use of the old objects now apply to messages flowing in the reverse direction.

From a message standpoint, this document does not introduce any new signaling messages or change the relationship between LSRs that are adjacent in the control plane. As such, this document introduces no additional message- or neighbor-related security considerations.

See [[RFC3473](#)] for relevant security considerations, and [SEC-FRAMEWORK] for a more general discussion on RSVP-TE security discussions.



## [7.](#) References

### [7.1.](#) Normative References

- [RFC2205]        Braden, R., Ed., Zhang, L., Berson, S., Herzog, S.,  
                 and S. Jamin, "Resource ReSerVation Protocol (RSVP)  
                 -- Version 1 Functional Specification", [RFC 2205](#),  
                 September 1997.
- [RFC2210]        Wroclawski, J., "The Use of RSVP with IETF Integrated  
                 Services", [RFC 2210](#), September 1997.
- [RFC2119]        Bradner, S., "Key words for use in RFCs to Indicate  
                 Requirement Levels", [BCP 14](#), [RFC 2119](#), March 1997.
- [RFC3209]        Awduche, D., Berger, L., Gan, D., Li, T., Srinivasan,  
                 V., and G. Swallow, "RSVP-TE: Extensions to RSVP for  
                 LSP Tunnels", [RFC 3209](#), December 2001.
- [RFC3473]        Berger, L., Ed., "Generalized Multi-Protocol Label  
                 Switching (GMPLS) Signaling Resource ReserVation  
                 Protocol-Traffic Engineering (RSVP-TE) Extensions",  
                 [RFC 3473](#), January 2003.

### [7.2.](#) Informative References

- [GMPLS-PBBTE]    Fedyk, D., et al "GMPLS Control of Ethernet", Work in  
                 Progress, July 2008.
- [RFC6003]        Papadimitriou, D., "MEF Ethernet Traffic Parameters,"  
                 [RFC 6003](#), October 2008.
- [RFC5654]        B. Niven-Jenkins, Ed., D. Brungard, Ed. and  
                 M. Betts, Ed., "Requirements of an MPLS Transport  
                 Profile," [RFC 5654](#), September 2009.
- [RFC4606]        Mannie, E. and D. Papadimitriou, "Generalized Multi-  
                 Protocol Label Switching (GMPLS) Extensions for  
                 Synchronous Optical Network (SONET) and Synchronous  
                 Digital Hierarchy (SDH) Control", [RFC 4606](#), August  
                 2006.



- [RFC4328]        Papadimitriou, D., Ed., "Generalized Multi-Protocol Label Switching (GMPLS) Signaling Extensions for G.709 Optical Transport Networks Control", [RFC 4328](#), January 2006.
- [RFC5511]        Farrel, A. "Reduced Backus-Naur Form (RBNF) A Syntax Used in Various Protocol Specifications", [RFC 5511](#), April 2009.
- [RFC5920]        Fang, L., Ed., "Security Framework for MPLS and GMPLS Networks", [RFC 5920](#), July 2010.
- [RFC5467]        L. Berger, A. Takacs, D. Caviglia, D. Fedyk and J. Meuric, "GMPLS Asymmetric Bandwidth Bidirectional Label Switched Paths (LSPs)", [RFC 5467](#), March 2009.





Authors' Addresses

Attila Takacs  
Ericsson  
Laborc u. 1.  
Budapest, 1037  
Hungary

Email: attila.takacs@ericsson.com

Lou Berger  
LabN Consulting, L.L.C.

Email: lberger@labn.net

Diego Caviglia  
Ericsson  
Via A. Negrone 1/A  
Genova-Sestri Ponente,  
Italy

Phone: +390106003738

Fax:

Email: diego.caviglia@ericsson.com

Don Fedyk  
Alcatel-Lucent  
Groton, MA  
USA

Email: donald.fedyk@alcatel-lucent.com

Julien Meuric  
France Telecom Orange  
2, avenue Pierre Marzin  
Lannion Cedex, 22307  
France

Email: julien.meuric@orange-ftgroup.com

