

Internet Engineering Task Force
Internet-Draft
Intended status: Standards Track
Expires: May 22, 2021

D. Hiremagalur, Ed.
G. Grammel, Ed.
Juniper
G. Galimberti, Ed.
Cisco
R. Kunze, Ed.
Deutsche Telekom
D. Beller
Nokia
November 18, 2020

Extension to the Link Management Protocol (LMP/DWDM -rfc4209) for Dense Wavelength Division Multiplexing (DWDM) Optical Line Systems to manage the application code of optical interface parameters in DWDM application
[draft-ietf-ccamp-dwdm-if-lmp-03](#)

Abstract

This memo defines extensions to LMP([rfc4209](#)) for managing Optical parameters associated with Wavelength Division Multiplexing (WDM) systems in accordance with the Interface Application Identifier approach defined in ITU-T Recommendation G.694.1.[[ITU-T.G694.1](#)] and its extensions.

Copyright Notice

Copyright (c) 2011 IETF Trust and the persons identified as the document authors. All rights reserved.

Status of This Memo

This Internet-Draft is submitted in full conformance with the provisions of [BCP 78](#) and [BCP 79](#).

Internet-Drafts are working documents of the Internet Engineering Task Force (IETF). Note that other groups may also distribute working documents as Internet-Drafts. The list of current Internet-Drafts is at <https://datatracker.ietf.org/drafts/current/>.

Internet-Drafts are draft documents valid for a maximum of six months and may be updated, replaced, or obsoleted by other documents at any time. It is inappropriate to use Internet-Drafts as reference material or to cite them other than as "work in progress."

This Internet-Draft will expire on May 22, 2021.

Copyright Notice

Copyright (c) 2020 IETF Trust and the persons identified as the document authors. All rights reserved.

This document is subject to [BCP 78](#) and the IETF Trust's Legal Provisions Relating to IETF Documents (<https://trustee.ietf.org/license-info>) in effect on the date of publication of this document. Please review these documents carefully, as they describe your rights and restrictions with respect to this document. Code Components extracted from this document must include Simplified BSD License text as described in Section 4.e of the Trust Legal Provisions and are provided without warranty as described in the Simplified BSD License.

Table of Contents

1.	Introduction	2
2.	DWDM line system	3
3.	Use Cases	4
3.1.	Optical interface parameter collection	4
3.2.	DWDM client - ROADM interconnection discovery	5
3.3.	Service Setup	5
3.4.	Link Monitoring Use Cases	6
4.	Extensions to LMP-WDM Protocol	7
5.	General Parameters - OCh_General	7
6.	ApplicationIdentifier - OCh_ApplicationIdentifier	9
7.	OCh_Ss - OCh transmit parameters	11
8.	OCh_Rs - receive parameters	12
9.	Security Considerations	12
10.	IANA Considerations	12
11.	Contributors	13
12.	References	13
12.1.	Normative References	14
12.2.	Informative References	15
	Authors' Addresses	15


[1.](#) Introduction

LMP [[RFC4902](#)] provides link property correlation capabilities that can be used between a transceiver device and an Optical Line System (OLS) device. Link property correlation is a procedure by which, intrinsic parameters and capabilities are exchanged between two ends of a link. Link property correlation as defined in [RFC3591](#) allows either end of the link to supervise the received signal and operate within a commonly understood parameter window. Here the term 'link' refers in particular to the attachment link between OXC and OLS (see Figure 1). The relevant interface parameters are in line with

"[draft-dharini-ccamp-dwdm-if-yang](#)". Use cases are 1- Optical interface parameter collection, 2- DWDM client - ROADM interconnection discovery, 3- Service Setup, 4- Service Setup

2. DWDM line system

Figure 1 shows a set of reference points (Rs and Ss), for a single-channel connection between transmitter (Tx) and receiver (Rx) devices. Here the DWDM network elements in between those devices include an Optical Multiplexer (OM) and an Optical Demultiplexer (OD). In addition it may include one or more Optical Amplifiers (OA) and one or more Optical Add-Drop Multiplexers (OADM).

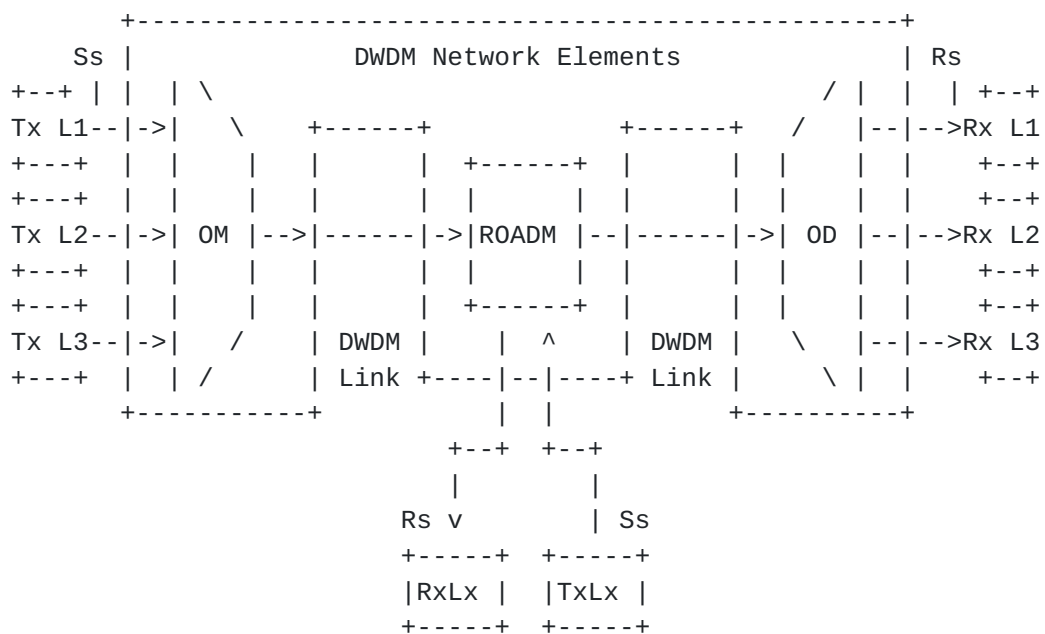

Ss = Sender reference point at the DWDM network element tributary output

Rs = Receiver reference point at the DWDM network element tributary input

Lx = Lambda x

OM = Optical Mux

OD = Optical Demux

ROADM = Reconfigurable Optical Add Drop Mux

from Fig. 5.1/G.698.2

Figure 1: Linear Single Channel approach

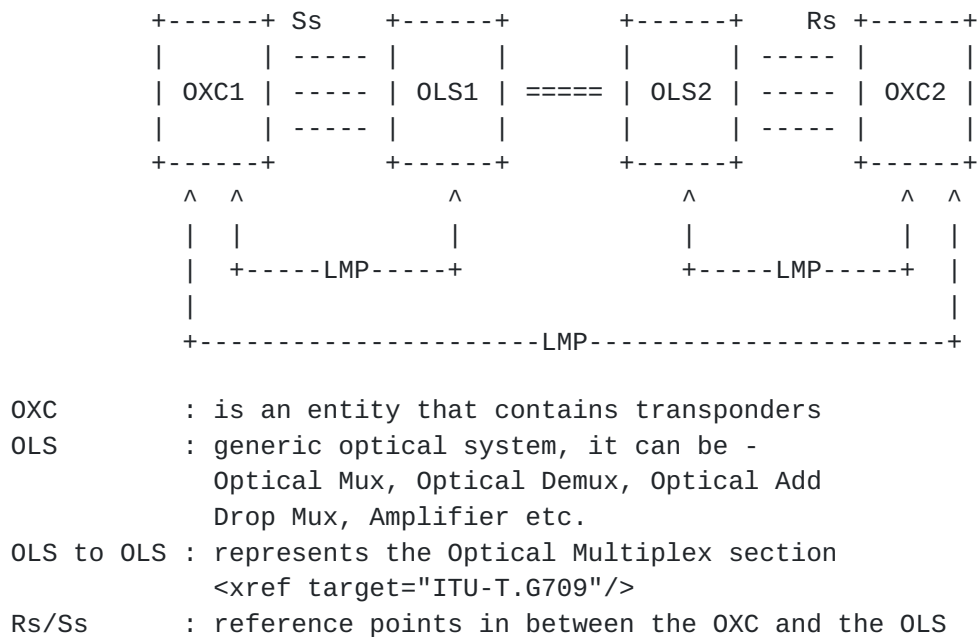
Figure 2 Extended LMP Model (from [[RFC4209](#)])

Figure 2: Extended LMP Model

3. Use Cases

A comparison with the traditional operation scenarios provides an insight of similarities and distinctions in operation and management of DWDM interfaces. The following use cases provide an overview about operation and maintenance processes.

3.1. Optical interface parameter collection

It is necessary to identify the Optical interface characteristics and setting in order to properly calculate the end to end path and match the Head End interface against the Tail End interface compatibility. The optical parameters may have multiple possible values that the Controller (SDN or GMPLS) can use and select for the best network optimisation. In case of GMPLS the LMP is suitable to support the parameters exchange between the ROADM and the Transponder (or DWDM interface located into the client box).

3.2. DWDM client - ROADM interconnection discovery

Being the the DWDM port and ROADM port belonging to different domains and Network Elements, the interconnection between them is not embedded in the Optical Nodes and can not be shared to the EMS and the Controller. The Controller needs then to retrieve the connectivity using data coming from the two domains correlating them to discover the relationship. The methods to discover the interconnection can be LMP, LLDP, installation provisioning or any other mechanism checking using the light transmitted by the DWDM transmitter and detector by the ROADM port photodiode. This use case is fundamental to build the interconnections between the DWDM and Client layer (e.g. Routers) and calculate the multilayer network topology.

3.3. Service Setup

It is necessary to differentiate between different operational issues for setting up a light path (a DWDM connection is specific in having defined maximum impairments) within an operational network.

The first step is to determine if transceivers located at different end-points are interoperable, i.e. support a common set of operational parameters. In this step it is required to determine transceiver capabilities in a way to be able to correlate them for interoperability purposes. Such parameters include modulation scheme, modulation parameters, FEC to name a few. If both transceivers are controlled by the same NMS or CP, such data is readily available. However in cases where the transceivers are controlled by different CP, a protocol needs to be used to inform the controlling instance (NMS or CP) about transceiver parameters. It is suggested to extend LMP for that purpose.

The second step is to determine the feasibility of a lightpath between two transceivers without applying an optical signal. Understanding the limitations of the transceiver pair, a path through the optical network has to be found, whereby each path has an individual set of impairments deteriorating a wavelength traveling along that path. Since a single transceiver can support multiple parameter sets, the selection of a path may limit the permissible parameter sets determined in previous steps.

The third step is then to setup the connection itself and to determine the Wavelength. This is done using the NMS of the optical transport network or by means of a control plane interaction such as signaling and includes the path information as well as the parameter set information necessary to enable communication.

In a fourth step, optical monitoring is activated in the WDM network in order to monitor the status of the connection. The monitor functions of the optical interfaces at the terminals are also activated in order to monitor the end to end connection.

Furthermore it should be possible to automate this step. After connecting the client device to the neighbor control plane-enabled transport node, a control adjacency may be automatically established, e.g. using LMP.

3.4. Link Monitoring Use Cases

The use cases described below are assuming that power monitoring functions are available in the ingress and egress network element of the DWDM network, respectively. By performing link property correlation it would be beneficial to include the current transmit power value at reference point Ss and the current received power value at reference point Rs. For example if the Client transmitter power has a value of 0dBm and the ROADM interface measured power is -6dBm the fiber patch cord connecting the two nodes may be pinched or the connectors are dirty. As discussed before, the actual path or selection of a specific wavelength within the allowed set is outside the scope of LMP. The computing entities (e.g. the first optical node originating the circuit) can rely on GMPLS IGP (OSPF) to retrieve all the information related to the network, calculate the path to reach the endpoint and signal the path implementation through the network via RSVP-TE.

[ITU-T.G.698.2] defines a single channel optical interface for DWDM systems that allows interconnecting network-external optical transponders across a DWDM network. The optical transponders are external to the DWDM network. This so-called 'Black Link' approach illustrated in Fig. 5-1 of [ITU-T.G.698.2]. The single channel fiber link between the Ss/Rs reference points and the ingress/egress port of the network element on the domain boundary of the DWDM network (DWDM border NE) is called access link. Based on the definition in [ITU-T.G.698.2] it is part of the DWDM network. The access link is typically realized as a passive fiber link that has a specific optical attenuation (insertion loss). As the access link is an integral part of the DWDM network, it is desirable to monitor its attenuation. Therefore, it is useful to detect an increase of the access link attenuation, for example, when the access link fiber has been disconnected and reconnected (maintenance) and a bad patch panel connection (connector) resulted in a significantly higher access link attenuation (loss of signal in the extreme case of an open connector or a fiber cut). In the following section, two use cases are presented and discussed:

- 1) pure access link monitoring
- 2) access link monitoring with a power control loop

These use cases require a power monitor as described in G.697 (see [section 6.1.2](#)), that is capable to measure the optical power of the incoming or outgoing single channel signal. The use case where a power control loop is in place could even be used to compensate an increased attenuation if the optical transmitter can still be operated within its output power range defined by its application code.

4. Extensions to LMP-WDM Protocol

This document defines extensions to [\[RFC4209\]](#) to allow a set of characteristic parameters, to be exchanged between a router or optical switch (e.g. OTN cross connect) and the optical line system to which it is attached. In particular, this document defines additional Data Link sub-objects to be carried in the LinkSummary message defined in [\[RFC4204\]](#) and [\[RFC6205\]](#). The OXC and OLS systems may be managed by different Network management systems and hence may not know the capability and status of their peer. These messages and their usage are defined in subsequent sections of this document.

The following new messages are defined for the WDM extension for ITU-T G.698.2 [\[ITU-T.G698.2\]](#)/ITU-T G.698.1 [\[ITU-T.G698.1\]](#)/ITU-T G.959.1 [\[ITU-T.G959.1\]](#)

- OCh_General (sub-object Type = TBA)
- OCh_ApplicationIdentifier (sub-object Type = TBA)
- OCh_Ss (sub-object Type = TBA)
- OCh_Rs (sub-object Type = TBA)

5. General Parameters - OCh_General

These are a set of general parameters as described in [\[G698.2\]](#) and [\[G.694.1\]](#). Please refer to the "[draft-dharini-ccamp-dwdm-if-yang](#)" for more details about these parameters and the [\[RFC6205\]](#) for the wavelength definition.

The general parameters are

1. Central Frequency - (Tera Hz) 4 bytes (see [RFC6205](#) sec.3.2)
2. Number of Application Identifiers (A.I.) Supported
3. Single-channel Application Identifier in use
4. Application Identifier Type in use
5. Application Identifier in use

Figure 3: The format of the this sub-object (Type = TBA, Length = TBA) is as follows:

0										1										2										3											
0	1	2	3	4	5	6	7	8	9	0	1	2	3	4	5	6	7	8	9	0	1	2	3	4	5	6	7	8	9	0	1	2	3	4	5	6	7	8	9	0	1
+ - +																																									

A.I. Type in use: STANDARD, PROPRIETARY

A.I. Type in use: STANDARD

Refer to G.698.2 recommendation : B-DScW-ytz(v)

0										1										2										3									
0	1	2	3	4	5	6	7	8	9	0	1	2	3	4	5	6	7	8	9	0	1	2	3	4	5	6	7	8	9	0	1								
+	-	+	-	+	-	+	-	+	-	+	-	+	-	+	-	+	-	+	-	+	-	+	-	+	-	+	-	+	-	+	-								
										Single-channel Application Code																													
+	-	+	-	+	-	+	-	+	-	+	-	+	-	+	-	+	-	+	-	+	-	+	-	+	-	+	-	+	-	+	-								
										Single-channel Application Code																													
+	-	+	-	+	-	+	-	+	-	+	-	+	-	+	-	+	-	+	-	+	-	+	-	+	-	+	-	+	-	+	-								
										Single-channel Application Code																													
+	-	+	-	+	-	+	-	+	-	+	-	+	-	+	-	+	-	+	-	+	-	+	-	+	-	+	-	+	-	+	-								

A.I. Type in use: PROPRIETARY

Note: if the A.I. type = PROPRIETARY, the first 6 Octets of the Application Identifier in use are six characters of the PrintableString must contain the Hexadecimal representation of an OUI (Organizationally Unique Identifier) assigned to the vendor whose implementation generated the Application Identifier; the remaining octets of the PrintableString are

unspecified.

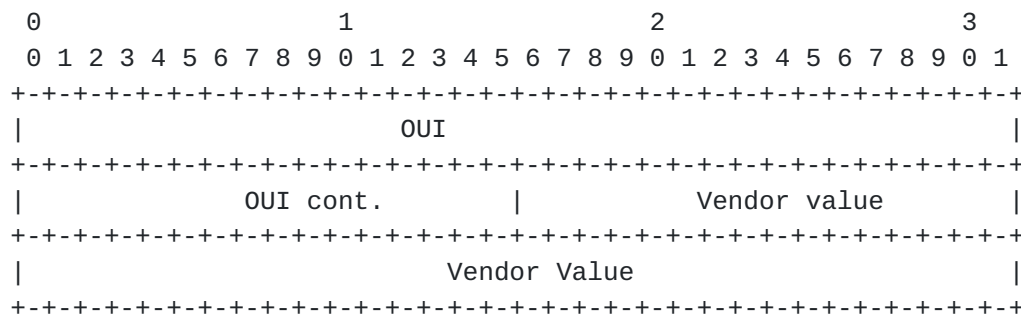


Figure 3: OCh_General


6. ApplicationIdentifier - OCh_ApplicationIdentifier

This message is to exchange the application identifiers supported as described in [G698.2]. There can be more than one Application Identifier supported by the transmitter/receiver in the OXC. The number of application identifiers supported is exchanged in the "OCh_General" message. (from [G698.1]/[G698.2]/[G959.1] and G.874.1)

The parameters are

1. Number of Application Identifiers (A.I.) Supported
 2. Single-channel application identifier Number
uniquely identifiers this entry - 8 bits
 3. Application Identifier Type (A.I.) (STANDARD/PROPRIETARY)
 4. Single-channel application identifier -- 96 bits
(from [G698.1]/[G698.2]/[G959.1])
- this parameter can have multiple instances as the transceiver can support multiple application identifiers.

Figure 4: The format of the this sub-object (Type = TBA, Length = TBA) is as follows:




```

|   Type   |   Length   |   (Reserved)   |
+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+
| Number of Application |   |   |
| Identifiers Supported |   |   | (Reserved) |
+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+
| Single-channel| A.I. Type |   | A.I. length |
| Application   |   |   |   |
| Identifier    |   |   |   |
| Number       |   |   |   |
+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+
|   Single-channel Application Identifier   |
+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+
|   Single-channel Application Identifier   |
+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+
|   Single-channel Application Identifier   |
+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+
//                                     ....                                     //
+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+
| Single-channel|   |   | A.I. length |
| Application   | A.I. Type |   |   |
| Identifier    |   |   |   |
| Number       |   |   |   |
|   |   |   |   |
+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+
|   Single-channel Application Identifier   |
+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+
|   Single-channel Application Identifier   |
+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+
|   Single-channel Application Identifier   |
+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+

```

A.I. Type in use: STANDARD, PROPRIETARY

A.I. Type in use: STANDARD

Refer to G.698.2 recommendation : B-DScW-ytz(v)

```

0           1           2           3
0 1 2 3 4 5 6 7 8 9 0 1 2 3 4 5 6 7 8 9 0 1 2 3 4 5 6 7 8 9 0 1
+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+
|   Single-channel Application Code   |
+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+
|   Single-channel Application Code   |
+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+
|   Single-channel Application Code   |
+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+

```


A.I. Type in use: PROPRIETARY

Note: if the A.I. type = PROPRIETARY, the first 6 Octets of the Application Identifier in use are six characters of the PrintableString must contain the Hexadecimal representation of an OUI (Organizationally Unique Identifier) assigned to the vendor whose implementation generated the Application Identifier; the remaining octets of the PrintableString are unspecified.

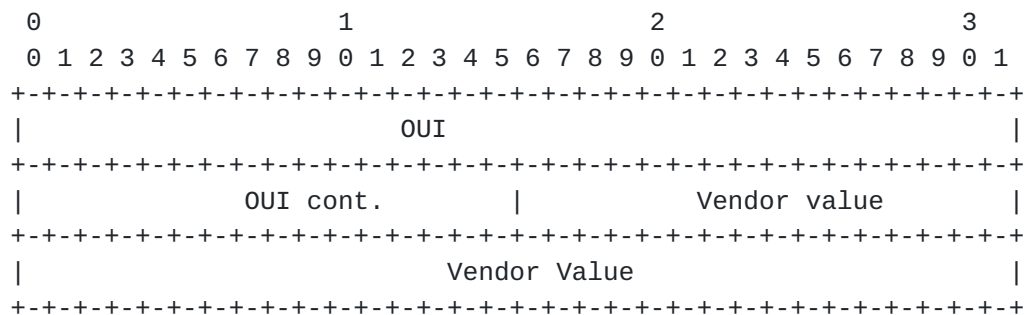


Figure 4: OCh_ApplicationIdentifier

7. OCh_Ss - OCh transmit parameters

These are the G.698.2 parameters at the Source(Ss reference points). Please refer to "[draft-dharini-ccamp-dwdm-if-yang](#)" for more details about these parameters.

1. Output power

Figure 5: The format of the OCh sub-object (Type = TBA, Length = TBA) is as follows:

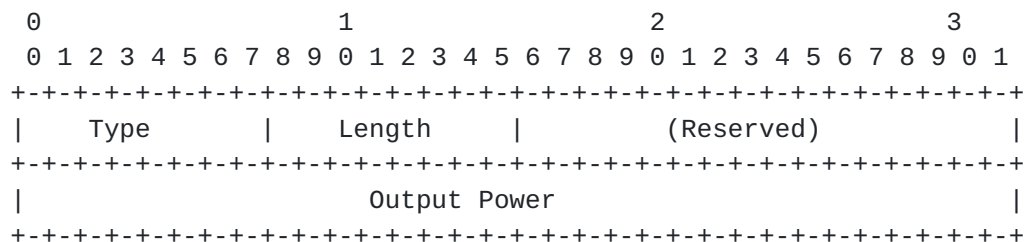


Figure 5: OCh_Ss transmit parameters

8. 0Ch_Rs - receive parameters

These are the G.698.2 parameters at the Sink (Rs reference points).

1. Current Input Power - (0.1dbm) 4bytes

Figure 6: The format of the 0Ch receive sub-object (Type = TBA, Length = TBA) is as follows:

The format of the OCh receive/OLS Sink sub-object (Type = TBA, Length = TBA) is as follows:

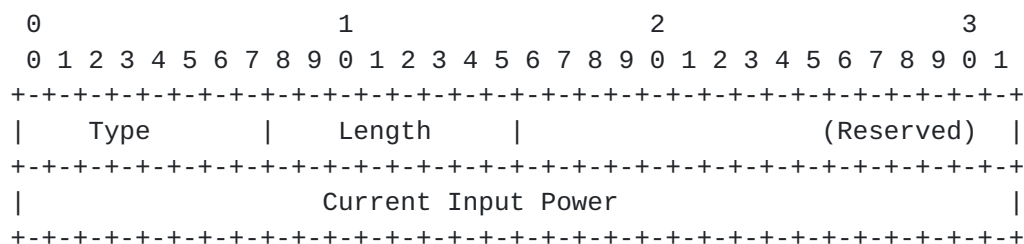


Figure 6: 0Ch_Rs receive parameters

9. Security Considerations

LMP message security uses IPsec, as described in [RFC4204]. This document only defines new LMP objects that are carried in existing LMP messages, similar to the LMP objects in [RFC:4209]. This document does not introduce new security considerations.

10. IANA Considerations

LMP <xref target="[RFC4204](#)"/> defines the following name spaces and the ways in which IANA can make assignments to these namespaces:

- LMP Message Type
- LMP Object Class
- LMP Object Class type (C-Type) unique within the Object Class
- LMP Sub-object Class type (Type) unique within the Object Class

This memo introduces the following new assignments:

LMP Sub-Object Class names:

under DATA_LINK Class name (as defined in <xref target="[RFC4204](#)"/>)

- OCh_General (sub-object Type = TBA)
- OCh_ApplicationIdentifier (sub-object Type = TBA)
- OCh_Ss (sub-object Type = TBA)
- OCh_Rs (sub-object Type = TBA)

[11.](#) Contributors

Arnold Mattheus
Deutsche Telekom
Darmstadt
Germany
email a.mattheus@telekom.de

John E. Drake
Juniper
1194 N Mathilda Avenue
HW-US, Pennsylvania
USA
jdrake@juniper.net

Zafar Ali
Cisco
3000 Innovation Drive
KANATA
ONTARIO K2K 3E8
zali@cisco.com

[12.](#) References

12.1. Normative References

- [ITU-T.G.698.2]
International Telecommunications Union, "Amplified multichannel dense wavelength division multiplexing applications with single channel optical interfaces", ITU-T Recommendation G.698.2, November 2009.
- [ITU-T.G694.1]
International Telecommunications Union, ""Spectral grids for WDM applications: DWDM frequency grid"", ITU-T Recommendation G.698.2, February 2012.
- [ITU-T.G709]
International Telecommunications Union, "Interface for the Optical Transport Network (OTN)", ITU-T Recommendation G.709, June 2016.
- [ITU-T.G872]
International Telecommunications Union, "Architecture of optical transport networks", ITU-T Recommendation G.872, January 2017.
- [ITU-T.G874.1]
International Telecommunications Union, "Optical transport network (OTN): Protocol-neutral management information model for the network element view", ITU-T Recommendation G.874.1, November 2016.
- [RFC4054] Strand, J., Ed. and A. Chiu, Ed., "Impairments and Other Constraints on Optical Layer Routing", [RFC 4054](#), DOI 10.17487/RFC4054, May 2005, <<https://www.rfc-editor.org/info/rfc4054>>.
- [RFC4204] Lang, J., Ed., "Link Management Protocol (LMP)", [RFC 4204](#), DOI 10.17487/RFC4204, October 2005, <<https://www.rfc-editor.org/info/rfc4204>>.
- [RFC4209] Fredette, A., Ed. and J. Lang, Ed., "Link Management Protocol (LMP) for Dense Wavelength Division Multiplexing (DWDM) Optical Line Systems", [RFC 4209](#), DOI 10.17487/RFC4209, October 2005, <<https://www.rfc-editor.org/info/rfc4209>>.
- [RFC6205] Otani, T., Ed. and D. Li, Ed., "Generalized Labels for Lambda-Switch-Capable (LSC) Label Switching Routers", [RFC 6205](#), DOI 10.17487/RFC6205, March 2011, <<https://www.rfc-editor.org/info/rfc6205>>.

12.2. Informative References

- [RFC2629] Rose, M., "Writing I-Ds and RFCs using XML", [RFC 2629](#), DOI 10.17487/RFC2629, June 1999, <<https://www.rfc-editor.org/info/rfc2629>>.
- [RFC3410] Case, J., Mundy, R., Partain, D., and B. Stewart, "Introduction and Applicability Statements for Internet-Standard Management Framework", [RFC 3410](#), DOI 10.17487/RFC3410, December 2002, <<https://www.rfc-editor.org/info/rfc3410>>.
- [RFC4181] Heard, C., Ed., "Guidelines for Authors and Reviewers of MIB Documents", [BCP 111](#), [RFC 4181](#), DOI 10.17487/RFC4181, September 2005, <<https://www.rfc-editor.org/info/rfc4181>>.

Authors' Addresses

Dharini Hiremagalur (editor)
Juniper
1194 N Mathilda Avenue
Sunnyvale - 94089 California
USA

Phone: +1408
Email: dharinih@juniper.net

Gert Grammel (editor)
Juniper
Oskar-Schlemmer Str. 15
80807 Muenchen
Germany

Phone: +49 1725186386
Email: ggrammel@juniper.net

Gabriele Galimberti (editor)
Cisco
Via S. Maria Molgora, 48 c
20871 - Vimercate
Italy

Phone: +390392091462
Email: ggalimbe@cisco.com

Ruediger Kunze (editor)
Deutsche Telekom
Winterfeldtstr. 21-27
10781 Berlin
Germany

Phone: +491702275321
Email: RKunze@telekom.de

Dieter Beller
Nokia
Lorenzstrasse, 10
70435 Stuttgart
Germany

Phone: +4971182143125
Email: Dieter.Beller@nokia.com

