

Network Working Group
Internet-Draft
Expires: January 16, 2006

A. Ayyangar, Ed.
Juniper Networks
JP. Vasseur
Cisco Systems, Inc.
July 15, 2005

Label Switched Path Stitching with Generalized MPLS Traffic Engineering
[draft-ietf-ccamp-lsp-stitching-01.txt](#)

Status of this Memo

By submitting this Internet-Draft, each author represents that any applicable patent or other IPR claims of which he or she is aware have been or will be disclosed, and any of which he or she becomes aware will be disclosed, in accordance with [Section 6 of BCP 79](#).

Internet-Drafts are working documents of the Internet Engineering Task Force (IETF), its areas, and its working groups. Note that other groups may also distribute working documents as Internet-Drafts.

Internet-Drafts are draft documents valid for a maximum of six months and may be updated, replaced, or obsoleted by other documents at any time. It is inappropriate to use Internet-Drafts as reference material or to cite them other than as "work in progress."

The list of current Internet-Drafts can be accessed at
<http://www.ietf.org/ietf/1id-abstracts.txt>.

The list of Internet-Draft Shadow Directories can be accessed at
<http://www.ietf.org/shadow.html>.

This Internet-Draft will expire on January 16, 2006.

Copyright Notice

Copyright (C) The Internet Society (2005).

Abstract

In certain scenarios, there may be a need to combine together two different Generalized Multi-Protocol Label Switching (GMPLS) Label Switched Paths (LSPs) such that in the data plane, a single end-to-end (e2e) LSP is achieved and all traffic from one LSP is switched onto the other LSP. We will refer to this as "LSP stitching". This document covers cases where: a) the node performing the stitching does not require configuration of every LSP pair to be stitched

together b) the node performing the stitching is not the egress of any of the LSPs c) LSP stitching not only results in an end-to-end LSP in the data plane, but there is also a corresponding end-to-end LSP (RSVP session) in the control plane. It might be possible to configure a GMPLS node to switch the traffic from an LSP for which it is the egress, to another LSP for which it is the ingress, without requiring any signaling or routing extensions whatsoever, completely transparent to other nodes. This will also result in LSP stitching in the data plane. However, this document does not cover this scenario of LSP stitching.

Table of Contents

1.	Introduction	3
1.1	Conventions used in this document	4
2.	Routing aspects	5
3.	Usage	6
3.1	LSP regions and LSP stitching	6
3.2	Applications	6
4.	Signaling aspects	7
4.1	RSVP-TE signaling extensions	7
4.1.1	Creating and preparing LSP segment for stitching	7
4.1.2	Stitching the e2e LSP to the LSP segment	9
4.1.3	RR0 Processing for e2e LSP	9
4.2	Summary of LSP Stitching procedures	10
4.2.1	Example topology	10
4.2.2	LSP segment setup	11
4.2.3	Setup of e2e LSP	11
4.2.4	Stitching of e2e LSP into an LSP segment	11
4.2.5	Teardown of e2e LSP	12
5.	Security Considerations	14
6.	IANA Considerations	15
6.1	Attribute Flags for LSP_ATTRIBUTES object	15
6.2	New Error Codes	15
7.	Acknowledgments	16
8.	References	17
8.1	Normative References	17
8.2	Informative References	17
	Authors' Addresses	18
	Intellectual Property and Copyright Statements	19

1. Introduction

This document describes the mechanisms to accomplish LSP stitching in the scenarios described above.

LSP hierarchy ([2]) provides signaling and routing procedures so that:

- a. a GMPLS node can form a forwarding adjacency (FA) over the FA LSP
- b. other Label Switching Routers (LSRs) can see this FA LSP as a Traffic Engineering (TE) link, when needed.
- c. the GMPLS node can nest one or more LSPs over the FA LSP. This only covers LSPs in a single domain.
- d. RSVP signaling for LSP setup can occur between nodes that do not have routing adjacency.

LSP stitching is a special case of LSP hierarchy. In case of LSP stitching, instead of an FA LSP, an "LSP segment" is created between two GMPLS nodes. So an LSP segment for stitching is considered to be the moral equivalent of an FA LSP for nesting and an LSP segment TE link is a moral equivalent of FA (FA-LSP TE link). While LSP hierarchy allows more than one LSP to be mapped to an FA-LSP, in case of LSP stitching, at most one LSP may be mapped to an LSP segment. E.g. if LSP-AB is an FA-LSP between nodes A and B, then multiple LSPs, say LSP1, LSP2, LSP3 could potentially be 'nested into' LSP-AB. This is achieved by exchanging a unique label for each of LSP1..3 over the LSP-AB hop thereby permitting LSP1..3 to share the FA-LSP LSP-AB. Each of LSP1..3 may reserve some bandwidth on LSP-AB. On the other hand, if LSP-AB is an LSP segment, then at most one LSP, say LSP1 may be 'stitched to' the LSP segment LSP-AB. No labels are exchanged for LSP1 over the LSP-AB hop directly between nodes A and B. Therefore LSP-AB is dedicated to LSP1 and no other LSPs can be associated with LSP-AB. The entire bandwidth on LSP segment LSP-AB is allocated to LSP1. The LSPs LSP1..3 which are either nested or stitched into another LSP are termed as end-to-end (e2e) LSPs in the rest of this document.

Signaling and routing procedures for LSP stitching are basically similar to that described in [2]. The LSP segment, like an FA-LSP is treated as a TE link. Also, non-adjacent RSVP signaling defined in [2]) is required to stitch an LSP to an LSP segment. So, in the control plane, there is one RSVP session corresponding to the e2e LSP as well as one for each LSP segment that the e2e LSP is being stitched to. The creation/termination of an LSP segment may be dictated by administrative control (statically provisioned) or due to

another incoming LSP request (dynamic). Triggers for dynamic creation of an LSP segment are different from that of an FA-LSP and will be described in detail later. In this document, where applicable, similarities and differences in the routing and signaling procedures between LSP hierarchy and LSP stitching are highlighted. Additional signaling extensions required for LSP stitching are also described here.

1.1 Conventions used in this document

The key words "MUST", "MUST NOT", "REQUIRED", "SHALL", "SHALL NOT", "SHOULD", "SHOULD NOT", "RECOMMENDED", "MAY", and "OPTIONAL" in this document are to be interpreted as described in [RFC 2119](#) [[1](#)].

2. Routing aspects

An LSP segment is created and treated like a TE link between two GMPLS nodes whose path transits zero or more GMPLS nodes in the same instance of the GMPLS control plane. These TE links may be numbered or unnumbered. For an unnumbered LSP segment, the assignment and handling of the local and remote link identifiers is specified in [9]. Unlike an FA-LSP, a GMPLS node does not have a data plane adjacency with the end point of the LSP segment. This implies that the traffic that arrives at the GMPLS node will be switched into the LSP segment contiguously with a label swap and no label is exchanged directly between the end nodes of the LSP segment itself. A routing adjacency will not be established over an LSP segment. ISIS/OSPF may, however, flood the TE information associated with an LSP segment TE link, when appropriate. Mechanisms similar to that for regular TE links may be used to flood LSP segment TE links. Advertising or flooding the LSP segment TE link is not a requirement for LSP stitching. Discretion should be used when advertising an LSP segment TE link in IGP. If advertised, this TE information will exist in the TE database (TED) and can then be used for path computation by other GMPLS nodes in the network.

The TE parameters defined for an FA in [2]) are exactly applicable to an LSP segment TE link as well. Note that the switching capability of an LSP segment TE link MUST be equal to the switching type of the underlying LSP segment; i.e. no hierarchy (nesting) is possible.

An LSP segment TE link SHOULD NOT admit more than one e2e LSP into it. So, once an LSP is stitched into an LSP segment, the unreserved bandwidth on the LSP segment SHOULD be set to zero. This will prevent any more LSPs from being computed and admitted over the LSP segment TE link. Multiple LSP segments between the same pair of nodes may be bundled using the concept of Link Bundling ([10]) into a single TE link. When any component LSP segment is allocated for an LSP, the component's unreserved bandwidth SHOULD be set to zero and the Minimum and Maximum LSP bandwidth of the TE link SHOULD be recalculated.

3. Usage

3.1 LSP regions and LSP stitching

An LSP segment may be created either by administrative control (configuration trigger) or dynamically due to an incoming LSP request. LSP Hierarchy ([2]) defines one possible trigger for dynamic creation of FA-LSP by introducing the notion of LSP regions based on Interface Switching Capabilities. As per [2], dynamic FA-LSP creation may be triggered on a node when an incoming LSP request crosses region boundaries. However, this trigger MUST NOT be used for creation of LSP segment for LSP stitching as described in this document. In case of LSP stitching, the switching capabilities of the previous hop and the next hop TE links MUST be the same. Therefore, local policies configured on the node SHOULD be used for dynamic creation of LSP segments.

Other possible triggers for dynamic creation of both FA-LSPs and LSP segments include cases where an e2e LSP may cross domain boundaries or satisfy locally configured policies on the node as described in [8].

3.2 Applications

LSP stitching procedures described in this document are applicable to GMPLS nodes that need to associate an e2e LSP with another LSP segment of the same switching type and LSP hierarchy procedures do not apply. E.g. if an e2e lambda LSP traverses an LSP segment TE link which is also lambda switch capable, then in this case LSP hierarchy is not possible.

LSP stitching procedures could be used for inter-domain TE LSP signaling to stitch an inter-domain LSP to a local intra-domain TE LSP segment ([8]).

LSP stitching could also be useful in networks to bypass legacy nodes which may not have certain new capabilities in the control plane and/or data plane. E.g. one suggested usage in case of P2MP RSVP LSPs ([7]) is the use of LSP stitching to stitch a P2MP RSVP LSP to an LSP segment between P2MP capable LSRs in the network. The LSP segment would traverse legacy LSRs that may be incapable of acting as P2MP branch points, thereby shielding them from the P2MP control and data path. Note, however, that such configuration may of course limit the attractiveness of RSVP P2MP and should carefully be examined before deployment.

4. Signaling aspects

The end nodes of the LSP segment do not have a routing adjacency. However, they will have a signaling adjacency and will exchange RSVP messages directly between each other. It may, in fact, be desirable to exchange RSVP Hellos directly between the LSP segment end points to allow support for state recovery during Graceful Restart procedures as described in [4].

In order to signal an e2e LSP over an LSP segment, signaling procedures described in section 8.1.1 of [2] MUST be used. Additional signaling extensions for stitching are described in the next section.

4.1 RSVP-TE signaling extensions

The signaling extensions described here MUST be used if the LSP segment is a packet LSP and an e2e packet LSP needs to be stitched to it. These extensions are optional for non-packet LSPs and SHOULD be used if no other local mechanisms exist to automatically detect a requirement for stitching at both the ingress and egress GMPLS nodes of the LSP segment. In cases where such mechanisms exist on these nodes and there is no need to signal "stitching" explicitly, the nodes MAY simply follow LSP hierarchy signaling procedures, but instead of nesting, they will stitch the LSPs in the data plane.

Stitching an e2e LSP to an LSP segment involves the following two step process :

- a. Creating and preparing the LSP segment for stitching by signaling the desire to stitch between end points of the LSP segment and
- b. Stitching the e2e LSP to the LSP segment

4.1.1 Creating and preparing LSP segment for stitching

If a GMPLS node desires to perform LSP stitching, then it MUST indicate this in the Path message for the LSP segment that it plans to use for stitching. This signaling explicitly informs the egress node for the LSP segment that the ingress node is planning to perform stitching over the LSP segment. This will allow the egress of the LSP segment to allocate the correct label(s) as explained below. Also, so that the head-end node can ensure that correct stitching actions were carried out at the egress node, a new flag is defined below in the Record Route Object (RRO) Attributes subobject to indicate that the LSP segment can be used for stitching.

In order to request LSP stitching on the LSP segment, we define a new flag bit in the Attributes Flags TLV of the LSP_ATTRIBUTES object defined in [3]:

0x02 (TBD): LSP stitching desired bit - This flag will be set in the Attributes Flags TLV of the LSP_ATTRIBUTES object in the Path message for the LSP segment by the head-end of the LSP segment, that desires LSP stitching. This flag MUST NOT be modified by any other nodes in the network.

An LSP segment can only be used for stitching if appropriate label actions were carried out at the egress node of the LSP segment. In order to indicate this to the head-end node of the LSP segment, the following new flag bit is defined in the RRO Attributes sub-object:
0x02 (TBD): LSP segment stitching ready.

If an egress node receiving a Path message, supports the LSP_ATTRIBUTES object and the Attributes Flags TLV, and also recognizes the "LSP stitching desired" flag bit, but cannot support the requested stitching behavior, then it MUST send back a PathErr message with an error code of "Routing Problem" and an error sub-code=16 (TBD) "Stitching unsupported" to the head-end node of the LSP segment.

If an egress node receiving a Path message with the "LSP stitching desired" flag set, recognizes the object, the TLV and the flag and also supports the desired stitching behavior, then it MUST allocate a non-NULL label for that LSP segment in the corresponding Resv message. Now, so that the head-end node can ensure that the correct label actions will be carried out by the egress node and that the LSP segment can be used for stitching, the egress node MUST set the "LSP segment stitching ready" bit defined in the RRO Attribute sub-object. Also, when the egress node for the LSP segment receives a Path message for an e2e LSP using this LSP segment, it SHOULD first check if it is also the egress for the e2e LSP. If the egress node is the egress for both the LSP segment as well as the e2e TE LSP, and this is a packet LSP which requires Penultimate Hop Popping (PHP), then the node MUST send back a Resv refresh for the LSP segment with a new label corresponding to the NULL label.

Finally, if the egress node for the LSP segment supports the LSP_ATTRIBUTES object but does not recognize the Attributes Flags TLV, or supports the TLV as well but does not recognize this particular flag bit, then it SHOULD simply ignore the above request.

An ingress node requesting LSP stitching MUST examine the RRO Attributes sub-object flag corresponding to the egress node for the LSP segment, to make sure that stitching actions were carried out at

the egress node. It MUST NOT use the LSP segment for stitching if the "LSP segment stitching ready" flag is cleared.

[4.1.2](#) Stitching the e2e LSP to the LSP segment

When a GMPLS node receives an e2e LSP request, depending on the applicable trigger it may either dynamically create an LSP segment based on procedures described above or it may map an e2e LSP to an existing LSP segment. The switching type in the Generalized Label Request of the e2e LSP MUST be equal to the switching type of the LSP segment. Other constraints like ERO, bandwidth, local TE policies may also be used for LSP segment selection or signaling. In either case, once an LSP segment has been selected for an e2e LSP, the following procedures MUST be followed in order to stitch an e2e LSP to an LSP segment.

The GMPLS node receiving the e2e LSP setup Path message MUST use the signaling procedures described in [\[2\]](#) to send the Path message directly to the end point of the LSP segment. In case of a bidirectional e2e TE LSP, an Upstream Label MUST NOT be allocated and signaled in the Path message for the e2e LSP over the LSP segment hop.

The egress node receiving this Path message MUST NOT allocate any Label in the Resv message for the e2e TE LSP over the LSP segment hop. This Resv message is IP routed back to the previous hop (ingress of the LSP segment).

The ingress node stitching an e2e TE LSP to an LSP segment MUST ignore any Label object received in the Resv for the e2e TE LSP over the LSP segment hop.

So, the main difference between signaling an e2e LSP over an LSP segment instead of over an FA-LSP is that no Labels are allocated and exchanged for the e2e LSP over the LSP segment hop. So, at most one e2e LSP is associated with one LSP segment. If a node at the head-end of an LSP segment receives a Path Msg for an LSP that identifies the LSP segment in the ERO and the LSP segment bandwidth has already been allocated to some other LSP, then regular rules of RSVP-TE pre-emption apply. If the LSP request over the LSP segment cannot be satisfied, then the node SHOULD send back a PathErr with the error codes as described in [\[5\]](#).

[4.1.3](#) RRO Processing for e2e LSP


RRO procedures for the LSP segment specific to LSP stitching are already described in [Section 4.1.1](#). In this section we will look at the RRO processing for the e2e LSP over the LSP segment hop.

An e2e LSP traversing an LSP segment, SHOULD record in the RRO for that hop, an identifier corresponding to the LSP segment TE link. This is applicable to both Path and Resv messages over the LSP segment hop. If the LSP segment is numbered, then the IPv4 or IPv6 address subobject ([5]) SHOULD be used to record the LSP segment TE link address. If the LSP segment is unnumbered, then the Unnumbered Interface ID subobject as described in [9] SHOULD be used to record the node's Router ID and Interface ID of the LSP segment TE link. In either case, the RRO subobject SHOULD identify the LSP segment TE link end point (link or node). Intermediate links or nodes traversed by the LSP segment itself SHOULD NOT be recorded in the RRO for the e2e LSP over the LSP segment hop.

4.2 Summary of LSP Stitching procedures

4.2.1 Example topology

The following topology will be used for the purpose of examples quoted in the following sections.

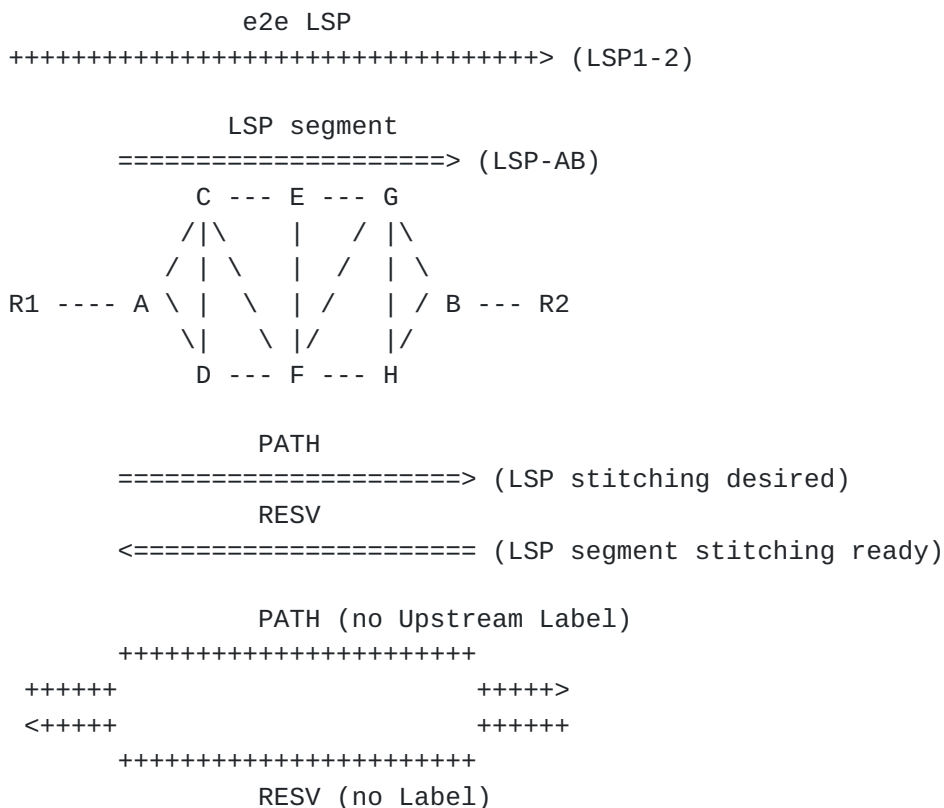

4.2.2 LSP segment setup

A GMPLS node that originates an LSP segment may decide to use this LSP segment for stitching. The creation of this LSP segment and its use for stitching may be dictated either by configuration or dynamically on arrival of an LSP setup request at the GMPLS node. Successful completion of signaling procedures for the LSP segment as described in [Section 4.1](#) will allow the GMPLS node to : a) advertise this LSP segment as a TE link with the bandwidth of the LSP as the unreserved bandwidth in the IGP and b) carry out stitching procedures to actually stitch an e2e LSP to the LSP segment. Note that it is not, however, required to advertise the LSP segment TE link in the IGP in the first place. Similar to setup, tearing down the LSP segment may also be decided either via local configuration or due to the fact that there is no longer an e2e LSP stitched to the LSP segment. E.g. Let us consider an LSP segment LSP-AB being setup between two nodes A and B which may be one or more hops away. A sends a Path message for the LSP-AB with "LSP stitching desired". If on the egress node B, stitching procedures are successfully carried out, then B will set the "LSP segment stitching ready" in the RRO sent in the Resv. Once A receives the Resv for LSP-AB and sees this bit set in the RRO, it can then use LSP-AB for stitching.

4.2.3 Setup of e2e LSP

Other nodes in the network (in the same domain) trying to setup an e2e LSP across the network may see the LSP segment as a TE link in their TE databases and may compute a path over this TE link. In case of an inter-domain e2e LSP, however, the LSP segment TE link, like any other basic TE link in the domain will not be advertised outside the domain. In this case, either per-domain path computation ([\[11\]](#)) or PCE based computation ([\[12\]](#)) will permit setting up e2e LSPs over LSP segments in other domains. The LSP segment TE link may itself be identified as an ERO hop in the Path message of the e2e LSP message or ERO hops signaled for the e2e LSP may be used as a criterion for LSP segment selection or signaling. E.g. Let us consider an e2e LSP LSP1-2 starting one hop before A on R1 and ending on node R2, as shown above. R1 may compute a path for LSP1-2 over the LSP segment LSP-AB and identify the LSP-AB hop in the ERO or R1 may compute hops between A and B and A may use these ERO hops for LSP segment selection or signaling a new LSP segment.

4.2.4 Stitching of e2e LSP into an LSP segment

When the Path message for an e2e LSP arrives at the GMPLS stitching node, the LSP segment to stitch the e2e LSP to is determined. The Path message for the e2e LSP is then sent directly (IP routed) to the LSP segment end node with the destination IP address of the Path

message set to the address of the LSP segment end node. The Router Alert option MUST NOT be set in this case. Furthermore, when the message arrives at the end node, RSVP TTL checks MUST be disabled. The LSP segment MUST be identified in the IF_ID RSVP_HOP (PHOP) object of the Path message. It is assumed that the receiver of this Path message can identify the LSP segment based on the data interface identification in the IF_ID RSVP_HOP. Also, if the e2e LSP is bidirectional, an Upstream Label MUST NOT be allocated/signaled in the Path message. When the Resv is sent back for the e2e LSP, a Label MUST NOT be allocated on the LSP segment hop. When the Resv is received and propagated further upstream (when applicable), the e2e LSP has been stitched to the LSP segment. E.g. When the Path message for the e2e LSP LSP1-2 arrives at node A, and the LSP segment LSP-AB to stitch LSP1-2 to has been identified (either based on explicit hop in ERO or due to local decision), then Path message for LSP1-2 is sent directly to node B with the IF_ID RSVP_HOP identifying the LSP segment LSP-AB. When B receives this Path message for LSP1-2, if B is also the egress for LSP1-2, and if this is a packet LSP requiring PHP, then B will send a Resv refresh for LSP-AB with the NULL Label. If B is not the egress, then Path message for LSP1-2 is propagated to R2. The Resv for LSP1-2 is sent back from B directly to A with no Label in it. Node A then propagates the Resv to R1. This stitches an e2e LSP LSP1-2 to an LSP segment LSP-AB between nodes A and B. In the data plane, this yields a series of label swaps from R1 to R2 along LSP LSP1-2.

4.2.5 Teardown of e2e LSP

When an e2e LSP teardown is initiated from the head-end, and a PathTear arrives at the GMPLS stitching node, the PathTear message like the Path message MUST be sent directly to the LSP segment egress node with the destination IP address of the Path message set to the address of the LSP segment end node. Router Alert MUST be off and RSVP TTL check MUST be disabled on the receiving node. PathTear will result in deletion of RSVP states corresponding to the e2e LSP and freeing of label allocations and bandwidth reservations on the LSP segment. The unreserved bandwidth on the LSP segment TE link SHOULD be re-adjusted.

Similarly, a teardown of the e2e LSP may be initiated from the tail-end either using a ResvTear or a PathErr with state removal. The egress of the LSP segment MUST propagate the ResvTear/PathErr upstream directly to the ingress of the LSP segment.

Graceful LSP teardown using ADMIN_STATUS as described in [4] is also applicable to stitched LSPs.

If the LSP segment was statically provisioned, tearing down of an e2e

LSP MAY not result in tearing down of the LSP segment. If, however, the LSP segment was dynamically setup due to the e2e LSP setup request, then depending on local policy, the LSP segment MAY be torn down if no e2e LSP is utilizing the LSP segment. Although the LSP segment may be torn down while the e2e LSP is being torn down, it is RECOMMENDED that a delay be introduced in tearing down the LSP segment once the e2e LSP teardown is complete, in order to reduce the simultaneous generation of RSVP errors and teardown messages due to multiple events. The delay interval may be set based on local implementation. The recommended interval is 30 seconds.

Also, deletion/teardown of the LSP segment (due to some failure or maintenance) SHOULD be treated as a failure event for the e2e LSP associated with it and corresponding teardown or recovery procedures SHOULD be triggered for the e2e LSP.

5. Security Considerations

Similar to [2], this document permits that the control interface over which RSVP messages are sent or received need not be the same as the data interface which the message identifies for switching traffic. Also, the 'sending interface' and 'receiving interface' may change as routing changes. So, these cannot be used to establish security association between neighbors. Mechanisms described in [6] should be re-examined and may need to be altered to define new security associations based on receiver's IP address instead of the sending and receiving interfaces. Also, this document allows the IP destination address of Path and PathTear messages to be the IP address of a nexthop node (receiver's address) instead of the RSVP session destination address. So, [6] should be revisited to check if IPSec AH is now a viable means of securing RSVP-TE messages.

6. IANA Considerations

The following values have to be defined by IANA for this document.
The registry is <http://www.iana.org/assignments/rsvp-parameters>.

6.1 Attribute Flags for LSP_ATTRIBUTES object

The following new flag bit is being defined for the Attributes Flags TLV in the LSP_ATTRIBUTES object. The numeric value should be assigned by IANA.

LSP stitching desired bit - 0x02 (Suggested value)

This flag bit is only to be used in the Attributes Flags TLV on a Path message.

The 'LSP stitching desired bit' has a corresponding 'LSP segment stitching ready' bit to be used in the RRO Attributes sub-object.

6.2 New Error Codes

The following new error sub-code is being defined under the RSVP error-code "Routing Problem" (24). The numeric error sub-code value should be assigned by IANA.

Stitching unsupported - sub-code 16 (Suggested value)

This error code is to be used only in a RSVP PathErr.

7. Acknowledgments

The authors would like to thank Adrian Farrel and Kireeti Kompella for their comments and suggestions. The authors would also like to thank Dimitri Papadimitriou and Igor Bryskin for their thorough review of the document and discussions regarding the same.

8. References

8.1 Normative References

- [1] Bradner, S., "Key words for use in RFCs to Indicate Requirement Levels", [BCP 14](#), [RFC 2119](#), March 1997.
- [2] Kompella, K. and Y. Rekhter, "LSP Hierarchy with Generalized MPLS TE", [draft-ietf-mpls-lsp-hierarchy-08](#) (work in progress), September 2002.
- [3] Farrel, A., "Encoding of Attributes for Multiprotocol Label Switching (MPLS) Label Switched Path (LSP) Establishment Using RSVP-TE", [draft-ietf-mpls-rsvp-te-attributes-05](#) (work in progress), May 2005.
- [4] Berger, L., "Generalized Multi-Protocol Label Switching (GMPLS) Signaling Resource ReserVation Protocol-Traffic Engineering (RSVP-TE) Extensions", [RFC 3473](#), January 2003.
- [5] Awduche, D., Berger, L., Gan, D., Li, T., Srinivasan, V., and G. Swallow, "RSVP-TE: Extensions to RSVP for LSP Tunnels", [RFC 3209](#), December 2001.
- [6] Baker, F., Lindell, B., and M. Talwar, "RSVP Cryptographic Authentication", [RFC 2747](#), January 2000.

8.2 Informative References

- [7] Aggarwal, R., "Extensions to RSVP-TE for Point to Multipoint TE LSPs", [draft-ietf-mpls-rsvp-te-p2mp-01](#) (work in progress), January 2005.
- [8] Ayyangar, A. and J. Vasseur, "Inter domain GMPLS Traffic Engineering - RSVP-TE extensions", [draft-ietf-ccamp-inter-domain-rsvp-te-00](#) (work in progress), February 2005.
- [9] Kompella, K. and Y. Rekhter, "Signalling Unnumbered Links in Resource ReSerVation Protocol - Traffic Engineering (RSVP-TE)", [RFC 3477](#), January 2003.
- [10] Kompella, K., Rekhter, Y., and L. Berger, "Link Bundling in MPLS Traffic Engineering", [draft-ietf-mpls-bundle-06](#) (work in progress), December 2004.
- [11] Vasseur, J., "A Per-domain path computation method for computing Inter-domain Traffic Engineering (TE) Label Switched

Path (LSP)", [draft-vasseur-ccamp-inter-domain-pd-path-comp-00](#)
(work in progress), February 2005.

- [12] Farrel, A., "Path Computation Element (PCE) Architecture",
[draft-ietf-pce-architecture-00](#) (work in progress), March 2005.

Authors' Addresses

Arthi Ayyangar (editor)
Juniper Networks
1194 N. Mathilda Ave.
Sunnyvale, CA 94089
US

Email: arthi@juniper.net

Jean Philippe Vasseur
Cisco Systems, Inc.
300 Beaver Brook Road
Boxborough, MA 01719
US

Email: jpv@cisco.com

Intellectual Property Statement

The IETF takes no position regarding the validity or scope of any Intellectual Property Rights or other rights that might be claimed to pertain to the implementation or use of the technology described in this document or the extent to which any license under such rights might or might not be available; nor does it represent that it has made any independent effort to identify any such rights. Information on the procedures with respect to rights in RFC documents can be found in [BCP 78](#) and [BCP 79](#).

Copies of IPR disclosures made to the IETF Secretariat and any assurances of licenses to be made available, or the result of an attempt made to obtain a general license or permission for the use of such proprietary rights by implementers or users of this specification can be obtained from the IETF on-line IPR repository at <http://www.ietf.org/ipr>.

The IETF invites any interested party to bring to its attention any copyrights, patents or patent applications, or other proprietary rights that may cover technology that may be required to implement this standard. Please address the information to the IETF at ietf-ipr@ietf.org.

Disclaimer of Validity

This document and the information contained herein are provided on an "AS IS" basis and THE CONTRIBUTOR, THE ORGANIZATION HE/SHE REPRESENTS OR IS SPONSORED BY (IF ANY), THE INTERNET SOCIETY AND THE INTERNET ENGINEERING TASK FORCE DISCLAIM ALL WARRANTIES, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO ANY WARRANTY THAT THE USE OF THE INFORMATION HEREIN WILL NOT INFRINGE ANY RIGHTS OR ANY IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE.

Copyright Statement

Copyright (C) The Internet Society (2005). This document is subject to the rights, licenses and restrictions contained in [BCP 78](#), and except as set forth therein, the authors retain all their rights.

Acknowledgment

Funding for the RFC Editor function is currently provided by the Internet Society.

