

Network Working Group  
Internet Draft  
Category: Standards Track  
Updates: [3630](#)  
Expires: April 2004

K. Kompella, Editor  
Y. Rekhter, Editor  
Juniper Networks  
October 2003

**OSPF Extensions in Support of Generalized  
Multi-Protocol Label Switching**

[draft-ietf-ccamp-ospf-gmpls-extensions-12.txt](#)

Status of this Memo

This document is an Internet-Draft and is in full conformance with all provisions of [Section 10 of RFC2026](#).

Internet-Drafts are working documents of the Internet Engineering Task Force (IETF), its areas, and its working groups. Note that other groups may also distribute working documents as Internet-Drafts.

Internet-Drafts are draft documents valid for a maximum of six months and may be updated, replaced, or obsoleted by other documents at any time. It is inappropriate to use Internet-Drafts as reference material or to cite them other than as ``work in progress.''

The list of current Internet-Drafts can be accessed at <http://www.ietf.org/ietf/1id-abstracts.txt>

The list of Internet-Draft Shadow Directories can be accessed at <http://www.ietf.org/shadow.html>.

Copyright Notice

Copyright (C) The Internet Society (2003). All Rights Reserved.

[illegible]



```

+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+
|                               Link Remote Identifier                               |
+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+

```

A node can communicate its Link Local Identifier to its neighbor using a link local Opaque LSA, as described in Section "Exchanging Link Local TE Information".

## 1.2. Link Protection Type

The Link Protection Type is a sub-TLV of the Link TLV. The type of this sub-TLV is 14, and length is four octets.

```

      0                   1                   2                   3
      0 1 2 3 4 5 6 7 8 9 0 1 2 3 4 5 6 7 8 9 0 1 2 3 4 5 6 7 8 9 0 1
+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+
|Protection Cap |                               Reserved                               |
+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+

```

The first octet is a bit vector describing the protection capabilities of the link (see Section "Link Protection Type" of [\[GMPLS-ROUTING\]](#)). They are:

```

0x01  Extra Traffic

0x02  Unprotected

0x04  Shared

0x08  Dedicated 1:1

0x10  Dedicated 1+1

0x20  Enhanced

0x40  Reserved

0x80  Reserved

```

The remaining three octets SHOULD be set to zero by the sender, and SHOULD be ignored by the receiver.

The Link Protection Type sub-TLV may occur at most once within the Link TLV.



### 1.3. Shared Risk Link Group (SRLG)

The SRLG is a sub-TLV (of type 16) of the Link TLV. The length is the length of the list in octets. The value is an unordered list of 32 bit numbers that are the SRLGs that the link belongs to. The format of the value field is as shown below:

```

      0              1              2              3
    0 1 2 3 4 5 6 7 8 9 0 1 2 3 4 5 6 7 8 9 0 1 2 3 4 5 6 7 8 9 0 1
+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+
|                               Shared Risk Link Group Value                               |
+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+
|                               .....                               |
+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+
|                               Shared Risk Link Group Value                               |
+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+

```

This sub-TLV carries the Shared Risk Link Group information (see Section "Shared Risk Link Group Information" of [\[GMPLS-ROUTING\]](#)).

The SRLG sub-TLV may occur at most once within the Link TLV.

### 1.4. Interface Switching Capability Descriptor

The Interface Switching Capability Descriptor is a sub-TLV (of type 15) of the Link TLV. The length is the length of value field in octets. The format of the value field is as shown below:

```

      0              1              2              3
    0 1 2 3 4 5 6 7 8 9 0 1 2 3 4 5 6 7 8 9 0 1 2 3 4 5 6 7 8 9 0 1
+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+
| Switching Cap |   Encoding   |           Reserved           |
+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+
|                               Max LSP Bandwidth at priority 0                               |
+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+
|                               Max LSP Bandwidth at priority 1                               |
+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+
|                               Max LSP Bandwidth at priority 2                               |
+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+
|                               Max LSP Bandwidth at priority 3                               |
+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+
|                               Max LSP Bandwidth at priority 4                               |
+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+
|                               Max LSP Bandwidth at priority 5                               |
+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+
|                               Max LSP Bandwidth at priority 6                               |
+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+
|                               Max LSP Bandwidth at priority 7                               |
+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+

```



```

+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+
|           Switching Capability-specific information           |
|           (variable)                                         |
+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+

```

The Switching Capability (Switching Cap) field contains one of the following values:

- |     |                                       |
|-----|---------------------------------------|
| 1   | Packet-Switch Capable-1 (PSC-1)       |
| 2   | Packet-Switch Capable-2 (PSC-2)       |
| 3   | Packet-Switch Capable-3 (PSC-3)       |
| 4   | Packet-Switch Capable-4 (PSC-4)       |
| 51  | Layer-2 Switch Capable (L2SC)         |
| 100 | Time-Division-Multiplex Capable (TDM) |
| 150 | Lambda-Switch Capable (LSC)           |
| 200 | Fiber-Switch Capable (FSC)            |

The Encoding field contains one of the values specified in [Section 3.1.1](#) of [\[GMPLS-SIG\]](#).

Maximum LSP Bandwidth is encoded as a list of eight 4 octet fields in the IEEE floating point format [\[IEEE\]](#), with priority 0 first and priority 7 last. The units are bytes (not bits!) per second.

The content of the Switching Capability specific information field depends on the value of the Switching Capability field.

When the Switching Capability field is PSC-1, PSC-2, PSC-3, or PSC-4, the Switching Capability specific information field includes Minimum LSP Bandwidth, Interface MTU, and padding.

```

      0               1               2               3
0 1 2 3 4 5 6 7 8 9 0 1 2 3 4 5 6 7 8 9 0 1 2 3 4 5 6 7 8 9 0 1
+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+
|           Minimum LSP Bandwidth           |
+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+
|           Interface MTU           |           Padding           |
+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+

```


The Minimum LSP Bandwidth is encoded in a 4 octets field in the IEEE floating point format. The units are bytes (not bits!) per second. The Interface MTU is encoded as a 2 octets integer. The padding is 2 octets, and is used to make the Interface Switching Capability Descriptor sub-TLV 32-bits aligned. It SHOULD be set to zero by the sender and SHOULD be ignored by the receiver.





When a restarting node is going to originate its TE LSAs, the TE LSAs containing Link TLV should be originated with 0 unreserved bandwidth, Traffic Engineering metric set to 0xffffffff, and if the Link has LSC or FSC as its Switching Capability then also with 0 as Max LSP Bandwidth, until the node is able to determine the amount of unreserved resources taking into account the resources reserved by the already established LSPs that have been preserved across the restart. Once the restarting node determines the amount of



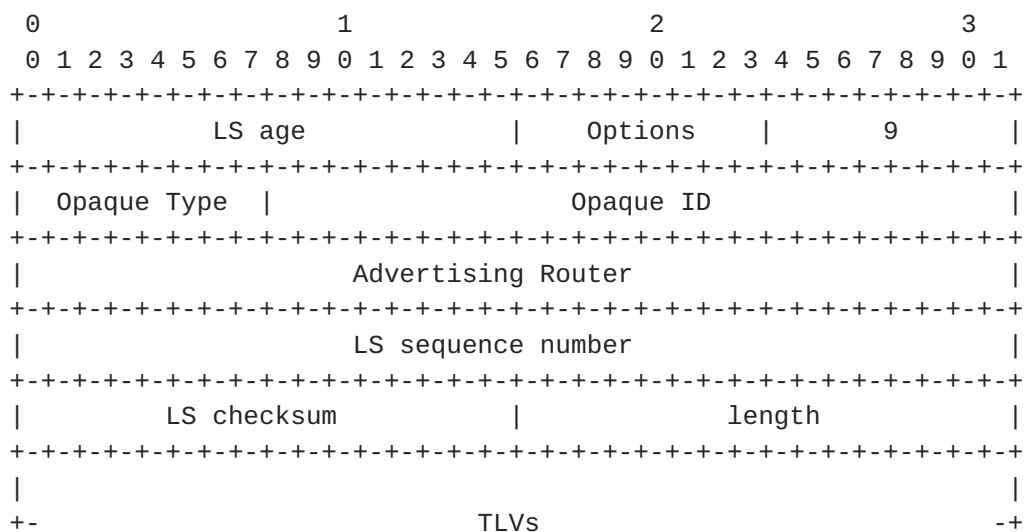



| ... |

The format of the TLVs that make up the body of the TE Link Local LSA is the same as that of the TE TLVs: a 2-octet Type field followed by a 2-octet Length field which indicates the length of the Value field in octets. The Value field is zero-padded at the end to a four octet boundary.

The only TLV defined here is the Link Local Identifier TLV, with Type 1, Length 4 and Value the 32 bit Link Local Identifier for the link over which the TE Link Local LSA is exchanged.

#### **4. Contributors**

Ayan Banerjee  
Calient Networks  
5853 Rue Ferrari  
San Jose, CA 95138  
Phone: +1.408.972.3645  
Email: abanerjee@calient.net

John Drake  
Calient Networks  
5853 Rue Ferrari  
San Jose, CA 95138  
Phone: +1.408.972.3720  
Email: jdrake@calient.net

Greg Bernstein  
Ciena Corporation  
10480 Ridgeview Court  
Cupertino, CA 94014  
Phone: +1.408.366.4713  
Email: greg@ciena.com

Don Fedyk  
Nortel Networks Corp.  
600 Technology Park Drive  
Billerica, MA 01821  
Phone: +1.978.288.4506  
Email: dwfedyk@nortelnetworks.com



Eric Mannie  
Independent Consultant  
E-mail: eric\_mannie@hotmail.com

Debanjan Saha  
Tellium Optical Systems  
2 Crescent Place  
P.O. Box 901  
Ocean Port, NJ 07757  
Phone: +1.732.923.4264  
Email: dsaha@tellium.com

Vishal Sharma  
Metanoia, Inc.  
335 Elan Village Lane, Unit 203  
San Jose, CA 95134-2539  
Phone: +1.408.943.1794  
Email: v.sharma@ieee.org

## **5. Acknowledgements**

The authors would like to thank Suresh Katukam, Jonathan Lang, Quaizar Vohra, and Alex Zinin for their comments on the draft.

## **6. Security Considerations**

This document specifies the contents of Opaque LSAs in OSPFv2. As Opaque LSAs are not used for SPF computation or normal routing, the extensions specified here have no direct effect on IP routing. Tampering with GMPLS TE LSAs may have an effect on the underlying transport (optical and/or SONET-SDH) network. [[OSPF-TE](#)] suggests mechanisms such as [[OSPF-SIG](#)] to protect the transmission of this information, and those or other mechanisms should be used to secure and/or authenticate the information carried in the Opaque LSAs.





## IANA Considerations

The memo introduces 4 new sub-TLVs of the TE Link TLV in the TE Opaque LSA for OSPF v2; [OSPF-TE] says that the sub-TLVs of the TE Link TLV in the range 10-32767 must be assigned by Expert Review, and must be registered with IANA.

The memo has four suggested values for the four sub-TLVs of the TE Link TLV; it is strongly recommended that the suggested values be granted, as there are interoperable implementations using these values.

## Normative References

- [GMPLS-ROUTING] Kompella, K., and Rekhter, Y. (Editors), "Routing Extensions in Support of Generalized Multi-Protocol Label Switching", (work in progress) [[draft-ietf-ccamp-gmpls-routing-08.txt](#)]
- [GMPLS-RSVP] Berger, L., (Editor), "Generalized Multi-Protocol Label Switching (GMPLS) Signaling Resource Reservation Protocol-Traffic Engineering (RSVP-TE) Extensions", [RFC 3473](#), January 2003
- [GMPLS-SIG] Berger, L. (Editor), "Generalized Multi-Protocol Label Switching (GMPLS) Signaling Functional Description", [RFC 3471](#), January 2003
- [IEEE] IEEE, "IEEE Standard for Binary Floating-Point Arithmetic", Standard 754-1985, 1985 (ISBN 1-5593-7653-8).
- [OSPF] Moy, J., "OSPF Version 2", STD 54, [RFC 2328](#), April 1998.
- [OSPF-RESTART] Moy, J., Pillay-Esnault, P., Lindem, A., "Graceful OSPF Restart", (work in progress) [[draft-ietf-ospf-hitless-restart-08.txt](#)]
- [OSPF-SIG] Murphy, S., Badger, M., and B. Wellington, "OSPF with Digital Signatures", [RFC 2154](#), June 1997.
- [OSPF-TE] Katz, D., Kompella, K. and Yeung, D., "Traffic Engineering (TE) Extensions to OSPF Version 2", [RFC 3630](#), September 2003.
- [RFC2119] Bradner, S., "Key words for use in RFCs to Indicate Requirement Levels", [BCP 14](#), [RFC 2119](#), March 1997.



## Authors' Information

Kireeti Kompella  
Juniper Networks, Inc.  
1194 N. Mathilda Ave  
Sunnyvale, CA 94089  
Email: kireeti@juniper.net

Yakov Rekhter  
Juniper Networks, Inc.  
1194 N. Mathilda Ave  
Sunnyvale, CA 94089  
Email: yakov@juniper.net

## Intellectual Property Rights Notices

The IETF takes no position regarding the validity or scope of any intellectual property or other rights that might be claimed to pertain to the implementation or use of the technology described in this document or the extent to which any license under such rights might or might not be available; neither does it represent that it has made any effort to identify any such rights. Information on the IETF's procedures with respect to rights in standards-track and standards-related documentation can be found in [BCP-11](#). Copies of claims of rights made available for publication and any assurances of licenses to be made available, or the result of an attempt made to obtain a general license or permission for the use of such proprietary rights by implementors or users of this specification can be obtained from the IETF Secretariat.

The IETF invites any interested party to bring to its attention any copyrights, patents or patent applications, or other proprietary rights which may cover technology that may be required to practice this standard. Please address the information to the IETF Executive Director.



## Full Copyright Statement

Copyright (C) The Internet Society (2003). All Rights Reserved.

This document and translations of it may be copied and furnished to others, and derivative works that comment on or otherwise explain it or assist in its implementation may be prepared, copied, published and distributed, in whole or in part, without restriction of any kind, provided that the above copyright notice and this paragraph are included on all such copies and derivative works. However, this document itself may not be modified in any way, such as by removing the copyright notice or references to the Internet Society or other Internet organizations, except as needed for the purpose of developing Internet standards in which case the procedures for copyrights defined in the Internet Standards process must be followed, or as required to translate it into languages other than English.

The limited permissions granted above are perpetual and will not be revoked by the Internet Society or its successors or assignees.

This document and the information contained herein is provided on an "AS IS" basis and THE INTERNET SOCIETY AND THE INTERNET ENGINEERING TASK FORCE DISCLAIMS ALL WARRANTIES, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO ANY WARRANTY THAT THE USE OF THE INFORMATION HEREIN WILL NOT INFRINGE ANY RIGHTS OR ANY IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE.

