

CCAMP Working Group  
Internet-Draft  
Intended status: Standards Track  
Expires: December 22, 2013

E. Bellagamba, Ed.  
L. Andersson, Ed.  
Ericsson  
P. Skoldstrom, Ed.  
Acreo AB  
D. Ward  
Cisco  
A. Takacs  
Ericsson  
June 20, 2013

Configuration of Pro-Active Operations, Administration, and Maintenance  
(OAM) Functions for MPLS-based Transport Networks using RSVP-TE  
[draft-ietf-ccamp-rsvp-te-mpls-tp-oam-ext-12](#)

Abstract

This specification describes the configuration of pro-active MPLS-TP (MPLS-Transport Profile) Operations, Administration, and Maintenance (OAM) Functions for a given LSP using a set of TLVs that are carried by the GMPLS RSVP-TE protocol based on [[OAM-CONF-FWK](#)].

This document is a product of a joint Internet Engineering Task Force (IETF) / International Telecommunication Union Telecommunication Standardization Sector (ITU-T) effort to include an MPLS Transport Profile within the IETF MPLS and PWE3 architectures to support the capabilities and functionalities of a packet transport network.

Status of This Memo

This Internet-Draft is submitted in full conformance with the provisions of [BCP 78](#) and [BCP 79](#).

Internet-Drafts are working documents of the Internet Engineering Task Force (IETF). Note that other groups may also distribute working documents as Internet-Drafts. The list of current Internet-Drafts is at <http://datatracker.ietf.org/drafts/current/>.

Internet-Drafts are draft documents valid for a maximum of six months and may be updated, replaced, or obsoleted by other documents at any time. It is inappropriate to use Internet-Drafts as reference material or to cite them other than as "work in progress."

This Internet-Draft will expire on December 22, 2013.

Copyright Notice

Copyright (c) 2013 IETF Trust and the persons identified as the document authors. All rights reserved.

This document is subject to [BCP 78](http://trustee.ietf.org/license-info) and the IETF Trust's Legal Provisions Relating to IETF Documents (<http://trustee.ietf.org/license-info>) in effect on the date of publication of this document. Please review these documents carefully, as they describe your rights and restrictions with respect to this document. Code Components extracted from this document must include Simplified BSD License text as described in Section 4.e of the Trust Legal Provisions and are provided without warranty as described in the Simplified BSD License.

## Table of Contents

<a href="#">1.</a>	<a href="#">Introduction</a>	<a href="#">2</a>
<a href="#">1.1.</a>	<a href="#">Contributing Authors</a>	<a href="#">4</a>
<a href="#">1.2.</a>	<a href="#">Requirements Language</a>	<a href="#">4</a>
<a href="#">2.</a>	<a href="#">Overview of MPLS OAM for Transport Applications</a>	<a href="#">4</a>
<a href="#">3.</a>	<a href="#">Theory of Operations</a>	<a href="#">5</a>
<a href="#">3.1.</a>	<a href="#">MPLS-TP OAM Configuration Operation Overview</a>	<a href="#">5</a>
<a href="#">3.1.1.</a>	<a href="#">Configuration of BFD sessions</a>	<a href="#">5</a>
<a href="#">3.1.2.</a>	<a href="#">Configuration of Performance Monitoring</a>	<a href="#">6</a>
<a href="#">3.1.3.</a>	<a href="#">Configuration of Fault Management Signals</a>	<a href="#">7</a>
<a href="#">3.2.</a>	<a href="#">MPLS OAM Configuration sub-TLV</a>	<a href="#">7</a>
<a href="#">3.3.</a>	<a href="#">BFD Configuration sub-TLV</a>	<a href="#">9</a>
<a href="#">3.3.1.</a>	<a href="#">BFD Identifiers sub-TLV</a>	<a href="#">11</a>
<a href="#">3.3.2.</a>	<a href="#">Negotiation Timer Parameters sub-TLV</a>	<a href="#">12</a>
<a href="#">3.3.3.</a>	<a href="#">BFD Authentication sub-TLV</a>	<a href="#">13</a>
<a href="#">3.4.</a>	<a href="#">Performance Monitoring sub-TLV</a>	<a href="#">14</a>
<a href="#">3.4.1.</a>	<a href="#">MPLS OAM PM Loss sub-TLV</a>	<a href="#">15</a>
<a href="#">3.4.2.</a>	<a href="#">MPLS OAM PM Delay sub-TLV</a>	<a href="#">16</a>
<a href="#">3.5.</a>	<a href="#">MPLS OAM FMS sub-TLV</a>	<a href="#">18</a>
<a href="#">4.</a>	<a href="#">Summary of MPLS OAM configuration errors</a>	<a href="#">19</a>
<a href="#">5.</a>	<a href="#">IANA Considerations</a>	<a href="#">20</a>
<a href="#">6.</a>	<a href="#">Acknowledgements</a>	<a href="#">21</a>
<a href="#">7.</a>	<a href="#">Security Considerations</a>	<a href="#">22</a>
<a href="#">8.</a>	<a href="#">References</a>	<a href="#">22</a>
<a href="#">8.1.</a>	<a href="#">Normative References</a>	<a href="#">22</a>
<a href="#">8.2.</a>	<a href="#">Informative References</a>	<a href="#">23</a>
	<a href="#">Authors' Addresses</a>	<a href="#">24</a>

## [1.](#) Introduction

This document describes the configuration of pro-active MPLS-TP (MPLS-Transport Profile) Operations, Administration, and Maintenance (OAM) Functions for a given LSP using TLVs using GMPLS RSVP-TE [[RFC3473](#)]. The use of GMPLS RSVP-TE for the configuration of OAM



functions is defined in a technology agnostic way in [[OAM-CONF-FWK](#)]. This document specifies the additional mechanisms necessary to establish MPLS-TP OAM entities at the maintenance points for monitoring and performing measurements on an LSP, as well as defining information elements and procedures to configure pro-active MPLS-TP OAM functions running between LERs. Initialization and control of on-demand MPLS-TP OAM functions are expected to be carried out by directly accessing network nodes via a management interface; hence configuration and control of on-demand OAM functions are out-of-scope for this document.

MPLS-TP, the Transport Profile of MPLS, must, by definition [[RFC5654](#)], be capable of operating without a control plane. Therefore, there are several options for configuring MPLS-TP OAM, without a control plane by either using an NMS or LSP Ping, or with a control plane using signaling protocols such as RSVP-TE.

Pro-active MPLS-TP OAM is performed by four different protocols, Bi-directional Forwarding Detection (BFD) [[RFC6428](#)] for Continuity Check /Connectivity Verification, the delay measurement protocol (DM) [[RFC6374](#)] for delay and delay variation (jitter) measurements, and the loss measurement protocol (LM) [[RFC6374](#)] for packet loss and throughput measurements. Additionally there is a number of Fault Management Signals that can be configured.

BFD is a protocol that provides low-overhead, fast detection of failures in the path between two forwarding engines, including the interfaces, data link(s), and to the extent possible the forwarding engines themselves. BFD can be used to track the liveness and detect data plane failures of MPLS-TP point-to-point and might also be extended to support point-to-multipoint connections.

The delay and loss measurements protocols [[RFC6374](#)] use a simple query/response model for performing bidirectional measurements that allows the originating node to measure packet loss and delay in both directions. By timestamping and/or writing current packet counters to the measurement packets at four times (Tx and Rx in both directions) current delays and packet losses can be calculated. By performing successive delay measurements the delay variation (jitter) can be calculated. Current throughput can be calculated from the packet loss measurements by dividing the number of packets sent/received with the time it took to perform the measurement, given by the timestamp in LM header. Combined with a packet generator the throughput measurement can be used to measure the maximum capacity of a particular LSP. It should be noted that here we are not configuring on-demand throughput estimates based on saturating the connection as defined in [[RFC6371](#)]. Rather, we only enable the estimation of the current throughput based on loss measurements.



MPLS-TP describes a profile of MPLS that enables operational models typical in transport networks, while providing additional OAM, survivability and other maintenance functions not currently supported by MPLS. [[RFC5860](#)] defines the requirements for the OAM functionality of MPLS-TP.

This document is a product of a joint Internet Engineering Task Force (IETF) / International Telecommunication Union Telecommunication Standardization Sector (ITU-T) effort to include an MPLS Transport Profile within the IETF MPLS and PWE3 architectures to support the capabilities and functionalities of a packet transport network.

### **1.1. Contributing Authors**

This document is the result of a large team of authors and contributors. The following is a list of the co-authors:

Gregory Mirsky

John Drake

Benoit Tremblay

### **1.2. Requirements Language**

The key words "MUST", "MUST NOT", "REQUIRED", "SHALL", "SHALL NOT", "SHOULD", "SHOULD NOT", "RECOMMENDED", "MAY", and "OPTIONAL" in this document are to be interpreted as described in [RFC 2119](#) [[RFC2119](#)].

## **2. Overview of MPLS OAM for Transport Applications**

[RFC6371] describes how MPLS-TP OAM mechanisms are operated to meet transport requirements outlined in [[RFC5860](#)].

[RFC6428] specifies two BFD operation modes: 1) "CC mode", which uses periodic BFD message exchanges with symmetric timer settings, supporting Continuity Check, 2) "CV/CC mode" which sends unique maintenance entity identifiers in the periodic BFD messages supporting Connectivity Verification as well as Continuity Check.

[RFC6374] specifies mechanisms for performance monitoring of LSPs, in particular it specifies loss and delay measurement OAM functions.

[RFC6427] specifies fault management signals with which a server LSP can notify client LSPs about various fault conditions to suppress alarms or to be used as triggers for actions in the client LSPs. The following signals are defined: Alarm Indication Signal (AIS), Link Down Indication (LDI) and Lock Report (LKR).



[RFC6371] describes the mapping of fault conditions to consequent actions. Some of these mappings may be configured by the operator, depending on the application of the LSP. The following defects are identified: Loss Of Continuity (LOC), Misconnectivity, MEP Misconfiguration and Period Misconfiguration. Out of these defect conditions, the following consequent actions may be configurable: 1) whether or not the LOC defect should result in blocking the outgoing data traffic; 2) whether or not the "Period Misconfiguration defect" should result in a signal fail condition.

### **3. Theory of Operations**

#### **3.1. MPLS-TP OAM Configuration Operation Overview**

GMPLS RSVP-TE, or alternatively LSP Ping [[LSP-PING-CONF](#)], can be used to simply enable the different OAM functions, by setting the corresponding flags in the "OAM Function Flags sub-TLV" [OAM-CONF-FWK]. For a more detailed configuration one may include sub-TLVs for the different OAM functions in order to specify various parameters in detail.

Typically intermediate nodes should not process or modify any of the OAM configuration TLVs but simply forward them to the end-node. There is one exception to this and that is if the "MPLS OAM FMS sub-TLV" is present. This sub-TLV has to be examined even by intermediate nodes, but only acted upon by nodes capable of transmitting FMS signals into the LSP being established. The sub-TLV MAY be present the FMS flag is set in the "OAM Function Flags sub-TLV". If this sub-TLV is present the "OAM MIP entities desired" and "OAM MEP entities desired" flags (described in [[OAM-CONF-FWK](#)]) in the "LSP Attributes Flags TLV" MUST be set and the entire OAM Configuration TLV placed either in the LSP\_REQUIRED\_ATTRIBUTES object or in the LSP\_ATTRIBUTES object ensure that capable intermediate nodes process the configuration. If placed in LSP\_ATTRIBUTES nodes that are not able to process the OAM Configuration TLV will forward the message without generating an error, this is not the case if placed in the LSP\_REQUIRED\_ATTRIBUTES object.

Finally, if the "MPLS OAM FMS sub-TLV" is not included only the "OAM MEP entities desired" flag is set and the OAM Configuration TLV may be placed in either LSP\_ATTRIBUTES or LSP\_REQUIRED\_ATTRIBUTES.

##### **3.1.1. Configuration of BFD sessions**

For this specification, BFD MUST be run in either one of the two modes:

- Asynchronous mode, where both sides should be in active mode





- Unidirectional mode

In the simplest scenario, RSVP-TE, or alternatively LSP Ping [LSP-PING-CONF], is used only to bootstrap a BFD session for an LSP, without any timer negotiation.

Timer negotiation can be performed either in subsequent BFD control messages (in this case the operation is similar to LSP Ping based bootstrapping described in [[RFC5884](#)]) or directly in the RSVP-TE signaling messages.

When BFD Control packets are transported in the G-ACh they are not protected by any end-to-end checksum, only lower-layers are providing error detection/correction. A single bit error, e.g. a flipped bit in the BFD State field could cause the receiving end to wrongly conclude that the link is down and in turn trigger protection switching. To prevent this from happening the "BFD Configuration sub-TLV" has an Integrity flag that when set enables BFD Authentication using Keyed SHA1 with an empty key (all 0s) [[RFC5880](#)]. This would ensure that every BFD Control packet carries an SHA1 hash of itself that can be used to detect errors.

If BFD Authentication using a pre-shared key / password is desired (i.e. authentication and not only error detection), the "BFD Authentication sub-TLV" MUST be included in the "BFD Configuration sub-TLV". The "BFD Authentication sub-TLV" is used to specify which authentication method should be used and which pre-shared key / password should be used for this particular session. How the key exchange is performed is out of scope of this document.


### **3.1.2. Configuration of Performance Monitoring**

It is possible to configure Performance Monitoring functionalities such as Loss, Delay, Delay variation (jitter), and Throughput as described in [[RFC6374](#)].

When configuring Performance monitoring functionalities it is possible to choose either the default configuration, by only setting the respective flags in the "OAM Function Flags sub-TLV", or a customized configuration. To customize the configuration, one would set the respective flags and including the respective Loss and/or Delay sub-TLVs).

By setting the PM/Loss flag in the "OAM Function Flags sub-TLV" and by including the "MPLS OAM PM Loss sub-TLV", one can configure the measurement interval and loss threshold values for triggering protection.



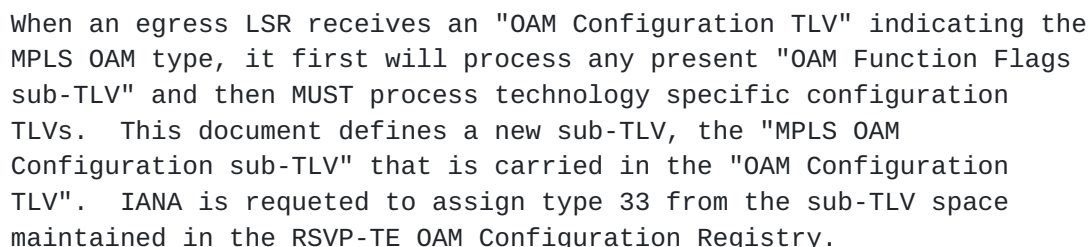



```

+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+
|                                     |
~                               sub-TLVs                               ~
|                                     |
+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+

```

Type: 33, the "MPLS OAM Configuration sub-TLV".

Length: indicates the total length including sub-TLVs.

The following MPLS OAM specific sub-TLVs MAY be included in the the "MPLS OAM Configuration sub-TLV":

- "BFD Configuration sub-TLV", which MUST be included if the CC and/or the CV OAM Function flag is set. This sub-TLV carries additional sub-TLVs, failure to include the correct sub-TLVs MUST result in an error being generated: "OAM Problem/Configuration Error". The sub-TLVs are:
  - "BFD Identifiers sub-TLV", MUST always be included.
  - "Timer Negotiation Parameters sub-TLV", MUST be included if the N flag is not set.
  - "BFD Authentication sub-TLV", MAY be included if the I flag is set.
- "Performance Monitoring sub-TLV", which MUST be included if any of the PM/Delay, PM/Loss or PM/Throughput flags are set in the "OAM Function Flag sub-TLV". This sub-TLV MAY carry additional sub-TLVs:
  - "MPLS OAM PM Loss sub-TLV" MAY be included if the PM/Loss OAM Function flag is set. If the "MPLS OAM PM Loss sub-TLV" is not included, default configuration values are used. The same sub-TLV MAY also be included in case the PM/Throughput OAM Function flag is set and there is the need to specify measurement interval different from the default ones. Since throughput measurements use the same tool as loss measurements the same TLV is used.
  - "MPLS OAM PM Delay sub-TLV" MAY be included if the PM/Delay OAM Function flag is set. If the "MPLS OAM PM Delay sub-TLV" is not included, default configuration values are used.



- "MPLS OAM FMS sub-TLV" MAY be included if the FMS OAM Function flag is set. If the "MPLS OAM FMS sub-TLV" is not included, default configuration values are used.

Moreover, if the CV Flag is set, the CC flag SHOULD be set as well. The format of an MPLS-TP CV/CC message is shown in [RFC6428] and it requires, together with the BFD Control packet information, the "LSP MEP-ID". The "LSP MEP-ID" contain four identifiers:

- MPLS-TP Global\_ID
- MPLS-TP Node Identifier
- Tunnel\_Num
- LSP\_Num

These values need to be correctly set by both ingress and egress when transmitting a CV packet and both ingress and egress needs to know what to expect when receiving a CV packet. Most of these values can be derived from the Path and Resv messages [RFC3473], which uses a 5-tuple to uniquely identify an LSP within an operator's network. This tuple is composed of a Tunnel Sender Address, Tunnel Endpoint Address, Tunnel\_ID, Extended Tunnel ID, and (GMPLS) LSP\_ID.

However, not all the values can be derived from the standard RSVP-TE objects, in particular the locally assigned Tunnel ID at the egress cannot be derived by the ingress node. Therefore, the full LSP MEP-ID used by the ingress has to be carried in the "BFD Identifiers sub-TLV" in the Path message and the egress LSP MEP-ID in the same way in the Resv message.

### 3.3. BFD Configuration sub-TLV

The "BFD Configuration sub-TLV" (depicted below) is defined for BFD OAM specific configuration parameters. The "BFD Configuration sub-TLV" is carried as a sub-TLV of the "MPLS OAM Configuration sub-TLV".

This TLV accommodates generic BFD OAM information and carries sub-TLVs.

0										1										2										3									
0	1	2	3	4	5	6	7	8	9	0	1	2	3	4	5	6	7	8	9	0	1	2	3	4	5	6	7	8	9	0	1								
BFD Conf. Type (1)										Length																													
Vers.   PHB  N S I G U B										Reserved (set to all 0s)																													





```

|                                     |
~                               sub-TLVs                               ~
|                                     |
+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+

```

Type: 1, the "BFD Configuration sub-TLV".

Length: indicates the total length including sub-TLVs.

Version: identifies the BFD protocol version. If the egress LSR does not support the version an error MUST be generated: "OAM Problem/Unsupported BFD Version".

PHB: Identifies the Per-Hop Behavior (PHB) to be used for periodic continuity monitoring messages.

BFD Negotiation (N): If set timer negotiation/re-negotiation via BFD Control Messages is enabled, when cleared it is disabled.

Symmetric session (S): If set the BFD session MUST use symmetric timing values.

Integrity (I): If set BFD Authentication MUST be enabled. If the "BFD Configuration sub-TLV" does not include a "BFD Authentication sub-TLV" the authentication MUST use Keyed SHA1 with an empty pre-shared key (all 0s). If the egress LSR does not support BFD Authentication an error MUST be generated: "OAM Problem/BFD Authentication unsupported".

Encapsulation Capability (G): if set, shows the capability of encapsulating BFD messages into The G-Ach channel. If both the G bit and U bit are set, configuration gives precedence to the G bit. If the egress LSR does not support any of the ingress LSR Encapsulation Capabilities an error MUST be generated: "OAM Problem/Unsupported BFD Encapsulation format".

Encapsulation Capability (U): if set, shows the capability of encapsulating BFD messages into UDP packets. If both the G bit and U bit are set, configuration gives precedence to the G bit. If the egress LSR does not support any of the ingress LSR Encapsulation Capabilities an error MUST be generated: "OAM Problem/Unsupported BFD Encapsulation format".

Bidirectional (B): if set, it configures BFD in the Bidirectional mode. If it is not set it configures BFD in unidirectional mode. In the second case, the source node does not expect any Discriminator values back from the destination node.



Reserved: Reserved for future specification and set to 0 on transmission and ignored when received.

The "BFD Configuration sub-TLV" MUST include the following sub-TLVs in the Path message:


- "BFD Identifiers sub-TLV";
- "Negotiation Timer Parameters sub-TLV" if the N flag is cleared.

The "BFD Configuration sub-TLV" MUST include the following sub-TLVs in the Resv message:

- "BFD Identifiers sub-TLV";
- "Negotiation Timer Parameters sub-TLV" if:
  - the N and S flags are cleared, or if:
  - the N flag is cleared and the S flag is set, and the "Negotiation Timer Parameters sub-TLV" received by the egress contains unsupported values. In this case an updated "Negotiation Timer Parameters sub-TLV", containing values supported by the egress LSR, MUST be returned to the ingress.

### [3.3.1.](#) BFD Identifiers sub-TLV

The "BFD Identifiers sub-TLV" is carried as a sub-TLV of the "BFD Configuration sub-TLV" and is depicted below.

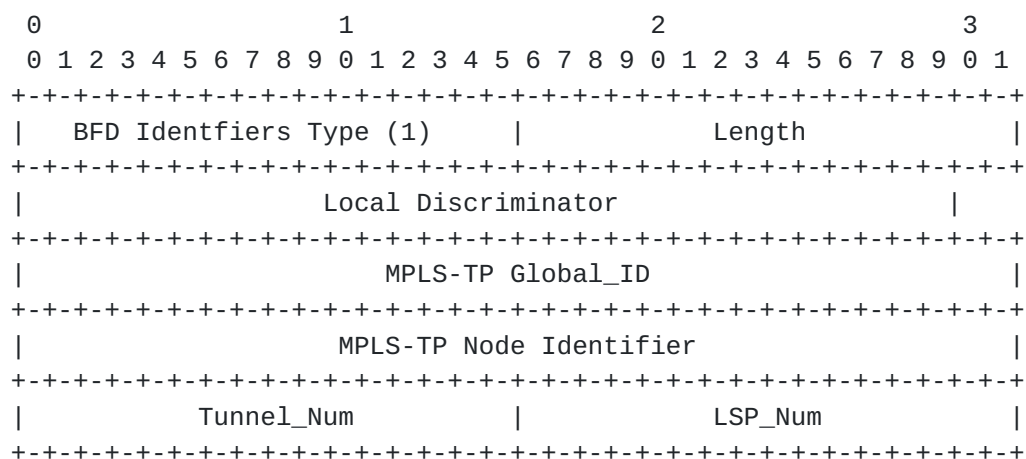

Type: 1, "BFD Identifiers sub-TLV".



Acceptable Min. Asynchronous RX interval: If the S (symmetric) flag is set in the "BFD Configuration sub-TLV", this field MUST be equal to "Acceptable Min. Asynchronous TX interval" and has no additional meaning with respect to the one described for "Acceptable Min. Asynchronous TX interval".



Auth Key ID: indicates which authentication key or password (depending on Auth Type) should be used. How the key exchange is performed is out of scope of this document. If the egress LSR does not support this Auth Key ID an "OAM Problem/Mismatch of BFD Authentication ID" error MUST be generated.





Reserved: Reserved for future specification and set to 0 on transmission and ignored when received.

### 3.4. Performance Monitoring sub-TLV

If the "OAM Function Flags sub-TLV" has either the PM/Loss, PM/Delay or PM/Throughput flag set, the "Performance Monitoring sub-TLV" MUST be present in the "MPLS OAM Configuration sub-TLV". Failure to include the correct sub-TLVs MUST result in an "OAM Problem/Configuration Error" error being generated.

The "Performance Monitoring sub-TLV" provides the configuration information mentioned in [Section 7 of \[RFC6374\]](#). It includes support for the configuration of quality thresholds and, as described in [\[RFC6374\]](#), "the crossing of which will trigger warnings or alarms, and result reporting and exception notification will be integrated into the system-wide network management and reporting framework."

In case the values need to be different than the default ones the "Performance Monitoring sub-TLV" MAY include the following sub-TLVs:

- "MPLS OAM PM Loss sub-TLV" if the PM/Loss and/or PM/Throughput flag is set in the "OAM Function Flags sub-TLV";
- "MPLS OAM PM Delay sub-TLV" if the PM/Delay flag is set in the "OAM Function Flags sub-TLV";

The "Performance Monitoring sub-TLV" depicted below is carried as a sub-TLV of the "MPLS OAM Configuration sub-TLV".

```

0          1          2          3
0 1 2 3 4 5 6 7 8 9 0 1 2 3 4 5 6 7 8 9 0 1 2 3 4 5 6 7 8 9 0 1
+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+
|   Perf. Monitoring Type(2)   |           Length           |
+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+
|D|L|J|Y|K|C|                 Reserved (set to all 0s)      |
+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+
|                               sub-TLVs                      |
~                               ~                              ~
|                               ~                              ~
+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+

```

Type: 2, "Performance Monitoring sub-TLV".

Length: indicates the TLV total length in octets.



[illegible]



```

+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+--+

```

Type: 1, "MPLS OAM PM Loss sub-TLV".

Length: indicates the length of the parameters in octets (20).

OTF: Origin Timestamp Format of the Origin Timestamp field described in [RFC6374]. By default it is set to IEEE 1588 version 1. If the egress LSR cannot support this value an "OAM Problem/Unsupported Timestamp Format" error MUST be generated.

Configuration Flags, please refer to [RFC6374] for further details:

- T: Traffic-class-specific measurement indicator. Set to 1 when the measurement operation is scoped to packets of a particular traffic class (DSCP value), and 0 otherwise. When set to 1, the DS field of the message indicates the measured traffic class. By default it is set to 1.
- B: Octet (byte) count. When set to 1, indicates that the Counter 1-4 fields represent octet counts. When set to 0, indicates that the Counter 1-4 fields represent packet counts. By default it is set to 0.

Reserved: Reserved for future specification and set to 0 on transmission and ignored when received.

Measurement Interval: the time interval (in milliseconds) at which Loss Measurement query messages MUST be sent on both directions. If the egress LSR cannot support the value, it SHOULD reply with a supported interval. By default it is set to (100) as per [RFC6375].

Test Interval: test messages interval in milliseconds as described in [RFC6374]. By default it is set to (10) as per [RFC6375]. If the egress LSR cannot support the value, it SHOULD reply with a supported interval.

Loss Threshold: the threshold value of measured lost packets per measurement over which action(s) SHOULD be triggered.

#### **3.4.2. MPLS OAM PM Delay sub-TLV**

The "MPLS OAM PM Delay sub-TLV" depicted below is carried as a sub-TLV of the "Performance Monitoring sub-TLV".

```

0                               1                               2                               3
0 1 2 3 4 5 6 7 8 9 0 1 2 3 4 5 6 7 8 9 0 1 2 3 4 5 6 7 8 9 0 1

```



```

+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+
|      PM Delay Type (2)      |      Length      |
+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+
| OTF |T|B|      Reserved (set to all 0s)      |
+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+
|      Measurement Interval      |
+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+
|      Test Interval      |
+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+
|      Delay Threshold      |
+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+

```

Type: 2, "MPLS OAM PM Loss sub-TLV".

Length: indicates the length of the parameters in octets (20).

OTF: Origin Timestamp Format of the Origin Timestamp field described in [\[RFC6374\]](#). By default it is set to IEEE 1588 version 1. If the egress LSR cannot support this value an "OAM Problem/Unsupported Timestamp Format" error MUST be generated.

Configuration Flags, please refer to [\[RFC6374\]](#) for further details:

- T: Traffic-class-specific measurement indicator. Set to 1 when the measurement operation is scoped to packets of a particular traffic class (DSCP value), and 0 otherwise. When set to 1, the DS field of the message indicates the measured traffic class. By default it is set to 1.
- B: Octet (byte) count. When set to 1, indicates that the Counter 1-4 fields represent octet counts. When set to 0, indicates that the Counter 1-4 fields represent packet counts. By default it is set to 0.

Reserved: Reserved for future specification and set to 0 on transmission and ignored when received.

Measurement Interval: the time interval (in milliseconds) at which Delay Measurement query messages MUST be sent on both directions. If the egress LSR cannot support the value, it SHOULD reply with a supported interval. By default it is set to (1000) as per [\[RFC6375\]](#).

Test Interval: test messages interval (in milliseconds) as described in [\[RFC6374\]](#). By default it is set to (10) as per [\[RFC6375\]](#). If the egress LSR cannot support the value, it SHOULD reply with a supported interval.





Delay Threshold: the threshold value of measured two-way delay (in milliseconds) over which action(s) SHOULD be triggered.

### 3.5. MPLS OAM FMS sub-TLV

The "MPLS OAM FMS sub-TLV" depicted below is carried as a sub-TLV of the "MPLS OAM Configuration sub-TLV". When both working and protection paths are signaled, both LSPs SHOULD be signaled with identical settings of the E flag, T flag, and the refresh timer.

```

0               1               2               3
0 1 2 3 4 5 6 7 8 9 0 1 2 3 4 5 6 7 8 9 0 1 2 3 4 5 6 7 8 9 0 1
+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+
|      MPLS OAM FMS Type (3)      |      Length      |
+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+
|E|S|T| Reserved (set to all 0s)|      Refresh Timer      | PHB |
+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+---+

```

Type: 3, "MPLS OAM FMS sub-TLV".

Length: indicates the TLV total length in octets. (8)

FMS Signal Flags are used to enable the FMS signals at end point MEPs and the Server MEPs of the links over which the LSP is forwarded. In this document only the S flag pertains to Server MEPs.

The following flags are defined:

- E: Enable Alarm Indication Signal (AIS) and Lock Report (LKR) signalling as described in [[RFC6427](#)]. Default value is 1 (enabled). If the egress MEP does not support FMS signal generation an "OAM Problem/Fault management signaling unsupported" error MUST be generated.
- S: Indicate to a Server MEP that its should transmit AIS and LKR signals on client LSPs. Default value is 0 (disabled). If a Server MEP which is capable of generating FMS messages is for some reason unable to do so for the LSP being signalled an "OAM Problem /Unable to create fault management association" error MUST be generated.
- T: Set timer value, enabled the configuration of a specific timer value. Default value is 0 (disabled).
- Remaining bits: Reserved for future specification and set to 0.



Refresh Timer: indicates the refresh timer of fault indication messages, in seconds. The value MUST be between 1 to 20 seconds as specified for the Refresh Timer field in [RFC6427]. If the egress LSR cannot support the value it SHOULD reply with a supported timer value.

PHB: identifies the per-hop behavior of packets with fault management information.

#### **4. Summary of MPLS OAM configuration errors**

In addition to error values specified in [OAM-CONF-FWK] this document defines the following values for the "OAM Problem" Error Code:

- If an egress LSR does not support the specified BFD version, an error MUST be generated: "OAM Problem/Unsupported BFD Version".
- If an egress LSR does not support the specified BFD Encapsulation format, an error MUST be generated: "OAM Problem/Unsupported BFD Encapsulation format".
- If an egress LSR does not support BFD Authentication, and it is requested, an error MUST be generated: "OAM Problem/BFD Authentication unsupported".
- If an egress LSR does not support the specified BFD Authentication Type, an error MUST be generated: "OAM Problem/Unsupported BFD Authentication Type".
- If an egress LSR is not able to use the specified Authentication Key ID, an error MUST be generated: "OAM Problem/Mismatch of BFD Authentication Key ID".
- If an egress LSR does not support the specified Timestamp Format, an error MUST be generated: "OAM Problem/Unsupported Timestamp Format".
- If an egress LSR does not support specified Delay mode, an "OAM Problem/Unsupported Delay Mode" error MUST be generated.
- If an egress LSR does not support specified Loss mode, an "OAM Problem/Unsupported Loss Mode" error MUST be generated.
- If an egress LSR does not support Delay variation measurements, and it is requested, an "OAM Problem/Delay variation unsupported" error MUST be generated.



- If an egress LSR does not support Dyadic mode, and it is requested, an "OAM Problem/Dyadic mode unsupported" error MUST be generated.
- If an egress LSR does not support Loopback mode, and it is requested, an "OAM Problem/Loopback mode unsupported" error MUST be generated.
- If an egress LSR does not support Combined mode, and it is requested, an "OAM Problem/Combined mode unsupported" error MUST be generated.
- If an egress LSR does not support Fault Monitoring Signals, and it is requested, an "OAM Problem/Fault management signaling unsupported" error MUST be generated.
- If an intermediate server MEP supports Fault Monitoring Signals but is unable to create an association, when requested to do so, an "OAM Problem/Unable to create fault management association" error MUST be generated.

## 5. IANA Considerations

This document specifies the "MPLS OAM Configuration sub-TLV", IANA is requested to allocate a new type (33) from the sub-TLV space of the RSVP-TE OAM Configuration Registry. IANA is also requested to assign type (2) for MPLS OAM from the OAM Type space of the same registry.

### RSVP-TE OAM Configuration Registry

OAM Type	Description
-----	-----
2	MPLS OAM
Sub-TLV Type	Description
-----	-----
33	MPLS OAM Configuration Sub-TLV

IANA is requested to maintain an MPLS TLV Type space in the "RSVP-TE OAM Configuration Registry" for the sub-TLV types carried in the "MPLS OAM Configuration sub-TLV". This document defines the following types:

MPLS TLV Type	Description
-----	-----
0	Reserved
1	BFD Configuration sub-TLV



2	Performance Monitoring sub-TLV
3	MPLS OAM FMS sub-TLV
4-	Reserved

IANA is requested to maintain an BFD Configuration Type space in the "RSVP-TE OAM Configuration Registry" for the sub-TLV types carried in the "BFD Configuration sub-TLV". This document defines the following types:

BFD Conf. TLV Type	Description
-----	-----
0	Reserved
1	BFD Identifiers sub-TLV
2	Negotiation Timer Parameters sub-TLV
3	BFD Authentication sub-TLV
4-	Reserved

IANA is requested to maintain an Performance Monitoring Type space in the "RSVP-TE OAM Configuration Registry" for the sub-TLV types carried in the "Performance Monitoring sub-TLV". This document defines the following types:

Perf. Mon. TLV Type	Description
-----	-----
0	Reserved
1	MPLS OAM PM Loss sub-TLV
2	MPLS OAM PM Delay sub-TLV
3-	Reserved

The following values need to be assigned under the "OAM Problem" Error Code [[OAM-CONF-FWK](#)]: "OAM Problem/Unsupported BFD Version", "OAM Problem/Unsupported BFD Encapsulation format", "OAM Problem/BFD Authentication unsupported", "OAM Problem/Unsupported BFD Authentication Type", "OAM Problem/Mismatch of BFD Authentication Key ID", "OAM Problem/Unsupported Timestamp Format", "OAM Problem/Unsupported Delay Mode", "OAM Problem/Unsupported Loss Mode", "OAM Problem/Delay variation unsupported", "OAM Problem/Dyadic mode unsupported", "OAM Problem/Loopback mode unsupported" "OAM Problem/Combined mode unsupported", "OAM Problem/Fault management signaling unsupported", "OAM Problem/Unable to create fault management association".

## 6. Acknowledgements





The authors would like to thank David Allan, Lou Berger, Annamaria Fulignoli, Eric Gray, Andras Kern, David Jocha and David Sinicrope for their useful comments.

## 7. Security Considerations

The signaling of OAM related parameters and the automatic establishment of OAM entities introduces additional security considerations to those discussed in [RFC3473]. In particular, a network element could be overloaded if an attacker were to request high frequency liveliness monitoring of a large number of LSPs, targeting a single network element as discussed in [OAM-CONF-FWK] and [RFC6060].

## 8. References

### 8.1. Normative References

- [OAM-CONF-FWK]  
Takacs, A., Fedyk, D., and J. van He, "OAM Configuration Framework for GMPLS RSVP-TE", 2009, <[draft-ietf-ccamp-oam-configuration-fwk](#)>.
- [RFC2119] Bradner, S., "Key words for use in RFCs to Indicate Requirement Levels", [BCP 14](#), [RFC 2119](#), March 1997.
- [RFC3209] Awduche, D., Berger, L., Gan, D., Li, T., Srinivasan, V., and G. Swallow, "RSVP-TE: Extensions to RSVP for LSP Tunnels", [RFC 3209](#), December 2001.
- [RFC3471] Berger, L., "Generalized Multi-Protocol Label Switching (GMPLS) Signaling Functional Description", [RFC 3471](#), January 2003.
- [RFC3473] Berger, L., "Generalized Multi-Protocol Label Switching (GMPLS) Signaling Resource ReserVation Protocol-Traffic Engineering (RSVP-TE) Extensions", [RFC 3473](#), January 2003.
- [RFC5586] Bocci, M., Vigoureux, M., and S. Bryant, "MPLS Generic Associated Channel", [RFC 5586](#), June 2009.
- [RFC5654] Niven-Jenkins, B., Brungard, D., Betts, M., Sprecher, N., and S. Ueno, "Requirements of an MPLS Transport Profile", [RFC 5654](#), September 2009.
- [RFC5860] Vigoureux, M., Ward, D., and M. Betts, "Requirements for Operations, Administration, and Maintenance (OAM) in MPLS Transport Networks", [RFC 5860](#), May 2010.



- [RFC5880] Katz, D. and D. Ward, "Bidirectional Forwarding Detection (BFD)", [RFC 5880](#), June 2010.
- [RFC5884] Aggarwal, R., Kompella, K., Nadeau, T., and G. Swallow, "Bidirectional Forwarding Detection (BFD) for MPLS Label Switched Paths (LSPs)", [RFC 5884](#), June 2010.
- [RFC6370] Bocci, M., Swallow, G., and E. Gray, "MPLS Transport Profile (MPLS-TP) Identifiers", [RFC 6370](#), September 2011.
- [RFC6374] Frost, D. and S. Bryant, "Packet Loss and Delay Measurement for MPLS Networks", [RFC 6374](#), September 2011.
- [RFC6427] Swallow, G., Fulignoli, A., Vigoureux, M., Boutros, S., and D. Ward, "MPLS Fault Management Operations, Administration, and Maintenance (OAM)", [RFC 6427](#), November 2011.
- [RFC6428] Allan, D., Swallow Ed. , G., and J. Drake Ed. , "Proactive Connectivity Verification, Continuity Check, and Remote Defect Indication for the MPLS Transport Profile", [RFC 6428](#), November 2011.

## **8.2. Informative References**

- [ETH-OAM] Takacs, A., Gero, B., and H. Long, "GMPLS RSVP-TE Extensions for Ethernet OAM Configuration", 2012, <[draft-ietf-ccamp-rsvp-te-eth-oam-ext](#)>.
- [LSP-PING-CONF]  
Bellagamba, E., Andersson, L., Ward, D., Drake, J., and P. Skoldstrom, "Configuration of pro-active MPLS-TP Operations, Administration, and Maintenance (OAM) Functions Using LSP Ping", 2012, <[draft-ietf-mpls-lsp-ping-mpls-tp-oam-conf](#)>.
- [RFC4379] Kompella, K. and G. Swallow, "Detecting Multi-Protocol Label Switched (MPLS) Data Plane Failures", [RFC 4379](#), February 2006.
- [RFC4447] Martini, L., Rosen, E., El-Aawar, N., Smith, T., and G. Heron, "Pseudowire Setup and Maintenance Using the Label Distribution Protocol (LDP)", [RFC 4447](#), April 2006.
- [RFC5921] Bocci, M., Bryant, S., Frost, D., Levrau, L., and L. Berger, "A Framework for MPLS in Transport Networks", [RFC 5921](#), July 2010.



- [RFC6371] Busi, I. and D. Allan, "Operations, Administration, and Maintenance Framework for MPLS-Based Transport Networks", [RFC 6371](#), September 2011.
- [RFC6375] Frost, D. and S. Bryant, "A Packet Loss and Delay Measurement Profile for MPLS-Based Transport Networks", [RFC 6375](#), September 2011.
- [RFC6435] Boutros, S., Sivabalan, S., Aggarwal, R., Vigoureux, M., and X. Dai, "MPLS Transport Profile Lock Instruct and Loopback Functions", [RFC 6435](#), November 2011.
- [RFC6669] Sprecher, N. and L. Fang, "An Overview of the Operations, Administration, and Maintenance (OAM) Toolset for MPLS-Based Transport Networks", [RFC 6669](#), July 2012.

#### Authors' Addresses

Elisa Bellagamba (editor)  
Ericsson  
Torshamnsgatan 48  
Kista 164 40  
Sweden

Email: [elisa.bellagamba@ericsson.com](mailto:elisa.bellagamba@ericsson.com)

Loa Andersson (editor)  
Ericsson  
Torshamnsgatan 48  
Kista 164 40  
Sweden

Email: [loa.andersson@ericsson.com](mailto:loa.andersson@ericsson.com)

Pontus Skoldstrom (editor)  
Acreo AB  
Electrum 236  
Kista 164 40  
Sweden

Phone: +46 8 6327731

Email: [pontus.skoldstrom@acreo.se](mailto:pontus.skoldstrom@acreo.se)



Dave Ward  
Cisco

Email: [dward@cisco.com](mailto:dward@cisco.com)

Attila Takacs  
Ericsson  
1. Laborc u.  
Budapest  
HUNGARY

Email: [attila.takacs@ericsson.com](mailto:attila.takacs@ericsson.com)